



GET OUTPUT:

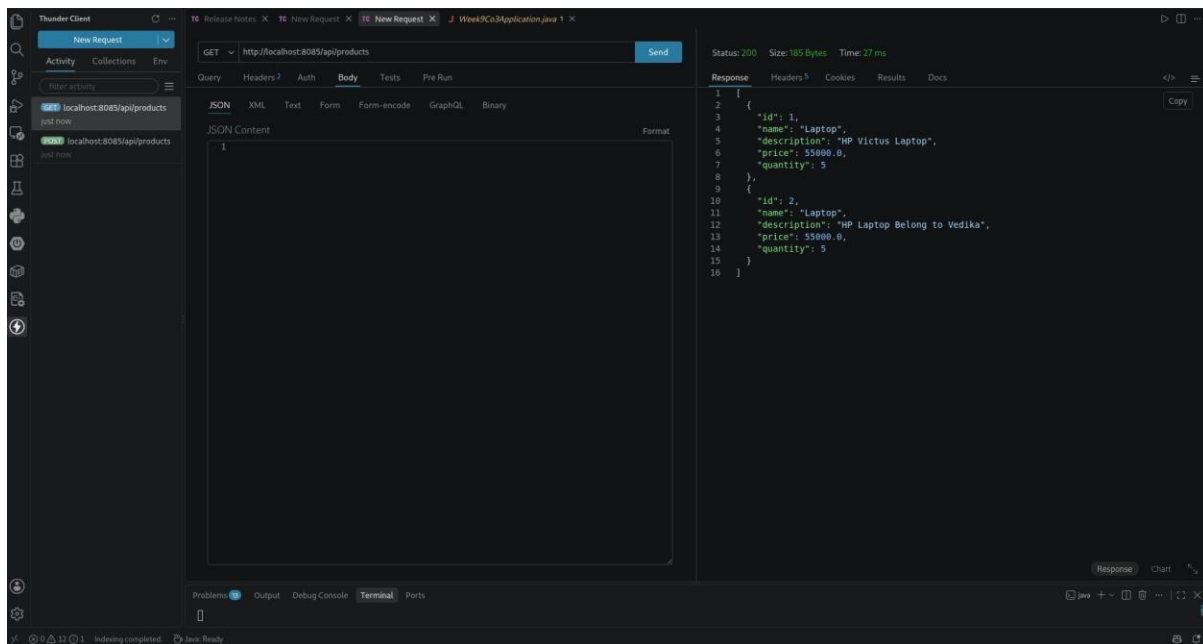

Thunder Client interface showing a GET request to `http://localhost:8085/api/products`. The request is successful with a status of 200, size of 185 Bytes, and time of 27 ms. The response is a JSON array containing two laptop items.

```
1 {
2   {
3     "id": 1,
4     "name": "Laptop",
5     "description": "HP Victus Laptop",
6     "price": 55800.0,
7     "quantity": 5
8   },
9   {
10    "id": 2,
11    "name": "Laptop",
12    "description": "HP Laptop Belong to Vedika",
13    "price": 55000.0,
14    "quantity": 5
15  }
16 }
```

POST OUTPUT:

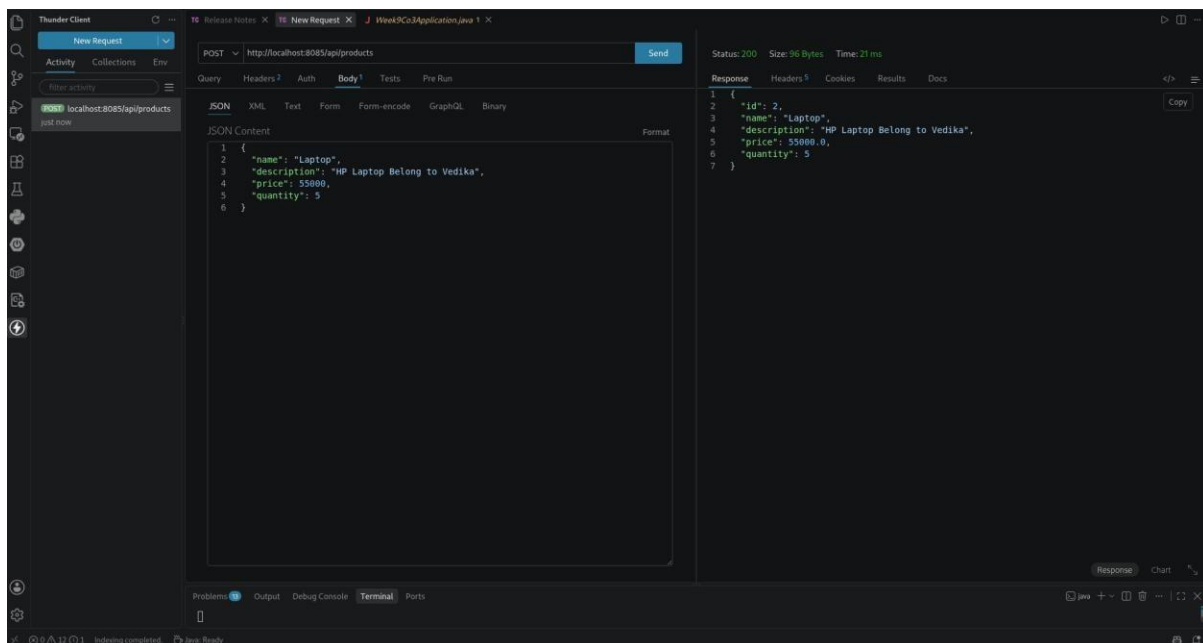

Thunder Client interface showing a POST request to `http://localhost:8085/api/products`. The request is successful with a status of 200, size of 96 Bytes, and time of 27 ms. The response is a JSON object containing one laptop item.

```
1 {
2   "id": 2,
3   "name": "Laptop",
4   "description": "HP Laptop Belong to Vedika",
5   "price": 55000.0,
6   "quantity": 5
7 }
```