

WEEK 1 REPORT

HEMAVATHI.B (E25AI114)

Requirement Analysis and Perfume Store Database Module

Module	Database System	Main Operations	Report Focus
Perfume Store Database	Oracle SQL	CREATE, INSERT, UPDATE, SELECT	Requirement analysis, process flow, entities and SQL implementation

This report documents the first week of work on a perfume store database module. It explains the requirements, identifies the entities and attributes, and records the SQL commands used to create, insert, update and retrieve perfume store information.

1. Requirement Analysis


1.1 Functional Requirements

No.	Functional Requirement
1	Create tables for category, brand, customer and perfume details with suitable columns and data types.
2	Store unique IDs for each category, brand, customer and perfume.
3	Record perfume name, brand, category, price, size and stock, along with customer details.
4	Insert new category, brand, customer and perfume records into the tables.
5	Update existing perfume information using the perfume ID.
6	Retrieve and verify all stored records using SELECT.

1.2 Non-Functional Requirements

The database should provide accurate, reliable and quick access to perfume store records. It should maintain data consistency through primary and foreign keys and allow easy maintenance of the stored information.

2. Process Flow

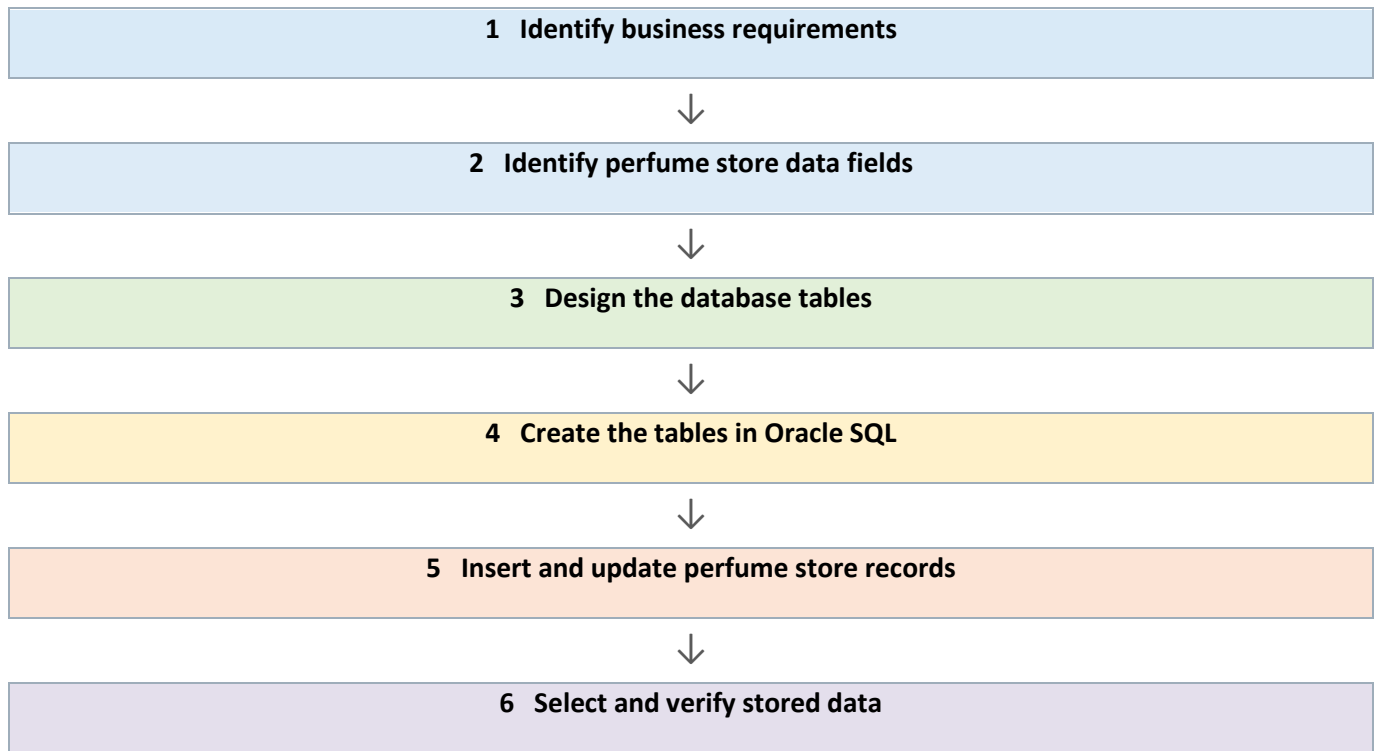

Perfume Store database module process flow

3. Points of Definition

Term	Definition
Requirement Analysis	Process of identifying the data and operations required by the database.
Entity	A real-world object represented in the database.
Attribute	A property or field of an entity.
Relation/Table	A structured collection of related records.
Primary Key	A field that uniquely identifies each record.
Foreign Key	A field that links one table with another table.
VARCHAR2	Oracle data type used to store variable-length text.
NUMBER	Oracle data type used to store numeric values.
INSERT	SQL command used to add new records.
UPDATE	SQL command used to modify existing records.
SELECT	SQL command used to retrieve records.

4. Entities

Category

Attribute	Details
Category_ID	NUMBER PRIMARY KEY

Category_Name	VARCHAR2(30) NOT NULL
---------------	-----------------------

Brand

Attribute	Details
Brand_ID	NUMBER PRIMARY KEY
Brand_Name	VARCHAR2(30) NOT NULL

Customer

Attribute	Details
Customer_ID	NUMBER PRIMARY KEY
Customer_Name	VARCHAR2(30) NOT NULL
Email	VARCHAR2(50) Optional
Phone	NUMBER UNIQUE
Address	VARCHAR2(50) Optional

Perfume

Attribute	Details
Perfume_ID	NUMBER PRIMARY KEY
Perfume_Name	VARCHAR2(50) NOT NULL
Brand_ID	NUMBER FOREIGN KEY
Category_ID	NUMBER FOREIGN KEY
Price	NUMBER(10,2)
Size	VARCHAR2(20)
Stock	NUMBER

5. Perfume Store Table Creation

The required tables are created in Oracle SQL using primary keys and foreign keys to maintain data integrity.

```
SQL> CREATE TABLE Customer(Customer_ID VARCHAR(10) PRIMARY KEY,First_Name VARCHAR(20),Last_Name VARCHAR(20),Email VARCHAR(20),Phone NUMBER UNIQUE, C
REATED_AT DATE);

Table created.

SQL> desc Customer
Name                               Null?    Type
-----
CUSTOMER_ID                        NOT NULL VARCHAR2(10)
FIRST_NAME                         VARCHAR2(20)
LAST_NAME                          VARCHAR2(20)
EMAIL                             VARCHAR2(20)
PHONE                             NUMBER
CREATED_AT                        DATE
```

6. Insert Values

Sample records are inserted into the category, brand, customer and perfume tables and committed to save the changes.

```
SQL> INSERT INTO Customer(Customer_ID,FIRST_NAME, LAST_NAME, EMAIL, PHONE, CREATED_AT) VALUES ('&Customer_ID','&FIRST_NAME','&LAST_NAME','&EMAIL','&phone',TO_DATE('&CREATED_AT','DD-MM-YYYY'));
Enter value for customer_id: C-1001
Enter value for first_name: Raju
Enter value for last_name: Chiru
Enter value for email: chiruraju16@gmail.com
Enter value for phone: 9347855515
Enter value for created_at: 16-09-2026
old 1: INSERT INTO Customer(Customer_ID,FIRST_NAME, LAST_NAME, EMAIL, PHONE, CREATED_AT) VALUES ('&Customer_ID','&FIRST_NAME','&LAST_NAME','&EMAIL','&phone',TO_DATE('&CREATED_AT','DD-MM-YYYY'))
new 1: INSERT INTO Customer(Customer_ID,FIRST_NAME, LAST_NAME, EMAIL, PHONE, CREATED_AT) VALUES ('C-1001','Raju','Chiru','chiruraju16@gmail.com','9347855515',TO_DATE('16-09-2026','DD-MM-YYYY'))
1 row created.
```

7. Update Operation

An existing perfume price is updated using the perfume ID, followed by a SELECT statement to verify the updated record.

```
SQL> UPDATE Customer set phone = 9884487152 where Customer_Id = 'C-1002';

1 row updated.
```

8. Select Table

The stored record are retrieved using SELECT statements to verify the data in all four tables.

```
SQL> SELECT * FROM Customer;
```

CUSTOMER_I	FIRST_NAME	LAST_NAME	EMAIL	PHONE	CREATED_A
C-1001	Chiru	Raju	rajuch06@gmail.com	9347855515	17-SEP-26
C-1002	Hema	Bhaskar	hemabhaskar02@gmail.com	9840430082	14-JUN-26
C-1003	Seetha	Mani	seethamani16@gmail.com	9392273469	15-MAY-26

CUSTOMER_I	FIRST_NAME	LAST_NAME	EMAIL	PHONE	CREATED_A
C-1004	Abinaya	Ramesh	abiramesh79@gmail.com	9710021922	14-SEP-26
C-1005	Deepikaa	Selvam	deepiselva30@gmail.com	9043707830	15-SEP-26
C-1006	Sanjana	Doss	sanjanat08@gmail.com	9003197590	16-SEP-26

9. SQL Command Summary

SQL Command	Purpose	Example
CREATE TABLE	Creates a new table	CREATE TABLE Perfume (...)
INSERT	Adds new records	INSERT INTO Perfume VALUES (...)
UPDATE	Modifies existing records	UPDATE Perfume SET Price = 9000 WHERE Perfume_ID = 101;
SELECT	Retrieves records	SELECT * FROM Perfume;

Conclusion

This report documents the first week of work on the Perfume Store database module. The requirements, process flow, entities and attributes were identified, and the basic SQL operations used to create, insert, update and retrieve perfume store records were implemented using