


(a) Random split of overlapping sequences (pilot protocol): each validation sequence shares four of its five windows with training sequences



(b) Window-disjoint chronological split (corrected protocol): the timeline is divided first, sequences are formed inside each region, and those crossing the boundary are dropped

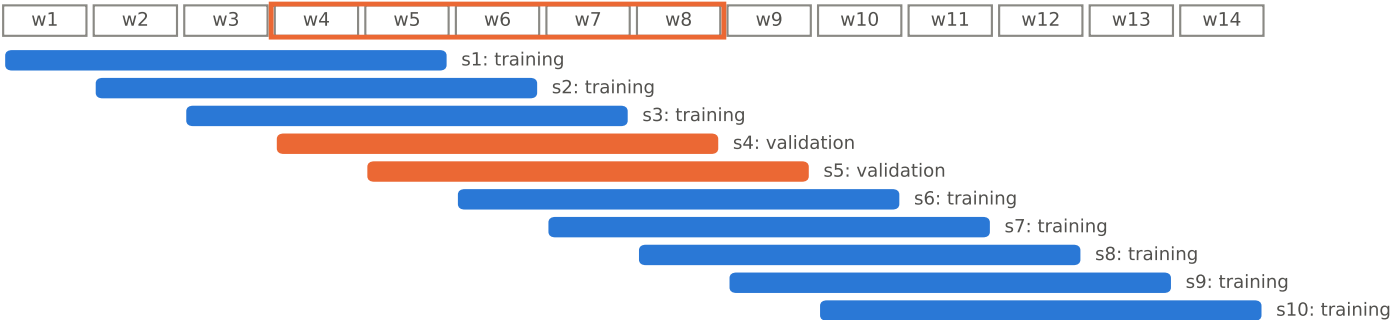