(a) Random split of overlapping sequences (pilot protocol)
Each validation sequence shares four of its five windows with training sequences.

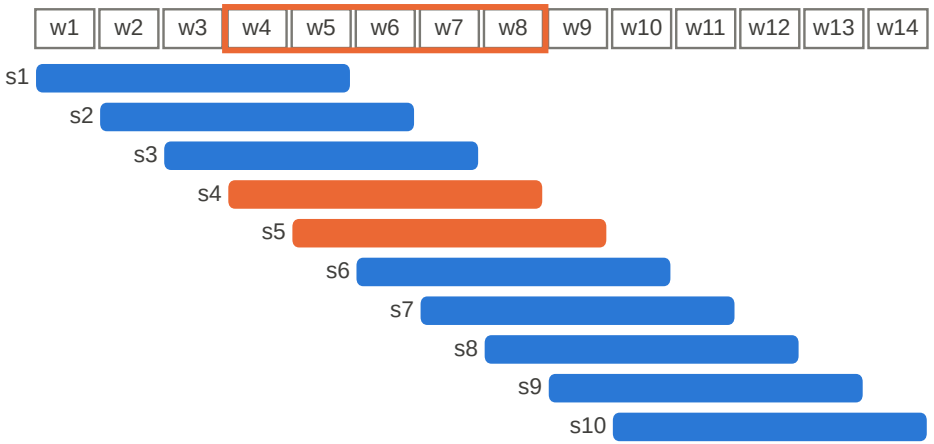
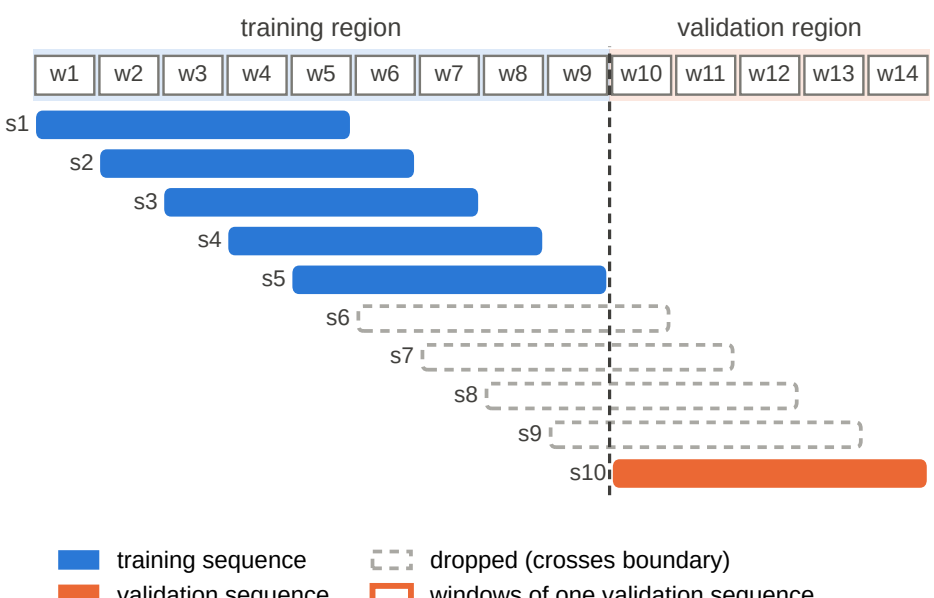
(b) Window-disjoint chronological split (corrected protocol)
The timeline is divided first, sequences are formed inside each region, and sequences crossing the boundary are dropped.