

## GE23131-Programming Using C-2024



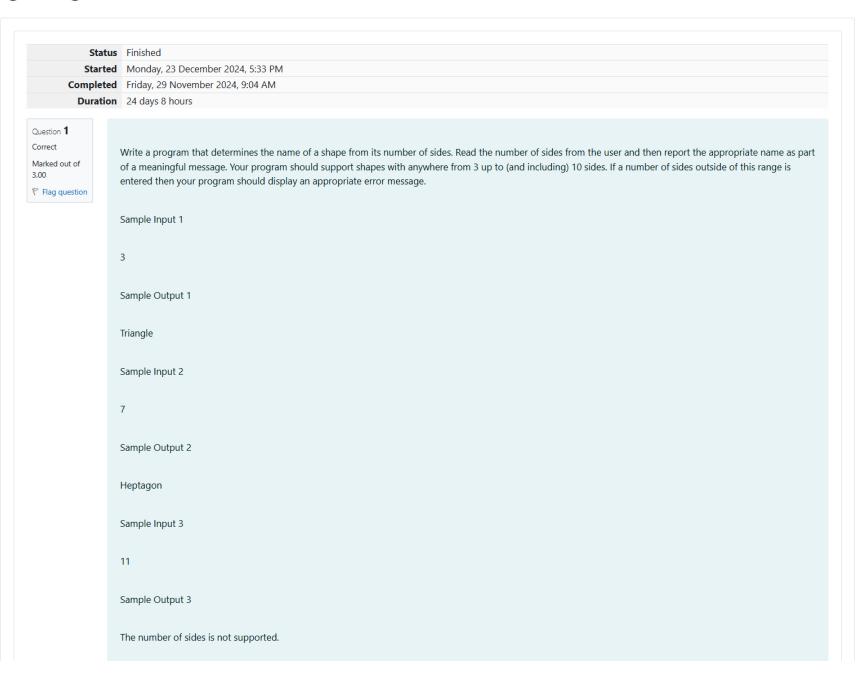

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
 2 int main()
 3 √ {
 4 int n;
 5 scanf("%d",&n);
6 if(n==3)
7 ▼ {
8 printf("Triangle");
9 }
10 else if(n==4)
11 + {
12 printf("Square");
13
14 | else if(n==5)
15 ₹ {
16 printf("Pentagon");
17 }
      else if(n==6)
18
19 🔻
20 printf("Hexagon");
21 }
22 | else if(n==7)
23 ₹ {
24
      printf("Heptagon");
25 }
26 else if(n==8)
27 ▼ {
28 printf("Octagon");
29 }
30 else if(n==9)
31 ₹ {
32 printf("Nonagon");
33 }
34 | else if(n==10)
35 ₹ {
36 printf("Decagon");
37
38
   else
39 ₹ {
    printf("The number of sides is not supported.");
40
41
42
43
44
45
```

		Input	Expected	Got	
	~	3	Triangle	Triangle	~
	~	7	Heptagon	Heptagon	~
	~	11	The number of sides is not supported.	The number of sides is not supported.	~

Passed all tests! <

Question **2**Correct

Marked out of 5.00

Flag question

The Chinese zodiac assigns animals to years in a 12-year cycle. One 12-year cycle is shown in the table below. The pattern repeats from there, with 2012 being another year of the Dragon, and 1999 being another year of the Hare.

Year	Animal
2000	Dragon
2001	Snake
2002	Horse
2003	Sheep
2004	Monke
2005	Rooste
2006	Dog
2007	Pig
2008	Rat
2009	Ox
2010	Tiger
2011	Hare

Write a program that reads a year from the user and displays the animal associated with that year. Your program should work correctly for any year greater than or equal to zero, not just the ones listed in the table.

2004 Sample Output 1

Sample Input 1

Sample Input 2

Monkey

2010

Sample Output 2

Tiger


```
Answer: (penalty regime: 0 %)
  1 #include<stdio.h>
   2 int main()
   3 √ {
   4
          int year;
   5
          scanf("%d",&year);
   6 ,
         if(year%12==8){
             printf("Dragon");
   7
   8
   9 ,
         else if(year%12==9){
             printf("Snake");
  10
  11
  12
          else if(year%12==10)
  13 ₹ {
      printf("Horse");
  14
  15
  16
      else if(year%12==11)
  17 ▼ {
  18
         printf("Sheep");
  19
      else if(year%12==0)
  20
  21 🔻 {
  22
         printf("Monkey");
  23 }
  24 | else if(year%12==1)
  25 ▼ {
         printf("Rooster");
  26
  27
  28
      else if(year%12==2)
  29 ₹ {
  30
         printf("Dog");
  31
  32
      else if(year%12==3)
  33 ₹ {
  34
         printf("Pig");
  35
  36 else if(year%12==4)
  37 ▼ {
  38
         printf("Rat");
  39
      else if(year%12==5)
  40
  41 🔻 {
         printf("0x");
  42
  43
  44
      else if(year%12==6)
  45 ₹ {
         printf("Tiger");
  46
  47
  48
      else
  49 + {
         printf("Hare");
  50
  51
  52
```

	Input	Expected	Got	
~	2004	Monkey	Monkey	~
~	2010	Tiger	Tiger	~

Question **3**Correct
Marked out of 7.00

Flag question

Positions on a chess board are identified by a letter and a number. The letter identifies the column, while the number identifies the row, as shown below:



Write a program that reads a position from the user. Use an if statement to determine if the column begins with a black square or a white square. Then use modular arithmetic to report the color of the square in that row. For example, if the user enters a1 then your program should report that the square is black. If the user enters d5 then your program should report that the square is white. Your program may assume that a valid position will always be entered. It does not need to perform any error checking.

Sample Input 1

a 1

Sample Output 1

The square is black.

Sample Input 2

d 5

Sample Output 2

The square is white.

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 * {
4     int num, sum;
5     char alpha;
```

```
scanf("%c %d",&alpha,&num);
6
 7
       sum=alpha+num;
 8
       if(sum%2==0)
9 🔻
           printf("The square is black.");
10
11
12 🔻
          printf("The square is white.");
13
14
15
16 }
```

		Input	Expected	Got	
	~	a 1	The square is black.	The square is black.	~
	~	d 5	The square is white.	The square is white.	~

Passed all tests! 🗸

Finish review