


IS490 - Assignment 2 - Documentation

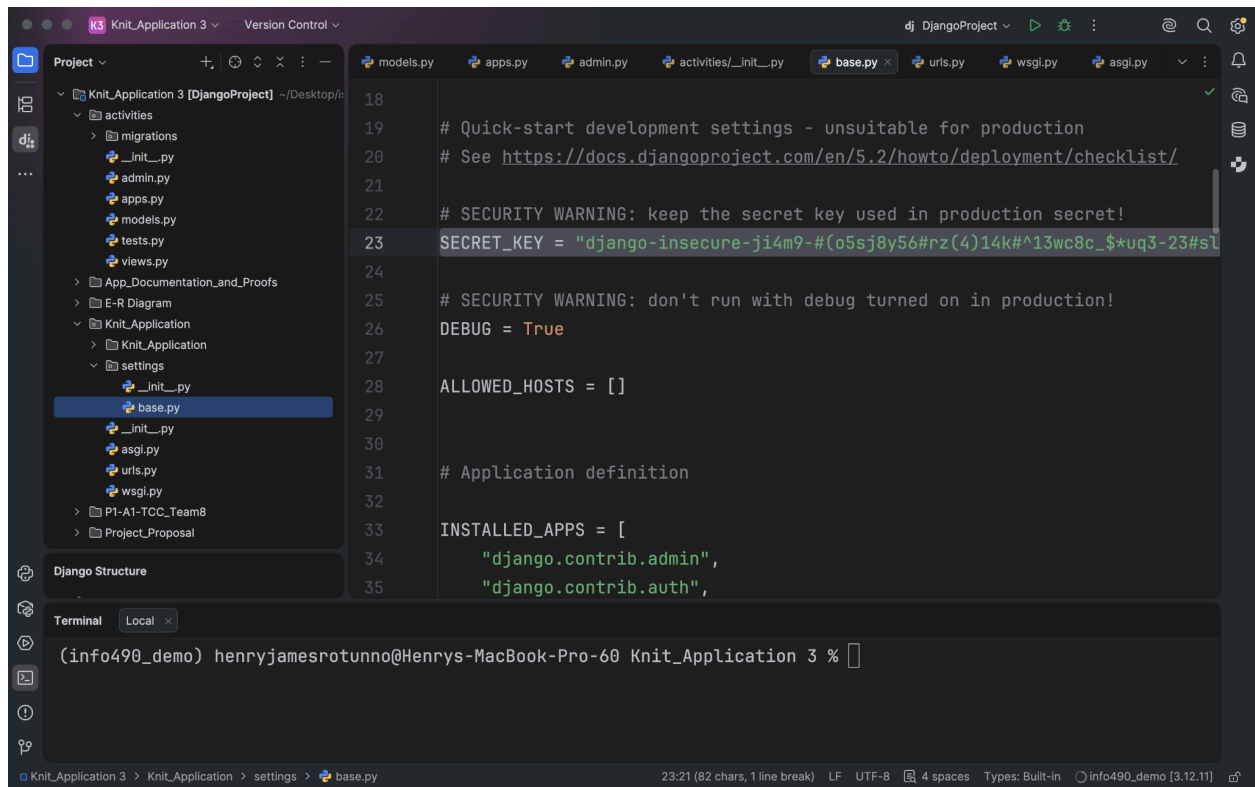


```
18
19 # Quick-start development settings - unsuitable for production
20 # See https://docs.djangoproject.com/en/5.2/howto/deployment/checklist/
21
22 # SECURITY WARNING: keep the secret key used in production secret!
23 SECRET_KEY = "django-insecure-ji4m9-#(o5sj8y56#rz(4)14k#^13wc8c_$*uq3-23#sL
24
25 # SECURITY WARNING: don't run with debug turned on in production!
26 DEBUG = True
27
28 ALLOWED_HOSTS = []
29
30
31 # Application definition
32
33 INSTALLED_APPS = [
34     "django.contrib.admin",
35     "django.contrib.auth",
```

(info490_demo) henryjamesrotunno@Henrys-MacBook-Pro-60 Knit_Application 3 %


Created "settings" directory

Renamed settings to [base.py](#)

Created the `__init__.py` file to indicate creating a module

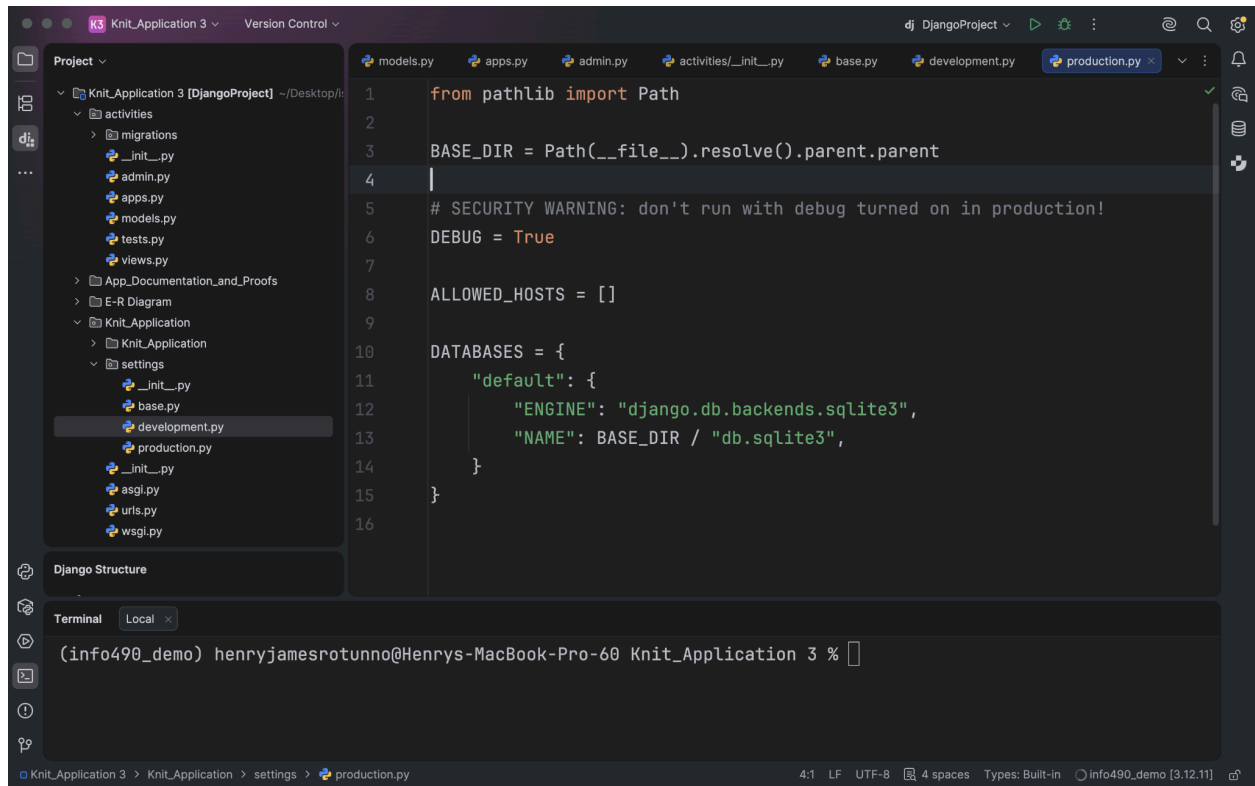


Configured [development.py](#) and [production.py](#)

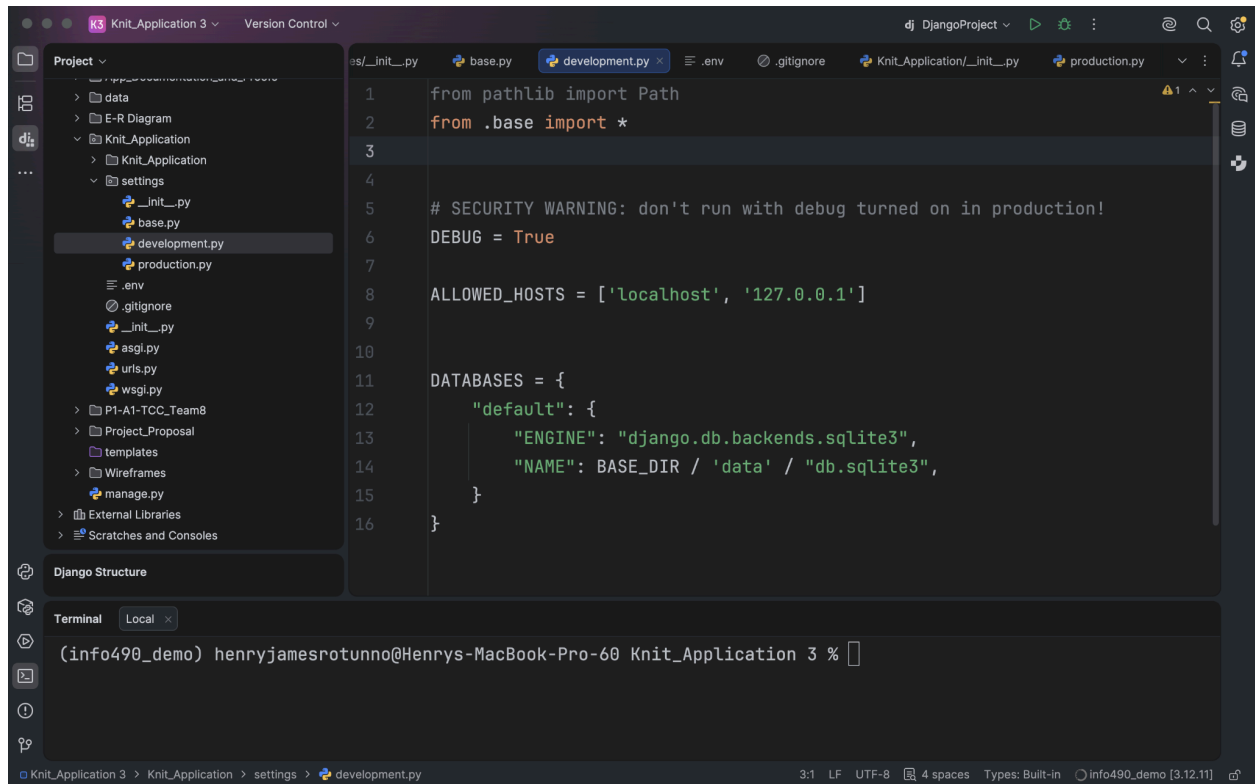

Created the data folder for sqlite
Debug = True in Development
Debug = False in Production

TODO:


Create the secret environments file (52 minute mark at lecture)
Go to line 37 of models, create the `get_absolute_url` function

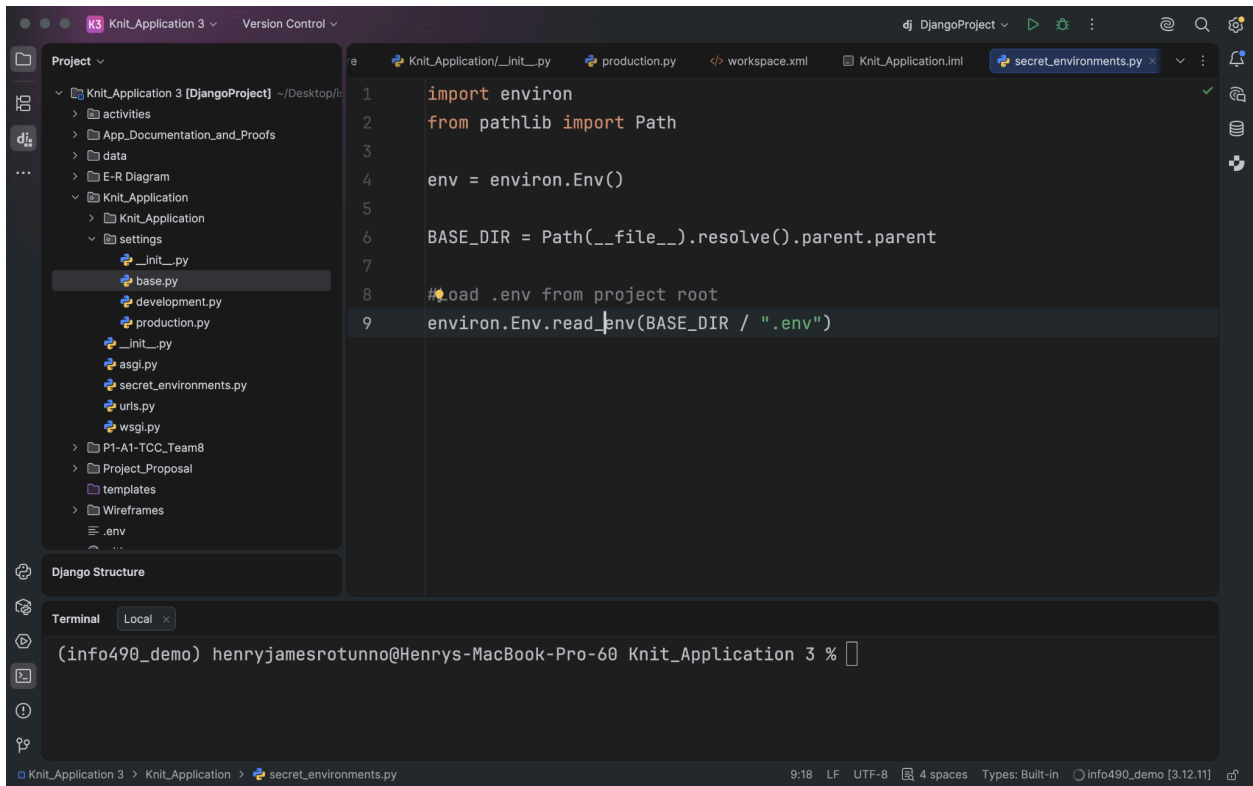

Secret environment setup

```
SECRET_KEY = env('SECRET_KEY') # need to import
secret_environments file
```

On [Base.py](#) SECRET_KEY is no longer exposed

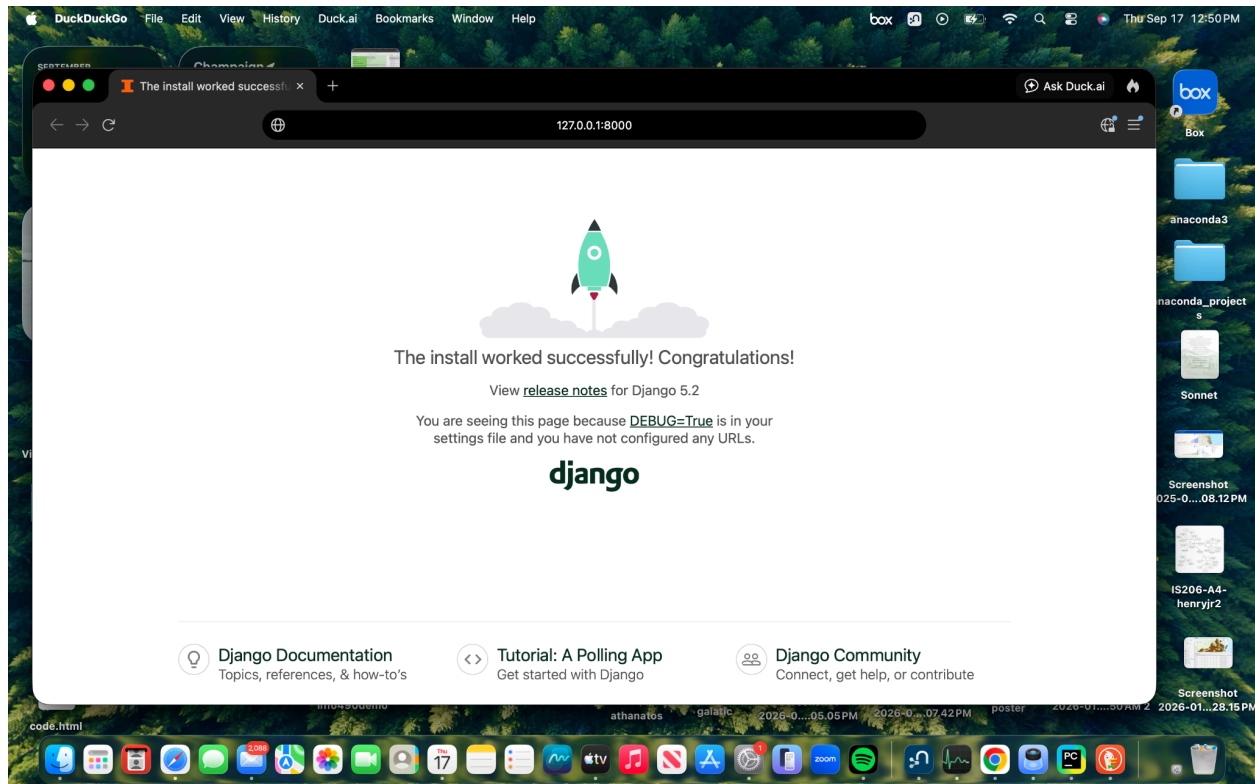

Running server with refactoring complete:


[production.py](#)

[development.py](#)

Data folder → sqlite3


.env


.secret_environments

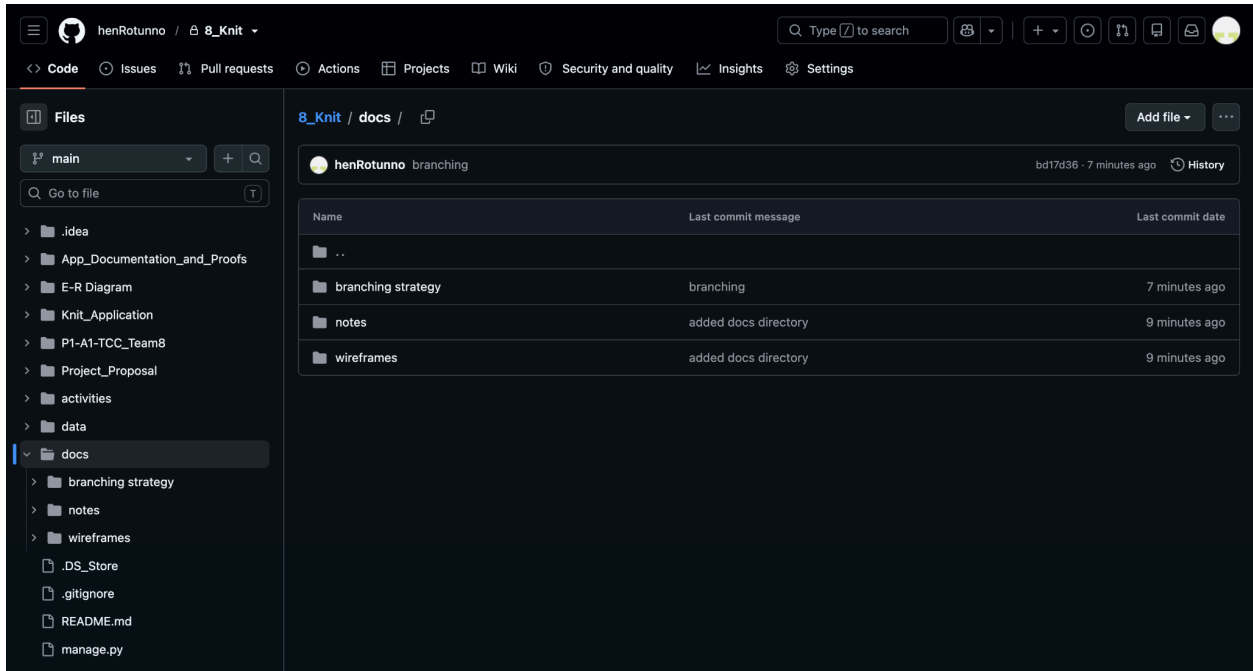


Docs directory, branching, notes, wireframes. Everything is pushed on github, added readme.

Created “tester” branch and pushed:

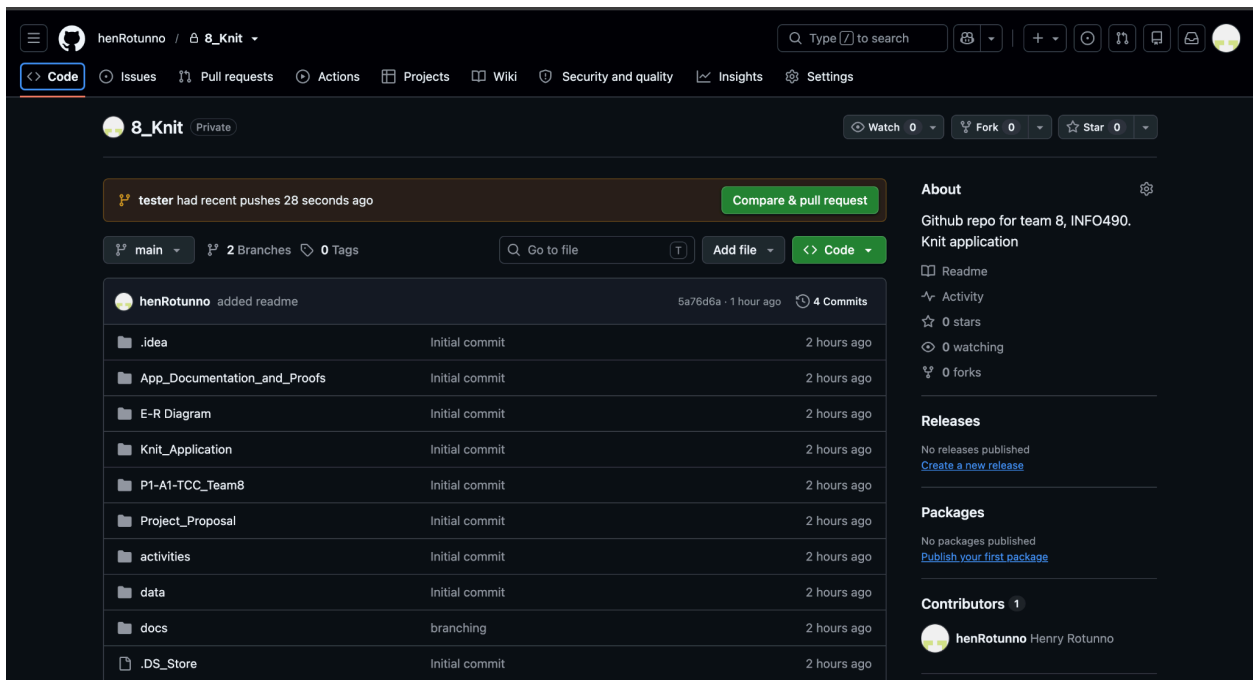

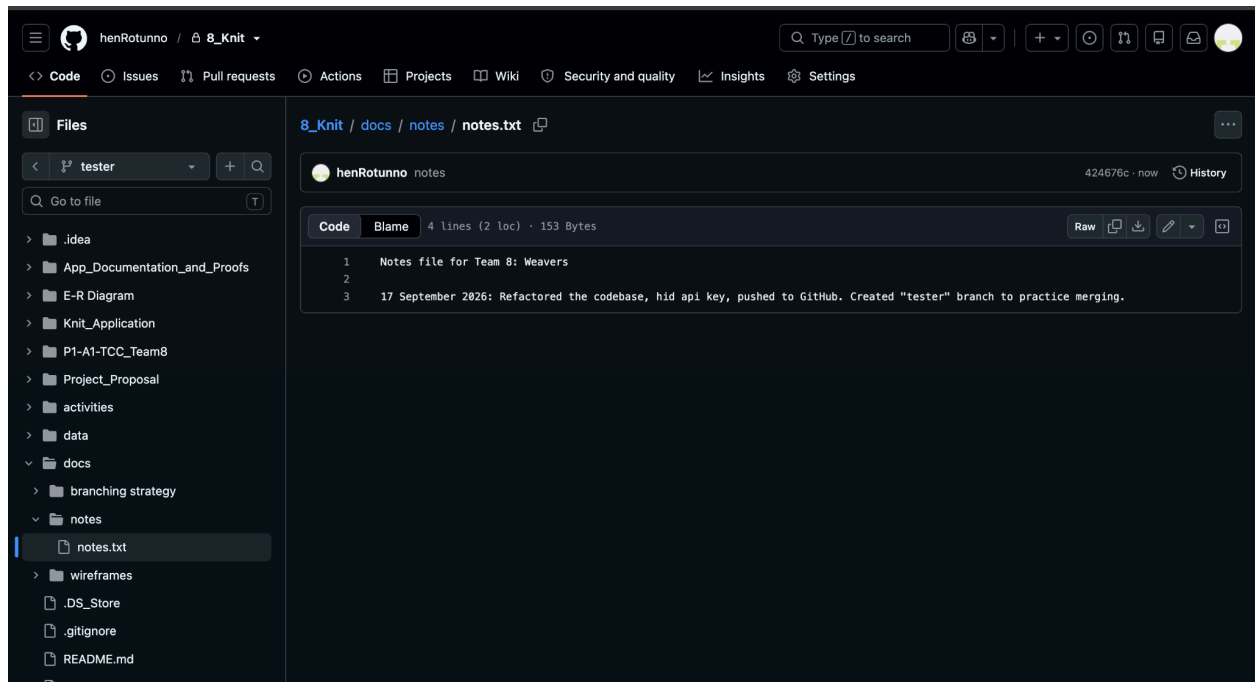

Pushed to the tester branch

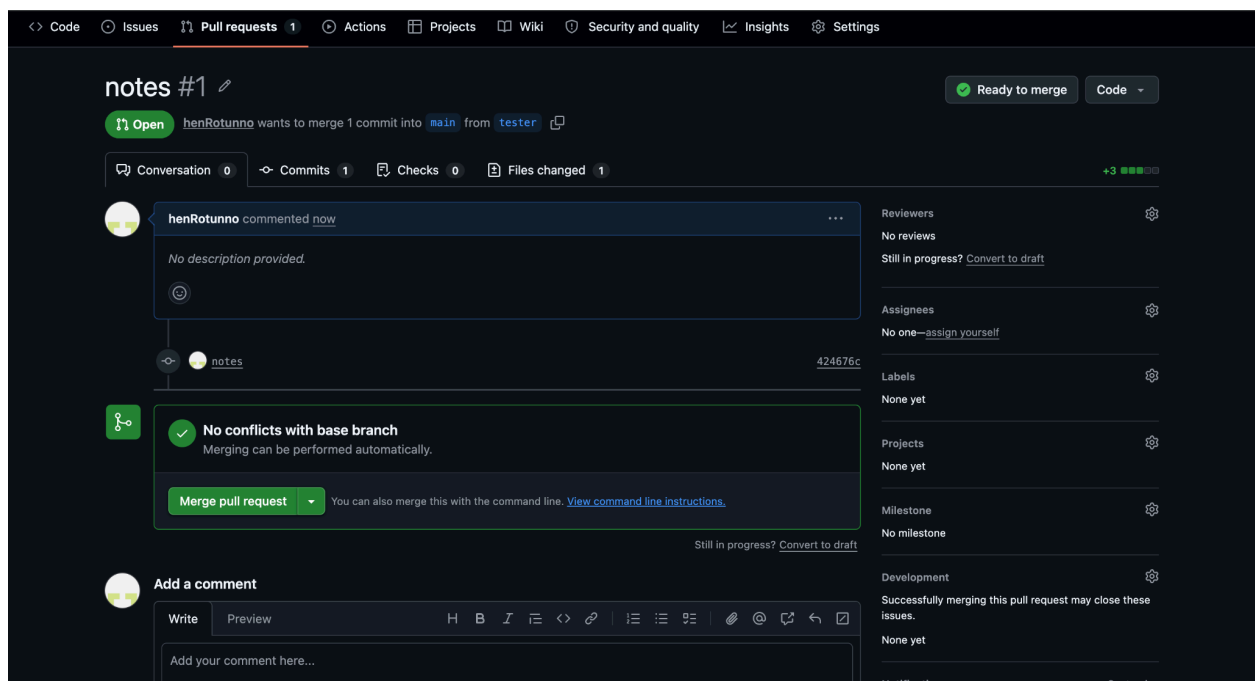

Successful merge into main!

Screenshots for Views:



Recommendations

- No recommendations yet!

Generic



Friend List

- No friends yet!

Render



Notifications

- No notifications yet!

HttpResponse



Activities

- Test

Base

Screenshots for Templates: