q1_discount.c - Code::Blocks / VS Code (C)

```c
#include <stdio.h>

int main(void)
{
    int price[3] = {200, 500, 1200}, qty[3] = {3, 4, 2}, senior[3] = {0, 1, 1};
    printf("Bill | buggy total | buggy net | correct total | correct net\n");
    for (int i = 0; i < 3; i++) {
        int p = price[i], q = qty[i], s = senior[i];

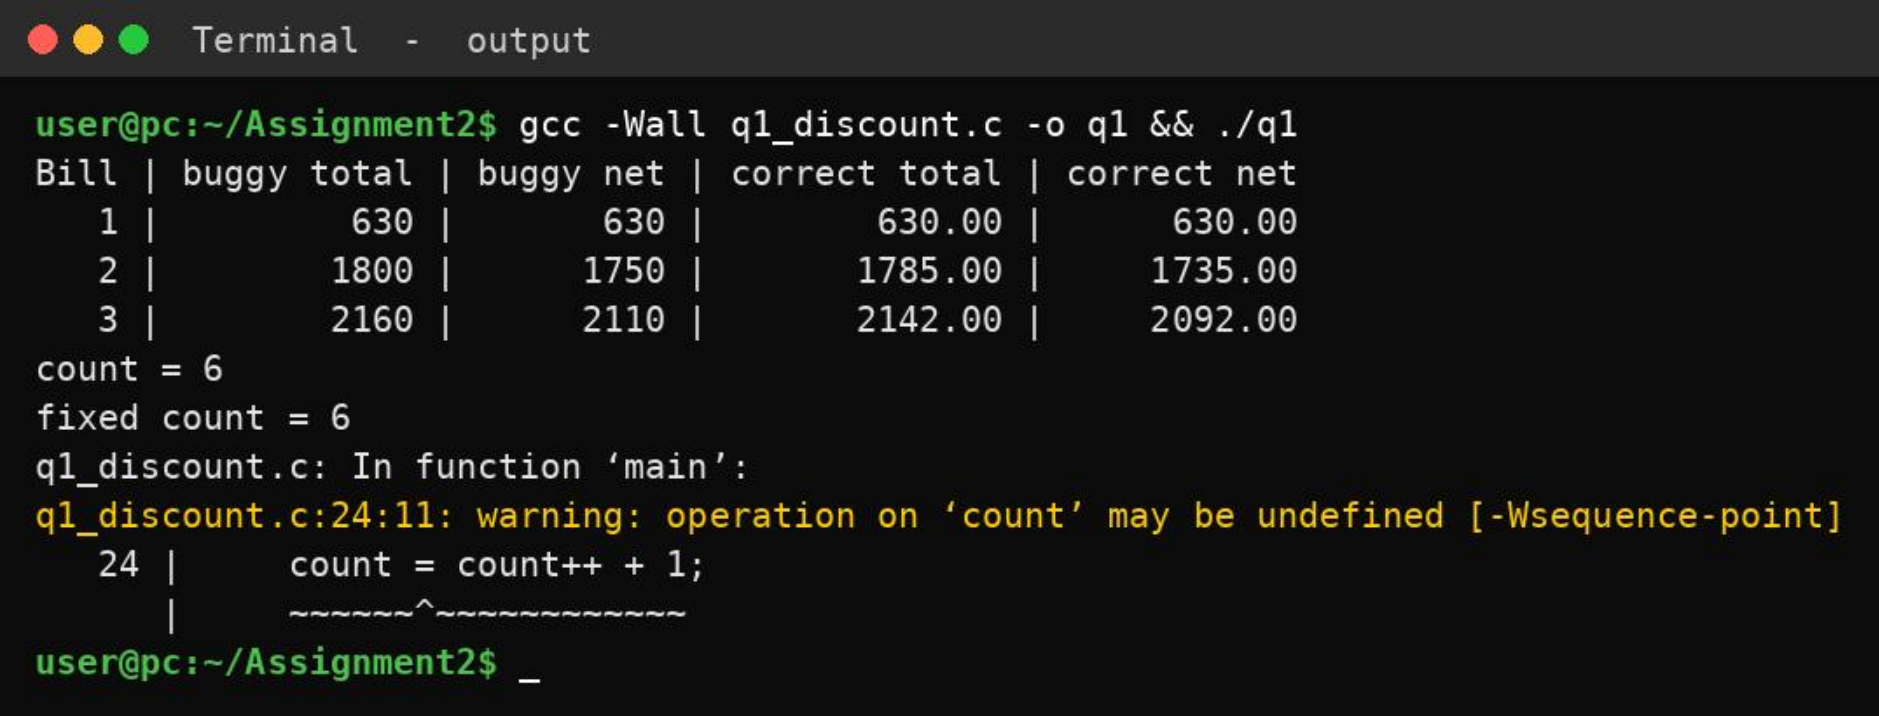
        int total = p * q - p * q * 15 / 100 * s + p * q * 5 / 100;
        int net = total > 1000 ? total - 50 : total;

        double gross    = (double)p * q;
        double discount = s ? gross * 15.0 / 100.0 : 0.0;
        double taxable  = gross - discount;
        double gst      = taxable * 5.0 / 100.0;
        double ctotal   = taxable + gst;
        double cnet     = ctotal > 1000 ? ctotal - 50 : ctotal;

        printf("%4d | %11d | %9d | %13.2f | %11.2f\n", i + 1, total, net, ctotal, cnet);
    }

    int count = 5;
    count = count++ + 1;
    printf("count = %d\n", count);

    count = 5;
    count = count + 1;
    printf("fixed count = %d\n", count);
    return 0;
}
```


Terminal - output
user@pc:~/Assignment2$ gcc -Wall q1_discount.c -o q1 && ./q1
Bill | buggy total | buggy net | correct total | correct net
1 | 630 | 630 | 630.00 | 630.00
2 | 1800 | 1750 | 1785.00 | 1735.00
3 | 2160 | 2110 | 2142.00 | 2092.00
count = 6
fixed count = 6
q1_discount.c: In function ‘main’:
q1_discount.c:24:11: warning: operation on ‘count’ may be undefined [-Wsequence-point]
24 | count = count++ + 1;
| ~~~~~~^~~~~~~~~~~~
user@pc:~/Assignment2$ _