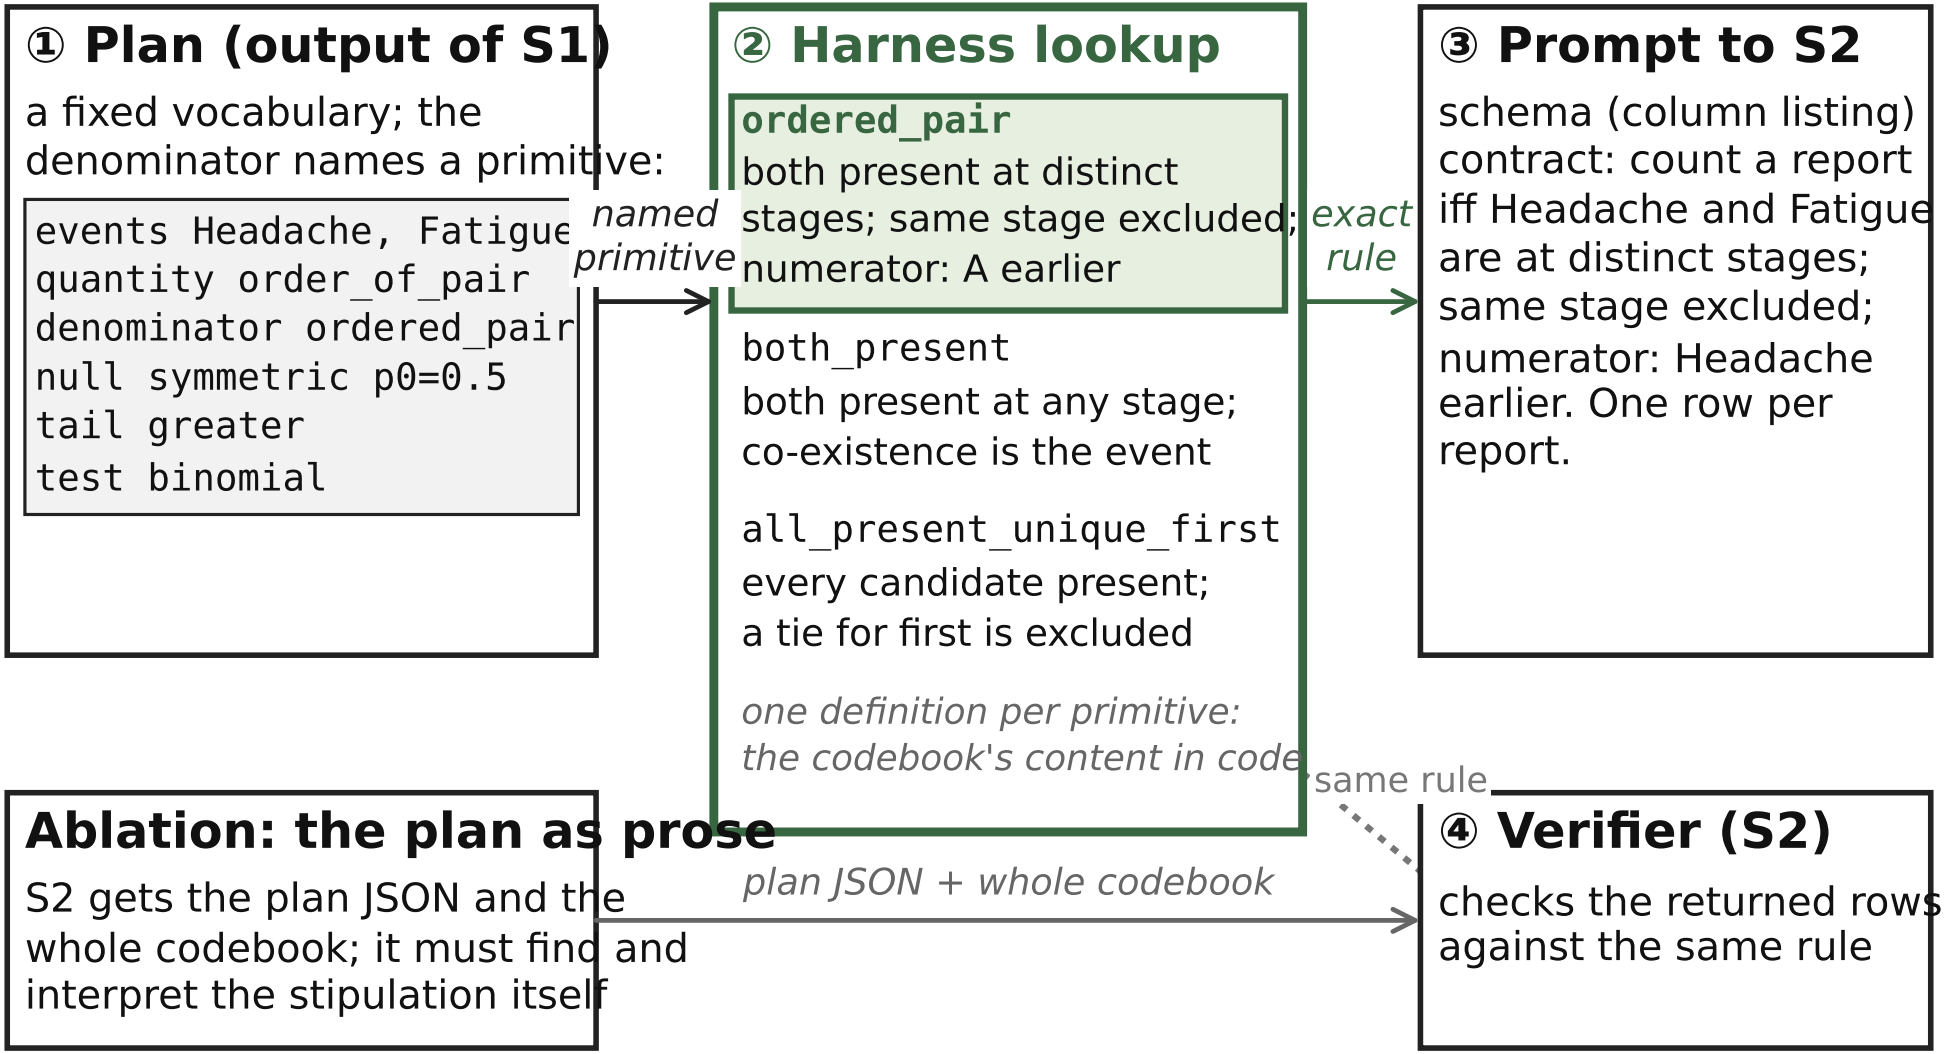
① Plan (output of S1)
a fixed vocabulary; the denominator names a primitive:
events Headache, Fatigue
quantity order_of_pair
denominator ordered_pair
null symmetric p0=0.5
tail greater
test binomial
named primitive
② Harness lookup
ordered_pair
both present at distinct stages; same stage excluded; numerator: A earlier
both_present
both present at any stage; co-existence is the event
all_present_unique_first
every candidate present; a tie for first is excluded
one definition per primitive: the codebook's content in code
exact rule
③ Prompt to S2
schema (column listing)
contract: count a report iff Headache and Fatigue are at distinct stages; same stage excluded; numerator: Headache earlier. One row per report.
same rule
Ablation: the plan as prose
S2 gets the plan JSON and the whole codebook; it must find and interpret the stipulation itself
plan JSON + whole codebook
④ Verifier (S2)
checks the returned rows against the same rule