




This course is outdated and will be removed from our platform. Try our new and improved version of this course.

[Visit New Course](#)

## Redundancy and Replication

**Redundancy** is the duplication of critical components or functions of a system with the intention of increasing the reliability of the system, usually in the form of a backup or fail-safe, or to improve actual system performance. For example, if there is only one copy of a file stored on a single server, then losing that server means losing the file. Since losing data is seldom a good thing, we can create duplicate or redundant copies of the file to solve this problem.

Redundancy plays a key role in removing the single points of failure in the system and provides backups if needed in a crisis. For example, if we have two instances of a service running in production and one fails, the system can failover to the other one.

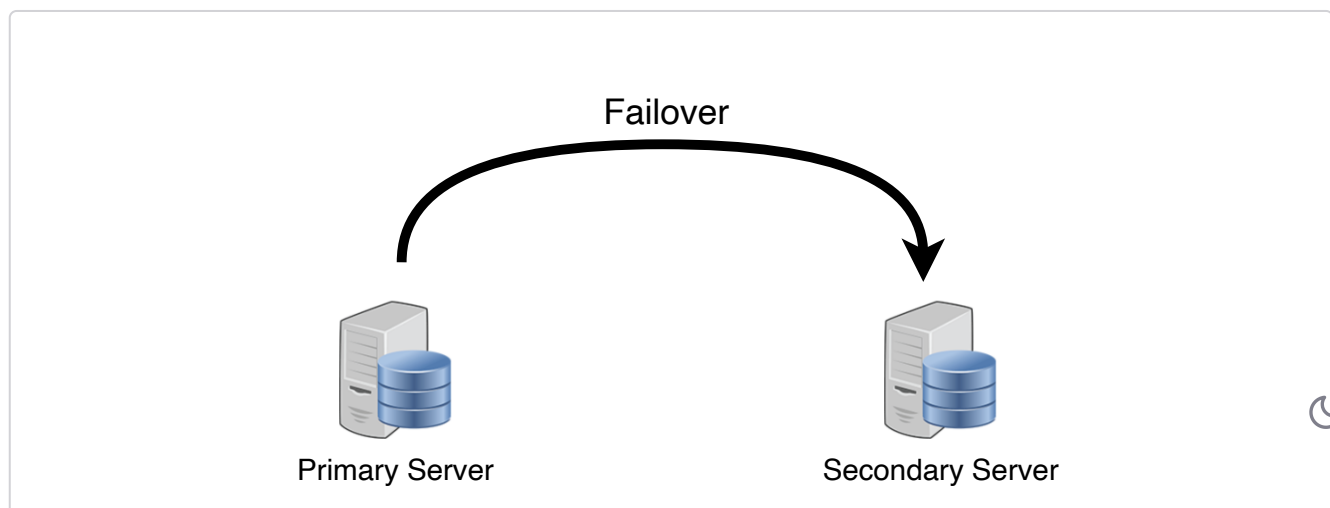



**Replication** means sharing information to ensure consistency between redundant resources, such as software or hardware components, to improve reliability, **fault-tolerance**, or accessibility.

Replication is widely used in many database management systems (DBMS), usually with a primary-replica relationship between the original and the copies. The primary server gets all the updates, which then ripple through to the replica servers. Each replica outputs a message stating that it has received the update successfully, thus allowing the sending of subsequent updates.

[← Back](#)

Proxies

[Next →](#)

SQL vs. NoSQL

☒ Completed