


## Estudiante: Hector Rincon

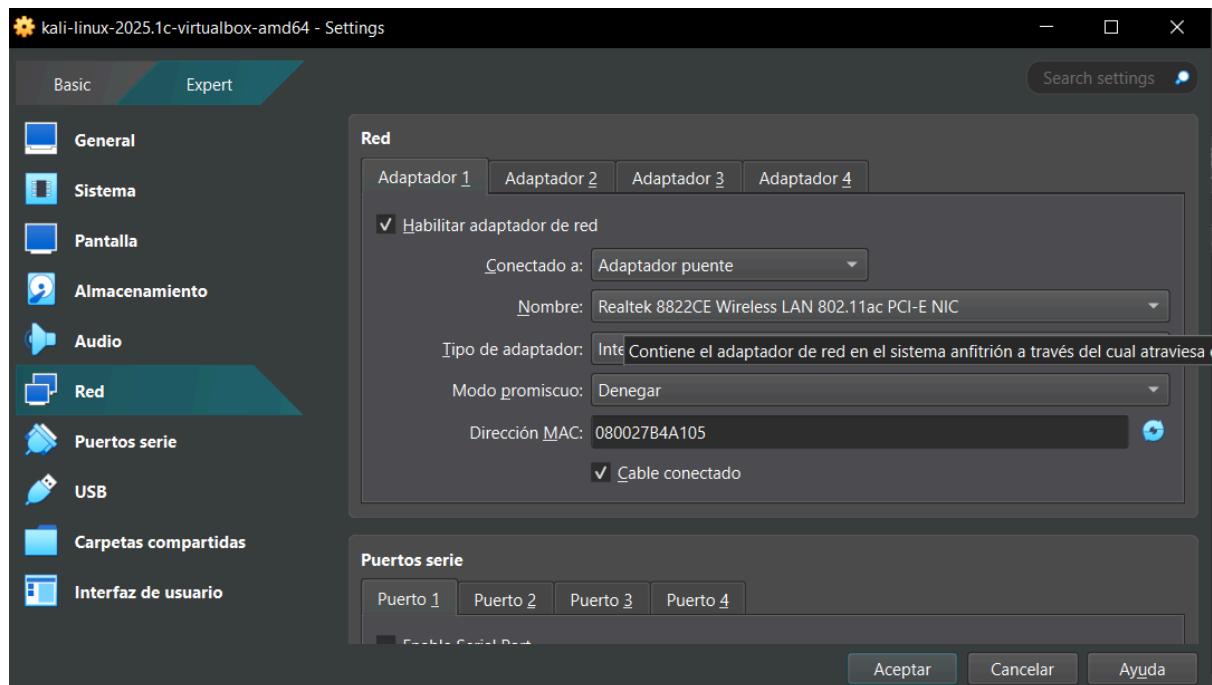

ahora descargamos la herramienta putty:

Package files

You probably want one of these. They include versions of all the PuTTY utilities (except the new and slightly experimental Windows pterm).  
(Not sure whether you want the 32-bit or the 64-bit version? Read the [FAQ entry](#).)  
We also publish the latest PuTTY installers for all Windows architectures as a free-of-charge download at the [Microsoft Store](#); they usually take a few days to appear there after we release them.

**MSI ('Windows Installer')**

64-bit x86:	<a href="#">putty-64bit-0.83-installer.msi</a>	(signature)
64-bit Arm:	<a href="#">putty-arm64-0.83-installer.msi</a>	(signature)
32-bit x86:	<a href="#">putty-0.83-installer.msi</a>	(signature)


**Unix source archive**

.tar.gz:	<a href="#">putty-0.83.tar.gz</a>	(signature)
----------	-----------------------------------	-------------


También descargamos filezilla



## Primero hacemos ping desde el pc a la maquina virtual

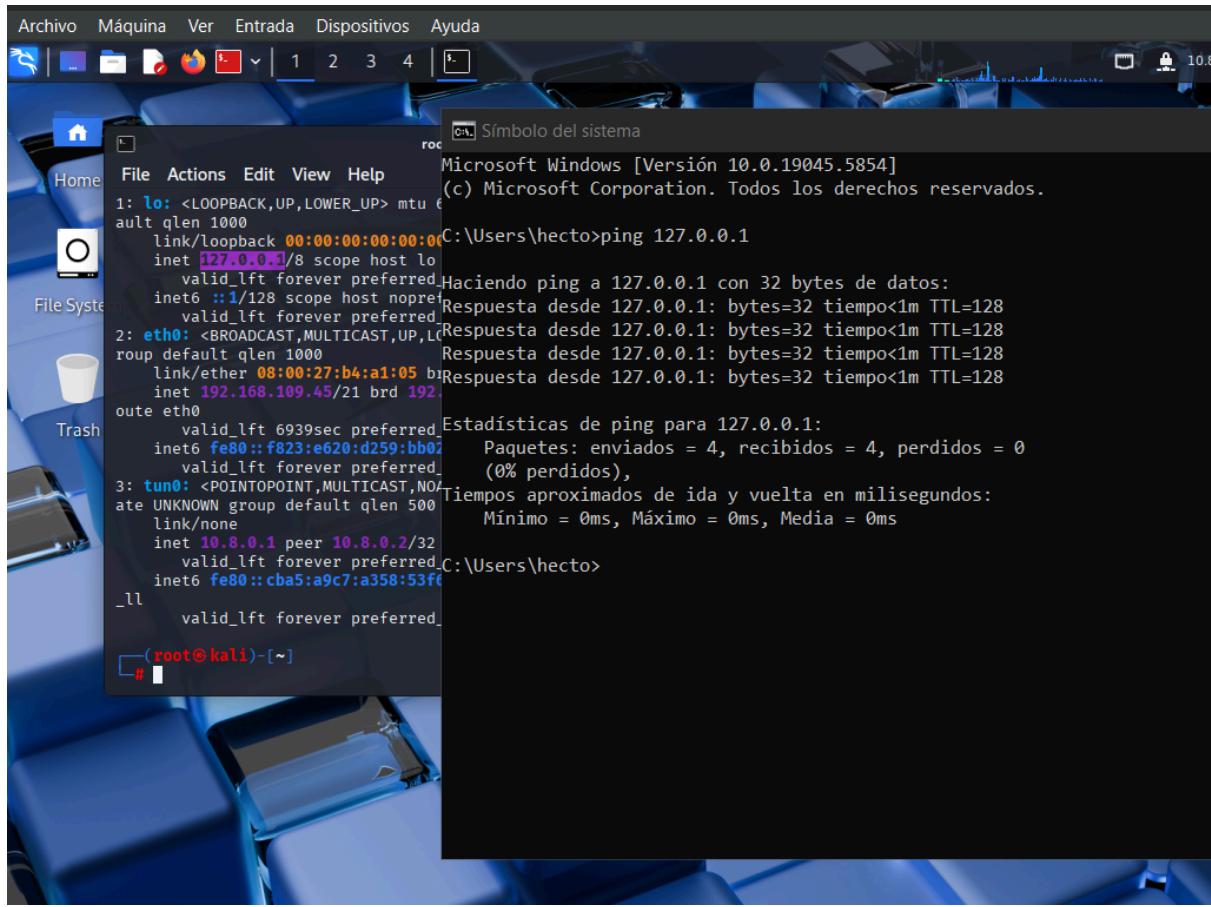

## Y ahora desde la máquina al pc

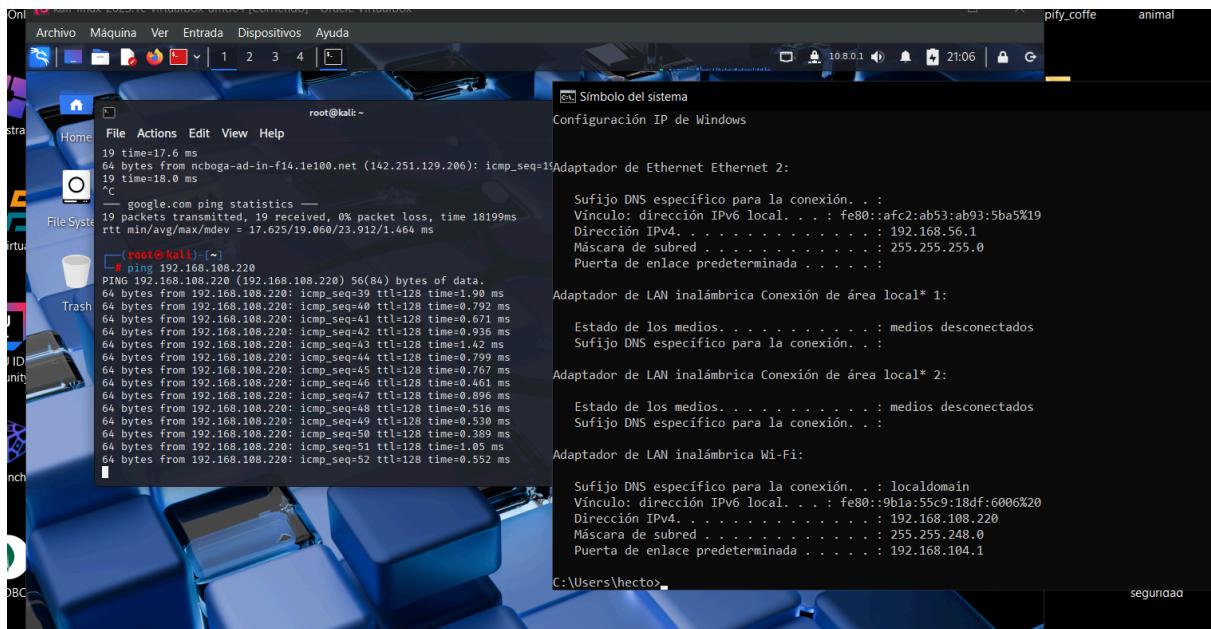

```
root@kali: ~
File Actions Edit View Help
└# apt install openshh -y
Error: Unable to locate package openshh

└(root@kali)-[~]
  # apt install openssh-server -y
  openssh-server is already the newest version (1:9.9p2-2).
  openssh-server set to manually installed.
  The following packages were automatically installed and are no longer require
d:
  icu-devtools  libglapi-mesa  libpython3.12-minimal  python3.12-tk
  libflac12t64  libicu-dev    libpython3.12-stdlib   ruby-zeitwerk
  libfuse3-3    liblbbfgsb0  libpython3.12t64     strongswan
  libgeos3.13.0 libpoptpler145 python3-setproctitle
  Use 'apt autoremove' to remove them.

Summary:
  Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 7

└(root@kali)-[~]
  # systemctl status ssh
  ● ssh.service - OpenBSD Secure Shell server
    Loaded: loaded (/usr/lib/systemd/system/ssh.service; disabled; preset: >
    Active: inactive (dead)
      Docs: man:sshd(8)
             man:sshd_config(5)
lines 1-5/5 (END)
```

```
root@kali: ~
File Actions Edit View Help
  Docs: man:sshd(8)
        man:sshd_config(5)

└(root@kali)-[~]
  # systemctl enable ssh
  Synchronizing state of ssh.service with SysV service script with /usr/lib/sys
  temd/systemd-sysv-install.
  Executing: /usr/lib/systemd/systemd-sysv-install enable ssh
  Created symlink '/etc/systemd/system/sshd.service' → '/usr/lib/systemd/system
  /ssh.service'.
  Created symlink '/etc/systemd/system/multi-user.target.wants/sshd.service' → '
  /usr/lib/systemd/system/sshd.service'.

└(root@kali)-[~]
  # systemctl status ssh
  ● ssh.service - OpenBSD Secure Shell server
    Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; preset: d>
    Active: inactive (dead)
      Docs: man:sshd(8)
            man:sshd_config(5)
lines 1-5/5 (END)
```

