
PIZZA SALES SQL QUERIES

A. KPI's


1. Total Revenue

```
select
sum(total_price) as total_revenue
from pizza_sales;
```

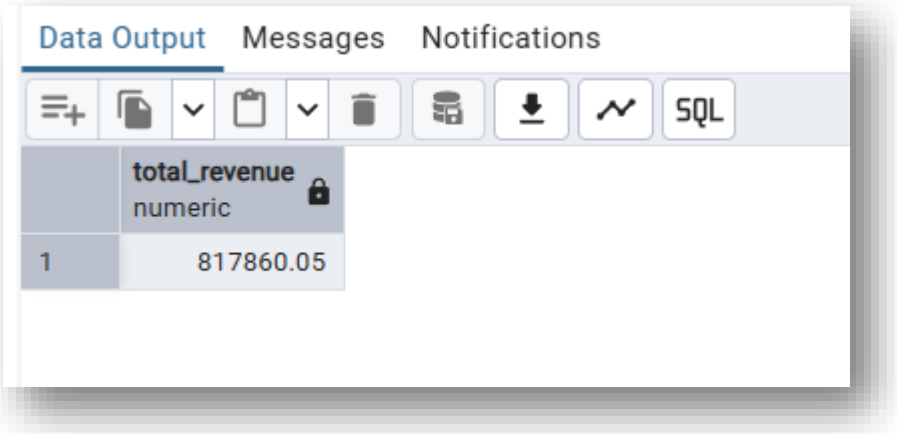


2. Average Order Value

```
select
round(sum(total_price)/count(distinct order_id), 2) as average_order_value
from pizza_sales
```

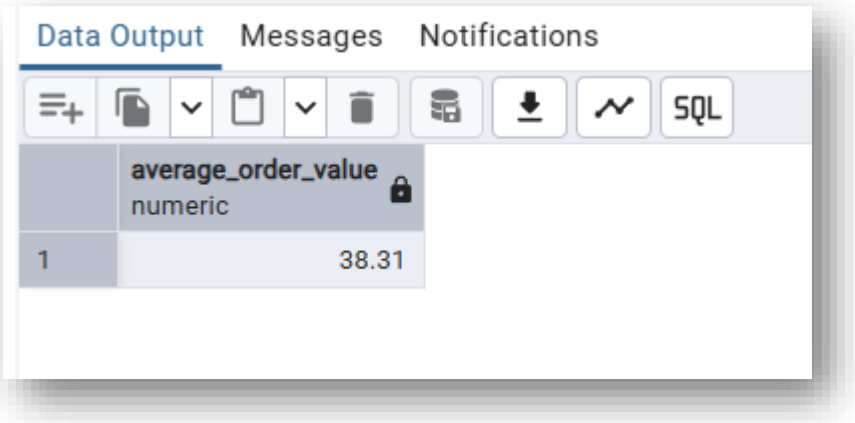


3. Total Pizzas Sold

```
select
sum(quantity) as total_pizza_sold
from pizza_sales;
```

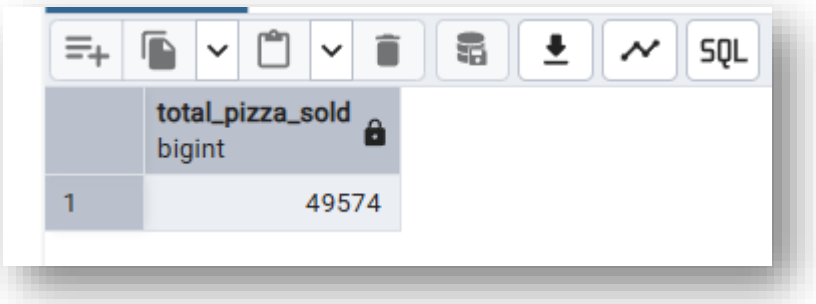


4. **Total Pizzas Sold**

```
select
count(distinct order_id) as total_orders
from pizza_sales;
```

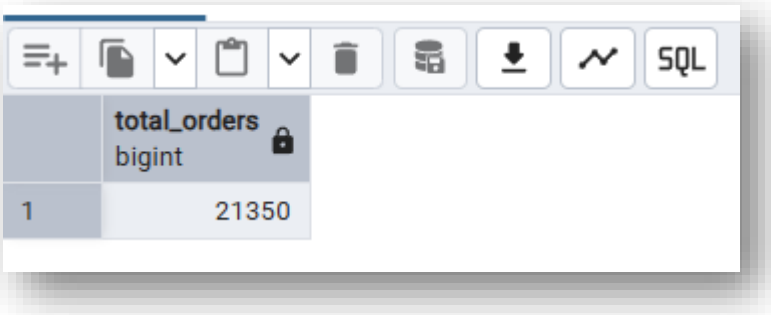

5. **Average Pizzas Per Order**

```
select
round(cast(sum(quantity) as decimal(10,2)) / count(distinct order_id), 2) as
Average_pizzas_per_order
from pizza_sales;
```

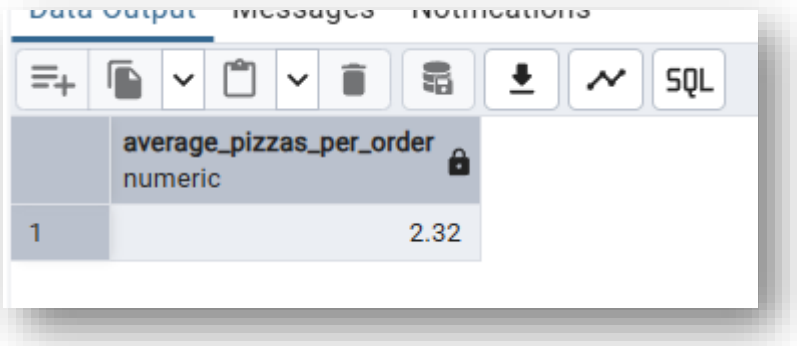


B. CHARTS REQUIREMENT

1. **Daily Trend for Total Orders:**

```
select
        to_char(order_date, 'FMDay') as day_is,
        count(distinct order_id) as total_orders
from pizza_sales
group by
to_char(order_date, 'FMDay'),
extract(isodow from order_date)
order by extract(isodow from order_date);
```


	day_is text	total_orders bigint
1	Monday	2794
2	Tuesday	2973
3	Wednesday	3024
4	Thursday	3239
5	Friday	3538
6	Saturday	3158
7	Sunday	2624

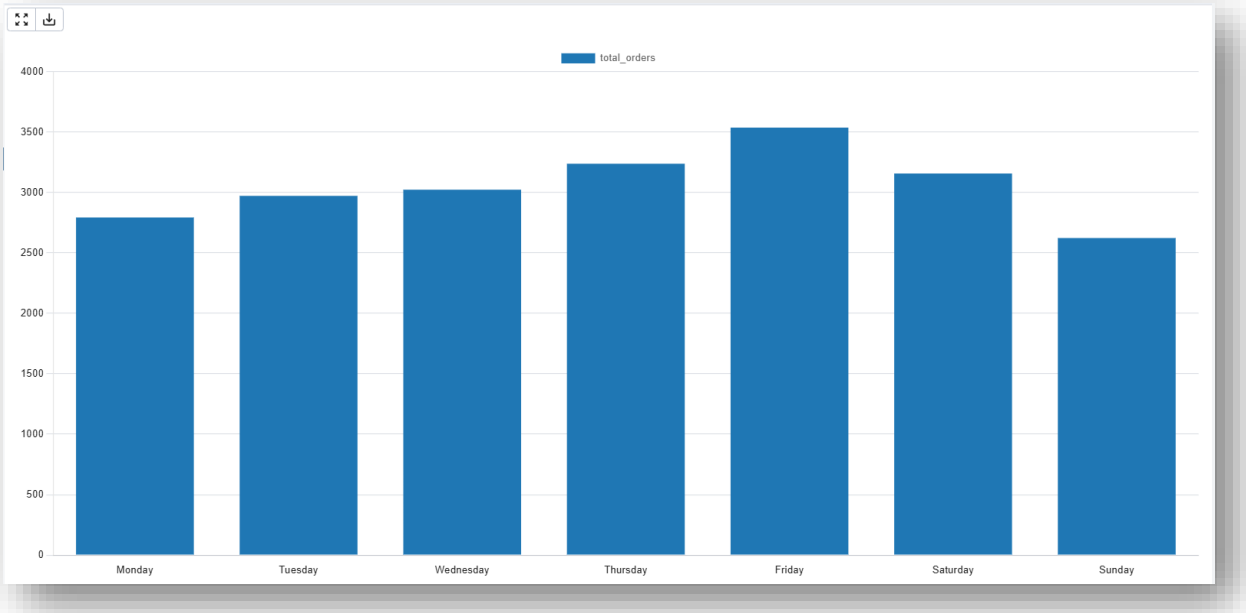

2. Hourly Trend for Total Orders:

```
select
        extract(hour from order_time) as hour_is,
        count(distinct order_id) as total_orders
from pizza_sales
group by extract(hour from order_time)
order by extract(hour from order_time);
```


	hour_is numeric	total_orders bigint
1	9	1
2	10	8
3	11	1231
4	12	2520
5	13	2455
6	14	1472
7	15	1468
8	16	1920
9	17	2336
10	18	2399
11	19	2009
12	20	1642
13	21	1198
14	22	663
15	23	28

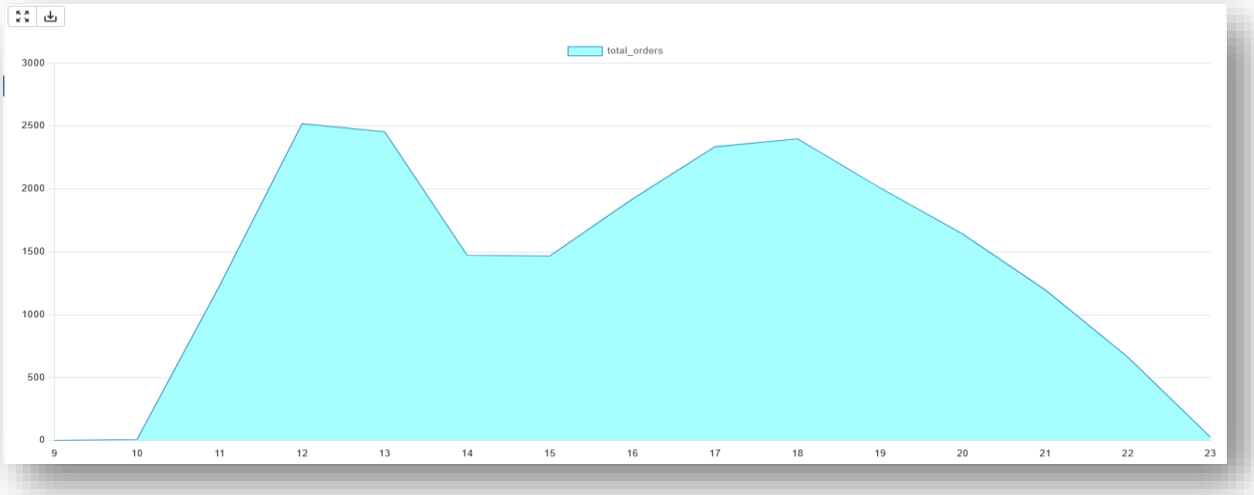

3. **Percentage of Sales by Pizza Category**

```
select
        pizza_category,
        sum(total_price) as total_sales,
        round(sum(total_price) * 100 / (select sum(total_price) from pizza_sales),
2) as percentage_share
from pizza_sales
group by pizza_category;
```

	pizza_category character varying (50)	total_sales numeric	percentage_share numeric
1	Supreme	208197.00	25.46
2	Chicken	195919.50	23.96
3	Veggie	193690.45	23.68
4	Classic	220053.10	26.91

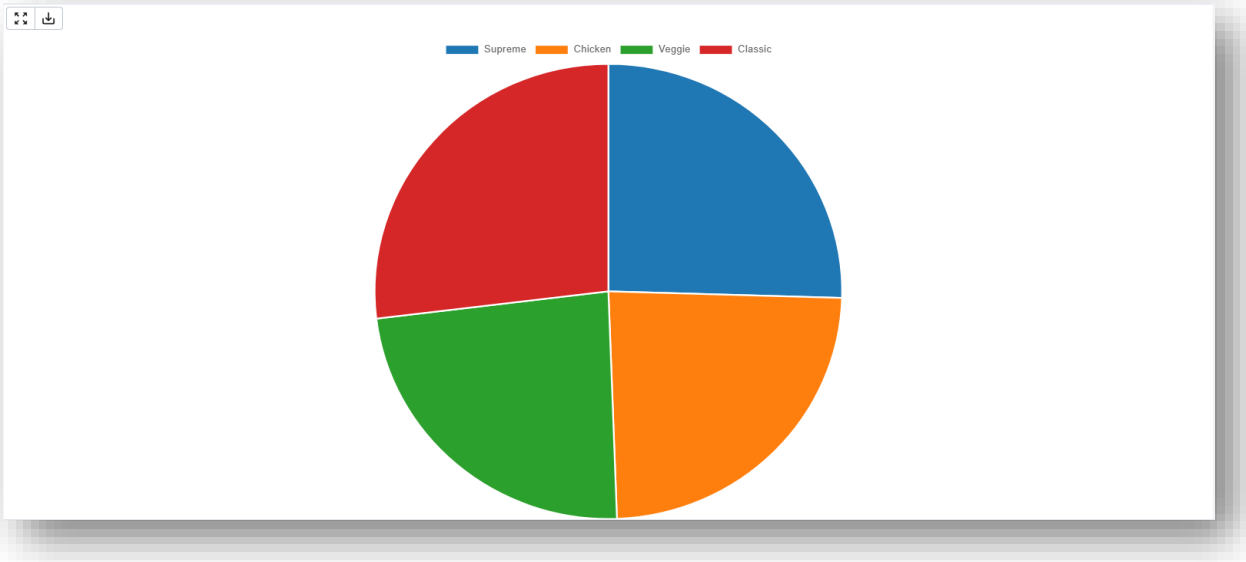


4. **Percentage of Sales by Pizza Size:**

```
select
        pizza_size,
        sum(total_price) as total_sales,
        round(sum(total_price) * 100 / (select sum(total_price) from pizza_sales),
2) as percentage_of_sales_by_size
```

```
from pizza_sales
group by pizza_size
order by percentage_of_sales_by_size desc;
```


	pizza_size character varying (10)	total_sales numeric	percentage_of_sales_by_size numeric
1	L	375318.70	45.89
2	M	249382.25	30.49
3	S	178076.50	21.77
4	XL	14076.00	1.72
5	XXL	1006.60	0.12

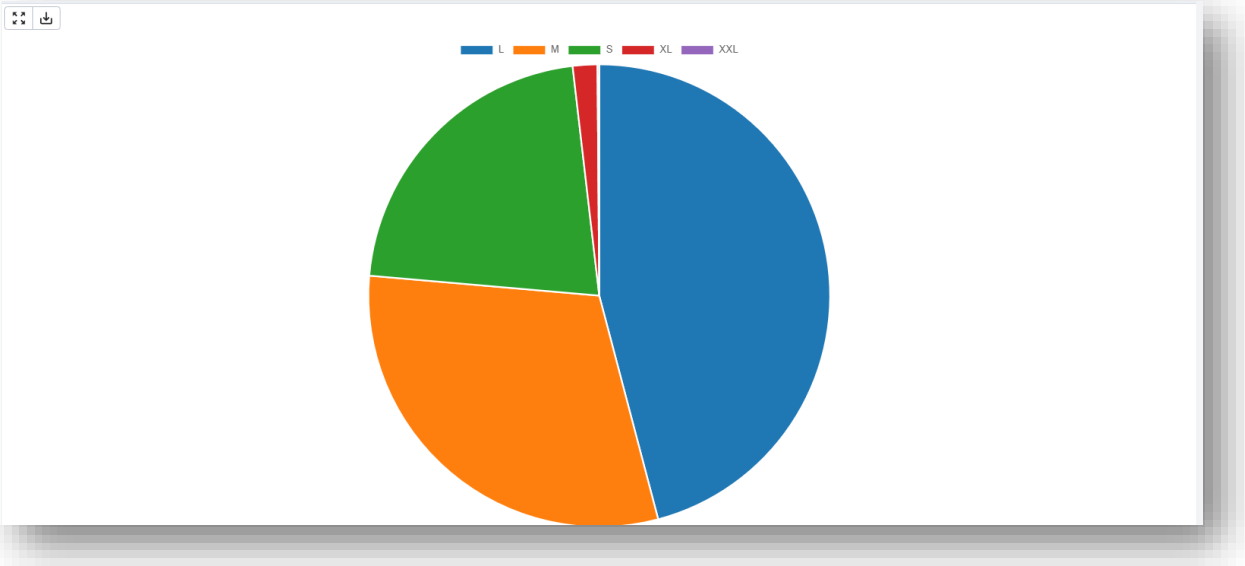

5. Total Pizzas Sold by Pizza Category:


```
select
        pizza_category,
        sum(quantity) as total_pizza_sold
from pizza_sales
group by pizza_category;
```

	pizza_category character varying (50)	total_pizza_sold bigint
1	Supreme	11987
2	Chicken	11050
3	Veggie	11649
4	Classic	14888

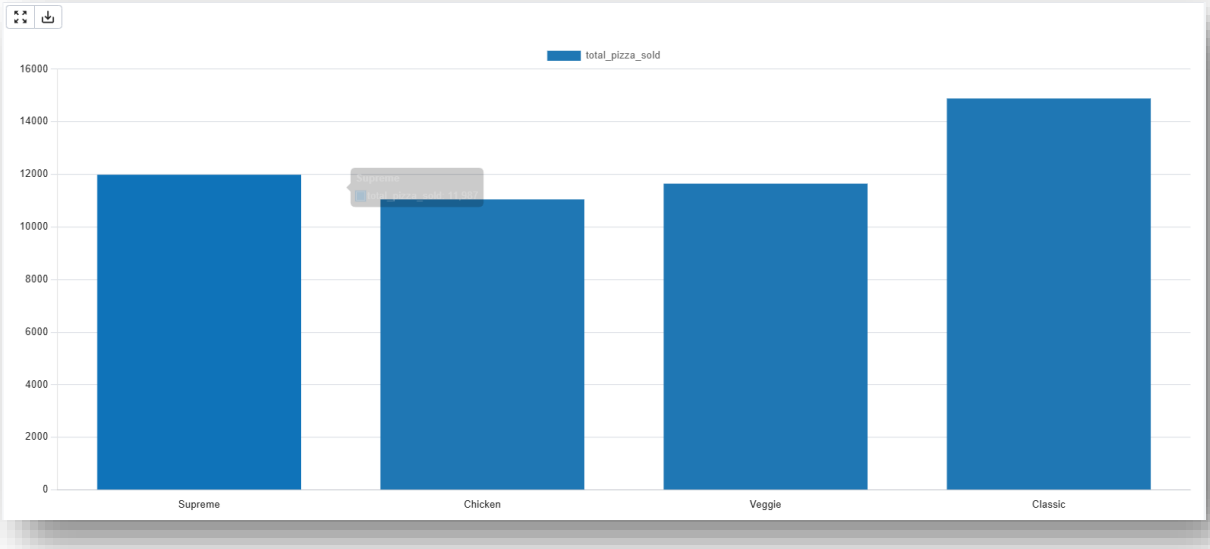

6. Top 5 Best Sellers by Total Pizzas Sold


```
select
        pizza_name,
        sum(quantity) as total_pizza_sold
from pizza_sales
group by pizza_name
order by total_pizza_sold desc
limit 5;
```

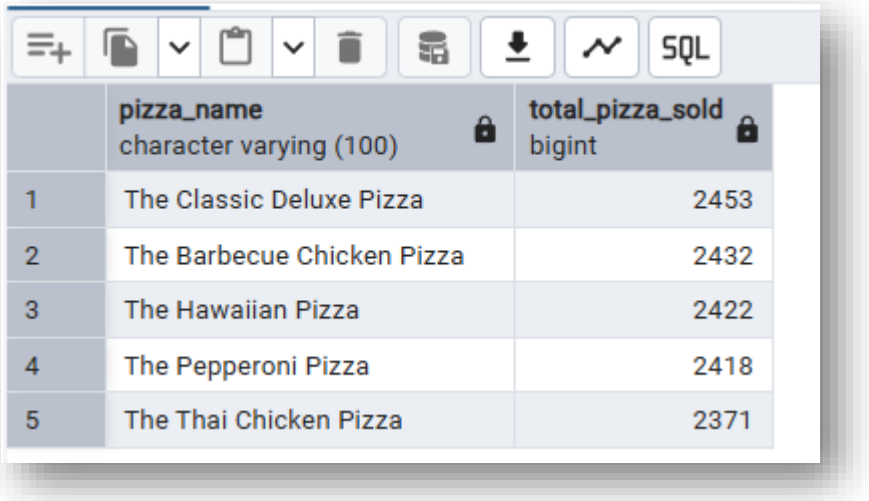

	pizza_name character varying (100)	total_pizza_sold bigint
1	The Classic Deluxe Pizza	2453
2	The Barbecue Chicken Pizza	2432
3	The Hawaiian Pizza	2422
4	The Pepperoni Pizza	2418
5	The Thai Chicken Pizza	2371

7. **Bottom 5 Worst Sellers by Total Pizzas Sold**

```
select
        pizza_name,
        sum(quantity) as total_pizza_sold
from pizza_sales
group by pizza_name
order by total_pizza_sold asc
limit 5;
```

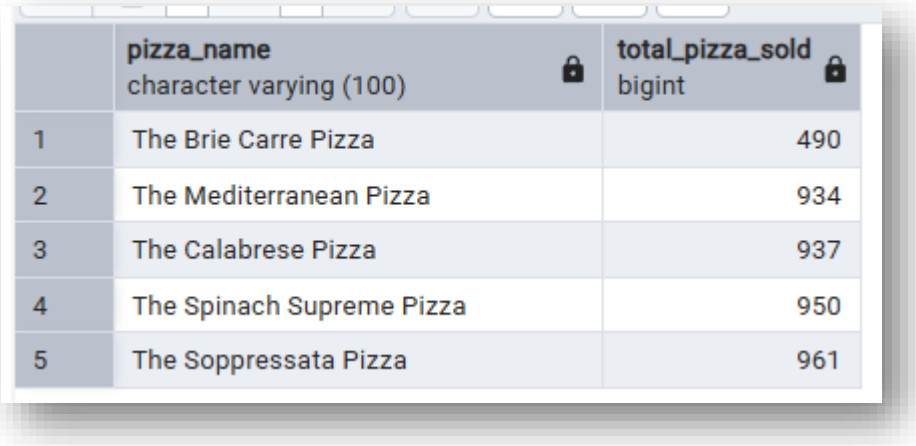

	pizza_name character varying (100)	total_pizza_sold bigint
1	The Brie Carre Pizza	490
2	The Mediterranean Pizza	934
3	The Calabrese Pizza	937
4	The Spinach Supreme Pizza	950
5	The Soppressata Pizza	961