

Connecting Multiple Configurations



Ned Bellavance

HashiCorp Ambassador

@ned1313 | nedinthecloud.com



Module Overview



Sharing data scenarios

Deploy the Globomantics application


Data sharing options

Update the application configuration

- Use `tfe_outputs`



Sharing Information

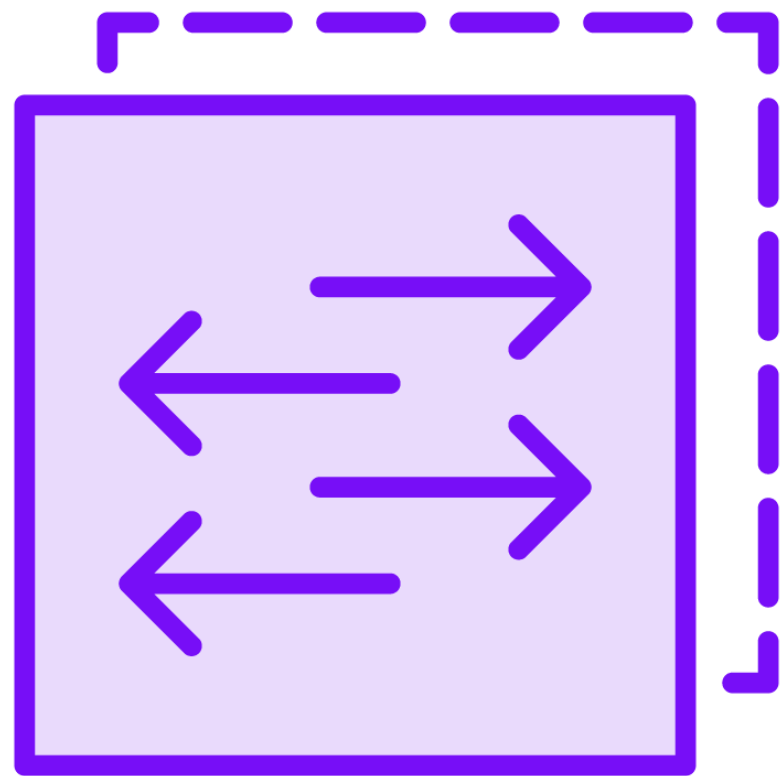

Monolithic configuration

Increased complexity

- Slow refresh and plan
- Blast radius

Scope of responsibility

- Separation by area of expertise
- Organize configuration by team

Share data across configurations

Globomantics Environment



GLOBOMANTICS


Taco Wagon application deployment

Networking information required

Code review and recommendations



Taco Wagon Architecture

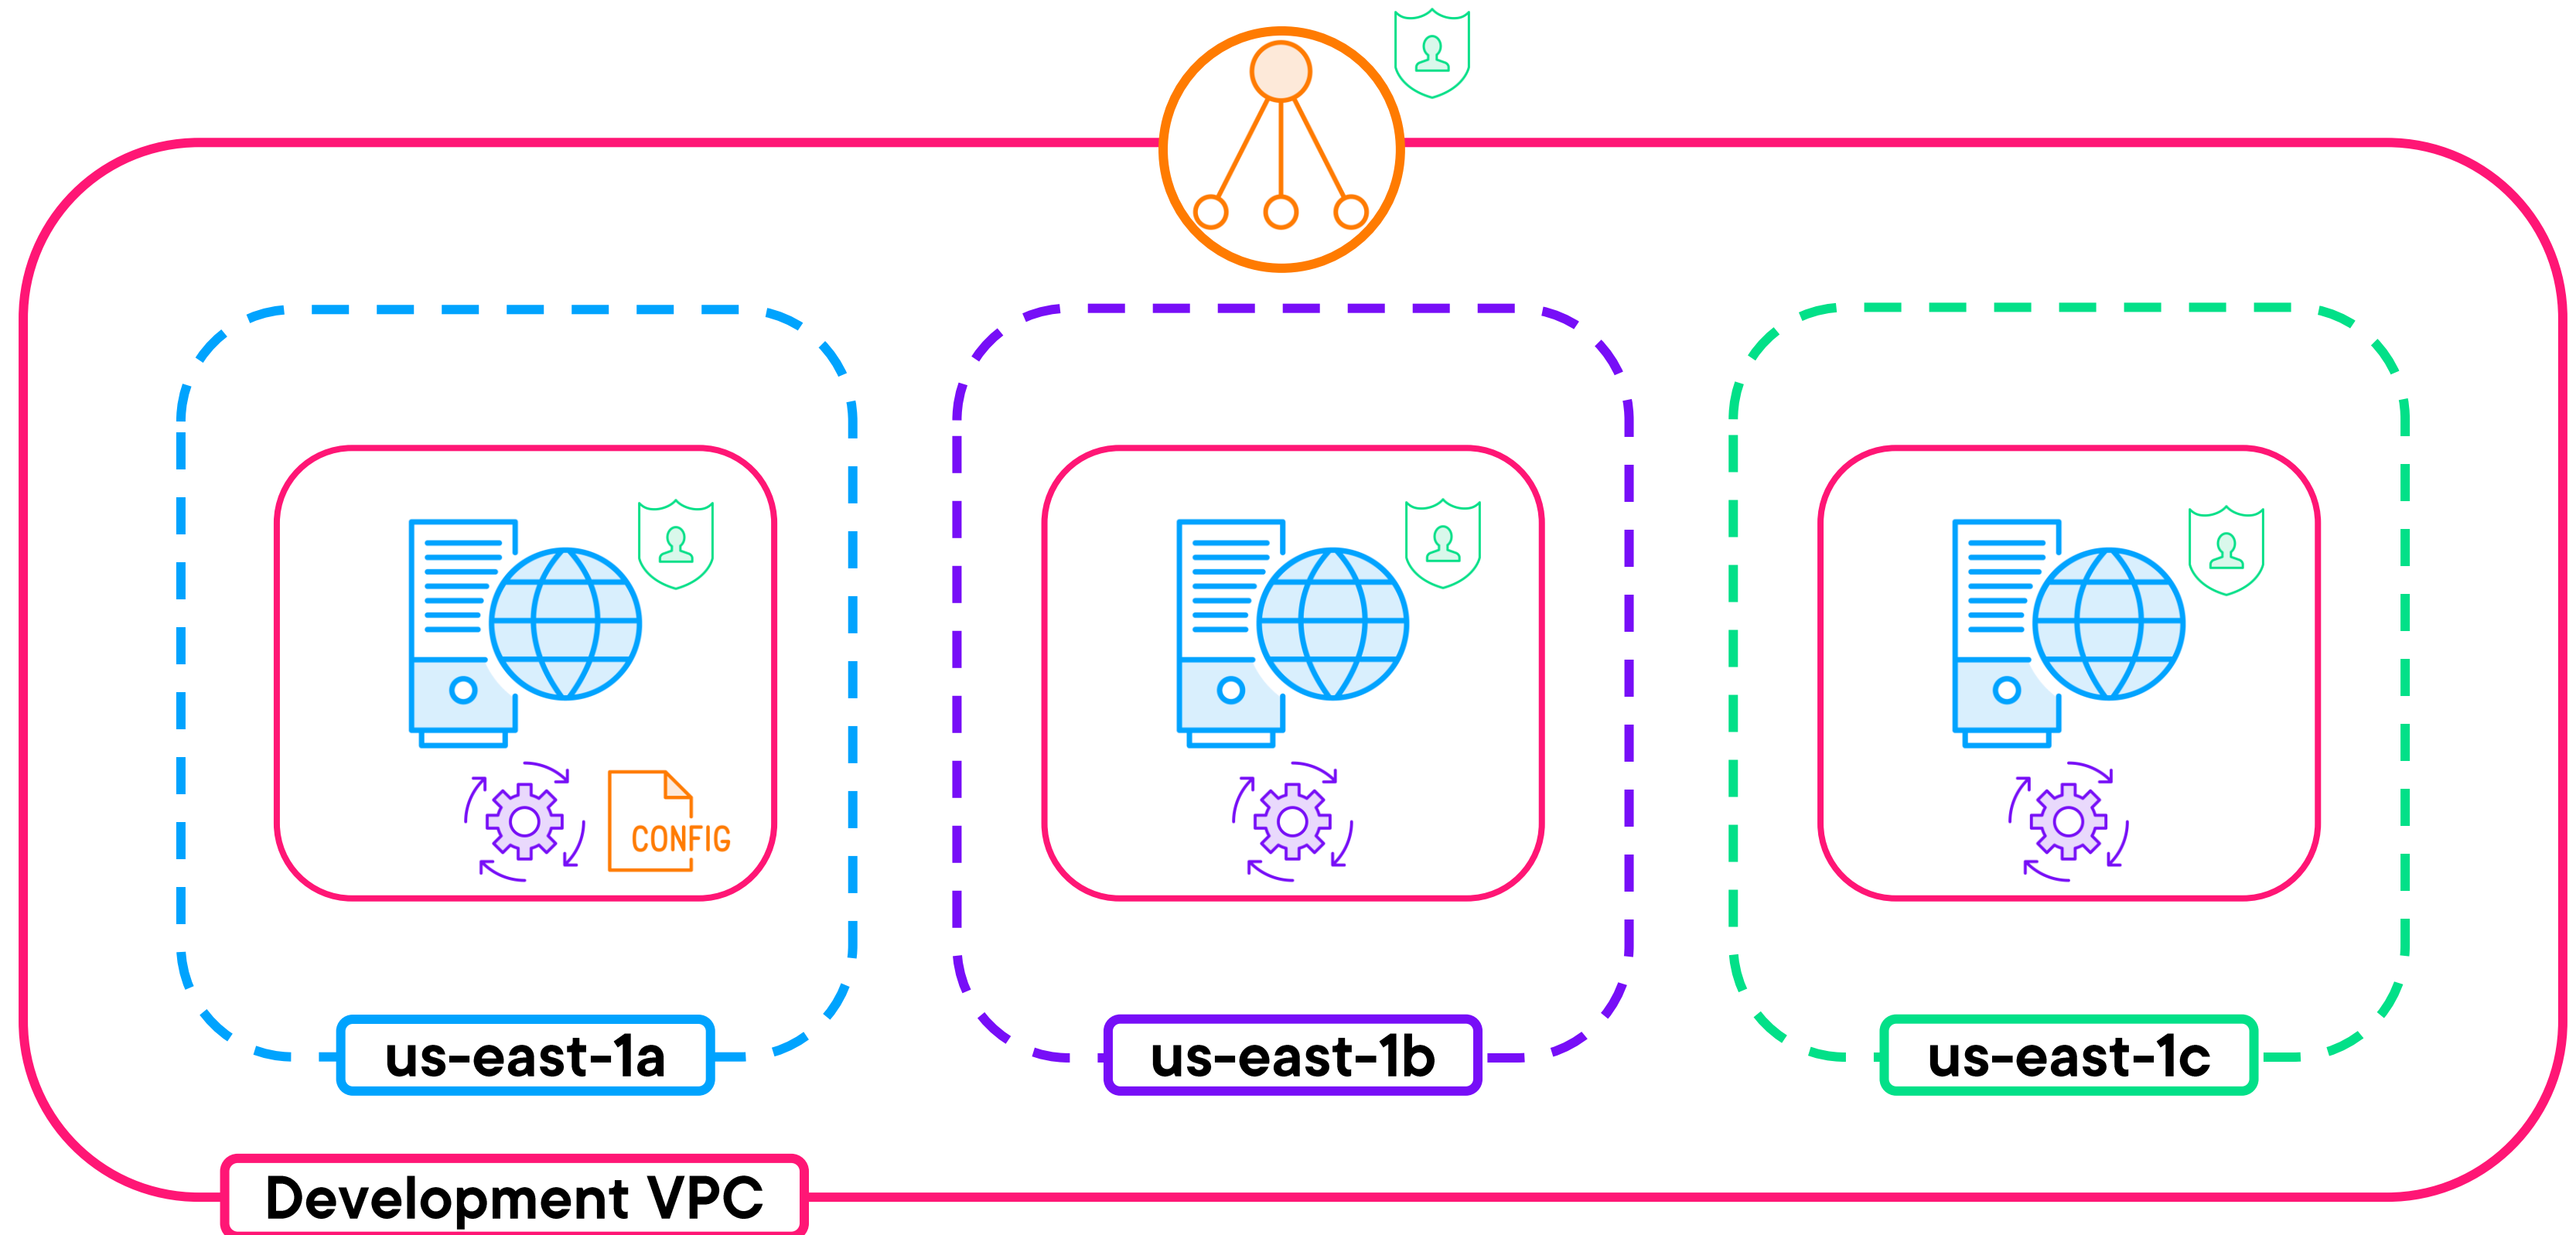

Recommendations



Remove input variables for network info

Use Ansible to deploy application

Switch to the terraform_data resource

Store the API key securely



Sharing Information Options

<https://developer.hashicorp.com/terraform/language/state/remote-state-data>

terraform_remote_state

Requires read access to state

tfe_outputs

Requires read access to outputs



Using tfe_outputs

datasources.tf

```
data "tfe_outputs" "main" {  
  organization = "MY_ORG"  
  workspace   = "SOURCE_WORKSPACE"  
}  
  
# All outputs from workspace  
data.tfe_outputs.main.values  
  
# All nonsensitive outputs from workspace  
data.tfe_outputs.main.nonsensitive_values
```



Demo



Add outputs to networking configuration

Update application with tfe_outputs

Remove input variables

Deploy updates with no changes



Module Summary



Sharing information between configurations

Review application code

Use the `tfe_outputs` data source

Deploy updates



Up Next:

Implementing Configuration Management

