

Animation Randomizer

File path: Assets/UIAnimationToolkit/Editor/Animation/Anim_Randomizer.cs

Menu: Tools > UI Animation Toolkit > Animation > Animation Randomizer


Overview

Generate random keyframe sequences for camera/UI shakes, drifting motion, flickering lights or color variation. Controls include amplitude, frequency, duration, repeatable seeds, looping and shared random offsets for synchronized properties.

How to use

1. Select property rows to start generation at time zero, or select keyframes to start at the earliest selected key on each property.
2. Set Amplitude, Frequency (Hz), Duration (s) and Random Seed. Choose Jitter or Perlin.
3. Enable Loop, Unified Random and/or Stepped Keys when appropriate.
4. Check the preview and selected-property count, then click Apply Randomization. Keys outside each generated time interval are retained.

Interface and parameters

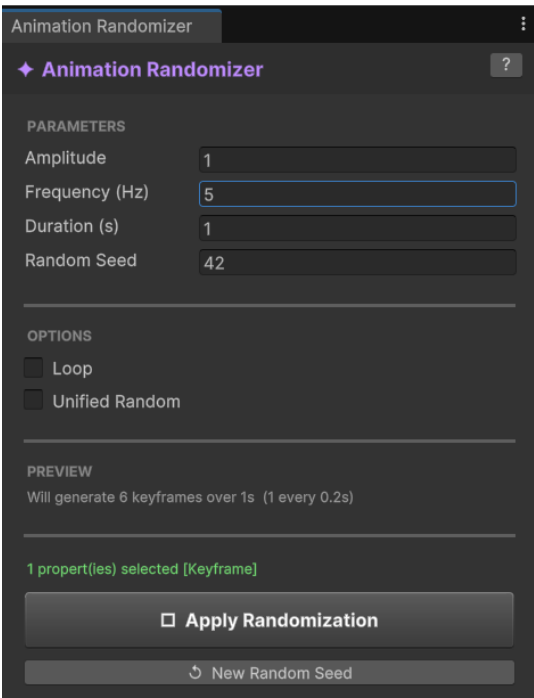

Supplied earlier interface screenshot. The current script additionally exposes Random Mode and Stepped Keys.

Control / parameter	Description
Amplitude	Maximum magnitude of the random offset around each property’s baseline.
Frequency (Hz)	Sampling frequency; higher values create more frequent keys.

Control / parameter	Description
Duration (s)	Length of the generated segment; must be greater than zero.
Random Seed	Integer seed. Reproducibility also depends on keeping the other settings and selection/order unchanged.
Random / New Random Seed	Generate a new seed.
Random Mode: Jitter	Sharper, independently randomized changes.
Random Mode: Perlin	Smoother noise-based variation.
Loop	Close the generated offset sequence, match endpoint tangents and enable the clip's Loop Time flag.
Unified Random	Use the same offset sequence for all processed properties. Baseline values may still differ. Useful for synchronized scale axes.
Stepped Keys	Use Constant tangents with no interpolation between generated values.
Apply Randomization	Write the generated segment into the clip; Undo is recorded.

Notes

- The baseline comes from the first key of each existing curve. If that curve has no keys, the script attempts to read the scene component value. The baseline is not necessarily the value at the generation start time.
- Loop closes the generated sequence; a longer clip with unrelated animation outside that segment is not automatically made seamless.
- The older screenshot omits controls added in the current script. Use the table above as the current parameter reference.