

Curve Flow

File path: Assets/UIAnimationToolkit/Editor/Animation/Anim_SetCurves.cs

Menu: Tools > UI Animation Toolkit > Animation > Curve Flow


Overview

Use a standalone AnimationCurve editor to apply a consistent easing shape to selected intervals across multiple properties. Add intermediate points and use the curve editor's preset features to reuse shapes. Selected animation keys can also be copied back into the editor for normalization and further adjustment.

How to use


1. In the Animation window's Dopesheet or Curves view, select at least two keys on each property to process. You can select keys across several properties.
2. Draw the desired shape in VELOCITY CURVE. Despite that UI label, the curve is mapped directly to normalized time/value; it is not integrated as a physical velocity function.
3. Optionally choose Copy Selected Keys to Curve Editor to extract the first suitable selected property's shape.
4. Click Apply to Selected Keyframes. The selected endpoints define the time/value range; intermediate keys are rebuilt from the editing curve and outside keys are retained.

Interface and parameters

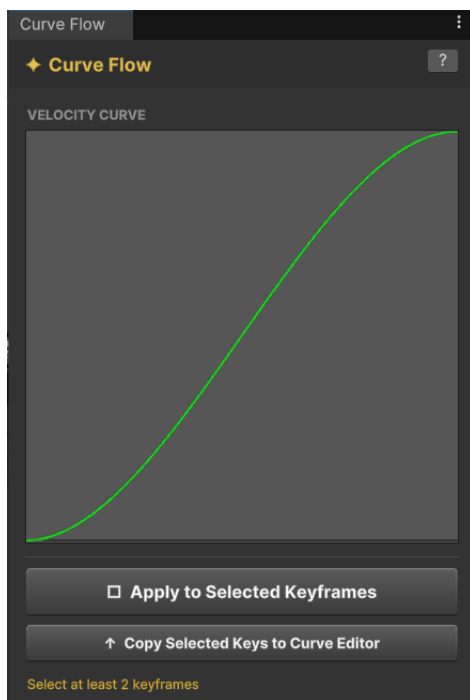

Supplied Curve Flow interface screenshot.

Control / parameter	Description
VELOCITY CURVE	Open and edit the desired time/value shape, including additional intermediate keys.
Apply to Selected Keyframes	Map the editing curve into each eligible selected interval.
Copy Selected Keys to Curve Editor	Normalize selected keys from the first binding with at least two selected keys.
Selection indicator	Shows the selected key count; each processed property needs a suitable pair of keys.

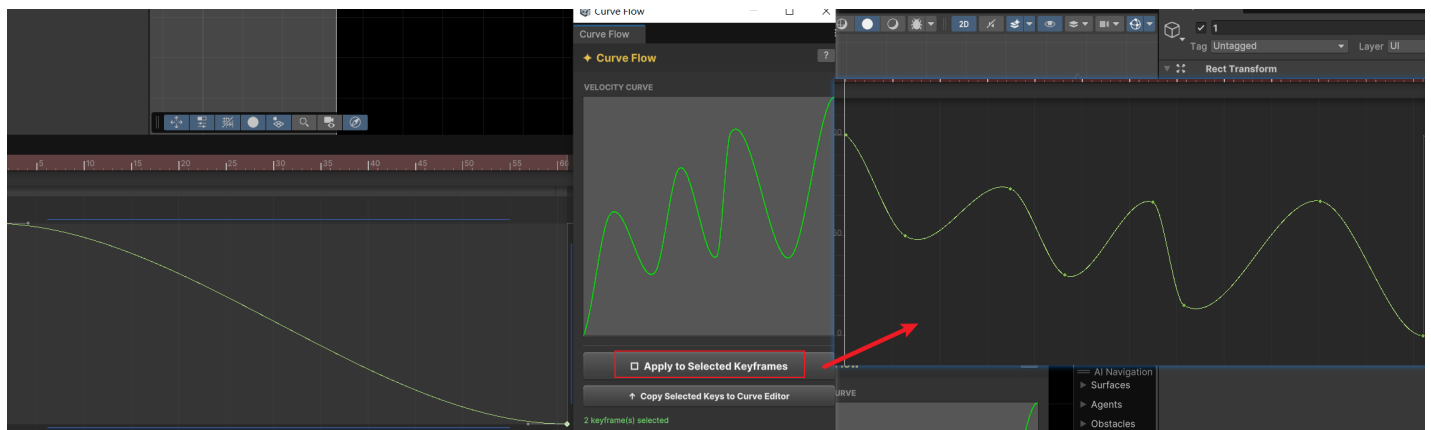

Supplied example: custom intermediate curve points are mapped back into the animation interval.

Notes

- The first and last selected key values are retained. The interval between them is replaced, including intermediate keys that were not individually selected.
- For normal easing, use a shape spanning normalized time 0 to 1 and value 0 to 1. Additional points can create overshoot or more complex motion.
- Copying from multiple selected properties uses one suitable source binding rather than merging them. A zero endpoint-value range cannot preserve a varying shape through ordinary endpoint normalization.
- Undo before comparing alternative curve applications. This tool edits the clip; it is not a runtime easing component.