



Security and trust issues in Fog computing: A survey

PeiYun Zhang^a, MengChu Zhou^{b,c,*}, Giancarlo Fortino^d

^a School of Computer and Information, Anhui Normal University, Wuhu 241003, China

^b Department of Electrical and Computer Engineering, New Jersey Institute of Technology, Newark, NJ 07102, USA

^c The Institute of Systems Engineering, Macau University of Science and Technology, Macau 999078, China

^d Department of Informatics, Modeling, Electronics, and Systems, University of Calabria, Italy

HIGHLIGHTS

- We discuss and analyze the architectures of Fog computing, and indicate the related potential security and trust issues.
- We analyze how such issues have been tackled in the existing investigations.
- We indicate the open challenges, research trends and future topics of security and trust in Fog computing.

ARTICLE INFO

Article history:

Received 27 December 2017

Received in revised form 3 March 2018

Accepted 8 May 2018

Available online 15 May 2018

Keywords:

Fog computing
Cloud computing
Trust
Security

ABSTRACT

Fog computing uses one or more collaborative end users or near-user edge devices to perform storage, communication, control, configuration, measurement and management functions. It can well solve latency and bandwidth limitation problems encountered by using cloud computing. First, this work discusses and analyzes the architectures of Fog computing, and indicates the related potential security and trust issues. Then, how such issues have been tackled in the existing literature is comprehensively reported. Finally, the open challenges, research trends and future topics of security and trust in Fog computing are discussed.

© 2018 Published by Elsevier B.V.

1. Introduction

Cloud computing (the Cloud in brief) has drastically changed the landscape of information technology (IT) by providing some major benefits to IT users, including eliminating upfront IT investment, scalability, proportional costs, and so on [1–5]. However, as more and more devices are connected, latency-sensitive applications seriously face the problem of large latency. In addition, Cloud computing is unable to meet the requirements of mobility support and location awareness. To overcome these problems, a new paradigm called Fog computing (the Fog in brief) was proposed in 2012 [6,7].

According to Bonomi et al. [8], the Fog is a highly virtualized platform that provides storage, computing and networking services between the Cloud data centers and end devices. Both Cloud and Fog provide data, computation, storage and application services to end users [9]. However, the latter is distinguished from the former by its decentralization, processing large amounts of

data locally, software installation on heterogeneous hardware [10], proximity to end-users, dense geographical distribution, and support for mobility [11].

Here, we show an example of a traffic light system to discuss the relationship between them when dealing with latency. In a traffic light system without the Fog, there may be 3~4 hops from the monitoring probe to the server in the Cloud. Hence, real-time decisions cannot be made immediately and the system faces the challenge of network latency. However, by using the Fog, the monitoring probe acts as a sensor, and the traffic lights act as an actuator. The Fog node can send conventional compressed video that may endure some time latency to the Cloud. When the Fog node detects an ambulance's headlight flashing, it makes an immediate decision to turn on the corresponding traffic lights, so as to let the ambulance go through without any delay. However, the Fog cannot replace the Cloud but supplements it.

Many companies and institutes, such as ARM, Cisco, Dell, Intel, Microsoft Corp., Cloudlet, Intelligent Edge by Intel and the Princeton University Edge Laboratory are devoted to research and development of the Fog. OpenFog (Found in 2015) Consortium workgroups are working towards creating an open architecture for the Fog to enable its interoperability and scalability [12].

* Corresponding author.

E-mail address: zhou@njit.edu (M.C. Zhou).

Network equipment like switches and gateways is provided by Cisco, Huawei, Ericsson, etc. The current research trends reflect the tremendous potential of the Fog.

The Fog features with location awareness, low latency and edge location [13]. It fits to a scenario where a huge number of heterogeneous ubiquitous and decentralized devices communicate, need to cooperate, and perform storage and processing tasks [6]. Users can visit their Fog anytime by using any device that can be connected to the Fog network. The Fog has many applications in such areas as smart city [14–16] and healthcare [17–20]. It can also provide better Quality of Service (QoS) in terms of fast response and small energy consumption [21,22].

The Fog uses network devices (named Fog nodes in this paper) for latency-aware processing of data collected from Internet of Thing (IoT) [23]. Fog nodes are denoted as heterogeneous components deployed in an edge network in Fog environments. They include gateways, routers, switchers, access points, base stations, and specific Fog servers [24]. The Fog facilitates uniform and seamless resource management including computation, networking and storage allocation [25]. Fog nodes are often the first set of processors that data encounter in IoT, and have the resources to implement a full hardware root of trust. This root of trust can be extended to all the processes and applications running on them, and then to the Cloud [26]. Without a hardware root of trust, various attack scenarios can compromise the software infrastructures of the Fog, allowing hackers to gain a foothold. The requirements of life safety-critical systems mandate the sorts of security capabilities available on the Fog [27]. Hence, new security and trust challenges emerge with the rise of the Fog. The existing methods cannot be directly applied to the Fog because of its mobility, heterogeneity, large-scale geo-distribution [12]. This work reviews these concerns in the Fog and the existing solutions. Differing from other survey papers about Fog computing, this paper focuses on its security and trust issues, especially in the region of the Fog.

The rest of this paper is organized as follows. Section 2 reveals a Fog architecture as well as related security and trust issues. Section 3 summarizes the related work to cope with security and trust issues. Section 4 presents open research problems. Section 5 discusses the future work. Finally, Section 6 concludes this survey paper.

2. Fog computing architecture

2.1. General architecture

Based on the modern computing architecture with three layers [11,21]: the Cloud, the Fog and the Edge, we provide a comprehensive fog architecture as shown in Fig. 1. Between the Cloud and the Fog lies a core network to offer network services. From it we can see that the Cloud lies at the upper core level and is far away from edge devices. The Fog lies at the middle level and is closer to edge devices than the Cloud. Each Fog node is connected to the Cloud. Each edge device is connected to a Fog node [28]. In addition, we can see that Fog nodes can be connected to each other. Communications between Fog–Fog, Fog–Cloud, and Fog–Edge are all bi-directional.

The Cloud: It includes high-performance servers and storage devices for broadcasting, data warehousing and big data analysis [19]. It is the remote control and management center that can store large data, and process highly complex but often non-urgent tasks. The data is sent to the Cloud through high-speed wireless or wired communications. The Cloud provides ultimate and global coverage. As a repository, it provides data storage to meet users' long-term needs and intelligent data analysis.

The Fog: It consists of a network of interconnected Fog nodes [19,24]. It provides geo-distributed, low latency and urgent computation as well as location awareness. Each Fog node is a resource

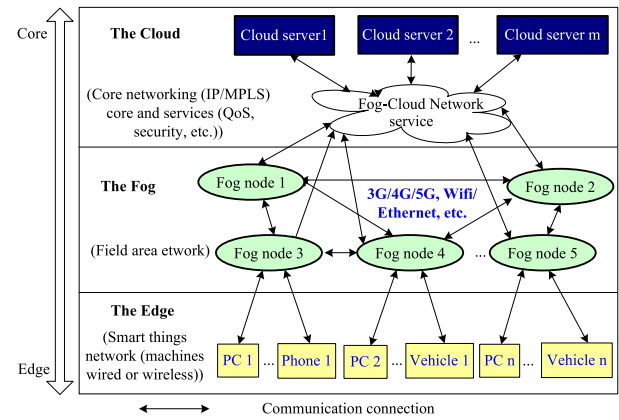


Fig. 1. A comprehensive Fog architecture.

center for ephemeral storage. Its functions include network transform, data collection, communications, data upload, data storage, computation and management. Compared with the edge devices, Fog nodes have more memory or storage ability for computing, which makes it possible to process a significant amount of data from edge devices. On the other hand, when needing a more complex and longtime computation, the computation work should be sent to the Cloud by Fog nodes through various available communications technologies, e.g., 3G/4G/5G cellular networks and WiFi. Fog nodes are bridges between Cloud and edge devices.

Fog nodes are independent and can be interconnected for collaboration. Management and collaborative procedures are applied on Fog nodes to implement management and control. The collaboration among Fog nodes can be executed via remote or local communications among them.

The Edge: It consists of several physical devices (edge devices) enabled with their ubiquitous identification, sensing, and communication capacity [19], such as vehicles, machines and cell phones. Each edge device is connected to one of the Fog nodes. Edge devices have a large variety of sensors and local data. It is very expensive and time-consuming to send all the data from terminal edge devices to the Cloud through a network. Hence, by connecting them to Fog nodes, one can deal with the urgent data but not transfer from edge devices to the cloud immediately.

Some easily misunderstood concepts are discussed in the following.

Edge computing vs. the Fog: Edge computing is different from the Fog in that the latter is a highly virtualized platform that provides computation, storage, and networking services between end devices and Cloud computing data centers [11]. Both of them need to push intelligence and processing capabilities out of centralized data centers and down closer to edge devices, such as IoT sensors, relays, and motors. The key difference between them is where intelligence and computing power are placed [12]. The Fog pushes intelligence down to the local area network (LAN) level, processing data in Fog nodes. While Edge computing pushes the intelligence, processing power, and communication capabilities further down to edge devices [29]. More details between them are discussed in [24]. In [30], Endpoint computing is regarded as Edge computing. Other similar concepts such as Cloudlets and Micro-data centers are discussed in [31].

Wireless sensor networks (WSNs) vs. the Fog: WSNs are designed to operate at very low power to extend battery life or use energy harvesting to sustain themselves. Most of them face the problems of small memory motes, low processing power, and

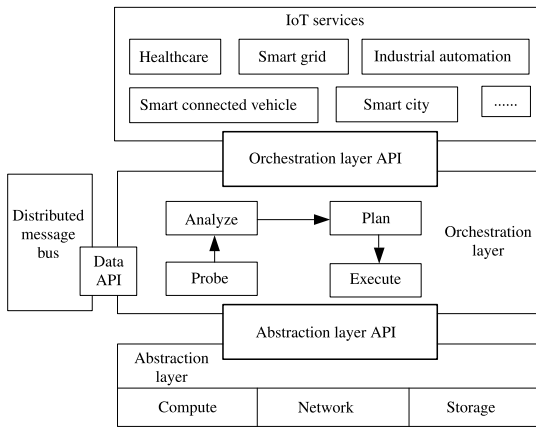


Fig. 2. The Fog architecture implementation [13].

sometimes unreliable sensors. The Fog is a suitable platform to support WSNs [11]. In addition, Romana et al. differentiate the features among Mobile Edge computing, Mobile Cloud computing, Fog and Cloud computing [32].

From Fig. 1 and the above analysis, we reveal the following security and trust issues for the Fog: Since the Fog is designed upon traditional networking components, it is highly vulnerable to security attacks. It is hard to ensure authenticated access to services and maintenance of privacy in a large Fog [28]. We can also see that the distributed and open nature of its hierarchical structure makes it vulnerable to security threats. Traditional security and trust issues, such as wiretapping, tampering, loss of information, and Trojan horses, still exist. The new ones caused by Fog characteristics are listed as follows:

- For an edge device, it may have to switch the connection to its nearby Fog node when faults happen. This may need to build a new connection and transfer data from the former Fog node to the new one, which may bring about more chance for new security when such connection fails.
- It also faces the crisis of re-locating a new Fog node for communications if its connected Fog node malfunctions when building a new connection from a Fog node to the Cloud.

2.2. Detailed architecture design

Based on the architecture in Fig. 1, the topological structures enable communications among Fog nodes and include net-like and bus topology as shown in [28] and [33], respectively. The former is more complex and may cause more communication overhead, security and trust risk. The shortcomings of bus topology include data collision, limited communication distance and limited range. It is also difficult to diagnose and isolate faults with it.

From the communication relationship among the Fog nodes, we reveal the following security and trust issues:

- Each Fog node is not only independent, but also can be collaborative with other ones through message passing. If Fog nodes fail to be well integrated into the network and work together to create meaningful services, trust problems may happen.
- When a new Fog node comes or an old one cannot provide its service and has to quit, the other Fog nodes potentially have to change their topology and rebuild their communication structure so as to enable communications among them. This may bring about new security issues as caused by such a topology rebuilding process.

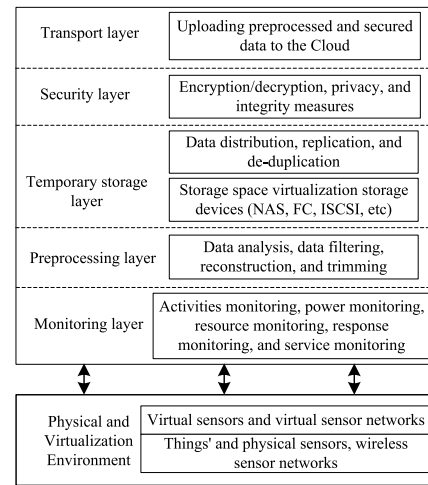


Fig. 3. The layered architecture of a gateway in the Fog [37].

- When Fog nodes collaborate with other nodes, if one node is attacked by malicious users and is infected, the infected one may attack or infect other nodes. This induces security or trust crisis among all the collaborative nodes.
- Fog nodes can communicate via a network. The communication overhead among them may be large. For latency-sensitive applications, it can be a serious problem. It will low the system reliability and then cause trust crisis for users when their task deadlines are missed. Hence, how to decrease the communication overhead to an acceptable level is a significant issue.

2.3. Architecture implementation

A three-layer Fog architecture [13] is realized as shown in Fig. 2. It has IoT services, orchestration layer and distributed message bus, and abstraction layer.

IoT services: The Fog platform hosts a set of diverse service applications, such as smart city. An IoT service is viewed as a way for users to access their needed functionality/application [34].

Orchestration layer and distributed message bus: Orchestration is the process through which the Fog systems determine how the virtualized resources are allocated and inter-operated. It is essential that orchestration is aware of the instantaneous state of the Fog network, and reacts quickly to any changes in its configuration, load, or status [27]. The core issues, challenges, and future research directions in fog-enabled orchestration for IoT services is overviewed in [35]. Because its services and infrastructure are distributive, the Fog should provide necessary means for distributed policy-based orchestration, which results in the scalable management of individual subsystems and the overall services. The orchestration functionality is distributed across the Fog deployment while distributed control provides better resiliency, higher scalability, and faster orchestration for geographically distributed deployments than centralized control [35]. The messaging bus is used for communications. The layer provides policy-based and dynamic life cycle management for Fog services. There are four parts in the life cycle: probing, analyzing, planning, and executing a task.

Abstraction layer: It provides uniformity in a heterogeneous infrastructure environment over various access, control and management of resources through customized Application Programming

Interfaces (APIs) and User Interfaces. Generic APIs concern security, isolation and privacy to various tenants.

In Fig. 2, from the Fog nodes themselves, we observe the following security and trust issues:

- New security and trust issues are raised because of service orchestration: It needs to specify how and what services must be chained before delivery. Highly trusted services should be chosen to execute the entire service.
- At the abstraction layer, security is related with isolation and privacy in multi-tenancy.

Because a gateway can be a Fog node in the Fog, which is different from the gateway in [36]. A five-layer architecture of the Fog gateway as a Fog node is shown in Fig. 3 [37]. Below the five layers are many things, sensors and WSNs in a physical and virtualization environment. The following five layers are on the top of the environment:

Monitoring layer: It monitors activities, power, responses, and services when performing tasks. Effective measures are taken in time.

Preprocessing layer: It analyzes, filters, reconstructs and trims data.

Temporary storage layer: It supports data distribution, replication and storage space virtualization. It stores preprocessed data in Fog nodes and passes them to the Cloud.

Security layer: Some private data may be generated via IoT devices and WSNs, such as ubiquitous health care data. Location-aware data sometimes is sensitive when security and privacy issues are concerned.

Transport layer: It uploads the ready-to-send data to the Cloud. After being uploaded, the data is removed from Fog nodes.

From Fig. 3, we find the following security and trust issues:

- Storage is needed in the Fog. Regarding the storage, some problems may be faced. For example, after an edge device sends data to its connected Fog node, what data is chosen to be stored in the Fog node and in the Cloud? If the urgent data is large and not permitted to transfer to the Cloud, how can we use the Fog node's orchestration to realize security and high efficient storage? A hybrid storage approach for IoT in PaaS cloud federation [38] is proposed. The issues about secure data storage and search for industrial IoT by integrating Fog Computing and Cloud Computing [39] are investigated.
- How can we realize cost-effectiveness and high resiliency against failures in crucial applications [30]?
- If a large job is needed to be processed at the preprocessing layer and is beyond the computation ability of the connected Fog node, how should it do? Some measures should be taken for it.
- Gateways serving as Fog nodes may be compromised or taken over by fake ones [40].

From the above analysis of the fog computing architecture, we can see many trust and security issues to be addressed. The related work is discussed next.

3. Trust and security in Fog computing

3.1. Existing surveys and their overview

We have retrieved 86 references about security and trust in the Fog, including eight survey papers. We summarize their covered security issues and characteristics in Table 1. These studies mainly

focus on the security issues. Since their publications, we have seen some new security issues emerging, e.g., context-aware and data-dependent security ones. As a vitally important issue, trust has drawn much attention. Hence, this work intends to write a new survey paper about the security and trust issues related to Fog computing and its architectures.

We classify security and trust issues of current researches into six types: (1) trust, (2) authentication and access control, (3) attack, (4) privacy, (5) secure communications and (6) the others (include service availability, secure applications and secure sharing technology). According to these types, the number of the references is listed in Table 2 from 2014. In Table 2, the first column denotes the research topic types. The first row denotes years. The entries indicate the number of references per topic in a year. We can see that there are 10 papers in 2016 and 35 ones in 2017. The number of papers increases clearly. We note that only the papers in the first two months of 2018 are retrieved. As the classic security issues, authentication and access control as well as privacy preservation have drawn more researchers' attention. There are eight papers about the trust issue, which is relatively significant. There are only two papers about service availability, eight about secure applications and one about secure sharing technology.

3.2. Trust

Trust plays a major role in fostering relations based on previous interactions among Fog nodes and edge devices. A Fog node is considered as the most critical component as it is in charge of ensuring privacy and anonymity for end-users [18]. Moreover, this component must be trusted for delegation, as they must be assured that the Fog node implements the global concealing process on their released data and triggers non-malicious activities only. This requires all nodes that are part of the Fog network to have a certain level of trust on one another.

3.2.1. Trust middleware and model

Elmisery et al. propose a Fog-based middleware, where trust agents calculate the approximated interpersonal trust between a Fog node and the Cloud [18]. The trust computation is done in a decentralized fashion by using the entropy definition in [41]. The local concealment agent implements the local concealment process to achieve user privacy. The global concealment agent only exists in a Fog node. It executes the global concealment process on the aggregated user profile. A service layer is adopted in the Fog architecture to improve and manage trust [18], as shown in Fig. 4.

The difference between the middle parts in Figs. 4 and 1 is that a service layer is added on the top of the Fog in [18]. At the service layer, there are two main components: (1) Security authority center: This center is used to select Fog nodes with the highest reputation to act as members for trust computation. It is a trusted third party responsible for making an assessment on those Fog nodes according to the latter's reports. Moreover, it records the calculated reputation scores for various Fog nodes and trust levels for different Clouds. (2) Service server: A Fog node can seamlessly interact with the service server which is in the Cloud.

Soleymani et al. point out that trust establishment among vehicles is important to secure integrity and reliability of applications [46]. A secure trust model can deal with uncertainties and risks taking from unreliable information in vehicular environments. However, inaccurate, incomplete, and imprecise information collected by vehicles as well as movable/immovable obstacles yield interrupting effects. A fuzzy trust model based on experience and plausibility is proposed to secure a vehicular network [46]. It executes a series of security checks to ensure the correctness of the information received from authorized vehicles. Moreover, Fog nodes are adopted as a facility to evaluate the level of accuracy of

Table 1

The summary of security and trust issues in major survey papers.

Ref.	Security and trust issues in the Fog	Characteristics
[10]	(1) Virtualization issues (2) Web security issues (3) Internal/external communication issues (4) Data security related issues (5) Wireless security issues (6) Malware protection	Detailed definition and discussion of potential security issues of a Fog platform inherited from Cloud computing are given: (1) Access to services: persistent threats, access control issues, account hijacking and denial of services; (2) Platform or system: insecure APIs, system and application vulnerabilities, malicious insiders, insufficient due diligence, abuse and nefarious use, and shared technology issues; (3) Data: data loss and data breaches.
[12]	(1) Trust (2) Authentication (3) Secure communications in the Fog (4) End user's privacy (5) Malicious attacks	Challenges about the following issues are presented: (1) Malicious or malfunctioning in Fog nodes (2) Malicious insider attack (3) Mutual authentication (4) Privacy preservation (5) Fog forensics (6) Authentication and key agreement in fog computing-based radio access networks.
[42]	(1) Man-in-the-middle (MitM) Attack (2) Intrusion detection (3) Malicious detection technique in the Fog environments (4) Malicious Fog node problem (5) Data protection (6) Data management issues	Several unique security threats are introduced to the Fog.
[40]	(1) Trust issue (2) Preserving integrity (3) Logs-related issues (4) Dependability for data acquisition (5) Compliance issue (6) Live forensics issues (7) Multi-tenancy issues (8) Chain of custody	More extensive researches in Fog security and Fog forensics are promoted.
[28]	(1) Authentication (2) Privacy (3) Encryption (4) Denial of service (DoS) attack	Reliability in the Fog can be discussed in terms of consistency of Fog nodes, availability of high-performance services, secured interactions and fault tolerance [28].
[43]	(1) Network security (2) Data security (3) Access control (4) Privacy	Location privacy and data confidentiality are focused. The greatest risk comes from the outside attack.
[44,45]	(1) Intrusion detection (2) Authentication	Stealthy features of MitM attack is investigated by checking the CPU and memory consumption of a Fog node. Authentication of connection between the Fog and the Cloud.

Table 2


The summary of the references.

	2014	2015	2016	2017	2018	Total
Trust	1	0	3	5	0	9
Authentication and Access Control	2	0	0	5	3	10
Attacks	2	2	1	3	0	8
Privacy preservation	0	1	5	9	3	18
Secure communications	0	0	0	5	1	6
The others	0	0	1	8	2	11
Total	5	3	10	35	9	62

an event's location. Koo et al. present a hybrid secure deduplication protocol by taking untrustworthy Fog storage environments into account [47]. The work [48] introduces a trusted third party (TTP) into its privacy preservation. Because malicious attacks can cause sensor communications to be unreliable, a trust evaluation method is needed to ensure the reliability relationship among sensors to resist malicious attacks. Fog nodes are adopted to help the system compute trust values [49].

3.2.2. Collusion deception

Wang et al. [50] study the trust scheme of a publish–subscribe system (PSS) [51] in the Fog, so as to defend trust against collusion attack. PSS has been widely applied in many modern large-scale critical systems, for example, traffic monitoring. A generic broker-based PSS is given in [52].

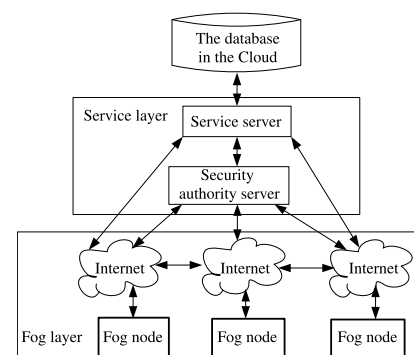**Fig. 4.** Service middleware in the Fog [18].

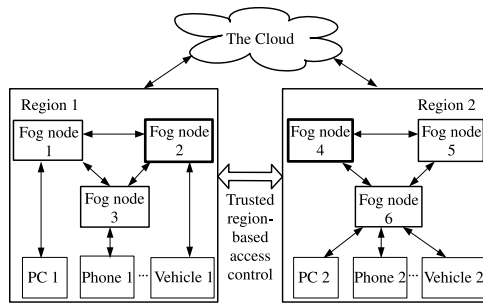


Fig. 5. A scenario of trusted region-based access control in the Fog [53].

The role of a broker is an important part of a PSS. Brokers communicate with different entities (e.g., publishers and subscribers), match the suitable user requirement and transmit users' data [52]. They can be used to decouple users' interaction and provide asynchronous communications. A malicious node (may be publisher or subscriber) who is supposed to keep the secret (the encryption key or content of data) of other nodes would deliberately leak the secret to the hostile brokers. Malicious brokers and nodes can collude with each other and share secret as follows:

- A malicious node provides other users' sensitive data to a malicious broker who can analyze these data, and
- The malicious broker provides other nodes' data to its colluders such that the latter could pretend as the most suitable candidate to other users. We can see that brokers may be malicious and the Fog may face collusion attacks. To decrease the security risks and vulnerabilities, the study [50] proposes content-based PSS with differential privacy in a Fog context to ensure the trustworthy function of publish-subscribe.

3.2.3. Region-based trust

There are numerous physical devices at different locations and with various communication types and connections structures in the Fog. Nevertheless, Fog nodes can provide local and regional computation to users for faster response. Therefore, how to accomplish these goals is one of future studies fitting to the Fog's characteristics. Dang et al. propose a region-based trust model for trust communications among Fog nodes at different regions [53]. The scenario of their trusted region-based access control in the Fog is shown in Fig. 5. A Fog node is selected to delegate computational resource management and task execution in a region. For example, node 2 in Region 1 and node 4 in Region 2 are selected as delegates, respectively. Delegate nodes are used to compute trust values for nodes in the same region. For example, if node 1 wants to obtain the trust value of node 3, it needs to obtain it via node 2 in Region 1. If node 1 wants to obtain the trust value of node 5, it needs to obtain it via node 4 in Region 2. They can also compute their region trust values and send them to the Cloud.

3.3. Access control

Based on different technologies for access control, we summarize the current related work into Table 3.

The detailed information about the work is summarized as follows.

3.3.1. Behavior profiling

Mandlekar et al. point out that unauthorized access needs to be detected and the real data should be saved without being hacked [54]. Hence, they exploit user behavior profiling and decoy

Table 3

The summary for access control in the Fog.

Related technology	Ref.
Behavior profiling	[54]
Attribute encryption	[33,55–61]
Certificate authority	[62]
Policy-based access control	[63]

information technology to compare the behavior of a user with that of normal users for user authentication.

3.3.2. Attribute encryption

Since the Fog originates from and is a non-trivial extension of Cloud computing, it inherits many security and privacy challenges of the latter. Commonly used encryption techniques can be used, e.g., Advanced Encryption Standard algorithm and Rivest Shamir Adleman algorithm [60].

Fan et al. point out that Ciphertext-policy attribute-based encryption (ABE) can help to achieve data access control in fog-cloud systems [59]. Hence, they propose an access control scheme based on a verifiable outsourced multi-authority.

Attribute-based cryptography is a well-known technology to guarantee data confidentiality and fine-grained data access control. The work [55] proposes a secure and fine-grained data access control scheme with ciphertext update and computation outsourcing in the Fog for IoT to decrease computational cost and realize secure data access control. The system consists of attribute authority, Cloud servers, Fog nodes and users. The Attribute Authority generates a public key for each Cloud server and Fog node. It also generates a secret key for each edge device from users. The communication data of Fog–Fog and Fog–Cloud is ciphertext, while it is partial ciphertext of Edge–Fog. Smart meters can encrypt and send the data to a Fog device, such as a home-area network gateway, then aggregate the results and finally pass them to the Cloud if needed.

Jiang et al. point out that some undesirable situations and the violation of an access control policy can appear because a user can generate a new private key for the access right [58]. To solve the problem, they propose a method to resolve this issue by formalizing security requirements and constructing an attribute-based encryption (ABE) scheme to satisfy the new security requirements.

To enable authentic and confidential communications among a group of Fog nodes, Alrawais et al. propose an efficient key exchange protocol based on ciphertext-policy attribute-based encryption (CP-ABE) to establish secure communications among participants [33]. To achieve confidentiality, authentication, verifiability, and access control, they combine CP-ABE and digital signature techniques together. The architecture with a key generator server is composed of the following entities: the Cloud, the key generator server, Fog nodes, and IoT devices. The key generator server is used to generate and distribute the keys among the involved entities. The Cloud defines an access structure to all Fog nodes and performs the encryption to get ciphertext [33].

In addition, Zhang et al. propose an access control scheme with outsourcing capability and attribute update for the Fog [57]. Yu et al. provide an access control method with leakage-resilient functional encryptions against side-channel attacks in the Fog [61]. Abdul et al. develop a biometric security method based on face images by using visual cryptography and zero-watermarking in the Fog [56].

3.3.3. Certificate authority and policy-based access control

Alrawais et al. focus on the security and privacy issues in IoT environments and propose a scheme that employs Fog nodes to improve the distribution of certificate revocation information among

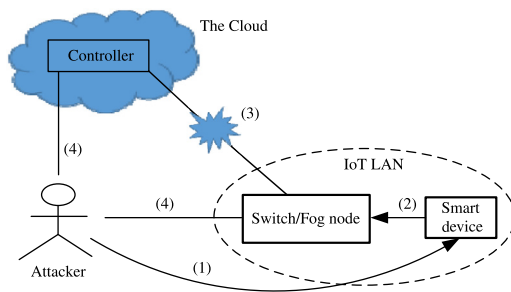


Fig. 6. A MitM model [65].

IoT devices for security enhancement [62]. It consists of a certificate authority (CA), a back-end Cloud, Fog nodes, and IoT devices. Dsouza et al. propose a policy-based resource access control in the Fog to support secure collaboration and interoperability among heterogeneous resources [63]. They adopt eXtensible Access Control Markup Language to define formalized and refined operational, security and network policy specifications.

3.4. Attacks

Because Fog nodes are usually deployed in some places with relatively weak protection, they may encounter various malicious attacks [24]. In addition, a malicious user can either tamper with its own smart meter, report false readings, or spoof IP addresses [45].

3.4.1. Malicious nodes and their attacks

Attacks from malicious Fog nodes: Lee et al. examine the components and several unique security threats of IoT Fog [42]. As one of the potential threats, a malicious Fog node problem is serious. In their research, the heavy workloads in the Fog are divided into several jobs and processed by Fog nodes. If some of these nodes are attacked by malicious users, it is hard to ensure the security of the data. However, they fail to give a detailed solution to solve such attack problem. In [21], the propagation of malicious nodes in the Fog is studied. The interaction between vulnerable nodes and malicious nodes in the Fog is first investigated as a non-cooperative differential game. The complex decision making process is then reviewed, analyzed and realized.

Attacks from malicious edge devices of users: Identifying malicious edge devices is crucial in data security in the Fog. However, it is difficult to prevent the attack because of certain privileges granted to them to use and process the data. Sohal et al. propose a framework by using a Markov model, intrusion detection system and virtual honeypot device to solve the problem [64].

3.4.2. MitM attack

Secure transmission channels protect all the traffic between edge devices and their Fog nodes. However, a user's released data can be eavesdropped or altered by an external attacker before the Fog node implements a global concealing process [18]. MitM is the typical kind of attack whose model is shown in Fig. 6.

In Fig. 6, after implementing four following steps, the outside attacker successfully intercepts the OpenFlow channel and controls the gateway as follows.

- For a device inside the IoT LAN, the outside attacker can take control of it by launching firmware updating attack because embedded smart devices are vulnerable to attacks.
- The smart device installs a client certificate at the Fog node, claiming that the Fog node needs to use this certificate to identify itself in the future communications.

- After the Fog node installs the client certificate, the outside attacker breaks the connection between the controller and it.
- The attacker performs MitM attack on the OpenFlow control channel.

In IoT Fog, the security issue of an OpenFlow channel between the controller and its switches is addressed in [65]. Because all the controller commands are sent through this channel, once attacked, the network is completely controlled by an attacker. It is a disaster for both the network service providers and their users. A countermeasure using the Bloom filter to detect MitM attack is thus proposed [65]. Stojmenovic et al. study MitM attack and investigate its stealthy features by examining its CPU and memory consumption of Fog devices [44]. One can also solve the problem by adopting encryption and decryption [24].

3.5. Privacy preservation

Privacy preservation is important because of users' many concerns about their sensitive data [47]. Different privacy preservation policies, schemes and methods are proposed, especially in health-care systems [17–20]. Based on different technologies for access control, we summarize the current related work into Table 4 and discuss it next.

3.5.1. Location privacy preservation

A location privacy issue remains a challenge in the Fog [68]. Location-based services are popular and can achieve low-latency with the help of the Fog. A privacy preservation scheme for locations in the Fog is studied in [68]. Kang et al. address location privacy issues for the Fog supporting Internet of Vehicles (IoV), which aims to overcome big latency and high cost [23]. Hence, a privacy-preserved pseudonym is presented for effective pseudonym management. The work [48] realizes trajectory privacy preservation based on the Fog for Cloud location services. The paper [66] presents a redundant Fog loop-based scheme to preserve the source node-location privacy and achieve energy efficiency in the Fog. The study [67] proposes a position cryptography protocol for preserving location privacy. Fog nodes are specifically to meet the requirements for location-specific applications and location-aware data management, such as in vehicular ad hoc networks [23,48,66].

3.5.2. Other data privacy preservation

Du et al. concern the privacy issue inherent in a Fog platform, and propose a differential privacy-based query model [69]. Wang et al. propose a privacy-preserving scheme by using differential privacy in the Fog, which can simultaneously ensure users' privacy and confidentiality [50]. In [70], most privacy-preserving data aggregation schemes support data aggregation for homogeneous IoT devices only and cannot aggregate hybrid IoT devices' data into one. Hence, a lightweight privacy-preserving data aggregation scheme for the Fog-enhanced IoT is presented. Al Hamid et al. formulates a secure privacy data and authenticated key agreement protocol based on the bilinear pairing cryptography [17]. Elmisery et al. study and reveal the disclosure boundary between privacy and publicity as well as the identity boundary between self and other [18]. Basudan et al. propose a privacy-preserving protocol for enhancing security in a vehicular crowdsensing-based road surface condition monitoring system by using the Fog [72]. Hu et al. propose a privacy-preserving scheme for identifying face by using the Fog [73]. Fog-based Vehicular ad hoc network is a new paradigm with the advantages of both vehicular cloud and the Fog, a secure and privacy-preserving navigation scheme is proposed for it [74].

Table 4
The summary for privacy preserving in the Fog.

Object	Technology	Ref.
Location privacy preservation	Position cryptography protocol	[66,67]
	Privacy preservation scheme	[23,68]
	Privacy-preserved pseudonym	[48]
Other Data privacy preservation	Differential privacy-based query	[50,69]
	Privacy-preserving data aggregation	[70]
	Cryptography and decryption	[17,71]
	Disclosure boundary	[18]
	Privacy-preserving protocol and scheme	[72–74]

3.6. Secure communications

There are two kinds of secure communications [12]: (1) Communications between constrained-IoT devices and Fog nodes; and (2) Communications among Fog nodes. There may be bogus messages during communication when wrong information is sent by attackers in the network [46]. Mukherjee et al. indicate that security should be robust and customizable in a resource-constrained Fog environment when transferring data from the Edge to the Cloud [75]. They design an intermittent and flexible end-to-end security mechanism for Fog–Cloud communications. It can deal with unreliable network connections and achieve security configurations suited for different application needs. Wang et al. propose a scheme to protect the identities of edge devices by using pseudonyms and guarantee data secrecy via a homomorphic encryption technique when uploading data from edge devices to the Cloud [76]. During communications from edge devices to the Cloud, the confidentiality and integrity of data should be guaranteed by using light-weight encryption or masking algorithms [24]. Fang et al. design a lightweight secure routing protocol based on a source anonymity in the Fog to improve the transmission performance and enhance security [77].

3.7. Others

Service availability: It includes how to decrease denial of service (DOS). When there are millions of user requests for a same service, DOS occurs if hackers take this advantage for attacking [78]. New scheme for defending DOS attacks [79] should be designed; novel methods should be proposed to avoid the unnecessary resource consumption and offer sufficient caching capabilities so as to improve the service availability.

Secure applications: Khan et al. summarize the potential security issues found in the following Fog applications: virtualized radio access, web optimization, 5G mobile networks, smart meters, healthcare systems, surveillance video processing, vehicular networks and road safety, food traceability, speech data, augmented brain–computer interface, resource management, energy reduction, disaster response, and hostile environment [10]. Not all Fog nodes are resource enriched. Therefore, large scale applications requiring resource-constrained nodes are not quite easy compared to conventional data centrals. The hot applications mainly focus on healthcare [17,18] and vehicles [23,46,72,80,81]. Encrypting sensitive data can improve the security of the applications when invoking APIs. However, if too many APIs are invoked and deployed, they may consume too many resources, thereby affecting the normal access to them, and even leading to the application system paralysis.

Secure sharing technology: This occurs when the information is shared among many sites [82], such as orchestration between Fog nodes and services. Social network can be creatively used for service sharing in the Fog. A novel security service provision model is proposed to recommend security services accurately with a crowd sensing-enabling mechanism in the social Fog [83].

4. Open research issues

Offering high security and trust is important to the Fog customers. Several open research issues remain.

4.1. Trusted execution environment

Devices in the Fog are often deployed without strict monitoring and protection, thereby facing all kinds of security threats. How to increase the trust in the Fog is the primary challenge. Public key infrastructure (PKI) based technique could partially solve this problem. Trusted execution environment (TEE) technique may have its potential in the Fog [18,62,84,85]. The open network environment of the Fog makes a malicious procedure easily spread to intelligent devices and bring heavy threat to user data [21]. How to control and avoid such spread of a malicious procedure is very important in trusted execution environment.

4.2. Trust and security during Fog orchestration

Achieving inter-nodal secure collaboration and trusted resource provisioning is an important issue [63]. Fog nodes are distributed, virtualized and shared. Fog orchestration should be optimized for a multi-tenant model. Complete isolation should be maintained among tenants through a virtualization system to avoid cross-disclosure and privacy compromise of application-specific data [27]. Based on policy-driven security management for the Fog, the work [63] studies resource management expanding the current Fog platform to support secure collaboration and interoperability among different user-requested resources in the Fog. However, multi-level collaboration results in large security and trust issues, mainly including identity management, authentication, access control, information sharing and QoS, for example, when a Fog node experiences a failure, nearby Fog nodes on the same or adjacent layers should step in to carry the load [27], which deserve further studies.

4.3. Access control

It is hard but important to improve confidentiality in accessing largely distributed Fog. Confidentiality [33,50,52,55] in the Fog needs to be scalable and efficient to cope with resource-constrained Fog devices. Traditional methods lack efficiency for the Fog. Lightweight encryption algorithms should be helpful for Fog nodes and edge devices [62]. In the Fog, we can also raise questions like how to design new access control methods spanning user–Fog–Cloud, to overcome the limitations of edge devices at different levels [63]. The Fog is visualized as an ideal candidate to grant access tokens to authorized parties. A centralized architecture may be used to authorize access and relay data between authorized parties and edge devices (IoT devices) [31]. However, in a distributed Fog environment, a centralized architecture may fail and result in inconsistent information. Hence, new mechanisms providing consistent guarantee need to be designed.

4.4. Collusion attack

Collusion attackers may be disguised. New technologies should be developed to protect the system privacy when facing a possible collusion attack [50]. In [50], there are two kinds of collusion attacks:

- Brokers collude with service providers: Malicious brokers and providers may spread the fake or duplicate events to the Fog network. Moreover, the latter can leak confidential information.
- Brokers collude with users: Malicious brokers and users may deny admitting any match accomplishing or utilizing data and services from legal providers.

However, the current work has not considered the attack from providers colluding with users. Malicious providers may leak confidential information to users for some profit from the latter. Colluding users may deny admitting obtaining any confidential information from the former. Hence, how to build high-security and low-cost collusion attack detection countermeasure is one of the key problems in the Fog. New methods, such as collaborative detection, may be used to observe and detect this kind of challenging attacks.

4.5. Data-dependent security and context-aware security

In the Fog, to improve data-dependent security, backup is needed for vital data. In addition, the data across multiple end-user devices faces larger attack possibility and more challenges [86]. Because an adversary can compromise data integrity by attempting to modify or destroy legitimate data, it is essential to define a security mechanism to provide data integrity verification of the transmitted data between the Fog nodes and the Cloud [33]. The context-aware applications present new and interesting security challenges for emerging applications [34]. The nature of supporting for mobility and proximity to end-users of the Fog calls for a new security approach for transparently and adaptively dealing with context changes, especially for authentication, access control and trust degree in different context-aware environments.

4.6. Service trust

In the Fog, a secure and trustworthy manner for users is needed [18]. However, the Service Level Agreement (SLA) is often affected by many factors such as, service cost, energy usage, application characteristics, data flow, and network status. Therefore, given a particular scenario, it is quite difficult to specify a service trust [84,85], which deserves in-depth study. Trust evaluation mechanisms in the Cloud can be modified to increase the security of Fog services [87]. Based on operational requirements and execution environments, one has to select suitable and trusted Fog nodes, their corresponding resource configuration and places of deployment in the Fog. Current methods [84,85], lack compatibility and scalability to track and verify their trust values and monitor them for the Fog. SLA [12] that has gained success in designing a trust model in Cloud computing may be modified to use in the Fog.

5. Future work

Based on the current research results, we propose the following issues to be addressed in the future:

5.1. Trust management models

A trusted third party is adopted in [18,48,88,89]. It can improve the security. However, the past work fails to consider the region

problem. The method in [53] involves region issues for the Fog, as shown in Fig. 5. However, the Fog node elected as a delegate from a region Fog may be a malicious node, which makes the Fog face a larger trust risk. To solve the problem and improve trust reliability, an improved trust management model is needed. One solution may be proposed as follows:

- Using a trusted third party can decrease the trust management and computation overhead of the Fog through the detailed consideration of the Fog scope. Then using the partition concept similar to [53] can decrease the management and computation overhead in the Fog;
- Managing the inter-region trust values for Fog nodes via using communication and historical data with each other in the region Fog;
- Managing the region–region trust values for the region Fog by communicating with the Cloud and using historical data in the Cloud;
- Some strategies can be adopted to improve the trust management in a region Fog, for example, by using strong identity verification mechanisms for Fog nodes [90].

5.2. Identification of trusted nodes

Fog users with resource-constrained devices can outsource their tasks to their trusted Fog nodes [88]. How to identify such nodes is crucial. Several strategies may be adopted:

- If there are direct or indirect trust evaluations of the goal nodes, trusted nodes are chosen according to their trust values.
- Otherwise, by using a probability model based on historical behavior of the goal nodes, we can assess their trust values and make the choice accordingly.
- Collusion deceptions may be conducted by collaborated users or Fog nodes. It means that collusion behavior is initialized and carried out both by users or by malicious Fog nodes. The kind of collusion behavior need to be detected to identify trusted nodes in a region Fog.
- Because Fog nodes tend to be resource-constrained, it is necessary to design lightweight solutions [91]. Hence, the trust computation algorithm should be simple and occupy limited memory only. The Fog's dynamic nature brings new challenge for trust computing when facing constrained resources and low latency requirements. A light-weight strategy for trust computation based on a region Fog may be designed for meeting certain constrained resource requirements. If the computation task is large, it may be executed in the Cloud.

5.3. Secure orchestration

Optimized Fog orchestration is needed to avoid cross-disclosure and privacy compromise of application-specific data. QoS and service level agreements (SLA) are needed to ensure that all applications receive the minimum and enough levels of resources for orchestration [27]. Two kinds of orchestration deserve further study.

Application orchestration: Large-scale IoT services within the Fog infrastructures, such as smart cities, healthcare, and marine monitoring are composed of sensors, computing resources and devices. Orchestrating such applications can simplify maintenance and system reliability. However, how to efficiently monitor and process these applications' transient behavior and dynamic changes is a crucial challenge [35]. An agent-based trust computation model

may be used for orchestration. A multi-agent orchestration method may be adopted to monitor the applications and coordinate them securely in real time in the Fog.

Fog nodes' orchestration: The orchestration of Fog nodes can deploy virtual services to Fog infrastructure and facilitate resource collaboration [91]. When Fog nodes collaborate with others, one node may be attacked by malicious users or Fog nodes. If it is infected, the infected one may attack and infect other nodes. This induces security and trust risk spreading among Fog nodes even to a whole region Fog. Some strategies should be taken to decrease this kind of risk, by failing the infected node. If a Fog node is made in a failure status during an orchestration, the other Fog nodes potentially have to change their topology and rebuild their communication structure reliably. The data in the failed node should also be transferred to other reliable Fog nodes such that the orchestration can proceed. A policy-based service orchestration may be adopted.

6. Conclusions

The Fog is a highly virtualized platform but not a replacement of Cloud computing. It provides storage, computing and networking services among edge devices as well as traditional Cloud computing data centers [13]. It mainly solves the problems of low latency, mobility support and location awareness in many cyber-physical systems [92,93]. However, its distributed and open structure makes it vulnerable and weak to security threats.

This work analyzes the architectures of the Fog from a general to detailed ones. The related security and trust research results about the Fog are summarized, and the discussions about open security and trust issues are given, and future work is outlined. A distributed and remotely operated Fog can pose new security and trust challenges, which are not presented in the centralized Cloud. We make some concluding remarks for the Fog:

New methods are needed. Because the Fog is highly distributed, implementation of security mechanisms for data-centric integrity can affect its QoS to a great extent [28]. Hence, we need to find new methods to improve the security and trust of the Fog. Low-latency and a large number of resource-constrained devices in the Fog motivate researchers and engineers to propose new methods such that the Fog can enjoy high security and trust.

New interfaces are needed. Because Fog nodes need to interact with different hardware platforms provided by different vendors, new interfaces are required for Fog software to ensure trusted computing.

New protocols are required. Some protocols have already been designed, such as those in [77,94]. However, novel protocols are lacking to automatically detect security and trust compromises in the Fog.

Considering the limitation of the current researches and research trends, it is critical to develop and carefully design a suite of elaborate security and trust countermeasures. Many security and trust issues seem to remain open and have thus attracted much attention from researchers and engineers. As a final remark, it should be underlined that these issues should be addressed by design [95].

Acknowledgments

The work was supported by National Natural Science Foundation of China under Grants 61472005, 61201252; CERNET Innovation Project, China under Grant NGII20160207, FDCT (Fundo para o Desenvolvimento das Ciências e da Tecnologia) under Grant 119/2014/A3, and the European Union through the INTER-IoT, Research and Innovation action - Horizon 2020 European Project under Grant Agreement #687283.

References

- [1] M.H. Ghahramani, M.C. Zhou, C.T. Hon, Toward cloud computing QoS architecture: Analysis of cloud systems and cloud services, *IEEE/CAA J. Autom. Sin.* 4 (1) (2017) 5–17.
- [2] Y. Xia, M. Zhou, X. Luo, Q. Zhu, Stochastic modeling and quality evaluation of Infrastructure-as-a-Service clouds, *IEEE Trans. Autom. Sci. Eng.* 12 (1) (2015) 160–172.
- [3] H. Yuan, J. Bi, W. Tan, M.C. Zhou, B.H. Li, J. Li, TTSA: An effective scheduling approach for delay bounded tasks in hybrid clouds, *IEEE Trans. Cybernet.* 47 (11) (2017) 3658–3668.
- [4] P.Y. Zhang, M.C. Zhou, Dynamic cloud task scheduling based on a two-stage strategy, *IEEE Trans. Autom. Sci. Eng.* (2017). <http://dx.doi.org/10.1109/TASE.2017.2693688>. (on-line).
- [5] W.B. Zheng, M.C. Zhou, Y.N. Xia, L. Wu, X. Luo, S.C. Pang, Q.S. Zhu, Percentile performance estimation of unreliable IaaS clouds and their cost-optimal capacity decision, *IEEE Access* 5 (2017) 2808–2818.
- [6] G. Luo, Y. Pan, ZTE communications special issue on cloud computing, fog computing, and dew computing, *ZTE Commun.* 15 (1) (2017) 2.
- [7] T.H. Luan, L. Gao, Z. Li, L. Sun, Fog computing: Focusing on mobile users at the edge, 2015. arXiv preprint [arXiv:1502.01815](https://arxiv.org/abs/1502.01815).
- [8] F. Bonomi, in: Connected vehicles, the Internet of Things, and fog computing, in: *Proc. VANET*, Las Vegas, CA, USA, Sep. 23, 2011, pp. 13–15.
- [9] S. Ivan, W. Sheng, The fog computing paradigm scenarios and security issues, in: *Proc. of the 2014 Federated Conference on Computer Science and Information Systems*, 2014, pp. 1–8.
- [10] S. Khan, S. Parkinson, Y. Qin, Fog computing security: a review of current applications and security solutions, *J. Cloud Comput. Adv. Syst. Appl.* 6 (19) (2017). <http://dx.doi.org/10.1186/s13677-017-0090-3>.
- [11] F. Bonomi, R. Milito, J. Zhu, S. Addepalli, Fog computing and its role in the Internet of Things, in: *Proc. of MCC'12*, 2012, pp. 13–15.
- [12] M. Mukherjee, R. Matam, L. Shu, L. Maglaras, M.A. Ferrag, N. Choudhury, V. Kumar, Security and privacy in fog computing: Challenges, *IEEE Access* (2017). <http://dx.doi.org/10.1109/ACCESS.2017.2749422>.
- [13] F. Bonomi, R. Milito, P. Natarajan, J. Zhu, Fog computing: A platform for Internet of Things and analytics, in: N. Bessis, C. Dobre (Eds.), *Big Data and Internet of Things: A Roadmap for Smart Environments*, in: *Studies in Computational Intelligence*, vol. 546, Springer, Cham, New York, 2014, pp. 169–186.
- [14] B. Tang, Z. Chen, G. Heffernan, S. Pei, T. Wei, H. He, Q. Yang, Incorporating intelligence in fog computing for big data analysis in smart cities, *IEEE Trans. Ind. Inform.* 13 (5) (2017) 2140–2150.
- [15] B. Molina, C.E. Palau, G. Fortino, A. Guerrieri, C. Savaglio, Empowering smart cities through interoperable sensor network enablers, in: *Proc. of 2014 IEEE International Conference on Systems, Man and Cybernetics, SMC, IEEE*, 2014, pp. 7–12.
- [16] F. Cicirelli, A. Guerrieri, G. Spezzano, A. Vinci, An edge-based platform for dynamic smart city applications, *Future Gener. Comput. Syst.* (ISSN: 0167-739X) 76 (2017) 106–118. <http://dx.doi.org/10.1016/j.future.2017.05.034>.
- [17] H.A. Al Hamid, S.M.M. Rahman, M.S. Hossain, A. Almogren, A. Alamri, A security model for preserving the privacy of medical big data in a healthcare cloud using a fog computing facility with pairing-based cryptography, *IEEE Access* (2017). <http://dx.doi.org/10.1109/ACCESS.2017.2757844>.
- [18] A.M. Elmisyry, S. Rho, D. Botvich, A fog based middleware for automated compliance with OECD privacy principles in internet of healthcare things, *IEEE Access* 4 (2016) 8418–8441.
- [19] S.R. Moosavia, T.N. Gia, E. Nigussie, A.M. Rahmania, S. Virtanen, H. Tenhunena, J. Isoaho, End-to-end security scheme for mobility enabled healthcare Internet of Things, *Future Gener. Comput. Syst.* 64 (2016) 108–124.
- [20] X. Liu, R.H. Deng, Y. Yang, H.N. Tran, S. Zhong, Hybrid privacy-preserving clinical decision support system in fog-cloud computing, *Future Gener. Comput. Syst.* 78 (2018) 825–837.
- [21] Z. Li, X. Zhou, Y. Liu, H. Xu, L. Miao, A non-cooperative differential game-based security model in fog computing, *China Commun.* 14 (1) (2017) 180–189.
- [22] V. Sharma, J.D. Lim, J.N. Kim, I. You, SACA: Self-aware communication architecture for IoT using mobile fog servers, *Mobile Inf. Syst.* (2017). <http://dx.doi.org/10.1155/2017/3273917>.
- [23] J. Kang, R. Yu, X. Huang, Y. Zhang, Privacy-preserved pseudonym scheme for fog computing supported internet of vehicles, *IEEE Trans. Intell. Transp. Syst.* (2017). <http://dx.doi.org/10.1109/TITS.2017.2764095>. (in press).
- [24] P. Hua, S. Dhelima, H. Ning, T. Qiu, Survey on fog computing: architecture, key technologies, applications and open issues, *J. Netw. Comput. Appl.* 98 (2017) 27–42.
- [25] C. Dsouza, G.J. Ahn, M. Taguinod, Policy-driven security management for fog computing: Preliminary framework and a case study, in: *IEEE IRI*, 2014, pp. 16–23.
- [26] G. Fortino, A. Guerrieri, W. Russo, C. Savaglio, Integration of agent-based and cloud computing for the smart objects-oriented IoT, in: *Proc. of the 2014 IEEE 18th International Conference on Computer Supported Cooperative Work in Design*, IEEE, 2014.

- [27] C.C. Byers, Architectural imperatives for fog computing: Use cases, requirements, and architectural techniques for fog-enabled IoT networks, *IEEE Commun. Mag.* 55 (8) (2017) 14–20.
- [28] R. Mahmud, R. Buyyar, Fog computing: A taxonomy, survey and future directions, 2016. [arXiv:1611.05539](https://arxiv.org/abs/1611.05539).
- [29] M. Lafferty, Edge computing vs. fog computing. <http://www.linkedin.com/pulse/report-from-dcia-ceo-marty-lafferty-marty-lafferty-6195982160948666368>.
- [30] K.C. Okafor, I.E. Achumba, G.A. Chukwudebe, G.C. Ononiwu, Leveraging fog computing for scalable IoT datacenter using spine-leaf network topology, *J. Electr. Comput. Eng.* (2017). <http://dx.doi.org/10.1155/2017/2363240>.
- [31] Y. Shi, S. Abhilash, K. Hwang, Cloudlet mesh for securing mobile clouds from intrusions and network attacks, in: *Proc. of the 3rd IEEE Int'l Conf. Mobile Cloud Computing, Services, and Eng.* 2015, pp. 109–118.
- [32] R. Romana, J. Lopez, M. Mambob, et al., Mobile edge computing, Fog et al.: A survey and analysis of security threats and challenges, *Future Gener. Comput. Syst.* 78 (2018) 680–698.
- [33] A. Alrawais, C. Hu, X. Cheng, An attribute-based encryption scheme to secure fog communications, *IEEE Access* 5 (2017) 91371–91378.
- [34] G. Fortino, W. Russo, C. Savaglio, M. Viroli, M. Zhou, Modeling opportunistic IoT services in open IoT ecosystems, in: *17th Workshop From Objects to Agents, WOA 2017, Scilla, Italy*, 2017, pp. 90–95.
- [35] Z. Wen, R. Yang, P. Garraghan, T. Lin, J. Xu, M. Rovatsos, Fog orchestration for internet of things services, *IEEE Internet Comput.* 21 (2) (2017) 16–24.
- [36] G. Aloï, G. Caliciuri, G. Fortino, R. Gravina, P. Pace, W. Russo, C. Savaglio, Enabling IoT interoperability through opportunistic smartphone-based mobile gateways, *J. Netw. Comput. Appl.* 81 (2017) 74–84.
- [37] M. Aazam, E.N. Huh, Fog computing and smart gateway based communication for cloud of things, in: *Proc. of 2014 International Conference on Future Internet of Things and Cloud*, 2014, pp. 464–470.
- [38] M. Fazio, A. Celesti, M. Villari, A. Puliafito, The need of a hybrid storage approach for IoT in PaaS cloud federation, in: *International Conference on Advanced Information Networking & Applications Workshops*, 2014, pp. 779–784.
- [39] J. Fu, Y. Liu, H.C. Chao, B. Bhargava, Z. Zhang, Secure data storage and searching for industrial IoT by integrating fog computing and cloud computing, *IEEE Trans. Ind. Inf.* (2018). <http://dx.doi.org/10.1109/TII.2018.2793350>.
- [40] Y. Wang, T. Uehara, R. Sasaki, Fog computing: Issues and challenges in security and forensics, in: *Proc. of 2015 IEEE 39th Annual International Computers, Software & Applications Conference*, 2015, pp. 53–59.
- [41] H.D. Kim, Applying consistency-based trust definition to collaborative filtering, *KSII Trans. Internet Inf. Syst.* 3 (4) (2009) 366–374.
- [42] K. Lee, D. Kim, D. Ha, U. Rajput, H. Oh, On security and privacy issues of fog computing supported internet of things environment, in: *Proc. of 2015 6th International Conference on the Network of the Future, NOF, IEEE*, 2015, pp. 1–3.
- [43] P. Kumar, N. Zaidi, T. Choudhury, Fog computing: Common security issues and proposed countermeasures, in: *Proc. of the SMART 2016*, in: *IEEE Conference*, 2016, pp. 311–315.
- [44] I. Stojmenovic, S. Wen, X. Huang, H. Luan, An overview of fog computing and its security issues, *Concurr. Comput.: Pract. Exper.* 28 (10) (2015) 2991–3005.
- [45] I. Stojmenovic, S. Wen, The fog computing paradigm: Scenarios and security issues, in: *Proc. 2014 Federated Conference on Computer Science and Information Systems*, FedCSIS, 2014.
- [46] S.A. Soleymani, A.H. Abdullah, M. Zareei, M.H. Anisi, C. Vargas-Rosales, M.K. Khan, S. Goudarzi, A secure trust model based on fuzzy logic in vehicular ad hoc networks with fog computing, *IEEE Access* 99 (2017) 1–10.
- [47] D. Koo, Y. Shin, J. Yun, J. Hur, A hybrid deduplication for secure and efficient data outsourcing in fog computing, in: *Proc. of 2016 IEEE 8th International Conference on Cloud Computing Technology and Science*, 2016, pp. 285–293.
- [48] T. Wang, J. Zeng, M.D.Z.A. Bhuiyan, H. Tian, Y. Cai, Y. Chen, B. Zhong, Trajectory privacy preservation based on a fog structure for cloud location services, *IEEE Access* 5 (2017) 7692–7701.
- [49] T. Wang, Y. Li, Y. Chen, H. Tian, Y. Cai, W. Jia, B. Wang, Fog-based evaluation approach for trustworthy communication in sensor-cloud system, *IEEE Commun. Lett.* 14 (8) (2017) 1–4.
- [50] Q. Wang, D. Chen, N. Zhang, Z. Ding, Z. Qin, PCP: A privacy-preserving content-based publish-subscribe scheme with differential privacy in fog computing, *IEEE Access* 5 (2017) 17962–17986.
- [51] C. Esposito, M. Ciampi, On security in publish/subscribe services: A survey, *IEEE Commun. Surv. Tutor.* 17 (2) (2014) 966–997.
- [52] E. Onica, P. Felber, H. Mercier, E. Rivière, Confidentiality-preserving publish/subscribe: A survey, *ACM Comput. Surv.* 49 (2) (2016) 1–41.
- [53] T.D. Dang, D. Hoang, A Data protection model for fog computing, in: *2017 Second International Conference on Fog and Mobile Edge computing, FMEC*, 2017, pp. 32–38.
- [54] V.G. Mandlekar, V.K. Mahale, S.S. Sancheti, M.S. Rais, Survey on fog computing mitigating data theft attacks in cloud, *Int. J. Innov. Res. Comput. Sci. Technol.* 2 (6) (2014) 13–16.
- [55] Q. Huang, Y. Yang, L. Wang, Secure data access control with ciphertext update and computation outsourcing in fog computing for Internet of Things, *IEEE Access* (2017) 12941–12950.
- [56] W. Abdul, Z. Ali, S. Ghouzali, B. Alfawaz, G. Muhammad, M.S. Hossain, Biometric security through visual encryption for fog edge computing, *IEEE Access* 5 (2017) 5531–5538.
- [57] P. Zhang, Z. Chena, J.K. Liu, K. Liang, H. Liu, An efficient access control scheme with outsourcing capability and attribute update for fog computing, *Future Gener. Comput. Syst.* 78 (2018) 753–762.
- [58] Y. Jiang, W. Susilo, Y. Mu, F. Guo, Ciphertext-policy attribute-based encryption against key-delegation abuse in fog computing, *Future Gener. Comput. Syst.* 78 (2018) 720–729.
- [59] K. Fan, J. Wang, X. Wang, H. Li, Y. Yang, A secure and verifiable outsourced access control scheme in fog-cloud computing, *Sensors* (2017) 17. <http://dx.doi.org/10.3390/s17071695>.
- [60] H.W. Kim, J.H. Kim, J.H. Park, Y.S. Jeong, Time pattern locking scheme for secure multimedia contents in human-centric device, *Sci. World J.* (2014). <http://dx.doi.org/10.1155/2014/796515>.
- [61] Z. Yua, M.H. Au, Q. Xu, R. Yang, J. Han, Towards leakage-resilient fine-grained access control in fog computing, *Future Gener. Comput. Syst.* 78 (2018) 763–777.
- [62] A. Alrawais, A. Althothaily, C. Hu, X. Cheng, Fog computing for the Internet of Things: Security and privacy issues, *IEEE Internet Comput.* 21 (2) (2017) 34–42.
- [63] C. Dsouza, G.J. Ahn, M. Taguinod, Policy-driven security management for fog computing: Preliminary framework and a case study, in: *Proc. of IEEE International Conference on Information Reuse & Integration*, 2014, pp. 16–23.
- [64] A.S. Sohal, R. Sandhu, S.K. Sood, V. Chang, A cybersecurity framework to identify malicious edge device in fog computing and cloud-of-things environments, *Comput. Secur.* (2017) 1–15.
- [65] C. Li, Z. Qin, E. Novak, Q. Li, Securing SDN Infrastructure of IoT–Fog network from MitM attacks, *IEEE Internet of Things J.* (2017) 1–8.
- [66] M. Dong, K. Ota, A. Liu, Preserving source-location privacy through redundant fog loop for wireless sensor networks, in: *2015 IEEE International Conference on Computer and Information Technology; Ubiquitous Computing and Communications; Dependable, Autonomic and Secure Computing; Pervasive Intelligence and Computing*, 2015, pp. 1835–1842.
- [67] R. Yang, Q. Xu, M.H. Au, Z. Yu, H. Wang, L. Zhou, Position based cryptography with location privacy: A step for fog computing, *Future Gener. Comput. Syst.* 78 (2018) 799–806.
- [68] X. Yang, F. Yin, X. Tang, A fine-grained and privacy-preserving query scheme for fog computing-enhanced location-based service, *Sensors* 17 (7) (2017). <http://dx.doi.org/10.3390/s17071611>.
- [69] M. Du, Y. Zhang, A differential privacy-based query model for sustainable fog data centers, *IEEE Trans. Sustain. Comput.* 99 (2017) 1.
- [70] R. Lu, K. Heung, A. Lashkari, A. Ghorbani, A lightweight privacy-preserving data aggregation scheme for fog computing-enhanced IoT, *IEEE Access* 5 (2017) 3302–3312.
- [71] C. Zuo, J. Shao, G. Wei, M. Xie, M. Ji, CCA-secure ABE with outsourced decryption for fog computing, *Future Gener. Comput. Syst.* 78 (2018) 730–738.
- [72] S. Basudan, X. Lin, K. Sankaranarayanan, A privacy-preserving vehicular crowdsensing-based road surface condition monitoring system using fog computing, *IEEE Internet of Things J.* 4 (3) (2017) 772–782.
- [73] P. Hu, H. Ning, T. Qiu, H. Song, Y. Wang, X. Yao, Security and privacy preservation scheme of face identification and resolution framework using fog computing in Internet of Things, *IEEE Internet of Things J.* (2016). <http://dx.doi.org/10.1109/JIOT.2017.2659783>.
- [74] L. Wang, G. Liu, L. Sun, A secure and privacy-preserving navigation scheme using spatial crowdsourcing in fog-based VANETs, *Sensors* 17 (4) (2017). <http://dx.doi.org/10.3390/s17040668>.
- [75] B. Mukherjee, R.L. Neupane, P. Callyam, End-to-end IoT security middleware for cloud-fog communication, in: *2017 IEEE 4th International Conference on Cyber Security and Cloud Computing*, 2017, pp. 151–156.
- [76] H. Wang, Z. Wang, J. Domingo-Ferrer, Anonymous and secure aggregation scheme in fog-based public cloud computing, *Future Gener. Comput. Syst.* 78 (2018) 712–719.
- [77] W. Fang, W. Zhang, J. Xiao, Y. Yang, W. Chen, A source anonymity-based lightweight secure AODV protocol for fog-based MANET, *Sensors* (2017) 17. <http://dx.doi.org/10.3390/s17061421>.
- [78] R. Rios, R. Roman, J.A. Onieva, J. Lopez, From smog to fog: A security perspective, in: *2017 Second International Conference on Fog and Mobile Edge computing, FMEC*, 2017, pp. 56–61.
- [79] J. Liu, J. Li, L. Zhang, F. Dai, Y. Zhang, X. Meng, J. Shen, Secure intelligent traffic light control using fog computing, *Future Gener. Comput. Syst.* 78 (2018) 817–824.
- [80] J. Ni, A. Zhang, X. Lin, X. Shen, Security, privacy, and fairness in fog-based vehicular crowdsensing, *IEEE Access* (2017). <http://dx.doi.org/10.1109/ACCESS.2017.2749422>.
- [81] J. Wu, M. Dong, K. Ota, J. Li, Z. Guan, FCSS: Fog-computing-based content-aware filtering for security services in information-centric social networks,

- IEEE Trans. Emerg. Top. Comput. (2017). <http://dx.doi.org/10.1109/TETC.2017.2747158>.
- [82] Cloud Security Alliance, Top threat to cloud computing V1.0, 2010.
 - [83] J. Wu, Z. Su, S. Wang, J. Li, Crowd sensing-enabling security service recommendation for social fog computing systems, *Sensors* (2017) 17. <http://dx.doi.org/10.3390/s17081744>.
 - [84] C. Chen, H. Raj, S. Saroiu, A. Wolman, ctpm: a Cloud tpm for cross-device trusted applications, in: Proc. of the 11th USENIX Conference on Networked Systems Design and Implementation, 2014, pp. 187–201.
 - [85] C. Marforio, N. Karapanos, C. Soriente, K. Kostiaainen, S. Gapkun, Smartphones as practical and secure location verification tokens for payments, in: Proc. of Network and Distributed System Security Symposium, 2014, pp. 1–16.
 - [86] A. Kott, A. Swami, B.J. West, The fog of war in cyberspace, *Computer* (2016) 84–87.
 - [87] Y. Xia, H. Hong, G. Lin, Z. Sun, A secure and efficient cloud resource allocation scheme with trust evaluation mechanism based on combinatorial double auction, *KSII Trans. Internet Inf. Syst.* 11 (9) (2017) 4197–4219.
 - [88] H. Huang, X. Chena, Q. Wuc, X. Huangd, J. Shene, Bitcoin-based fair payments for outsourcing computations of fog devices, *Future Gener. Comput. Syst.* 78 (2018) 850–858.
 - [89] P.Y. Zhang, Y. Kong, M.C. Zhou, A novel trust model for unreliable public clouds based on domain partition, in: Proc. of 14th IEEE International Conference on Networking, Sensing and Control, May 16–18, Calabria, Southern Italy, 2017.
 - [90] M. Chiang, S. Ha, C.L. I, F. Risso, T. Zhang, Clarifying fog computing and Networking: 10 questions and answers, *IEEE Commun. Mag.* 1 (2017) 8–20.
 - [91] M. Xiao, J. Zhou, X. Liu, M. Jiang, A hybrid scheme for fine-grained search and access authorization in fog computing environment, *Sensors* (6) (2017) 17. <http://dx.doi.org/10.3390/s17061423>.
 - [92] Y. Liu, Y. Peng, B. Wang, S. Yao, Z. Liu, Review on cyber-physical systems, *IEEE/CAA J. Autom. Sin.* 4 (1) (2017) 27–40.
 - [93] X. Guan, B. Yang, C. Chen, W. Dai, Y. Wang, A comprehensive overview of cyber-physical systems: From perspective of feedback system, *IEEE/CAA J. Autom. Sin.* 3 (1) (2016) 1–14.
 - [94] Y. Zhang, Y. Xiang, W. Wu, A. Alelaiwi, A variant of password authenticated key exchange protocol, *Future Gener. Comput. Syst.* 78 (2018) 699–711.
 - [95] M. Frustaci, P. Pace, G. Aloï, G. Fortino, Evaluating critical security issues of the IoT world: Present and Future challenges, *IEEE Internet of Things J.* (2017). <http://dx.doi.org/10.1109/JIOT.2017.2767291>.



Peiyun Zhang (M'16-S'17) received her B.S. degree from Anhui Normal University, Wuhu, China in 1998, M.S. degree from Northwest University, Xi'an, China in 2005, and Ph.D. degree from the School of Computer Science and Technology, Nanjing University of Science and Technology, Nanjing, China in 2008. She did post-doctoral research in University of Science & Technology China, Hefei, China, from 2010 to 2013, and was a Visiting Scholar with the New Jersey Institute of Technology, Newark, NJ, USA in 2016. She is currently a Professor with the School of Mathematics and Computer Science, Anhui Normal University,

Wuhu, China. Her research interests include cloud computing, big data, trust

computing, Web service and intelligent information processing. She has published over 50 papers in her research areas.



MengChu Zhou (S'88-M'90-SM'93-F'03) received his B.S. degree in Control Engineering from Nanjing University of Science and Technology, Nanjing, China in 1983, M.S. degree in Automatic Control from Beijing Institute of Technology, Beijing, China in 1986, and Ph.D. degree in Computer and Systems Engineering from Rensselaer Polytechnic Institute, Troy, NY in 1990. He joined New Jersey Institute of Technology (NJIT), Newark, NJ in 1990, and is now a Distinguished Professor of Electrical and Computer Engineering. His research interests are in Petri nets, intelligent automation, Internet of Things, big data, and intelligent transportation. He has over 700 publications including 12 books, 400+ journal papers (over 290 in IEEE transactions), and 28 book-chapters. He was the recipient of NSF's Research Initiation Award, CIM University-LEAD Award from Society of Manufacturing Engineers, Perlis Research Award and Fenster Innovation in Engineering Education Award from NJIT, Humboldt Research Award for US Senior Scientists, Leadership Award and Academic Achievement Award from Chinese Association for Science and Technology-USA, Distinguished Lecturership, Franklin V. Taylor Memorial Award and the Norbert Wiener Award from IEEE SMC Society, and Distinguished Service Award from IEEE Robotics and Automation Society. He has been among most highly cited scholars for years and ranked top one in the field of engineering worldwide in 2012 by Web of Science/Thomson Reuters. He is a life member of Chinese Association for Science and Technology-USA and served as its President in 1999. He is Fellow of IEEE, International Federation of Automatic Control (IFAC), American Association for the Advancement of Science (AAAS), and Chinese Association of Automation (CAA).



Giancarlo Fortino (SM'12) received the Laurea (B.S. and M.S.) and Ph.D. degrees in computer engineering from the University of Calabria, Rende, Italy, in 1995 and 2000, respectively. He has been with the Department of Informatics, Modeling, Electronics, and Systems, University of Calabria, since 2006, where he is currently an Associate Professor of Computer Engineering. He holds the Scientific National Italian Habilitation for Full Professor, and is also an Adjunct Full Professor of Computer Engineering with the Wuhan University of Technology, Wuhan, China, in the framework of high-end foreign experts in China and an Adjunct Senior Researcher with the Italian National Research Council. He is the Co-Founder and the CEO of SenSysCal S.r.l., a spin-off of the University of Calabria, where he is involved in the advanced applied Research and Development of IoT systems. He has authored over 300 publications in journals, conferences, body area networks and books. His current research interests include distributed computing, wireless sensor networks, software agents, IoT technology, and cloud computing. He is currently an Associate Editor of the IEEE TRANSACTIONS ON AFFECTIVE COMPUTING, the IEEE TRANSACTIONS ON Human-Machine, IEEE Sensors Journal, IEEE Access, Information Fusion, Engineering Application of Artificial Intelligence, the Journal of Network, and Computer Applications. He is the chair of the Italian Chapter of the IEEE SMC society.