


1. Fewer failed pairs with LLM configurations

200 unique synthetic pairs per approach | Failure of identifier removal, molecular preservation, or both

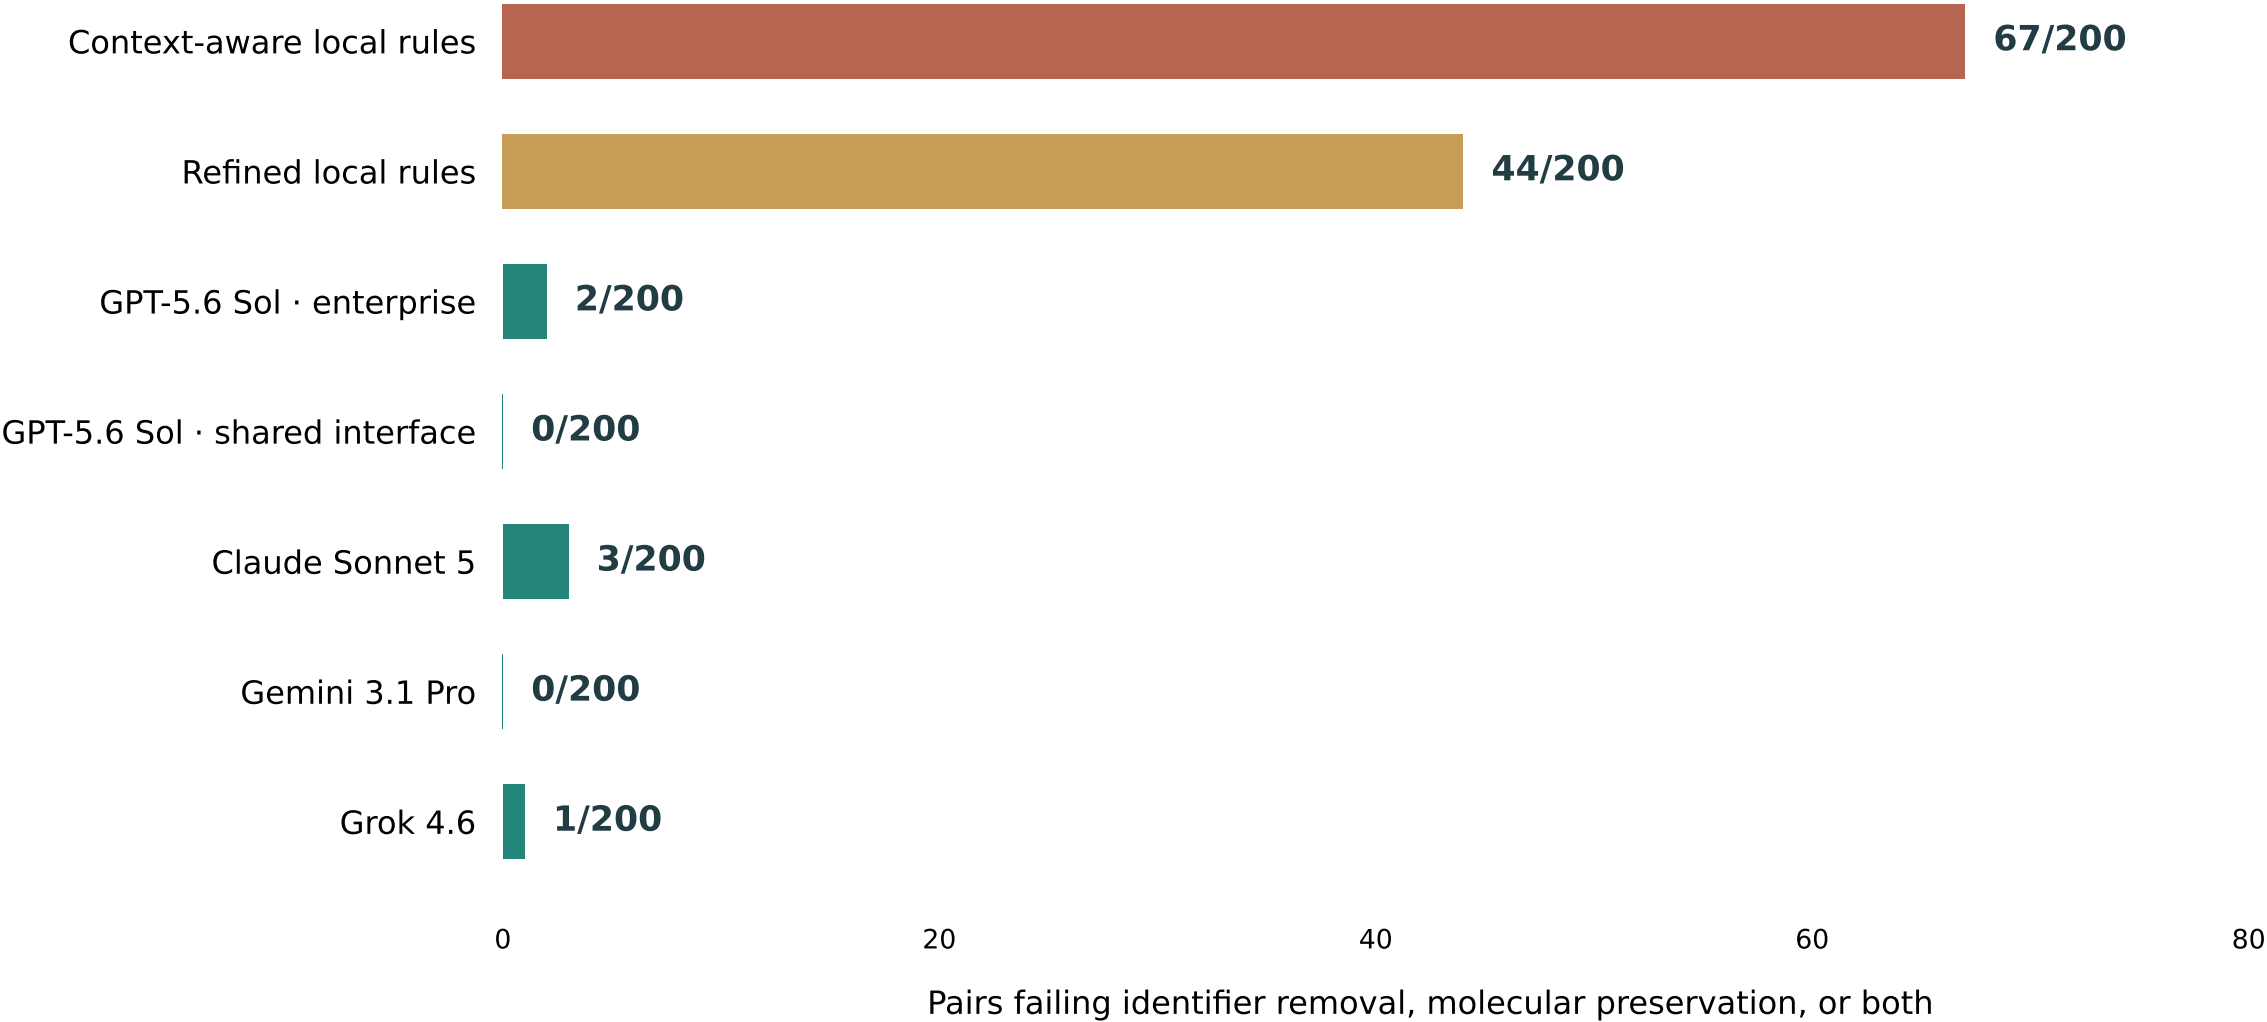

PAIR-LEVEL COMPARISON

Adjusted p < .001 versus either local rule method

ACCOUNTING FOR SHARED REPORT PATTERNS

Adjusted p = .156 / .375; evidence is inconclusive

Exploratory comparisons. Shared patterns limit the independence of the 200 pairs. Pattern-grouped values compare LLMs with earlier / refined rules. All non-Enterprise models used the same shared interface. The institution-developed pipeline failed all 200 pairs (Supplementary Figure S1).