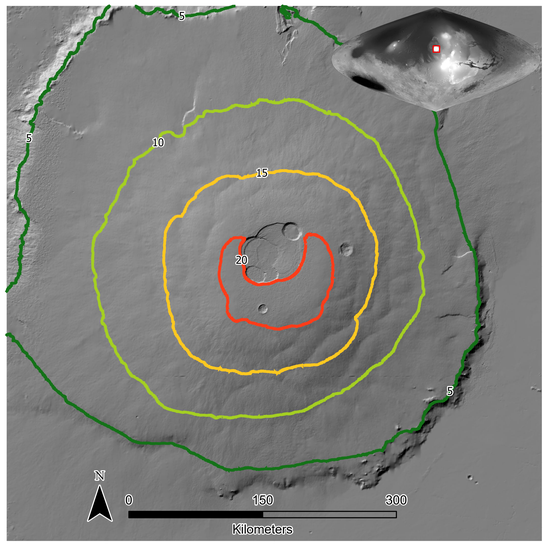

Figure 1: Hello



(a) Attitude data *collected* at each point: ϑ, φ, and ϑ'. $\vec{n} = (\vartheta, \varphi)$ as shown in Figure ??. The *family* of vectors ℓ is defined by ϑ'.



(b) Attitude data *calculated* at each point: φ' and α. From the family of vectors ℓ, the vector $\vec{n}'$ with zenith angle φ' is chosen to minimize the blue central angle (α) subtended by $\vec{n}$ and $\vec{n}'$.

Figure 2: Hello