

individual assignment 5

Linda Herrera

2026-05-06

Set up

Packages

```
# general use and cleaning
library(tidyverse)
library(here)
library(janitor)
library(snakecase)

# wrapping axis labels
library(scales)

# reading in .xlsx files
library(readxl)

# arranging plots
library(patchwork)
```

Data

```
# taxonomic information
taxon_list <- read_csv(here("data", "taxon_list.csv"))

# aquatic invertebrates
aq_ins <- read_xlsx(here("data", "Aquatic Sampling Data-2026-03-10.xlsx"),
  sheet = "Aquatic Insects")
```

```
# site information
sites <- read_xlsx(here("data", "Aquatic Sampling Data-2026-03-10.xlsx"),
                  sheet = "sites")

# water quality information
water_quality <- read_xlsx(here("data", "Aquatic Sampling Data-2026-03-10.xlsx"),
                          sheet = "Water Quality",
                          na = c("", "n/a", "N/A", "over", "173+"))
```

Cleaning

sites object

```
# creating new object from sites
ncos_sites <- sites |>
  # filter to only include NCOS sites sampled four times a year
  filter(sector == "NCOS" & sampling_frequency == "Quarterly")
```

taxon_list object

```
# creating new clean object from taxon_list
taxon_list_clean <- taxon_list |>
  # converting taxon name to snake case (no spaces or capital letters,
  # only underscores)
  mutate(verbatim_name = to_any_case(verbatim_name, case = "snake"))
```

water_quality object

```
# creating new clean object from water quality
water_quality_clean <- water_quality |>
  # clean column names
  clean_names() |>
  # filtering join: only include sites in ncos_sites
  semi_join(ncos_sites, by = "site") |>
  # create new column to join with later data frames
  unite("date_site", date, site, remove = TRUE) |>
  # group by date_site column
  group_by(date_site) |>
  # calculate median pH, salinity, DO
```

```

summarize(med_ph = median(p_h, na.rm = TRUE),
          med_sal = median(salinity_ppt, na.rm = TRUE),
          med_do = median(dissolved_oxygen_mg_l, na.rm = TRUE)) |>
# ungroup data frame
ungroup() |>
# filter out salinity outliers
filter(date_site != "2022-08-12_NVBR")

```

aq_ins object

```

# creating new clean object from aquatic inverts
aq_ins_clean <- aq_ins |>
# clean column names
clean_names() |>
# filtering join: only include sites occurring in ncos_sites
semi_join(ncos_sites, by = c("site")) |>
# renaming columns
rename(date = date_on_vial) |>
# select columns of interest
select(date, sample_type, site,
       ostracod,
       copepod,
       hemiptera_corixidae_boatman,
       cladocera,
       nematode,
       diptera_ceratopogonidae,
       annelida_oligochaete,
       diptera_chironomid,
       annelida_polychaete) |>
# filter to only include "filtered beaker" samples
filter(sample_type %in% c("FB 250", "FB250")) |>
# convert the data frame to long format
pivot_longer(cols = ostracod:annelida_polychaete,
             names_to = "taxon",
             values_to = "abundance") |>
# group by date, site, taxon
group_by(date, site, taxon) |>
# calculate average abundance per liter (sum abundance divided by 7.5 liters)
summarize(ave_lit = sum(abundance, na.rm = TRUE)/7.5) |>
# ungroup data frame
ungroup() |>

```

```

# create a new column called `date_site` to join with water quality
unite("date_site", date, site, remove = FALSE) |>
# join with water quality
left_join(water_quality_clean, by = c("date_site")) |>
# join with taxon list
left_join(taxon_list_clean, by = c("taxon" = "verbatim_name")) |>
# add full names of sites
mutate(site_full = case_when(
  site == "NVBR" ~ "North of Venoco Bridge",
  site == "NEC" ~ "South of Venoco Bridge",
  site == "NMC" ~ "Main Channel",
  site == "NPB" ~ "South of Phelps Bridge",
  site == "NPB1" ~ "North of Phelps Bridge",
  site == "NPB2" ~ "Phelps Road",
  site == "NWP" ~ "West Pond",
  site == "NDC" ~ "Devereux Creek"
)) |>
# setting factor levels for site
mutate(site_full = fct_reorder(site_full, med_sal, .fun = "median", .na_rm = TRUE),
       site_full = fct_rev(site_full))

```

Inserting the needed class code

Salinity visual

```

# base layer
salinity <- ggplot(data = aq_ins_clean,
  # x-axis: site
  # y-axis: mean salinity
  mapping = aes(x = site_full,
    y = med_sal)) +
# first layer: salinity measurements at each survey
geom_jitter(height = 0,
  shape = 21,
  width = 0.1,
  size = 2) +
# wrapping x-axis text
scale_x_discrete(labels = label_wrap(width = 15)) +
# second layer: points to represent means
stat_summary(fun = median,
  color = "tomato",


```

```

        size = 1,
        shape = 18) + # 18 = filled diamond
# relabelling x- and y-axes
labs(x = "Site",
     y = "Median salinity (ppt)",
     title = "Site salinity") +
# different theme
theme_bw()

# displaying object
salinity

```

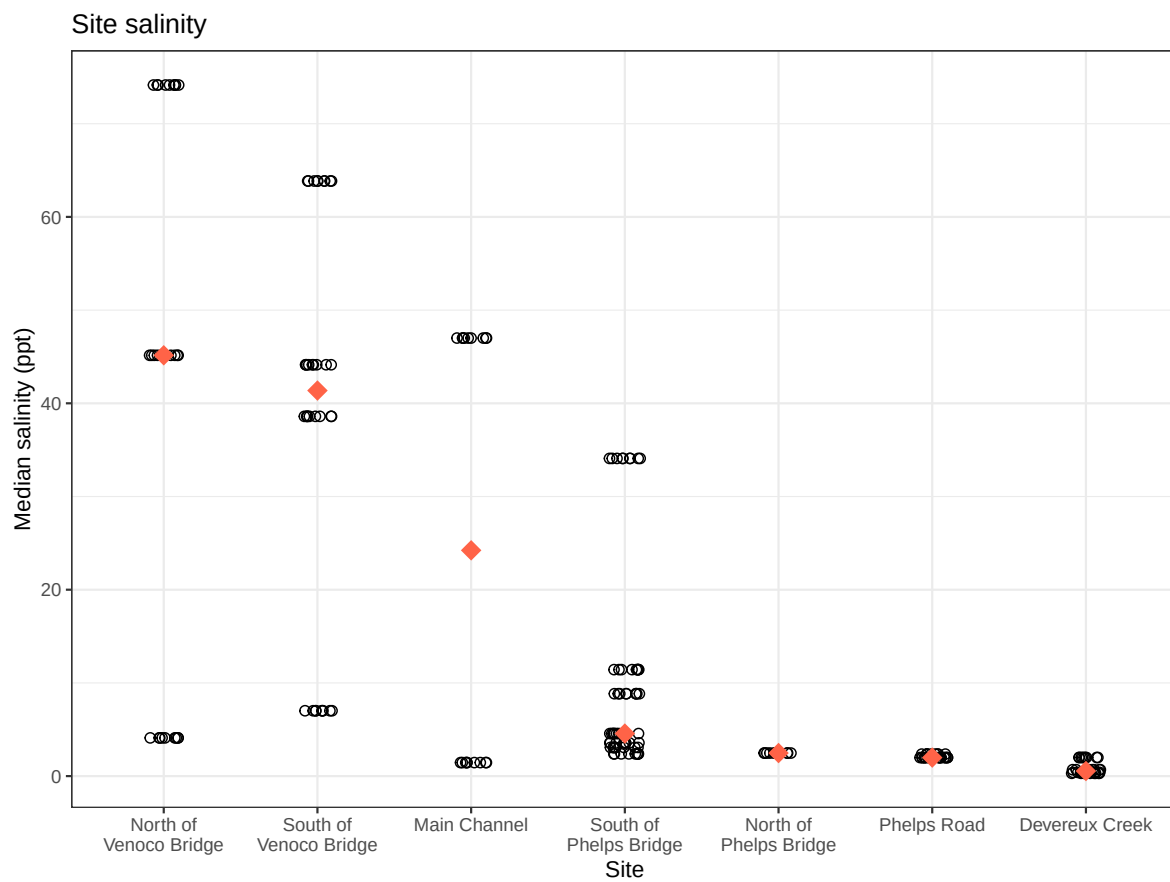


Copepod cleaning

```
# creating new object from clean aquatic inverts
copepods <- aq_ins_clean |>
  # filter to only include copepods
  filter(taxon == "copepod") |>
  # log + 1 transform mean abundance per liter
  mutate(log_ave_lit = log(ave_lit + 1))
```

Copepod visual

```
# base layer
copepods <- ggplot(data = copepods,
  # x-axis: site
  # y-axis: mean abundance/L
  mapping = aes(x = site_full,
    y = log_ave_lit)) +
  # first layer: points to represent observations
  geom_jitter(height = 0,
    shape = 21,
    width = 0.1,
    size = 2) +
  # second layer: points to represent medians
  stat_summary(geom = "point",
    fun = "median",
    size = 4,
    color = "tomato",
    shape = 18) + # 18 = filled diamond
  # wrapping x-axis text
  scale_x_discrete(labels = label_wrap(15)) +
  # relabelling x- and y-axis, adding title
  labs(x = "Site",
    y = "log + 1 transformed average abundance/L",
    title = "Copepods") +
  # different theme
  theme_bw()

# displaying object
copepods
```

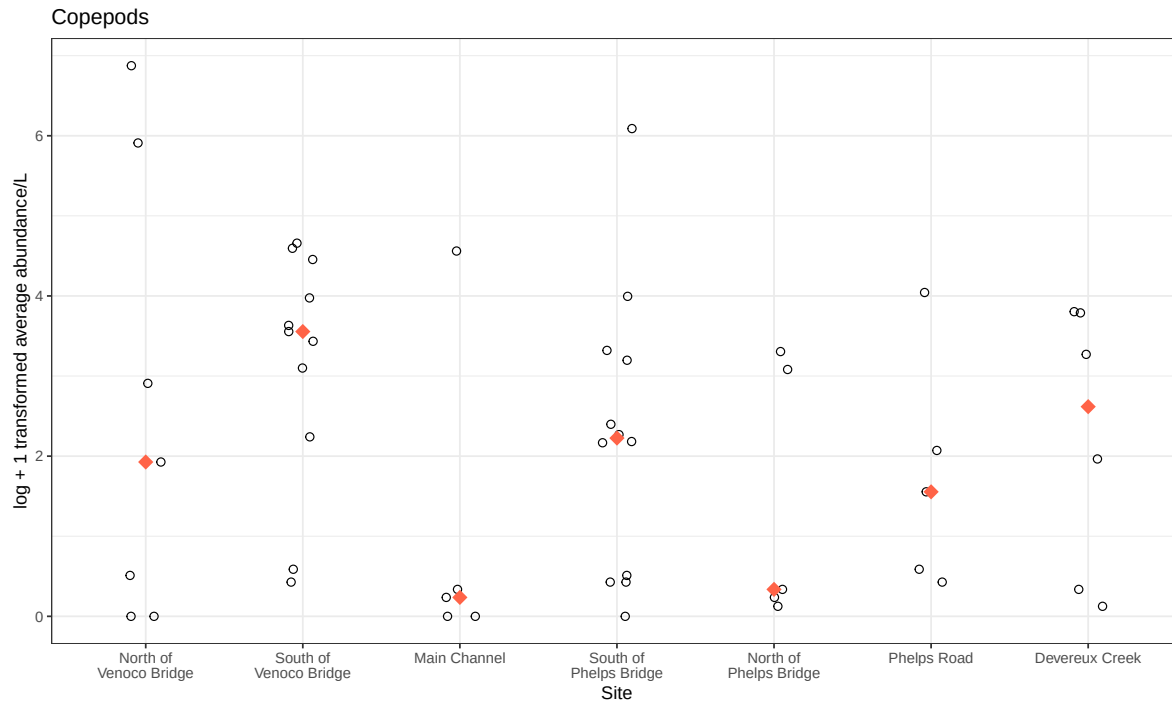

Problems

1. Visualizing differences across sites in major taxon abundance

a. Plan your figure

- x-axis: site
- y-axis: average abundance/L
- geometry to represent average abundance/L: `geom_jitter()`
- geometry to represent medians: `stat_summary()`

b. Wrangle your data

```
# creating new object from clean aquatic inverts
ostracod <- aq_ins_clean |>
  # filter to only include ostracods
  filter(taxon == "ostracod") |>
  # log + 1 transform mean abundance per liter
  mutate(log_ave_lit = log(ave_lit + 1))
```

```
# display 10 random rows
slice_sample(ostracod, n = 10)
```

```
# A tibble: 10 x 24
```

	date_site <chr>	date <dtm>	site <chr>	taxon <chr>	ave_lit <dbl>	med_ph <dbl>	med_sal <dbl>	med_do <dbl>
1	2022-05-12_NPB2	2022-05-12 00:00:00	NPB2	ostr~	1.20e+3	NA	NA	NA
2	2023-05-16_NVBR	2023-05-16 00:00:00	NVBR	ostr~	1.33e-1	9.29	NA	9.83
3	2022-02-21_NPB	2022-02-21 00:00:00	NPB	ostr~	1.33e+0	7.39	34.1	0.34
4	2022-11-19_NDC	2022-11-19 00:00:00	NDC	ostr~	6 e+0	NA	NA	NA
5	2023-02-21_NEC	2023-02-21 00:00:00	NEC	ostr~	0	8.56	NA	8.8
6	2023-11-12_NMC	2023-11-12 00:00:00	NMC	ostr~	5.33e-1	NA	47	14.0
7	2023-05-06_NDC	2023-05-06 00:00:00	NDC	ostr~	5.6 e+1	10.1	NA	13.1
8	2023-02-28_NPB1	2023-02-28 00:00:00	NPB1	ostr~	0	NA	NA	NA
9	2022-01-28_NDC	2022-01-28 00:00:00	NDC	ostr~	9.47e+0	7.65	2.00	9.55
10	2023-09-15_NMC	2023-09-15 00:00:00	NMC	ostr~	4 e-1	NA	NA	14.2

```
# i 16 more variables: taxonRank <chr>, scientificName <chr>, kingdom <chr>,  
#   Phylum <chr>, Class <chr>, Subclass <chr>, Superorder <chr>, Order <chr>,  
#   Infraorder <chr>, Family <chr>, Subfamily <chr>, Tribe <chr>, Genus <chr>,  
#   comments <chr>, site_full <fct>, log_ave_lit <dbl>
```

c. Code your figure

```
# creating the ostracod figure
ostracod_plot <- ggplot(data = ostracod,
  # x-axis: site
  # # y-axis: mean abundance/L
  mapping = aes(x = site_full,
    y = log_ave_lit)) +
  # first layer: individual observations as open circles
  geom_jitter(height = 0,
    shape = 21,
    width = 0.1,
    size = 2) +
  # second layer: median as a filled blue diamond
  stat_summary(geom = "point",
    fun = "median",
    size = 4,
    color = "tomato",
```




```

        shape = 18) + # 18 = filled diamond
# wrapping x-axis text
scale_x_discrete(labels = label_wrap(15)) +
# axis labels and title
labs(x = "Site",
     y = "log + 1 transformed average abundance/L",
     title = "Ostracods") +
# different theme
theme_bw()

# displaying object
ostracod_plot

```

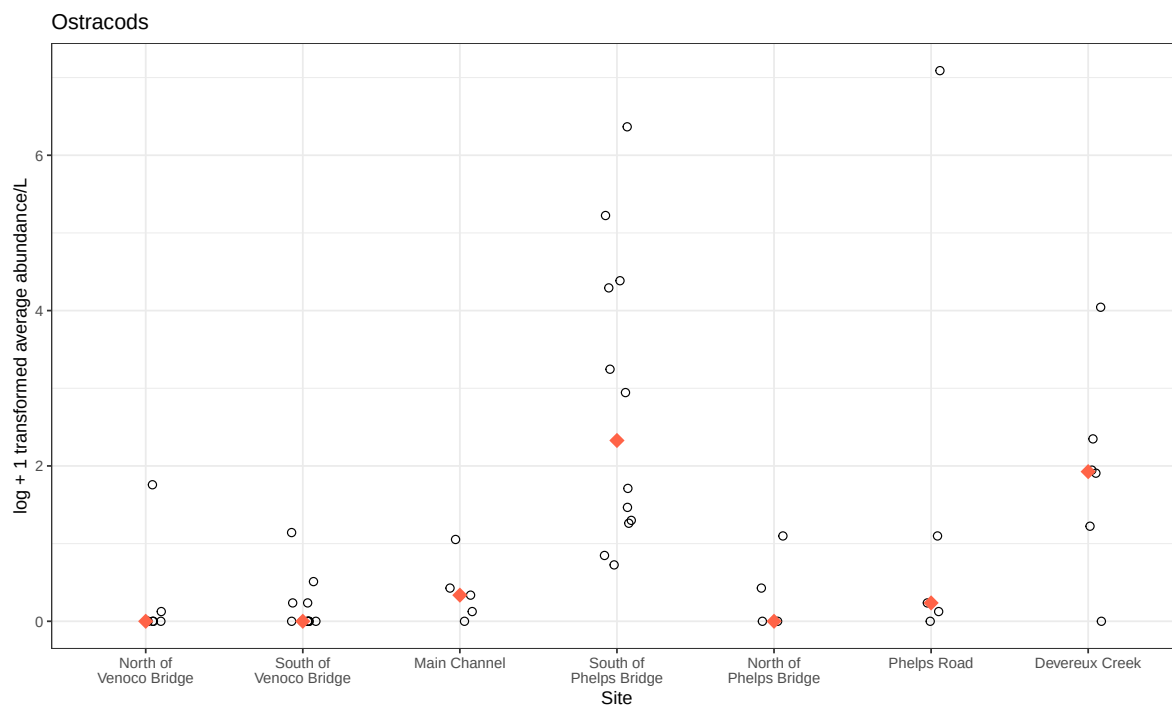


d. Create a multipanel figure

```

# combining the figures together
salinity/ ( copepods + ostracod_plot )

```

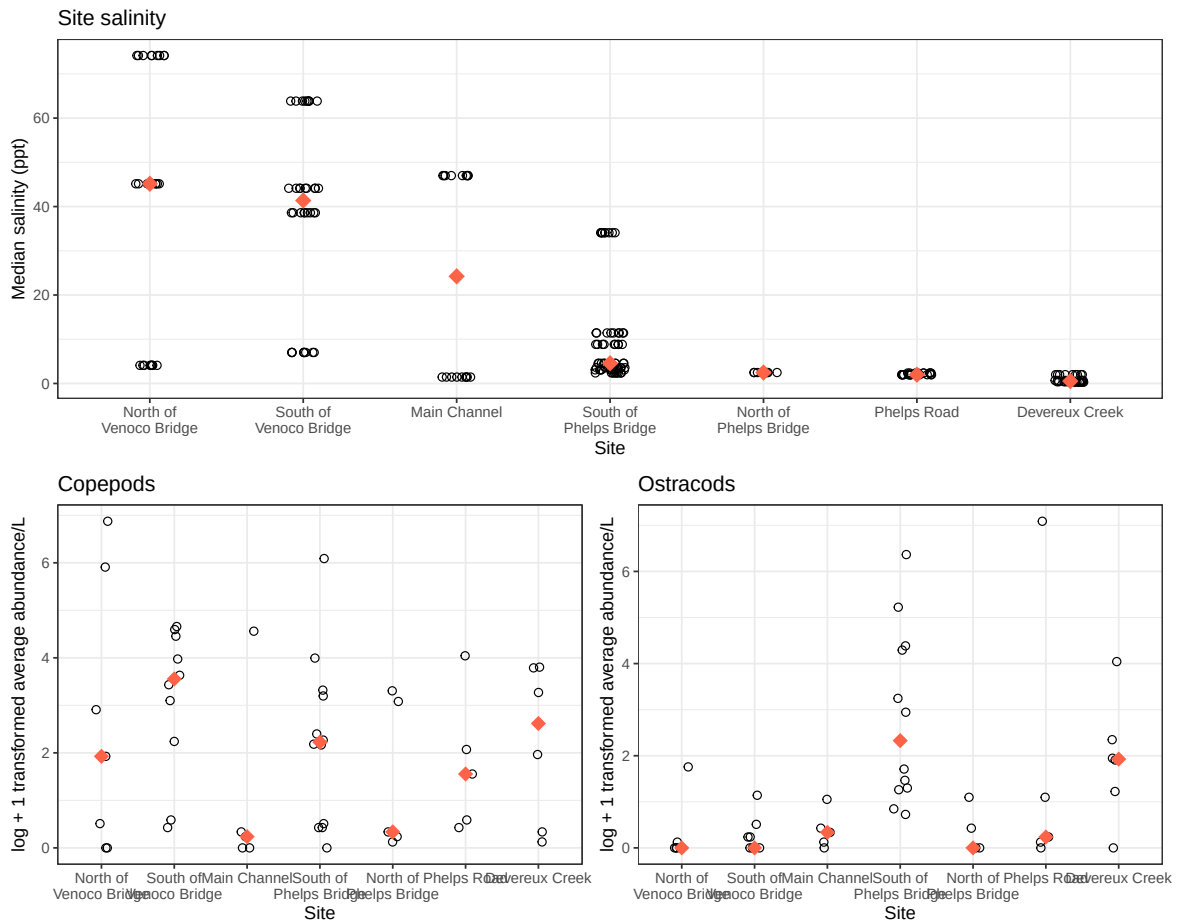

e. Interpret your figure

2. Visualizing total abundance as a function of salinity

a. Plan your figure

b. Wrangle your data

c. Code your figure

d. Interpret your figure