

deeplearning.ai





# Object Detection

# Putting it together: YOLO algorithm



y is  $3 \times 3 \times 2 \times 8$ 



- 1 pedestrian
- 2 car
- 3 motorcycle


$$= \begin{bmatrix} c_3 \\ p_c \\ b_x \\ b_y \\ b_h \\ b_w \\ c_1 \\ c_2 \end{bmatrix}$$

y is 
$$3 \times 3 \times 2 \times 8$$




- 1 pedestrian
- 2 car
- 3 motorcycle

$$y = \begin{bmatrix} c_1 \\ c_2 \\ c_3 \\ p_c \\ b_x \\ b_y \\ b_h \\ b_w \\ c_1 \\ c_2 \\ c_3 \end{bmatrix}$$

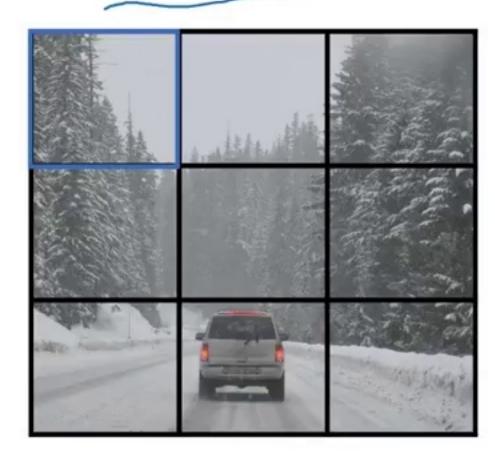

- 1 pedestrian
- 2 car
- 3 motorcycle


$$y = \begin{bmatrix} b_{w} \\ b_{w} \\ c_{1} \\ c_{2} \\ c_{3} \\ p_{c} \\ b_{x} \\ b_{y} \\ b_{h} \\ b_{w} \\ c_{1} \\ c_{2} \\ c_{3} \end{bmatrix}$$

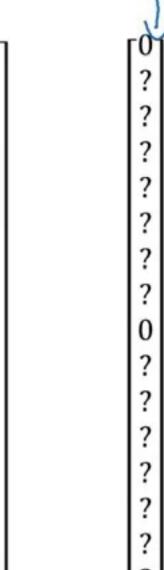



y is 
$$3 \times 3 \times 2 \times 8$$


# orchors


\$\frac{3 \times 3 \times 2 \times 8}{\frac{1}{2} \times 5 + \pm classes}\$

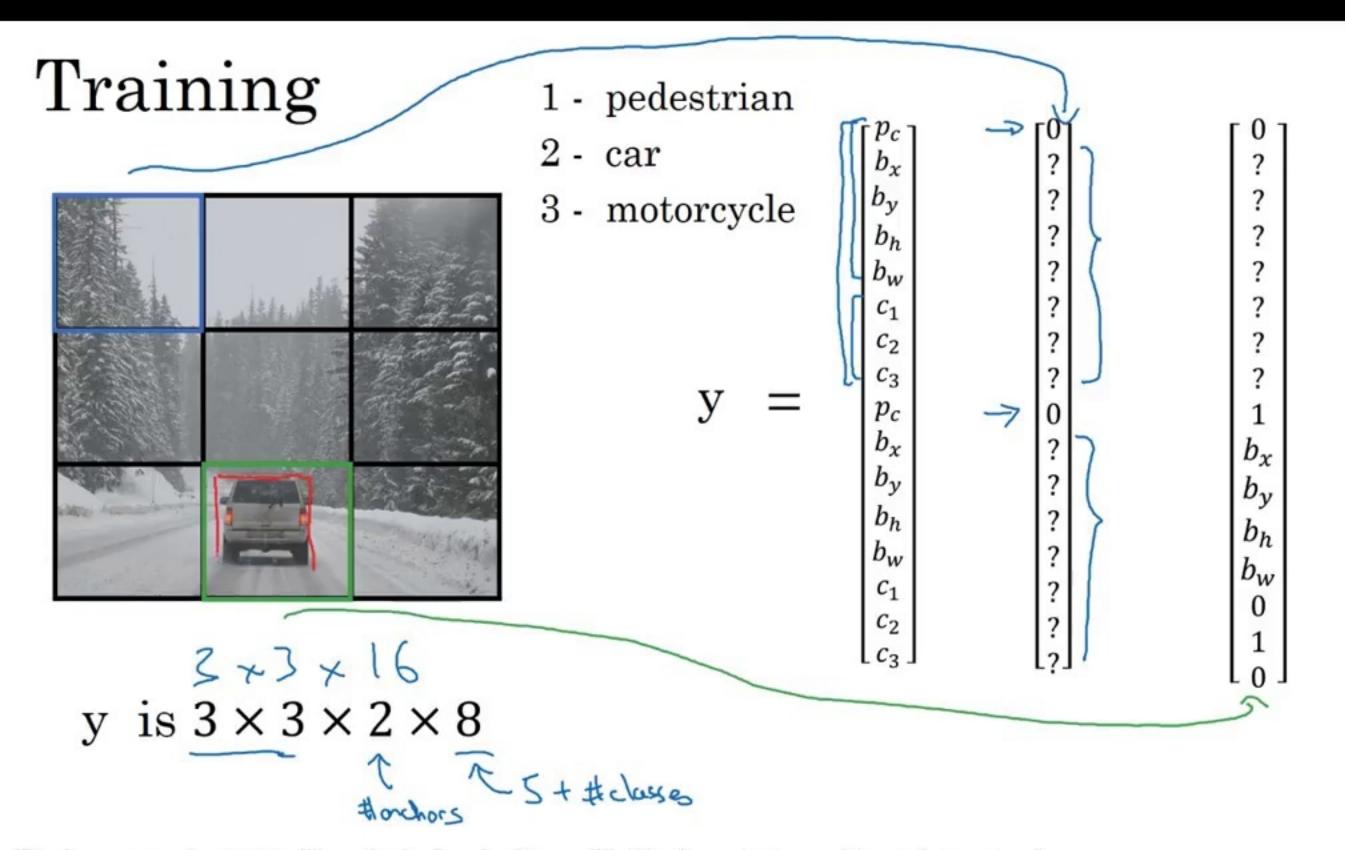

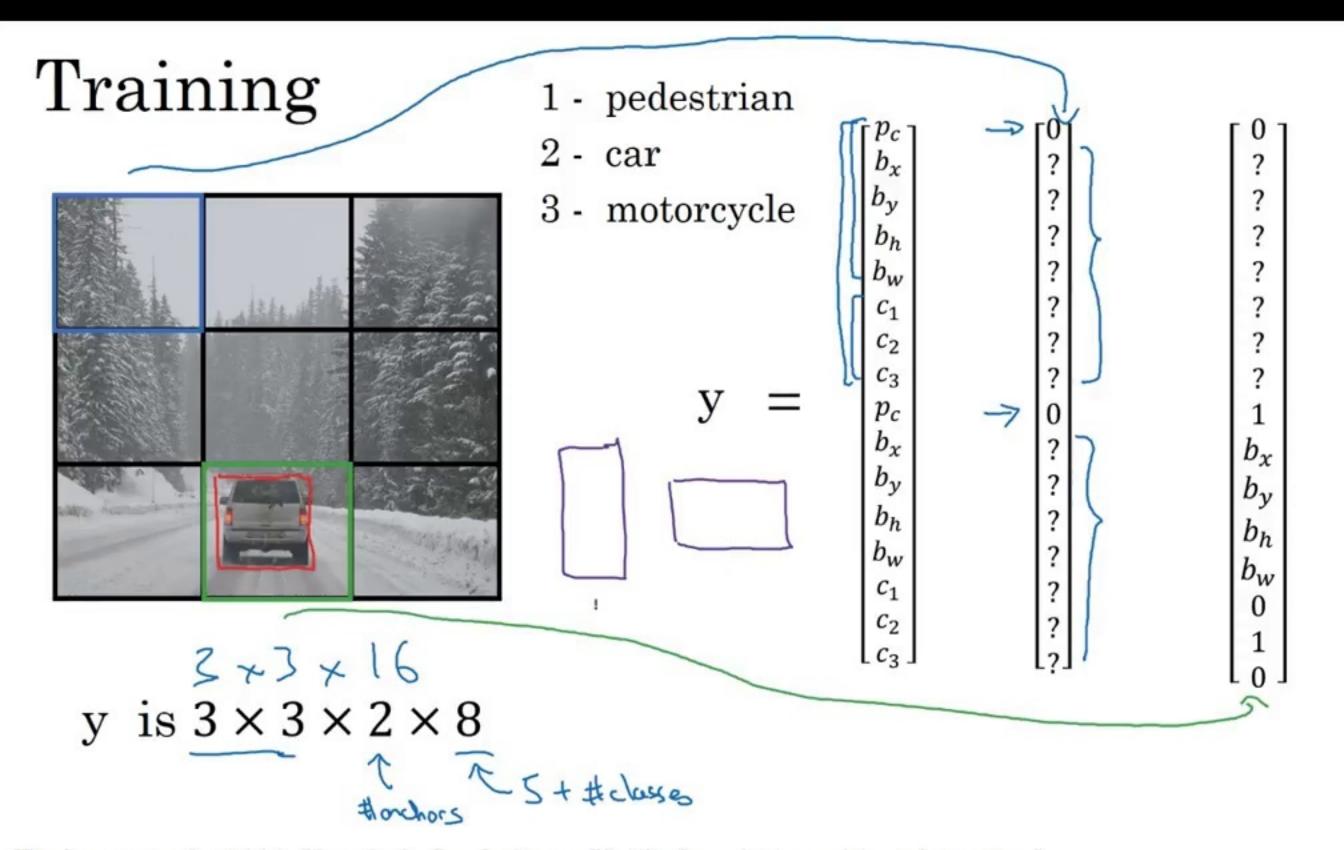


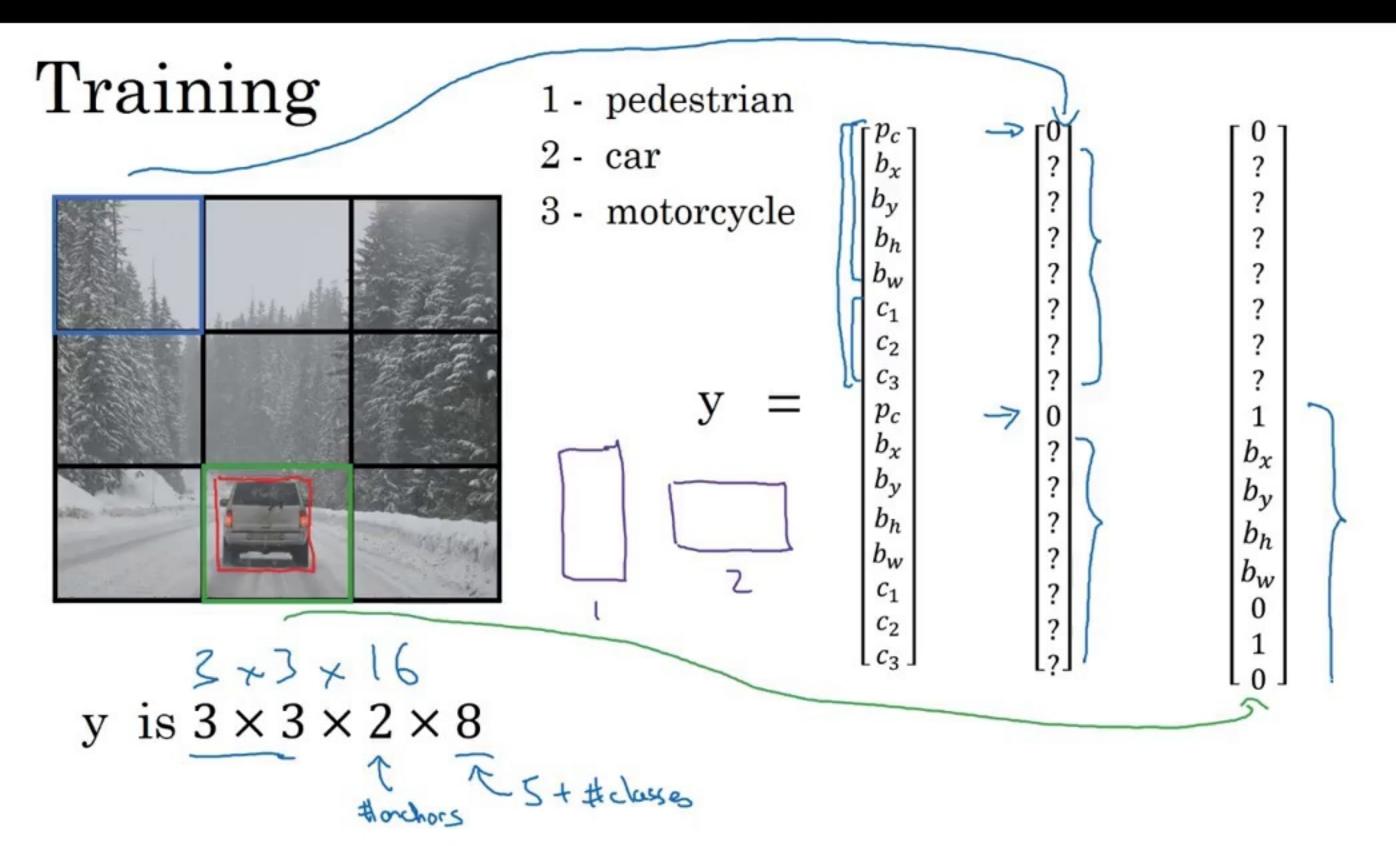

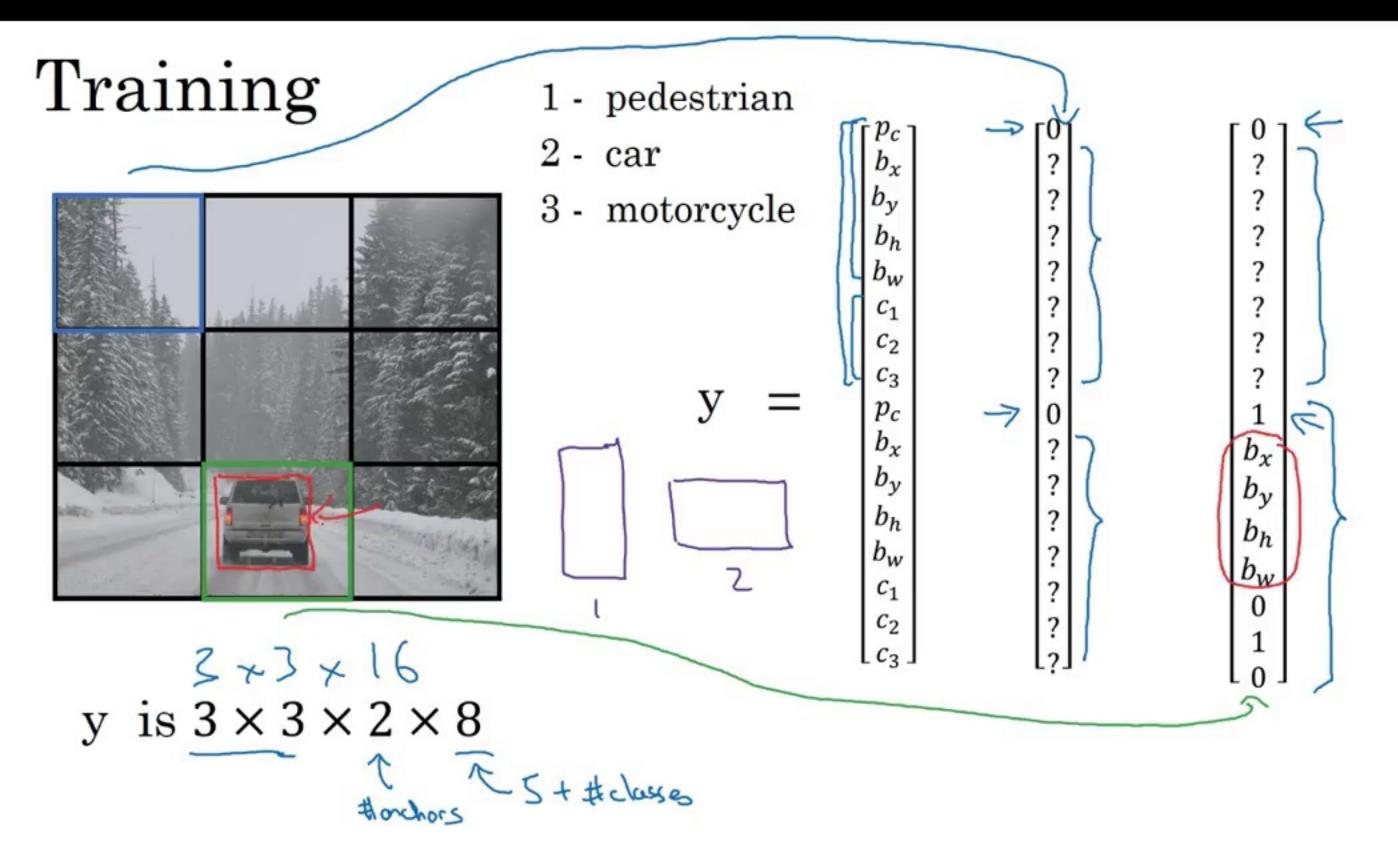

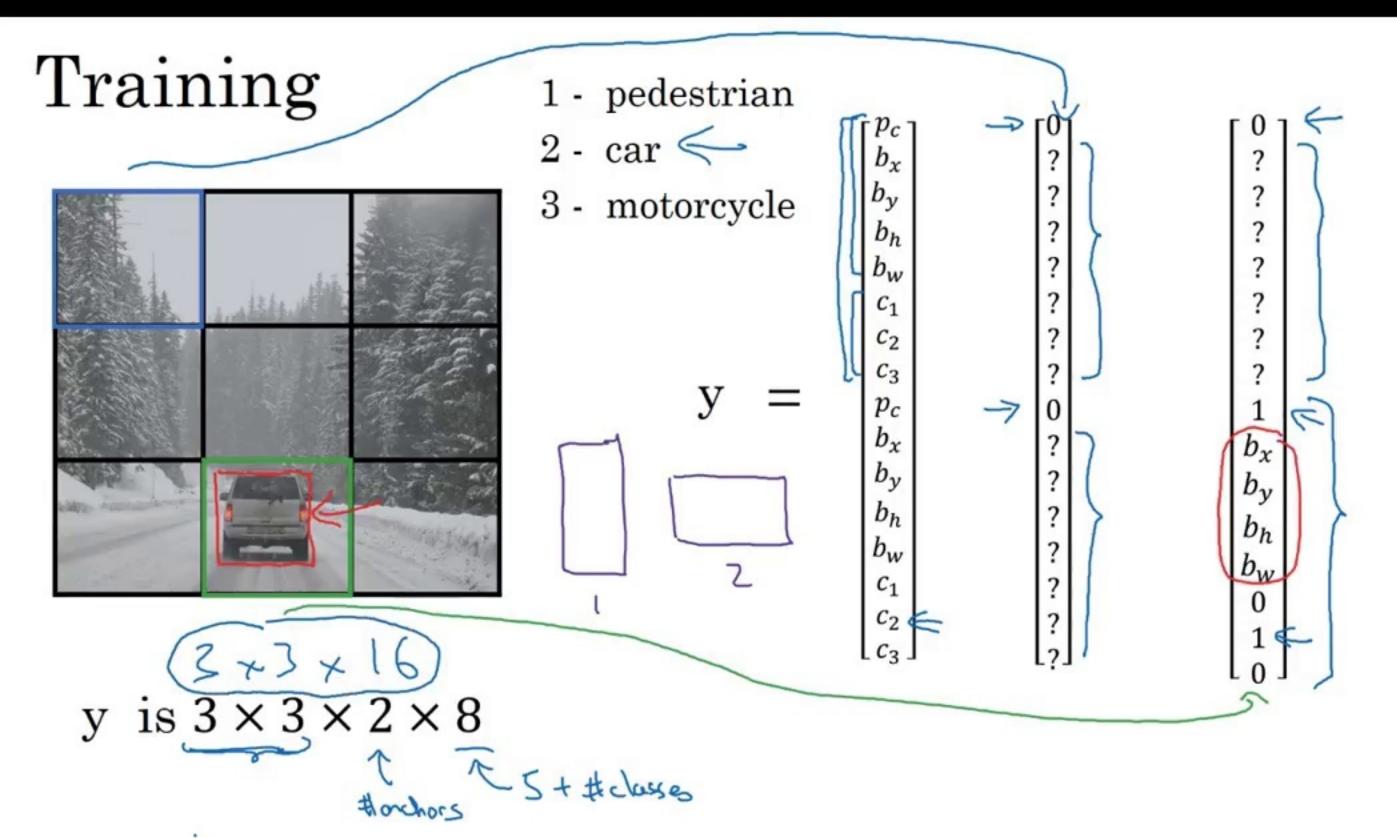


[Redmon et al., 2015, You Only Look Once: Unified real-time object detection]

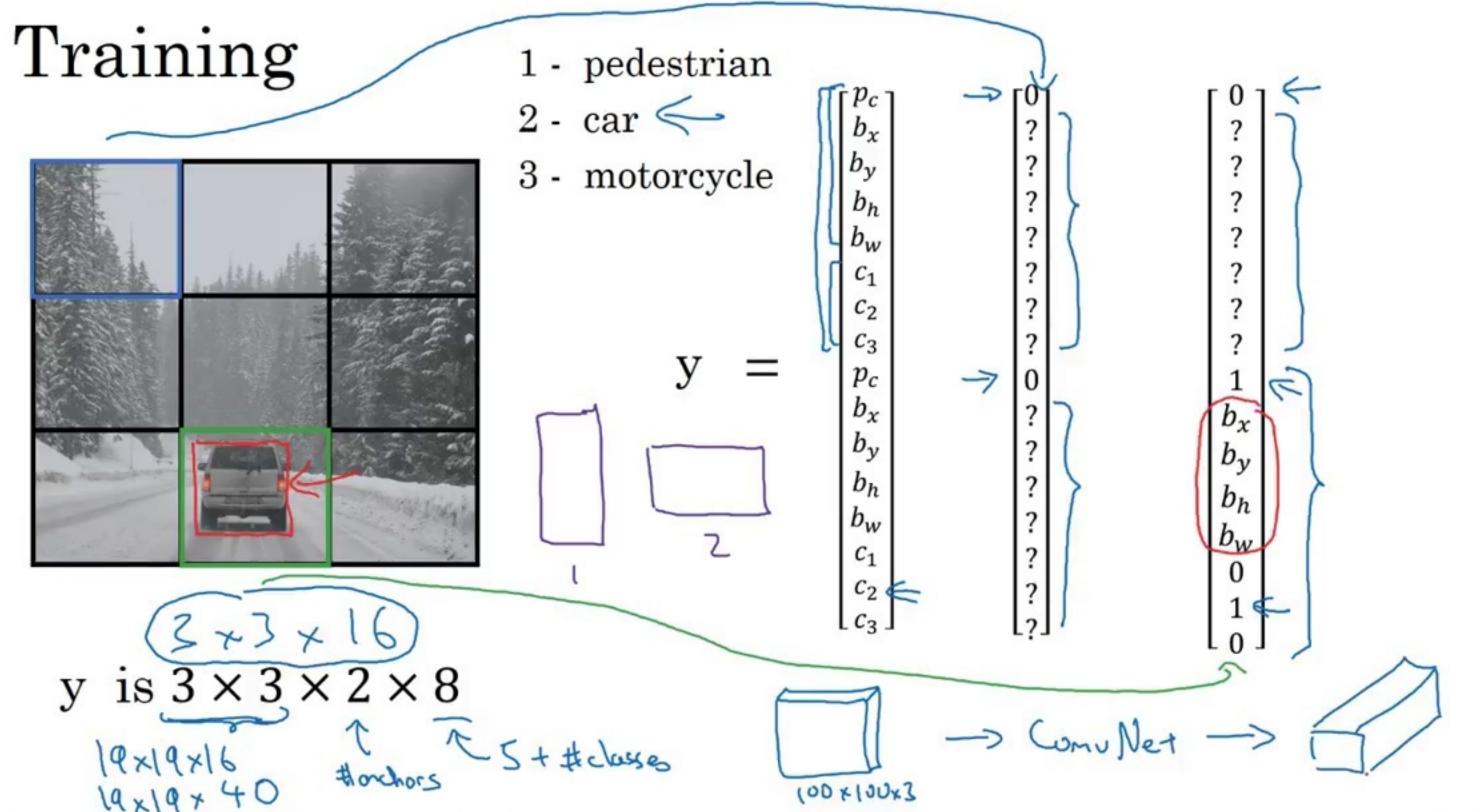


Andrew Ng


# Making predictions

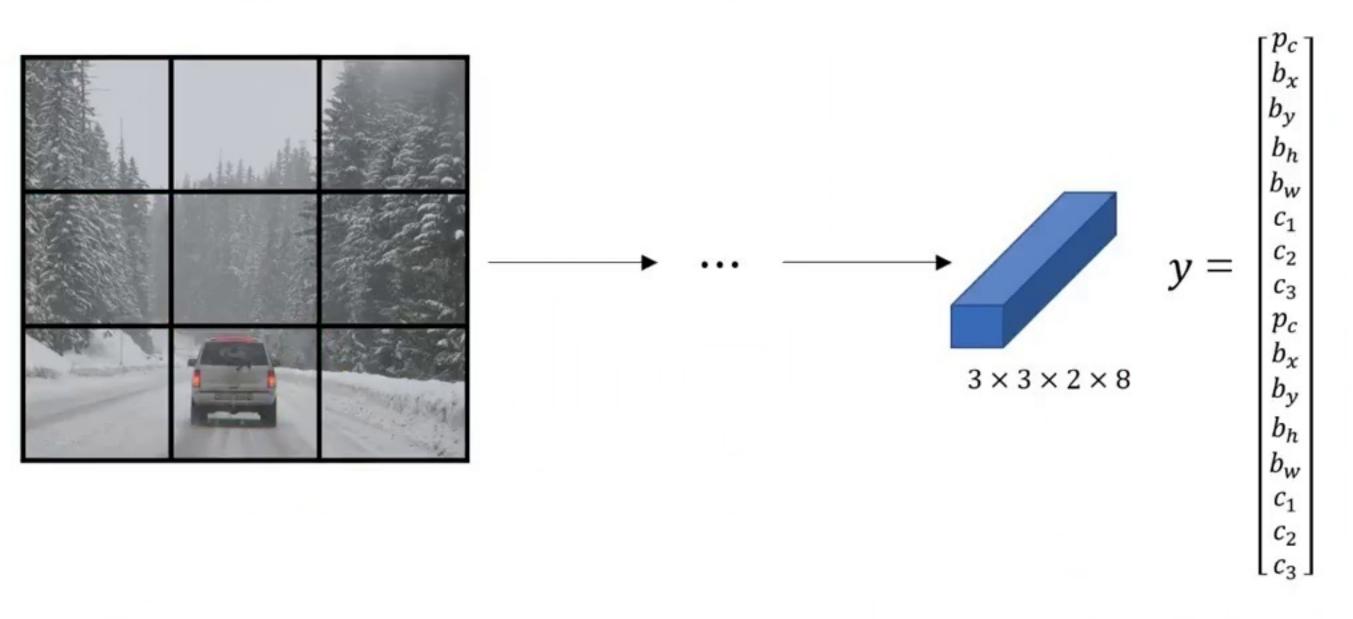

# Making predictions

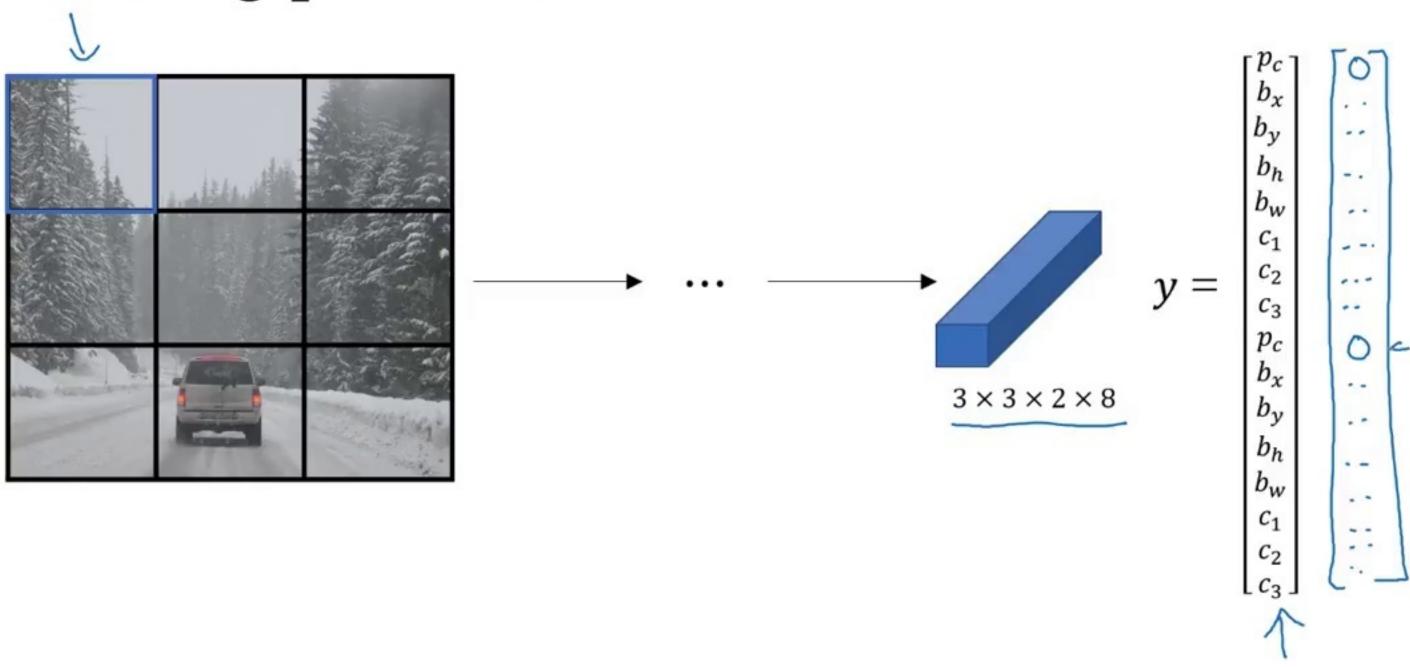

# Making predictions

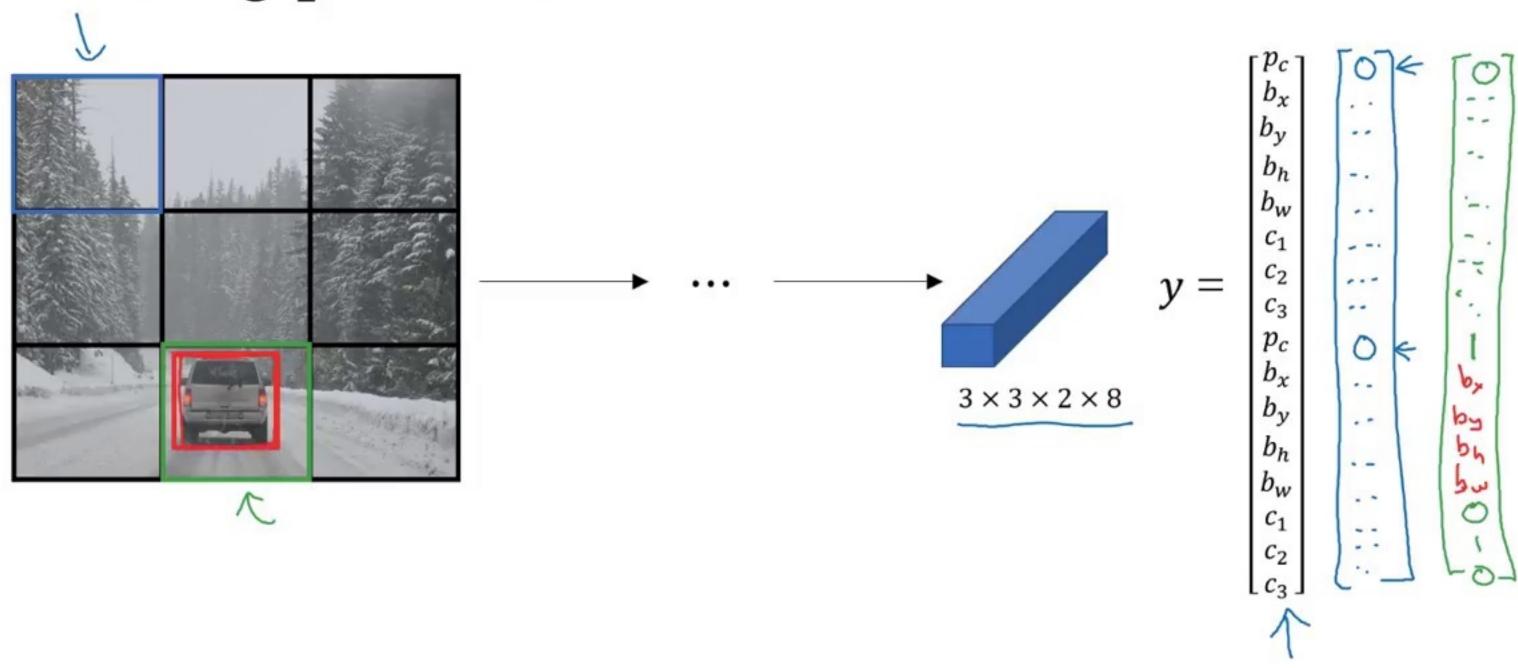





• For each grid call, get 2 predicted bounding boxes.



- For each grid call, get 2 predicted bounding boxes.
- Get rid of low probability predictions.



- For each grid call, get 2 predicted bounding boxes.
- Get rid of low probability predictions.



- For each grid call, get 2 predicted bounding boxes.
- Get rid of low probability predictions.
- For each class (pedestrian, car, motorcycle) use non-max suppression to generate final predictions.



- For each grid call, get 2 predicted bounding boxes.
- Get rid of low probability predictions.
- For each class (pedestrian, car, motorcycle) use non-max suppression to generate final predictions.