MinimumValueConfig API

Este metadata pode ser consumido diretamente pela REST API padrão do Salesforce, sem Apex custom.

Endpoint base

TEXT

```
GET /services/data/v66.0/query?q=<SOQL>
```

Autenticação

Usar um `access_token` OAuth válido no header:

HTTP

```
Authorization: Bearer <ACCESS_TOKEN>
Content-Type: application/json
```

Consulta de todos os registos com todos os campos do tipo

SOQL

```
SELECT DeveloperName,
       MasterLabel,
       CurrencyCode__c,
       IsActive__c,
       MinimumValue__c,
       Notes__c,
       SectionCode__c,
       SectionName__c,
       SubsectionCode__c,
```

```
       SubsectionName__c,
       TypeCode__c,
       TypeName__c,
       SubtypeCode__c,
       SubtypeName__c
FROM MinimumValueConfig__mdt
ORDER BY SectionCode__c, SubsectionCode__c, TypeCode__c,
SubtypeCode__c
```

Exemplo curl:

BASH

```
curl --request GET \
  --url
"https://YOUR_DOMAIN.my.salesforce.com/services/data/v66.0/query?q=SEL
ECT%20DeveloperName%2C%20MasterLabel%2C%20CurrencyCode__c%2C%20IsActiv
e__c%2C%20MinimumValue__c%2C%20Notes__c%2C%20SectionCode__c%2C%20Secti
onName__c%2C%20SubsectionCode__c%2C%20SubsectionName__c%2C%20TypeCode_
_c%2C%20TypeName__c%2C%20SubtypeCode__c%2C%20SubtypeName__c%20FROM%20M
inimumValueConfig__mdt%20ORDER%20BY%20SectionCode__c%2C%20SubsectionCo
de__c%2C%20TypeCode__c%2C%20SubtypeCode__c" \
  --header "Authorization: Bearer <ACCESS_TOKEN>" \
  --header "Content-Type: application/json"
```

Consulta filtrada

Se a equipa de engenharia enviar todos os filtros, a chamada pode filtrar exatamente o registo esperado.

Exemplo para secção 8 e subsecção 60:

SOQL

```
SELECT DeveloperName,
       MasterLabel,
       CurrencyCode__c,
       IsActive__c,
```

```
       MinimumValue__c,
       Notes__c,
       SectionCode__c,
       SectionName__c,
       SubsectionCode__c,
       SubsectionName__c,
       TypeCode__c,
       TypeName__c,
       SubtypeCode__c,
       SubtypeName__c
FROM MinimumValueConfig__mdt
WHERE IsActive__c = true
  AND SectionCode__c = '8'
  AND SubsectionCode__c = '60'
```

Exemplo `curl`:

BASH

```
curl --request GET \
  --url
"https://YOUR_DOMAIN.my.salesforce.com/services/data/v66.0/query?q=SEL
ECT%20DeveloperName%2C%20MasterLabel%2C%20CurrencyCode__c%2C%20IsActiv
e__c%2C%20MinimumValue__c%2C%20Notes__c%2C%20SectionCode__c%2C%20Secti
onName__c%2C%20SubsectionCode__c%2C%20SubsectionName__c%2C%20TypeCode_
_c%2C%20TypeName__c%2C%20SubtypeCode__c%2C%20SubtypeName__c%20FROM%20M
inimumValueConfig__mdt%20WHERE%20IsActive__c%20%3D%20true%20AND%20Sect
ionCode__c%20%3D%20%278%27%20AND%20SubsectionCode__c%20%3D%20%2760%27"
\
  --header "Authorization: Bearer <ACCESS_TOKEN>" \
  --header "Content-Type: application/json"
```

Exemplo de resposta

JSON

{
  "totalSize": 1,
  "done": true,
  "records": [
    {
      "attributes": {
        "type": "MinimumValueConfig__mdt",
        "url": "/services/data/v66.0/sobjects/MinimumValueConfig__mdt/MinimumValueConfig.Section_8_Subsection_60_Roupeiros"
      },
      "DeveloperName": "Section_8_Subsection_60_Roupeiros",
      "MasterLabel": "Secção 8 / Subsecção 60 - Roupeiros",
      "CurrencyCode__c": "EUR",
      "IsActive__c": true,
      "MinimumValue__c": 1300.0,
      "Notes__c": "Aplica-se apenas à subsecção 60 da secção 8 e deve ser avaliada antes da regra geral da secção 8.",
      "SectionCode__c": "8",
      "SectionName__c": "Cozinhas",
      "SubsectionCode__c": "60",
      "SubsectionName__c": "Roupeiros",
      "TypeCode__c": null,
      "TypeName__c": null,
      "SubtypeCode__c": null,
      "SubtypeName__c": null
    }
  ]
}

Exemplo em JavaScript

JAVASCRIPT

```
const soql = `
  SELECT DeveloperName,
         MasterLabel,
         CurrencyCode__c,
         IsActive__c,
         MinimumValue__c,
         Notes__c,
         SectionCode__c,
         SectionName__c,
         SubsectionCode__c,
         SubsectionName__c,
         TypeCode__c,
         TypeName__c,
         SubtypeCode__c,
         SubtypeName__c
  FROM MinimumValueConfig__mdt
  WHERE IsActive__c = true
`;


const response = await fetch(

`https://DOMAIN.my.salesforce.com/services/data/v66.0/query?q=${encode
URIComponent(soql)}`,
  {
    method: 'GET',
    headers: {
      Authorization: `Bearer ${accessToken}`,
```

```
      'Content-Type': 'application/json'
    }
  }
);
```

Observação

Como esta solução usa a API padrão de `query`, qualquer consumidor pode montar filtros adicionais com `WHERE` para `SectionCode__c`, `SubsectionCode__c`, `TypeCode__c` e `SubtypeCode__c` sem necessidade de nova API customizada.

A tabela ficará para acesso pelos administradores do sistema nos Metadatas Customizados pelo nome “Configurações de Valores Mínimos”

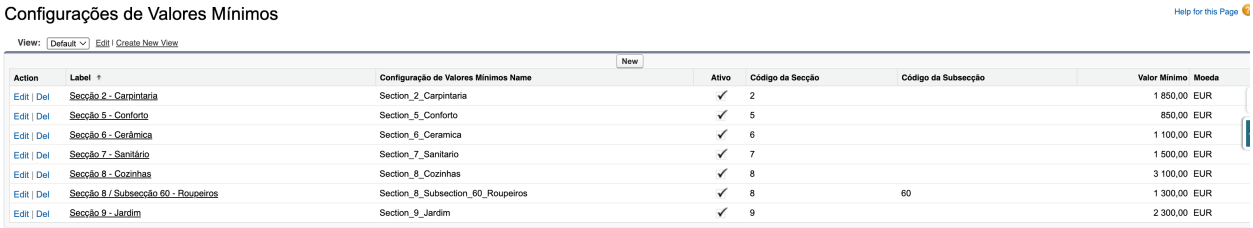
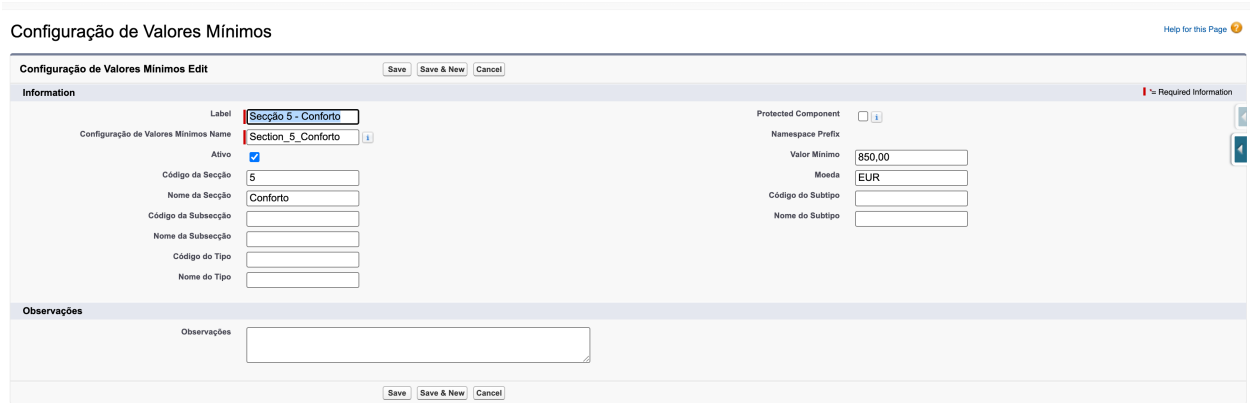
Action	Label	Configuração de Valores Mínimos Name	Ativo	Código da Secção	Código da Subsecção	Valor Mínimo	Moeda
Edit | Del	Secção 2 - Carpintaria	Section_2_Carpintaria	✓	2		1 850,00	EUR
Edit | Del	Secção 5 - Conforto	Section_5_Conforto	✓	5		850,00	EUR
Edit | Del	Secção 6 - Cerâmica	Section_6_Ceramica	✓	6		1 100,00	EUR
Edit | Del	Secção 7 - Sanitário	Section_7_Sanitario	✓	7		1 500,00	EUR
Edit | Del	Secção 8 - Cozinhas	Section_8_Cozinhas	✓	8		3 100,00	EUR
Edit | Del	Secção 8 / Subsecção 60 - Roupeiros	Section_8_Subsection_60_Roupeiros	✓	8	60	1 300,00	EUR
Edit | Del	Secção 9 - Jardim	Section_9_Jardim	✓	9		2 300,00	EUR