Valeo	PART NAME : Body_HR12	kwietnia 09, 2021	13:02
	DRAWING REV:	DRAWING No:	STATS COUNT : 24
	MEASUREMENT MADE BY : PAM_Jakubiec S.	COMMENT :	

```
****  Srednica D44H7   GG   (x3)

DIM LOC1= LOCATION OF CIRCLE D44H7_GG_1
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.011      0.011      0.000 ---#-----

DIM LOC2= LOCATION OF CIRCLE D44H7_GG_2
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.012      0.012      0.000 ----#----

DIM LOC3= LOCATION OF CIRCLE D44H7_GG_3
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.012      0.012      0.000 ----#----


****  Srednica D44H7   GX   (x3)

DIM LOC4= LOCATION OF CIRCLE D44H7_GX_1
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.006      0.006      0.000 --#------

DIM LOC5= LOCATION OF CIRCLE D44H7_GX_2
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.005      0.005      0.000 -#-------

DIM LOC6= LOCATION OF CIRCLE D44H7_GX_3
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.007      0.007      0.000 --#------


****  Cylinder D44H7   GG  &  GX

DIM LOC7= LOCATION OF CYLINDER CYL_D44_GG
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.012      0.012      0.000 ----#----

DIM LOC8= LOCATION OF CYLINDER CYL_D44_GX
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
D       40.000      0.025      0.000     40.005      0.005      0.000 -#-------


****  Walcowosc  Cylinder D44H7   GG
DIM CYLY1= CYLINDRICITY OF CYLINDER CYL_D44_GG
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.020      0.000      0.009      0.009      0.000 ---#-----
```

**** Okroglosc -7.25 od bazy N ****

**** Okroglosc dla informacji ****

DIM CIRTY1= CIRCULARITY OF CIRCLE D44H7_GG_1

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.020	0.000	0.006	0.006	0.000	--#------

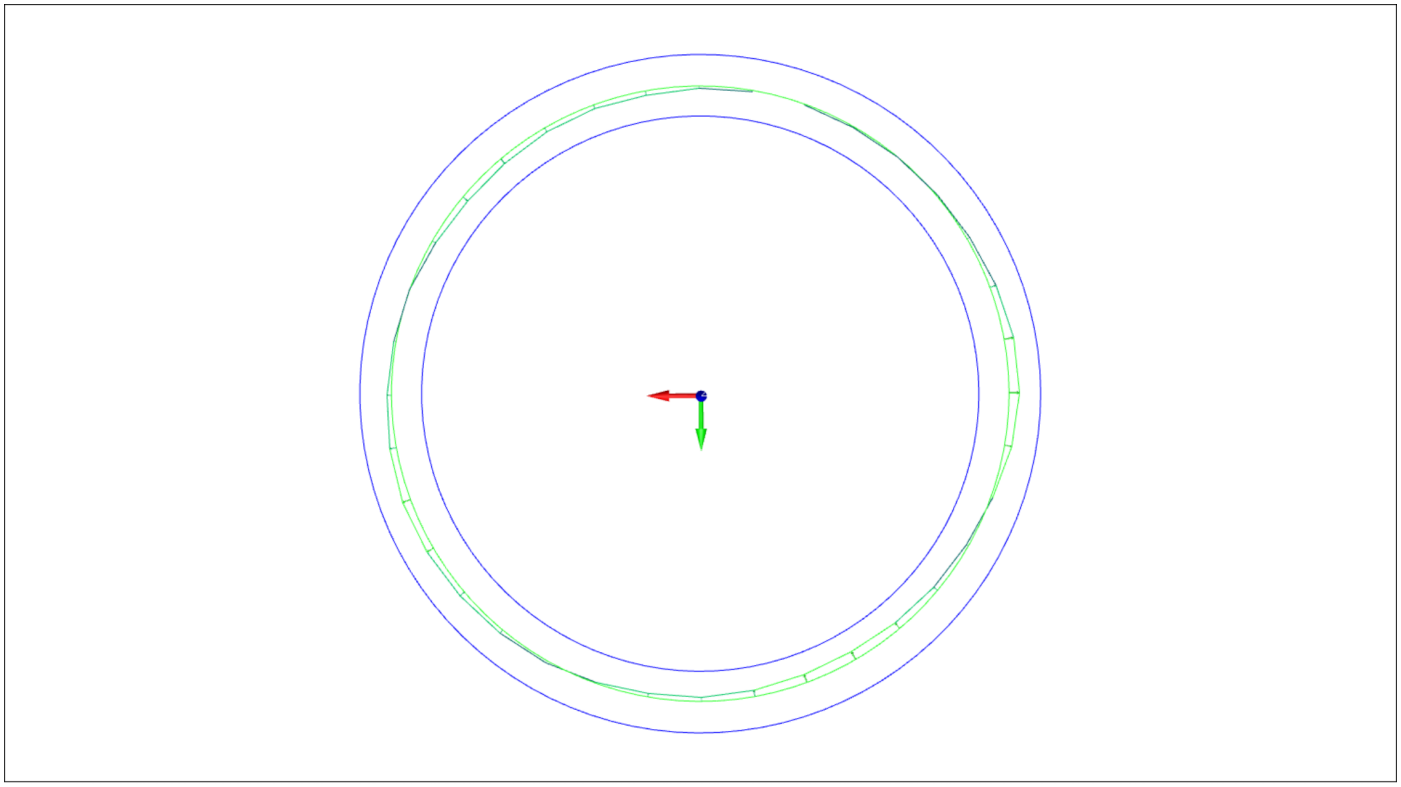

**** Okroglosc -12.45 od bazy N ****

DIM CIRTY2= CIRCULARITY OF CIRCLE D44H7_GG_2

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.020	0.000	0.008	0.008	0.000	---#-----

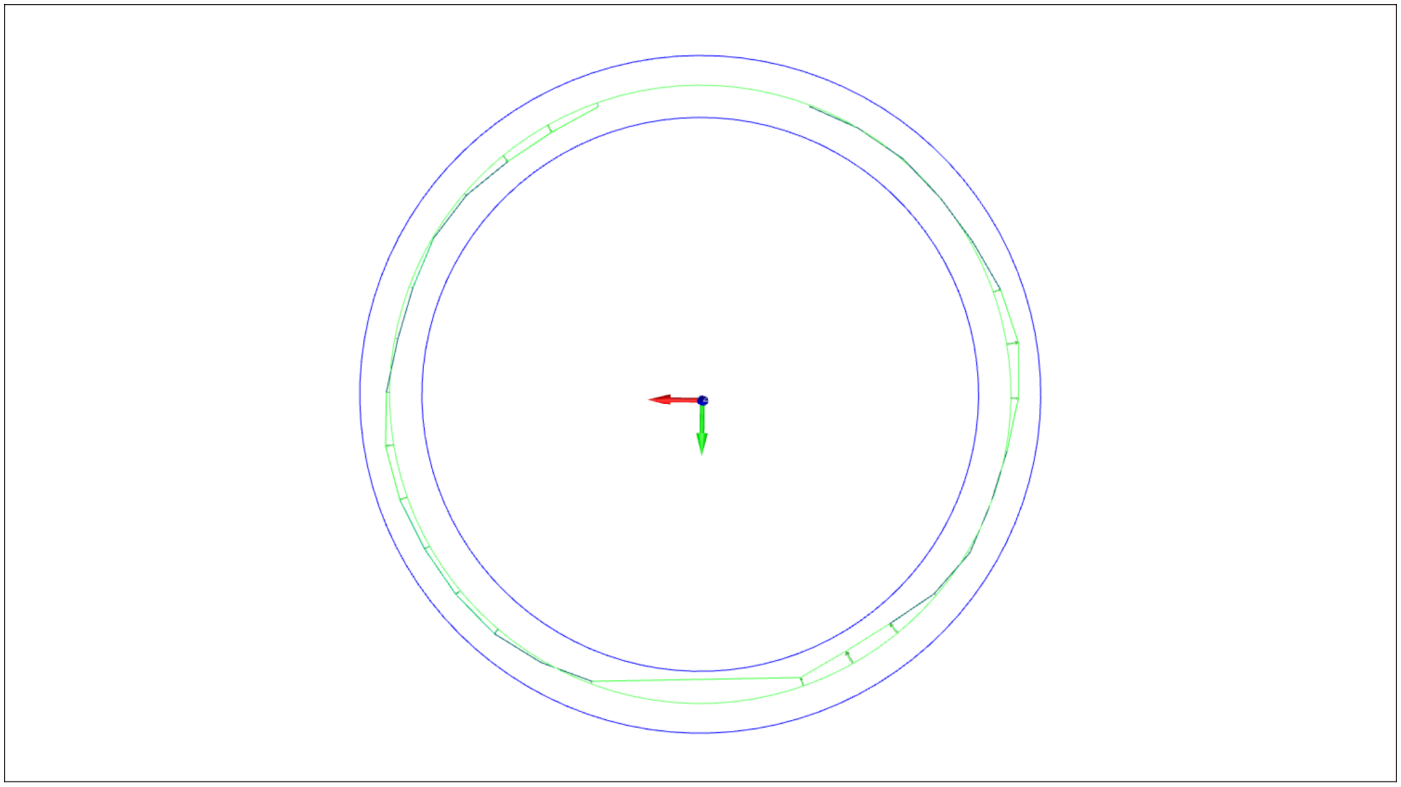

**** Okroglosc -17.65 od bazy N ****

DIM CIRTY3= CIRCULARITY OF CIRCLE D44H7_GG_3

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.020	0.000	0.007	0.007	0.000	--#------

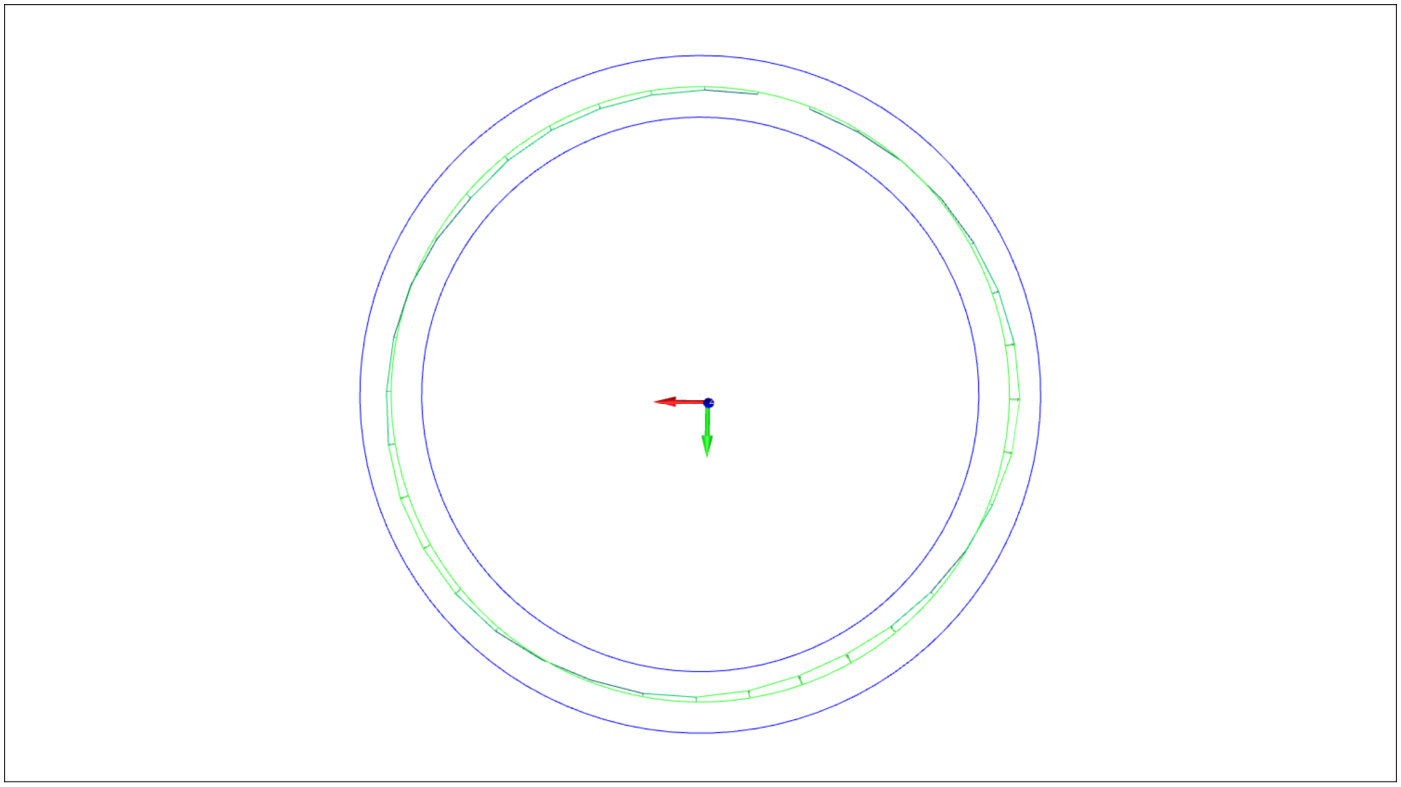

BEARING HOUSING

**** okrag (GG) (x3)

DIM LOC9= LOCATION OF CIRCLE D12_1

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	12.000	-0.009	-0.020	11.988	-0.012	0.000	------#--

DIM LOC10= LOCATION OF CIRCLE D12_2

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	12.000	-0.009	-0.020	11.987	-0.013	0.000	-----#---

DIM LOC11= LOCATION OF CIRCLE D12_3

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	12.000	-0.009	-0.020	11.985	-0.015	0.000	---#-----

**** okraglosc informacyjnie (x3)

DIM CIRTY4= CIRCULARITY OF CIRCLE D12_1

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.002	0.002	0.000	#--------

DIM CIRTY5= CIRCULARITY OF CIRCLE D12_2

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.003	0.003	0.000	#--------

DIM CIRTY6= CIRCULARITY OF CIRCLE D12_3

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.002	0.002	0.000	#--------

**** walcowosc informacyjnie

DIM CYLY2= CYLINDRICITY OF CYLINDER CYL_D12

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.003	0.003	0.000	#--------

**** Maksymalny cylinder wpisany (GX)

DIM LOC12= LOCATION OF CYLINDER CYL_D12_GX

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	12.000	-0.009	-0.020	11.983	-0.017	0.000	--#------

BUSHING HOUSING

**** okrag (GG) (x3)

DIM LOC25= LOCATION OF CIRCLE D10_1

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	10.000	0.015	0.000	10.011	0.011	0.000	------#--

DIM LOC26= LOCATION OF CIRCLE D10_2

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	10.000	0.015	0.000	10.011	0.011	0.000	------#--

DIM LOC27= LOCATION OF CIRCLE D10_3

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	10.000	0.015	0.000	10.012	0.012	0.000	------#--

**** okraglosc informacyjnie (x3)

DIM CIRTY7= CIRCULARITY OF CIRCLE D10_1

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

DIM CIRTY8= CIRCULARITY OF CIRCLE D10_2

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

DIM CIRTY9= CIRCULARITY OF CIRCLE D10_3

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.000	0.000	0.000	#--------

**** walcowosc informacyjnie

DIM CYLY3= CYLINDRICITY OF CYLINDER CYL_D10_GG

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.002	0.002	0.000	#--------

**** Maksymalny cylinder wpisany (GX)

DIM LOC28= LOCATION OF CYLINDER CYL_D10_GX

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
D	10.000	0.015	0.000	10.009	0.009	0.000	-----#---

Prostoliniowość lini B [CZ]

DIM STRA1= STRAIGHTNESS OF LINE LIN_B_CZ

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.006	0.006	0.000	-#-------

Wspolsrodkowść Ø8.09 do linii B1

DIM LOC13= POSITION OF CIRCLE D8.07_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.002	-0.002		
Y	0.000				0.000	0.000		
DF	8.090	0.022	0.000	0.019	8.109	0.019	0.000	-------#-
TP	MMC	0.000		0.019	0.004	0.004	0.000	-#-------

DIM LOC14= POSITION OF CIRCLE D8.07_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.002	-0.002		
Y	0.000				0.000	0.000		
DF	8.090	0.022	0.000	0.019	8.109	0.019	0.000	-------#-
TP	MMC	0.000		0.019	0.004	0.004	0.000	-#-------

DIM LOC15= POSITION OF CIRCLE D8.07_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.002	-0.002		
Y	0.000				0.000	0.000		
DF	8.090	0.022	0.000	0.018	8.108	0.018	0.000	-------#-
TP	MMC	0.000		0.018	0.003	0.003	0.000	-#-------

**** okraglosc Ø8.09 informacyjnie (x3)

DIM CIRTY10= CIRCULARITY OF CIRCLE D8.07_1

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.000	0.000	0.000	#--------

DIM CIRTY11= CIRCULARITY OF CIRCLE D8.07_2

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

DIM CIRTY12= CIRCULARITY OF CIRCLE D8.07_3

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

**** walcowość średnicy Ø8.09

DIM CYLY5= CYLINDRICITY OF CYLINDER CYL_D8.07

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

Wspolsrodkowść Ø8.07 do linii B2

DIM LOC16= POSITION OF CIRCLE D8.08_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.001	0.001		
Y	0.000				0.000	0.000		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.000		0.016	0.003	0.003	0.000	-#-------

DIM LOC17= POSITION OF CIRCLE D8.08_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.001	0.001		
Y	0.000				0.000	0.000		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.000		0.016	0.003	0.003	0.000	-#-------

DIM LOC18= POSITION OF CIRCLE D8.08_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.001	0.001		
Y	0.000				0.000	0.000		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.000		0.016	0.002	0.002	0.000	-#-------

**** okraglosc Ø8.07 informacyjnie (x3)

DIM CIRTY13= CIRCULARITY OF CIRCLE D8.08_1

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

DIM CIRTY14= CIRCULARITY OF CIRCLE D8.08_2

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

DIM CIRTY15= CIRCULARITY OF CIRCLE D8.08_3

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.001	0.001	0.000	#--------

**** walcowość średnicy Ø8.07

DIM CYLY6= CYLINDRICITY OF CYLINDER CYL_D8.08

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.002	0.002	0.000	#--------

Wspolsrodkowść Ø8.07 do linii B - informacyjnie

DIM LOC19= POSITION OF CIRCLE D8.08_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.001	0.001		
Y	0.000				-0.002	-0.002		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.000		0.016	0.004	0.004	0.000	--#------

DIM LOC20= POSITION OF CIRCLE D8.08_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.000	0.000		
Y	0.000				-0.003	-0.003		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.000		0.016	0.006	0.006	0.000	---#-----

DIM LOC21= POSITION OF CIRCLE D8.08_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				-0.004	-0.004		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.000		0.016	0.008	0.008	0.000	----#----

Wspolsrodkowść Ø8.09 do linii B - informacyjnie

DIM LOC22= POSITION OF CIRCLE D8.07_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				0.010	0.010		
DF	8.090	0.022	0.000	0.019	8.109	0.019	0.000	-------#-
TP	MMC	0.000		0.019	0.020	0.020	0.001	-------->

DIM LOC23= POSITION OF CIRCLE D8.07_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				0.012	0.012		
DF	8.090	0.022	0.000	0.019	8.109	0.019	0.000	-------#-
TP	MMC	0.000		0.019	0.024	0.024	0.005	-------->

DIM LOC24= POSITION OF CIRCLE D8.07_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.000	0.000		
Y	0.000				0.014	0.014		
DF	8.090	0.022	0.000	0.018	8.108	0.018	0.000	-------#-
TP	MMC	0.000		0.018	0.028	0.028	0.010	-------->

Prostoliniowość linii zbudowanej z wszystkich okregow (Ø10 - Ø8.07 - Ø8.08 - Ø12)

DIM STRA2= STRAIGHTNESS OF LINE LIN_TOTAL

AX	NOMINAL	+TOL	-TOL	MEAS	DEV	OUTTOL	
M	0.000	0.050	0.000	0.017	0.017	0.000	--#------

Polozenie wszystkich środkow w stosunku do linii B zbudowanej na końcach

Ø12

DIM LOC31= POSITION OF CIRCLE D12_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.000	0.000		
Y	0.000				0.000	0.000		
DF	12.000	-0.009	-0.020	0.008	11.988	-0.012	0.000	------#--
TP	MMC	0.050		0.008	0.000	0.000	0.000	#--------

DIM LOC32= POSITION OF CIRCLE D12_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.000	0.000		
Y	0.000				0.003	0.003		
DF	12.000	-0.009	-0.020	0.007	11.987	-0.013	0.000	-----#---
TP	MMC	0.050		0.007	0.006	0.006	0.000	-#-------

DIM LOC33= POSITION OF CIRCLE D12_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.000	0.000		
Y	0.000				0.005	0.005		
DF	12.000	-0.009	-0.020	0.005	11.985	-0.015	0.000	---#-----
TP	MMC	0.050		0.005	0.011	0.011	0.000	-#-------

Ø8.09

DIM LOC34= POSITION OF CIRCLE D8.07_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				0.009	0.009		
DF	8.090	0.022	0.000	0.019	8.109	0.019	0.000	-------#-
TP	MMC	0.050		0.019	0.019	0.019	0.000	--#------

DIM LOC35= POSITION OF CIRCLE D8.07_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				0.011	0.011		
DF	8.090	0.022	0.000	0.019	8.109	0.019	0.000	-------#-
TP	MMC	0.050		0.019	0.022	0.022	0.000	--#------

DIM LOC36= POSITION OF CIRCLE D8.07_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				0.013	0.013		
DF	8.090	0.022	0.000	0.018	8.108	0.018	0.000	-------#-
TP	MMC	0.050		0.018	0.026	0.026	0.000	---#-----

Ø10

DIM LOC37= POSITION OF CIRCLE D10_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				0.000	0.000		
Y	0.000				0.000	0.000		
DF	10.000	0.015	0.000	0.011	10.011	0.011	0.000	------#--
TP	MMC	0.050		0.011	0.000	0.000	0.000	#--------

DIM LOC38= POSITION OF CIRCLE D10_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				-0.001	-0.001		
DF	10.000	0.015	0.000	0.011	10.011	0.011	0.000	------#--
TP	MMC	0.050		0.011	0.003	0.003	0.000	#--------

DIM LOC39= POSITION OF CIRCLE D10_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.002	-0.002		
Y	0.000				-0.003	-0.003		
DF	10.000	0.015	0.000	0.012	10.012	0.012	0.000	------#--
TP	MMC	0.050		0.012	0.008	0.008	0.000	-#-------

Ø8.07

DIM LOC40= POSITION OF CIRCLE D8.08_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.001	-0.001		
Y	0.000				-0.005	-0.005		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.050		0.016	0.011	0.011	0.000	-#-------

DIM LOC41= POSITION OF CIRCLE D8.08_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.002	-0.002		
Y	0.000				-0.006	-0.006		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.050		0.016	0.013	0.013	0.000	-#-------

DIM LOC42= POSITION OF CIRCLE D8.08_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.003	-0.003		
Y	0.000				-0.007	-0.007		
DF	8.070	0.022	0.000	0.016	8.086	0.016	0.000	------#--
TP	MMC	0.050		0.016	0.015	0.015	0.000	--#------

```
### linia  LIN_B_I - linia zbudowana z dwoch skrajnych okregow
### linia  LIN_B_II - linia zbudowana z 6 okregow (3 okregi na Ø10 i 3 okregi na Ø12)
### linia  LIN_B_III - linia zbudowana z wszystkich okregow (Ø10 - Ø8.07 - Ø8.08 - Ø12)

### Prostopadość linii B do plaszczyzny A

## LIN_B_I
DIM PERP1= PERPENDICULARITY OF LINE LIN_B_I,RFS TO PLANE PLN _A,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.148      0.148      0.098 -------->

## LIN_B_II
DIM PERP2= PERPENDICULARITY OF LINE LIN_B_II,RFS TO PLANE PLN _A,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.148      0.148      0.098 -------->

## LIN_B_III
DIM PERP3= PERPENDICULARITY OF LINE LIN_B_III,RFS TO PLANE PLN _A,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.148      0.148      0.098 -------->


### Prostopadość linii B do plaszczyzny H
## LIN_B_I
DIM PERP4= PERPENDICULARITY OF LINE LIN_B_I,RFS TO PLANE PLN_H,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.046      0.046      0.000 --------#

## LIN_B_II
DIM PERP5= PERPENDICULARITY OF LINE LIN_B_II,RFS TO PLANE PLN_H,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.047      0.047      0.000 --------#

## LIN_B_III
DIM PERP6= PERPENDICULARITY OF LINE LIN_B_III,RFS TO PLANE PLN_H,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.047      0.047      0.000 --------#


### Prostopadość linii B do plaszczyzny G
## LIN_B_I
DIM PERP4= PERPENDICULARITY OF LINE LIN_B_I,RFS TO PLANE PLN_G,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.046      0.046      0.000 --------#

## LIN_B_II
DIM PERP5= PERPENDICULARITY OF LINE LIN_B_II,RFS TO PLANE PLN_G,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.046      0.046      0.000 --------#

## LIN_B_III
DIM PERP6= PERPENDICULARITY OF LINE LIN_B_III,RFS TO PLANE PLN_G,RFS EXTENDLENGTH=0.000
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.046      0.046      0.000 --------#
```

Koncentryczność otworow do linii B_I

LIN_B_I - średnica Ø8.09

```
DIM CONCEN1= CONCENTRICITY FROM CIRCLE D8.07_1 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.019      0.019      0.000 ---#-----

DIM CONCEN2= CONCENTRICITY FROM CIRCLE D8.07_2 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.022      0.022      0.000 ----#----

DIM CONCEN3= CONCENTRICITY FROM CIRCLE D8.07_3 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.026      0.026      0.000 ----#----
```

LIN_B_I - średnica Ø8.07

```
DIM CONCEN4= CONCENTRICITY FROM CIRCLE D8.08_1 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.011      0.011      0.000 -#-------

DIM CONCEN5= CONCENTRICITY FROM CIRCLE D8.08_2 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.013      0.013      0.000 --#------

DIM CONCEN6= CONCENTRICITY FROM CIRCLE D8.08_3 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.015      0.015      0.000 --#------
```

LIN_B_I - średnica Ø12

```
DIM CONCEN19= CONCENTRICITY FROM CIRCLE D12_1 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.000      0.000      0.000 #--------

DIM CONCEN20= CONCENTRICITY FROM CIRCLE D12_2 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.006      0.006      0.000 -#-------

DIM CONCEN21= CONCENTRICITY FROM CIRCLE D12_3 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.011      0.011      0.000 -#-------
```

LIN_B_I - średnica Ø10

```
DIM CONCEN22= CONCENTRICITY FROM CIRCLE D10_1 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.000      0.000      0.000 #--------

DIM CONCEN23= CONCENTRICITY FROM CIRCLE D10_2 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.003      0.003      0.000 #--------

DIM CONCEN24= CONCENTRICITY FROM CIRCLE D10_3 TO LINE LIN_B_I
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.008      0.008      0.000 -#-------
```

Koncentryczność otworow do linii B_II

LIN_B_II - średnica Ø8.09

```
DIM CONCEN7= CONCENTRICITY FROM CIRCLE D8.07_1 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.015      0.015      0.000 --#------

DIM CONCEN8= CONCENTRICITY FROM CIRCLE D8.07_2 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.019      0.019      0.000 ---#-----

DIM CONCEN9= CONCENTRICITY FROM CIRCLE D8.07_3 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.023      0.023      0.000 ----#----
```

LIN_B_II - średnica Ø8.07

```
DIM CONCEN10= CONCENTRICITY FROM CIRCLE D8.08_1 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.008      0.008      0.000 -#-------

DIM CONCEN11= CONCENTRICITY FROM CIRCLE D8.08_2 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.010      0.010      0.000 -#-------

DIM CONCEN12= CONCENTRICITY FROM CIRCLE D8.08_3 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.013      0.013      0.000 --#------
```

LIN_B_II - średnica Ø12

```
DIM CONCEN25= CONCENTRICITY FROM CIRCLE D12_1 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.006      0.006      0.000 -#-------

DIM CONCEN26= CONCENTRICITY FROM CIRCLE D12_2 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.001      0.001      0.000 #--------

DIM CONCEN27= CONCENTRICITY FROM CIRCLE D12_3 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.006      0.006      0.000 -#-------
```

LIN_B_II - średnica Ø10

```
DIM CONCEN28= CONCENTRICITY FROM CIRCLE D10_1 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.004      0.004      0.000 #--------

DIM CONCEN29= CONCENTRICITY FROM CIRCLE D10_2 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.000      0.000      0.000 #--------

DIM CONCEN30= CONCENTRICITY FROM CIRCLE D10_3 TO LINE LIN_B_II
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.005      0.005      0.000 #--------
```

Koncentryczność otworow do linii B_III

LIN_B_III - średnica Ø8.09

```
DIM CONCEN13= CONCENTRICITY FROM CIRCLE D8.07_1 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.008      0.008      0.000 -#-------

DIM CONCEN14= CONCENTRICITY FROM CIRCLE D8.07_2 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.013      0.013      0.000 --#------

DIM CONCEN15= CONCENTRICITY FROM CIRCLE D8.07_3 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.018      0.018      0.000 ---#-----
```

LIN_B_III - średnica Ø8.07

```
DIM CONCEN16= CONCENTRICITY FROM CIRCLE D8.08_1 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.005      0.005      0.000 #--------

DIM CONCEN17= CONCENTRICITY FROM CIRCLE D8.08_2 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.008      0.008      0.000 -#-------

DIM CONCEN18= CONCENTRICITY FROM CIRCLE D8.08_3 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.010      0.010      0.000 -#-------
```

LIN_B_III - średnica Ø12

```
DIM CONCEN31= CONCENTRICITY FROM CIRCLE D12_1 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.016      0.016      0.000 --#------

DIM CONCEN32= CONCENTRICITY FROM CIRCLE D12_2 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.008      0.008      0.000 -#-------

DIM CONCEN33= CONCENTRICITY FROM CIRCLE D12_3 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.002      0.002      0.000 #--------
```

LIN_B_III - średnica Ø10

```
DIM CONCEN34= CONCENTRICITY FROM CIRCLE D10_1 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.008      0.008      0.000 -#-------

DIM CONCEN35= CONCENTRICITY FROM CIRCLE D10_2 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.004      0.004      0.000 #--------

DIM CONCEN36= CONCENTRICITY FROM CIRCLE D10_3 TO LINE LIN_B_III
AX    NOMINAL       +TOL       -TOL       MEAS        DEV     OUTTOL
M        0.000      0.050      0.000      0.002      0.002      0.000 #--------
```

Pozycja otworu Ø8.07 mm do ukladu baz | H | Ø12_N6 |

DIM LOC43= POSITION OF CIRCLE D8.08_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.013	-0.013		
Y	0.000				0.045	0.045		
TP	RFS	0.100		0.000	0.093	0.093	0.000	--------#

DIM LOC44= POSITION OF CIRCLE D8.08_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.013	-0.013		
Y	0.000				0.045	0.045		
TP	RFS	0.100		0.000	0.094	0.094	0.000	--------#

DIM LOC45= POSITION OF CIRCLE D8.08_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.014	-0.014		
Y	0.000				0.045	0.045		
TP	RFS	0.100		0.000	0.094	0.094	0.000	--------#

Pozycja otworu Ø8.09 mm do ukladu baz | H | Ø12_N6 |

DIM LOC46= POSITION OF CIRCLE D8.07_1

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.004	-0.004		
Y	0.000				0.001	0.001		
TP	RFS	0.100		0.000	0.008	0.008	0.000	#--------

DIM LOC47= POSITION OF CIRCLE D8.07_2

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.004	-0.004		
Y	0.000				0.001	0.001		
TP	RFS	0.100		0.000	0.009	0.009	0.000	#--------

DIM LOC48= POSITION OF CIRCLE D8.07_3

AX	NOMINAL	+TOL	-TOL	BONUS	MEAS	DEV	OUTTOL	
X	0.000				-0.005	-0.005		
Y	0.000				0.001	0.001		
TP	RFS	0.100		0.000	0.009	0.009	0.000	#--------