

# The DLVHEX Benchmark System

Christoph Redl

November 11, 2014

## 1 Introduction

This repository contains scripts for benchmarking the HEX-program reasoner DLVHEX. The script system is designed to be easy to use yet customizable. The user is required to provide no more than one script for each benchmark problem, which essentially specifies problem-specific parameters and then delegates the call to generic scripts provided by this repository.

The system is intended to run benchmark instances with multiple DLVHEX configurations and extract benchmark parameters (such as grounding and solving time, number of answer sets) for each. It supports automated scheduling of instances, parameter extraction, aggregating the parameters, generating a table in text or  $\text{\LaTeX}$  format, and comparison of the results with previous runs.

## 2 Using the System

In order to use the benchmark system for a concrete benchmark problem, the file `run_template.sh` from the `benchmarks/scripts` directory should be copied to `run.sh` within the benchmark problem's directory. The file needs then to be adopted to the problem by modifying the lines marked with (1), (2) and (3) as follows.

- (1) The loop condition which iterates over the instances of the benchmark needs to be configured. Usually this condition will iterate over files, but sometimes also an iteration in a certain range can be useful.
- (2) Here the DLVHEX configurations to be compared should be entered in a semicolon-separated list.
- (3) Here the actual command-line needs to be inserted (without configuration-specific options). The tokens `INST` and `CONF` will be substituted by the instance name and the current configuration, respectively.

Note that the scripts `runinsts.sh` and `runconfs.sh` support more parameters than shown in `run_template.sh`. However, the default values are good for most benchmarks. If the aggregation of the results or the extraction of benchmark parameters from the runs needs to be customized, then Section 3 is a good starting point to learn about the parameters.

It is convenient to add the path to the `benchmarks/scripts` directory to the `PATH` variable. In this case, scheduling the benchmark instances is possible by simply calling `./run.sh`.

Moreover, the beginnings of `run.sh` scripts are in many cases exactly like in `run_template.sh`. Thus this part can be directly imported by

```
source dlvhex_run_header.sh
```

provided that the benchmark script directory is the `PATH` variable. This also defines the aliases `all=0`, `instance=$2`, `to=$3`, `bmscripts=$4` if `$1="single"`, and `all=1`, `to=$2`, `bmscripts=$3` otherwise (cf. Section 3.1). Moreover, `mydir` will be set to the absolute path of the directory where the current `run.sh` script is located.

### 3 Architecture of the Benchmark System

The basic system architecture is visualized in Figure 1. There is a single benchmark-specific file `run.sh`, which is usually stored in the benchmark’s directory (different from the `benchmarks/scripts` directory). This file can be used for scheduling all instances and for evaluating a single instance (controlled by parameters). Normally, the user calls this file without any parameters, which schedules all instances (due to the default values for the parameters). Internally, `run.sh` uses scripts from the benchmark scripts directory (`runinsts.sh` and `runconfs.sh`; those are not benchmark-specific) to schedule all instances for all DLVHEX configurations which are to be compared. Those scripts will make callbacks to `run.sh` for evaluating single instances (appropriate parameters make this script run a single instance rather than all instances in the initial call).

For each finished instance, the script system will call an `outputbuilder.sh` which extracts the actual benchmark parameters the user is interested in, e.g. time information and number of answer sets, from the reasoner output (standard output and standard error). The result is stored in a separate file `inst-n.out` for each instance `n`. When all instances have finished, the script system further calls `aggregateresults.sh`, which generates the final benchmark table `table.dat` from the instance outputs `inst-n.out`. The script system provides a standard output builder `outputbuilder.sh` and a standard aggregation script `aggregateresults.sh`, which are good for many benchmark problems, but customization is possible by providing alternative scripts (which need to be specified within `run.sh` as described in Sections 3.2 and 3.3).

The following subsections describe the scripts of the benchmark system in more detail. Note that except for `run_template.sh`, which serves as an example for writing a benchmark-specific file `run.sh`, none of these files need to be modified by the user.

#### 3.1 `run_template.sh`

This file is an example for an implementation of `run.sh`. It specifies how to execute a single instance under various configurations and how to iterate over the instances of the benchmark.

The parameters mainly specify whether to execute all instances of the benchmark (using further scripts from the benchmark system) or a single instance. Note that this script is (indirectly) recursively called: usually, the first call is to

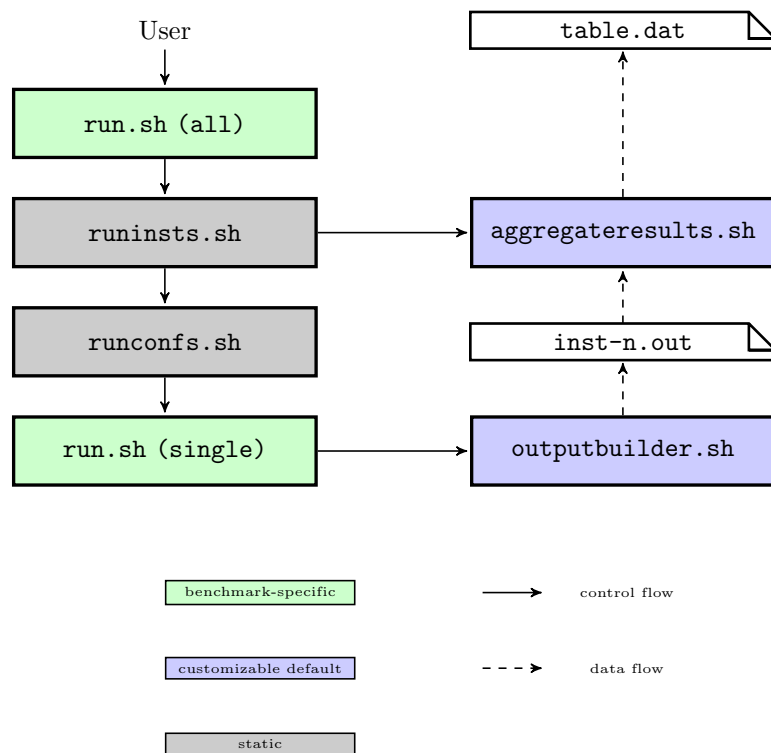


Figure 1: Benchmark System Architecture

evaluate all instances, which internally calls `runinsts.sh`, which in turn makes another call of `run.sh` for evaluating every single instance.

However, this recursion is managed by the benchmark system. The user only needs to adopt `run.sh` as described in Section 2.

**Parameters:**

- \$1: (optional) "all", "allseq" or "single", default is "all"
  - If \$1 is "all" then the instances are evaluated in parallel using HT-Condor. There are no further mandatory parameters.
    - \$2: (optional) Timeout, default is 300
    - \$3: (optional) Directory with the benchmark scripts
  - If \$1 is "allseq" then the instances are evaluated sequentially. There are no further mandatory parameters.
    - \$2: (optional) Timeout, default is 300
    - \$3: (optional) Directory with the benchmark scripts
  - If \$1 is "single" then a single instance is evaluated. There are three more mandatory parameters:
    - \$2: Instance name
    - \$3: Timeout in seconds
    - \$4: (optional) Directory with the benchmark scripts

### 3.2 runinsts.sh

This script implements a loop over instances and schedules them for execution, which is done either sequentially or in parallel using Condor HT. It is usually called from `run.sh` of a concrete benchmark problem.

The parameters of the script control the loop condition and the command used for executing a single instance. This script will also call `aggregate.sh` after execution of all instance to produce the final benchmark table.

**Parameters:**

- \$1: (optional) Instance loop condition, default is `*.hex`
- \$2: (optional) Single benchmark command, default is `./run.sh`
- \$3: (optional) Working directory, default is `$PWD`
- \$4: (optional) Timeout, default is 300
- \$5: (optional) Custom aggregation script, default is `aggregateresults.sh` in the benchmark scripts directory
- \$6: (optional) Name of the benchmark, default is the name of the working directory
- \$7: (optional) requirements file (cf. Section 4)

When the script makes a call for executing a single benchmark instance as specified by \$2, it will run

`$2 single INST TO SCRIPTS,`

where `INST` is the current instance (an element of the loop specified in `$1`), `TO` is the timeout specified in `$4` and `SCRIPTS` is the path of the benchmark scripts directly.

### 3.3 `runconfs.sh`

This script implements the evaluation of a single instance under various configurations. It is usually called from `run.sh` of a concrete benchmark problem that needs to evaluate a single instance.

The parameters control the configurations to be compared and the name of an output builder.

#### Parameters:

- `$1`: Command for executing an instance, which may contain the constant `CONF` as a placeholder for options to be inserted and `INST` as a placeholder for the instance
- `$2`: A semicolon-separated list of configuration strings to be substituted for `CONF` in `$1`
- `$3`: Instance to be inserted in the command string in `$1` for `INST`
- `$4`: Timeout
- `$5`: (optional) Custom output builder name of a script to build the output of a run, which gets the parameters, default is `timeoutputbuilder.sh` in the benchmark scripts directory. A custom output builder needs to behave as described in Section 5.

### 3.4 `aggregateresults.sh`

Generates the final output of a benchmark as a table in text format. As standard input the file gets the concatenation of the outputs for all instances produced by the output builder (cf. Section 5).

#### Parameters:

- `$1`: (optional) Timeout value to be used for `---` and `==` instances
- `$2,$3`: (optional) Start position and length of instance size information in the instance filenames (index origin 1), or 0 and 0 for auto-detection, default is auto-detection
- `$4`: (optional) Comma-separated lists of column indices to compute means
- `$5`: (optional) Comma-separated lists of column indices to compute maxima
- `$6`: (optional) Comma-separated lists of column indices to minima
- `$7`: (optional) Comma-separated lists of column indices to sums

In the input, column 1 is interpreted as instance size and used as the aggregation column.

The default for \$4-\$7 is to compute means of odd and sums of even columns (interpreted as times and timeouts, respectively).

If a customized aggregation script is specified in the call of `runinsts.sh` (cf. Section 3.2), then this script can delegate the call to the original script `aggregateresults.sh` with appropriate parameters.

## 4 Requirements File

The requirements file specifies the hardware resources to be allocated for the benchmark run.

The file is roughly a resource specification to be added to HTCondor job files<sup>1</sup>. In addition, the following specification may be part of a resource file:

- `# sequential`  
Evaluate all instances in sequence (not using HTCondor).
- `# ExtendedNotification = mail@address.com`  
Send the benchmark results by e-mail.

## 5 Output Builders

An output builder is a script which extracts the actual benchmark parameters from a run. This is the information the user is interest in. Usually it includes timing information (e.g. grounding and solving time), the number of answer sets, etc.

An output builder gets the following parameters:

- \$1: Return value of the reasoner call (0 if success, 124 if timeout,  $\neq 0$  if failed)
- \$2: file with the overall runtime of the reasoner call
- \$3: file with standard output of the reasoner call
- \$4: file with standard error of the reasoner call

The output builder needs to return 0 if the output builder succeeded (note that the output builder can succeed in extracting information even if the reasoner failed!) and  $\neq 0$  if the output builder itself failed.

It further needs to write a space-separated list of the actual benchmark parameters to standard output. This is usually a list of numbers to represent timing information, timeouts, number of answer sets, etc. For time values, the special values `---` and `===` for representing timeouts and memory outs, respectively, are supported. If the `---` or `===` is produced for some columns, the output builder can still return 0, i.e., output building counts as succeeded. In contrast, if the output builder completely fails to extract some information, it should output `FAIL` for the according column and return  $\neq 0$ ; detailed error descriptions are allowed on standard error.

The benchmark script directory provides the following predefined output builders:

---

<sup>1</sup><http://research.cs.wisc.edu/htcondor/>

- `timeoutbuilder.sh` extracts the overall time (one time column and a column 0/1 for tagging successful/timeout instances)
- `gstimeoutbuilder.sh` extracts the overall time, the grounding and the solving time (each accompanied by a column 0/1 for tagging successful/timeout instances).
- `ansctimeoutputbuilder` extracts the overall time (accompanied by a column 0/1 for tagging successful/timeout instances) and the number of answer sets.

## 6 Advanced Features

### 6.1 Running Multiple Benchmarks

The system supports to run multiple benchmarks and running a final script with a single call. To this end, the script `multibenchmark.sh` should be used.

#### Parameters:

- \$1: A file which defines the benchmarks to be executed. Each line of this file is of form

`BENCHMARKNAME=PATH,`

where `PATH` needs to point to the `run.sh` script of the according benchmark.

- \$2: Output directory for the overall benchmark results
- \$3: Requirements file to be used for all benchmarks (cf. Section ??)
- \$4: (optional) Either script to be executed after benchmarks have been finished; working directory will be \$2, or directory with reference benchmark results

After completion of all benchmarks, \$4 will be called (if existing); it gets the names of all benchmarks as parameters and is intended to compare the new results to reference results.

### 6.2 Comparison with Previous Results

The benchmark system supports to compare benchmark results to previous runs. To this end, `multibenchmark.sh` supports to specify in \$4 a directory with reference output. It is expected that for each benchmark with name `BM`, there is a reference output in `$4/BM/BM.dat`.

By default, the comparison procedure checks if there is an instance and configuration with a difference in runtime of more than 5 seconds and more than 10%. However, this behavior can be overridden for each benchmark by providing a custom comparison file `compare.sh` in the same directory as the `run.sh` file of the according benchmark.

Script `compare.sh` gets as parameters:

\$1: File (table) with the current benchmark results

\$1: File (table) with the reference benchmark results

It is expected to return 0 if there were no significant changes, 1 if comparison failed, and 2 if there were significant changes.

### 6.3 Generating L<sup>A</sup>T<sub>E</sub>X-Tables

The output of a benchmark table `table.dat` in text format may be passed to the script `tolatextable.sh` to produce valid L<sup>A</sup>T<sub>E</sub>X code.

#### Parameters:

\$1: (optional) L<sup>A</sup>T<sub>E</sub>X package to use for creating table header

Valid values: `none`, `standard`, `booktabs`, default is `none` (only table body)

\$2: (optional) Pattern how to format each line (without final `\\`)

The string needs to consist of constant parts and expressions of form `#{val[i]}` to refer to the value of the *i*-th column or `#{fill[i]}` to refer to a sequence of double-tilde (`~~`) required to align this column.

Default:

`#{val[0]} #{fill[1]}(#{val[1]}) &`

`#{val[2]} #{fill[3]}(#{val[3]}) & ...`

(pairs of columns are put in the same L<sup>A</sup>T<sub>E</sub>X table with even columns being interpreted as times and odd ones as timeouts which are put in parentheses)

\$3: (optional) `subst`

for a more convenient syntax for \$2: `#{val[i]}` and `#{fill[i]}` can be written as `val[i]` and `fill[i]`, respectively