



<http://iringtools.org>

# **Installation Guide**

Version 1.02.00

#### Notice

This is a controlled document. Unauthorized access, copying, replication or usage for a purpose other than for which it is intended, are prohibited.

All trademarks that appear in the document have been used for identification purposes only and belong to their respective companies.

## Document Release Note

Notice No.: 1.1

Customer: iRINGUserGroup

Project: **iRINGTools**

### Document details

Name	Version no.	Description
<b>iRINGTools</b> Installation Guide	1.02.00	<b>iRINGTools</b> Installation Guide

### Reviewers

L	Role	Organization Unit
Lee Colson	Documentation	<b>iRINGTools</b>
Hahn Le	Software Engineer	<b>iRINGTools</b>

### Revision details

Action taken (add/del/change)	Previous page no.	New page no.	Revision description
Change Add	44, 55, 63, 64 84	44, 55, 63, 64 84	Clarify screenshot content Additional settings for AdapterService

## Terms of License

Copyright (c) 2009, iringug.org

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- \* Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- \* Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- \* Neither the name of the iringug.org nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS DOCUMENT IS PROVIDED BY iringug.org 'AS IS' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL iringug.org BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## Document Revision List

---

Customer: iRINGUserGroup

Project: ***iRINGTools***

Document Name: iRING Installation Guide

### Release Notice Reference (for release)

Rev. No.	Revision date	Revision description	Page no.	Previous page no.	Action taken	Addenda/ New page	Release notice reference



## About this Manual

---

### Purpose

**iRINGTools** is a set of free, public domain, open source (BSD 3 license) software applications and utilities that implement **iRING** protocols. **iRINGTools** provide users with production ready deployable solutions. **iRINGTools** also provides technology solution providers with usage patterns for the implementation of **iRING** protocols in their respective solutions. This Installation Guide provides step by step detail instructions to setup **iRINGTools**.

### Intended Audience

Intended audience for this installation guide is **iRINGUserGroup**, an open online community of users, companies, and organizations that use, are considering using, or are developing or deploying **iRING** protocols. The **iRINGUserGroup** is also responsible for the management, enhancement, and maintenance of **iRINGTools** and **iRINGSandbox**.

### Organization of the Manual

Information in this manual has been organized as follows:

**Table 1: Organization of this Manual**

Chapter	Description
Chapter 1	This gives brief overview of <b>iRINGTools</b> and its components, packages involved, package dependencies, prerequisites and list of software components required for the individual package (the adaptor, the Sandbox or both) installation.
Chapter 2	This section provides detailed instructions for the installation and configuration of each prerequisite i.e. IIS, .Net Framework 3.5 SP1, Silverlight MIME extensions, Application Extension Mapping and SQL Server.
Chapter 3	This section describes the <b>iRINGTools</b> Sandbox components and provide detailed instructions on how to install and configure each component i.e. Sandbox Service, Reference Data Service, Reference Data Editor.
Chapter 4	This section describes the <b>iRINGTools</b> Adapter components and provide detailed instructions on how to install and configure each component i.e. Interface Service, Adapter Service, Mapping Editor.
Chapter 5	The final step in the installation is updating hostname in certain <b>iRINGTools</b> services for use with client browsers on the network





## Contents

---

List of Abbreviations .....	xi
<b>1 Overview .....</b>	<b>12</b>
1.1 Packages.....	12
1.2 Package Dependencies .....	13
1.3 Prerequisites .....	13
1.4 Preparing for Installation .....	14
1.4.1 Downloads.....	14
1.4.2 Internet Access.....	15
1.4.3 RDS-WIP Access .....	15
1.4.4 Sandbox Access.....	15
<b>2 Installing Prerequisites.....</b>	<b>16</b>
2.1 Internet Information Services .....	16
2.2 .NET Framework 3.5 SP 1 .....	18
2.3 Validate IIS and ASP.NET .....	19
2.4 Silverlight MIME Extensions.....	24
2.5 Application Extension Mapping for SemWeb.....	29
2.6 SQL Server.....	32
<b>3 Installation <i>iRINGTools</i> Sandbox .....</b>	<b>34</b>
3.1 <i>iRINGTools</i> Sandbox Components .....	34
3.2 Localhost versus Server Hostname .....	35
3.3 Installing Sandbox Service .....	35
3.4 Creating Sandbox Storage .....	42
3.5 Configuring Sandbox Service.....	<b>Error! Bookmark not defined.</b>
3.6 Testing Sandbox Service .....	42
3.7 Creating Virtual Directory for RefDataService .....	44
3.8 Configuring Reference Data Service .....	50
3.8.1 Creating Credential Tokens .....	50

3.8.2	Modify Reference Data Service Web.config .....	50
3.8.3	Modify Reference Data Service Repositories.xml.....	<b>Error! Bookmark not defined.</b>
3.9	Testing Reference Data Service .....	55
3.10	Creating Virtual Directory for Reference Data Editor .....	56
3.11	Configuring the Reference Data Editor .....	62
3.12	Testing Reference Data Editor .....	62
<b>4</b>	<b>Installing iRINGTools Adapter .....</b>	<b>64</b>
4.1	iRINGTools Adapter Components.....	64
4.2	Localhost versus Server Hostname .....	64
4.3	Creating the AdapterService Virtual Directory .....	65
4.4	Creating the MappingEditor Virtual Directory.....	70
4.5	Installing Interface Service .....	76
4.6	Creating iRING Storage .....	82
4.7	Configuring Interface Service.....	<b>Error! Bookmark not defined.</b>
4.8	Testing Interface Service .....	82
4.9	Creating the Test Database .....	85
4.10	Configuring the AdapterService .....	91
4.11	Testing the AdapterService.....	92
4.12	Testing the Mapping Editor .....	94
<b>5</b>	<b>Hostname Setup.....</b>	<b>96</b>
5.1	iRINGTools Sandbox .....	96
5.2	iRINGTools Adapter .....	97

The total number of pages in this document, including the cover page, is 98.

---

## List of Abbreviations

---

Acronym	Description
iRING	ISO 15926 Realtime Interoperability Network Grid
ISO	International Organization for Standardization
RDSWIP	Reference Data Service Work in Progress
SP	Service Pack
GUI	Graphical User Interface
IIS	Internet Information Services
MIME	Multipurpose Internet Mail Extensions
OLTP	Online Transaction Processing
API	Application Programming Interface
CRUD	Create, Read, Update and Delete
LAN	Local Area Network
FIPS	Federal Information Processing Standard

## 1 Overview

---


**iRING** is a set of information interoperability and integration protocols and reference data that are compliant with the ISO 15926, Parts 7, 8, and 9 standards, which builds and depends on ISO 15926 Parts 1 through 6.

**iRINGTools** is a set of free, public domain, open source (BSD 3 license) software applications and utilities that implement **iRING** protocols. **iRINGTools** provide users with production ready deployable solutions. **iRINGTools** also provides technology solution providers with usage patterns for the implementation of **iRING** protocols in their respective solutions.

This installation guide provides detailed instructions for the setup of **iRINGTools**. Once **iRINGTools** is setup, it will still need to be configured. Refer to the **iRINGTools** Users Guide for configuration.

### 1.1 Packages


**iRINGTools** is deployed in two packages, **iRINGTools** Adapter and **iRINGTools** Sandbox. These packages are separated for deployment purposes. This allows implementers to only download and install the necessary components. The **iRINGTools** Adapter is used to map and transform legacy data to ISO 15926 representation. The **iRINGTools** Sandbox is used to host local Reference Data or extend the reference data hosted in the RDSWIP (<http://rdswip.ids-adi.org/presentation/overview/index.html>) for use with the **iRINGTools** Adapter. The **iRINGTools** Adapter uses reference data from configured Sandboxes as well as the RDSWIP.

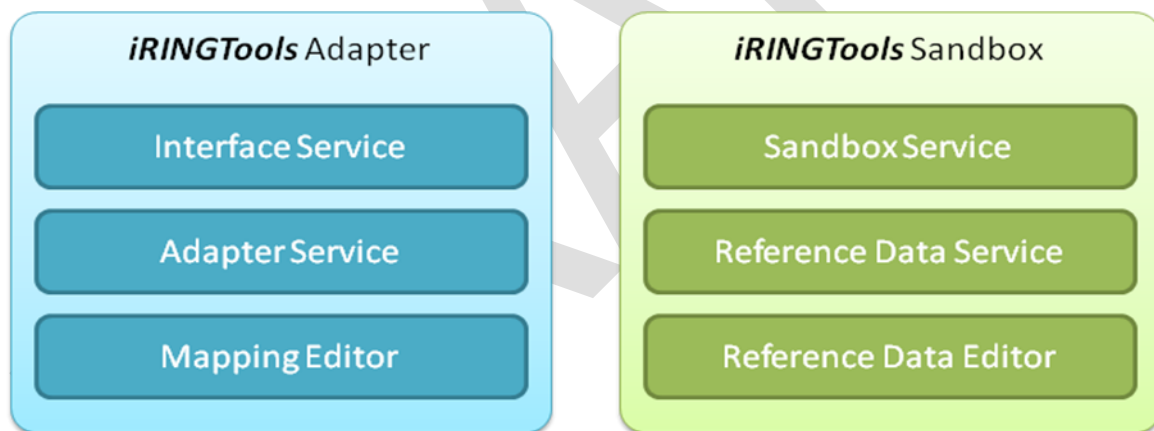

Neither package requires the other to run. You need to determine which packages will be installed and where. For test purposes, it is recommended that both packages be installed on a single machine. Virtual machines can be used to host **iRINGTools**, but it is not required.

## 1.2 Package Dependencies

Though each package is independent of the other, the **iRINGTools** Adapter needs access to an **iRINGTools** Sandbox.

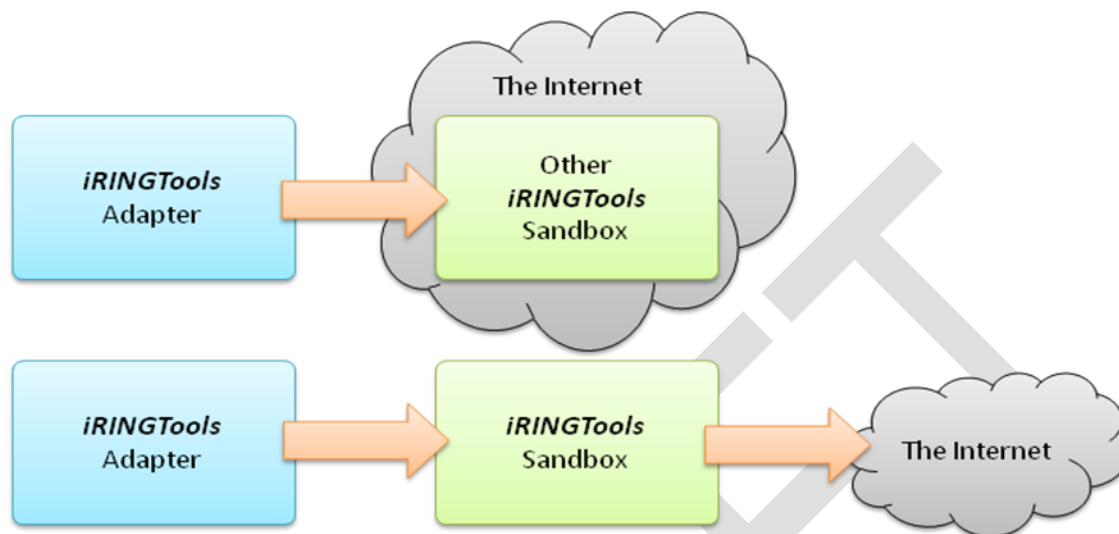

If only the **iRINGTools** Adapter will be deployed, then it will require internet access to connect to an existing **iRINGTools** Sandbox (e.g. **iRING** community Sandbox). If both packages will be deployed, it is assumed that the **iRINGTools** Adapter will use the reference data in the **iRINGTools** Sandbox. In this case, the **iRINGTools** Adapter will connect directly to the **iRINGTools** Sandbox being deployed (e.g. a private Sandbox). The **iRINGTools** Sandbox will require internet access to connect to the RDSWIP.

## 1.3 Prerequisites

There are several prerequisites and assumptions that are made in this guide. Some instructions are provided for setting up and configuring the prerequisites, but the instructions may not handle every case. Please see the documentation links provided in the section for each prerequisite for more information.

The base assumptions made are:

- The host server is running Windows Server 2003 SP2.
- You have administrative access to the host server.
- You are able to login to the graphical user interface on the host server.
- You have basic knowledge of the Windows Operating System and Windows Security.

Older and newer versions of windows are supported, but the installation and configuration may be slightly (and subtly) different for those versions. No instructions will be given on how to properly secure the operating system or the files on the host server. However, instructions will be provided on how to use the specific features of the operating system to properly install **iRINGTools**.

There are several essential software components required by **iRINGTools**. These are:

- .NET Framework 3.5 SP1
- Internet Information Services 6.0

You should understand these systems and how they work before attempting to install **iRINGTools**.

Finally, **iRINGTools** is built on top of Semantic Web, called SemWeb  
<http://razor.occams.info/code/semweb/>

Although this guide will provide the instructions necessary to install and configure the software components, you need to be aware of the technologies are being used. Below is a summary of the **iRINGTools** and prerequisite installations.

Software Component	Adapter	Sandbox	Remarks
<b>iRINGTools</b> Components 1.02.00	X	X	Use for both adapter and sandbox
<b>iRINGTools</b> Adapter 1.02.00	X		Use if installing adapter only
<b>iRINGTools</b> Sandbox 1.02.00		X	Use if installing sandbox only
.NET Framework 3.5 SP 1	X	X	
Internet Information Services	X	X	
SQL Server	X	X	
Application Extension Mapping	X	X	
Silverlight MIME Extensions	X	X	
Silverlight 3.0	X	X	

## 1.4 Preparing for Installation

Before beginning the installation, you need to decide which **iRINGTools** packages you are installing on the server: the adapter, the sandbox or both. This determines which prerequisites and downloads are needed.

### 1.4.1 Downloads


Download **iRINGTools** Components from the **iRINGTools** web site: <http://code.google.com/p/iring-tools/downloads/list>.

Alternately, if you are installing only the adapter or sandbox then you can download one of the following:

- **iRINGTools** Adapter (for adapter only installations)
- **iRINGTools** Sandbox (for sandbox only installations)

Unzip the downloaded file to a folder on the server called **iRINGWeb**. (The target folder must be **iRINGWeb** to ensure files are properly merged.)

The following are example screenshots of the above steps:

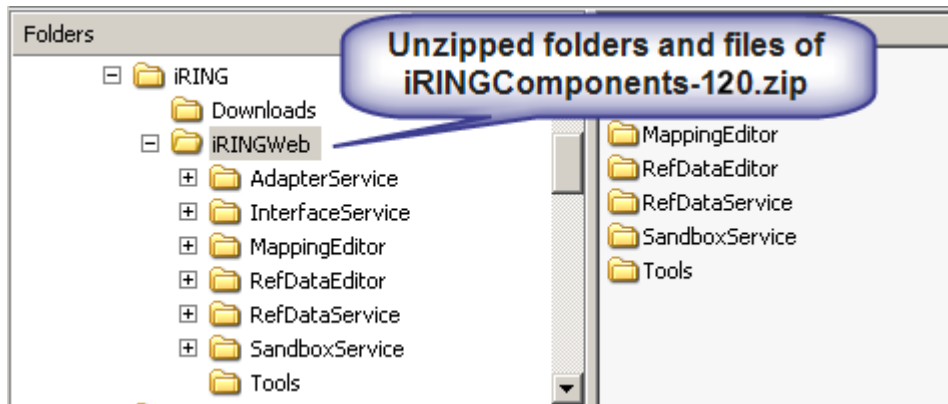

Other software packages may also be required. Installation links and instructions will be provided if and when necessary.

#### 1.4.2 Internet Access

**iRINGTools** is a web-enabled system and therefore requires access to the internet to work properly. If the host server is behind a firewall, the proxy server information and valid proxy credentials will be needed later in the setup.

#### 1.4.3 RDS-WIP Access

Access to the RDSWIP (<http://rdswip.ids-adi.org/presentation/overview/index.html>) is required for the **iRINGTools** Sandbox to generate new IDs for classes, templates and roles. An identity from ids-adi.org will be needed later in the setup.

#### 1.4.4 Sandbox Access

If there are any existing **iRINGTools** Sandboxes that will be used by the **iRINGTools** Adapter being deployed, then the URLs for those **iRINGTools** Sandboxes will need to be entered into the configuration later.


## 2 Installing Prerequisites

The following sections will provide detailed instructions for the installation and configuration of each prerequisite.

### 2.1 Internet Information Services


IIS (Internet Information Services) is part of the Windows Server 2003 operating system, but it is an optional component and is typically not installed by default. Perform the following steps to install or verify installation of IIS:

1. From the **Start** menu, click **Control Panel**.
2. Double-click **Add or Remove Programs**.
3. Click **Add/Remove Windows Components**.
4. In the **Components** list box, click **Application Server**.

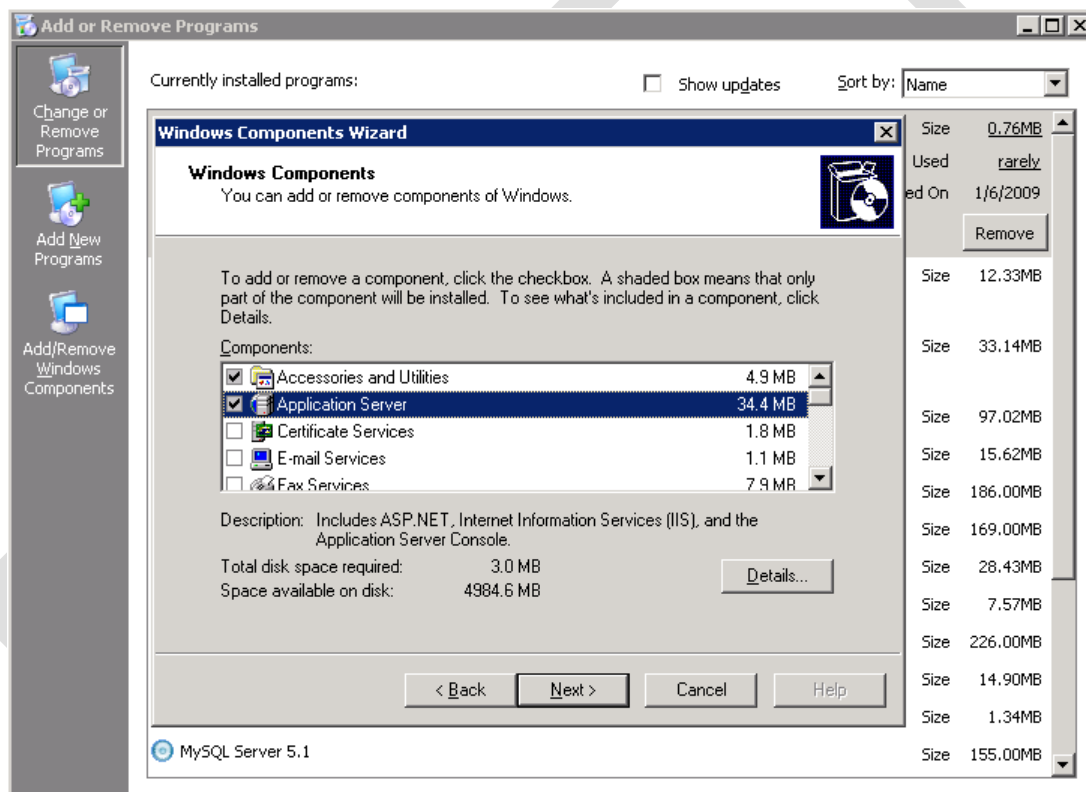


5. Click **Details**.
6. Click **Internet Information Services (IIS)**.
7. Click **Details** to view the list of IIS Subcomponents.
8. Ensure that the **Common Files** (not shown), **Internet Information Services Manager** and **World Wide Web Service** are checked.



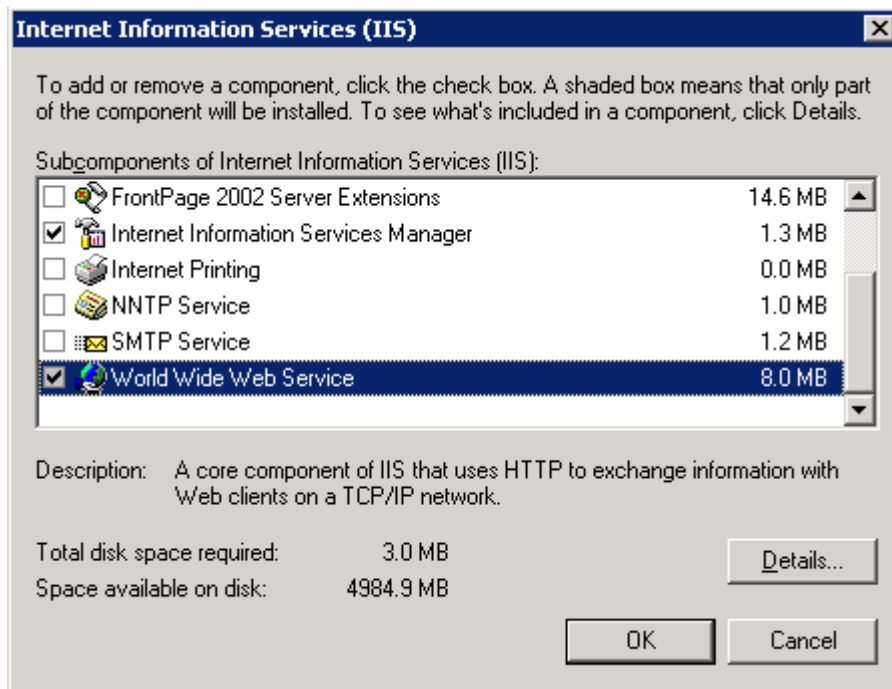

9. Click **World Wide Web Service**.
10. Click **Details**.
11. Ensure that **Active Server Pages** and **World Wide Web Service** are checked.

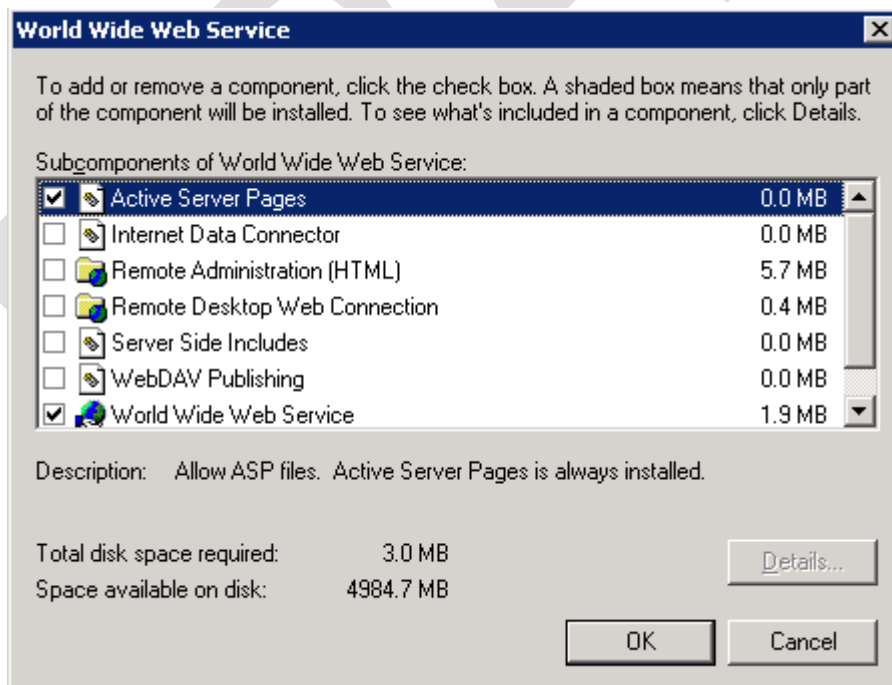


12. Click **OK** until you are returned to the **Windows Component Wizard**.
13. Click the **Next** button and complete the **Windows Component Wizard**.

## 2.2 .NET Framework 3.5 SP 1


The .NET Framework is used by most of the *iRINGTools* components. The latest .NET Framework is version 3.5 SP1. To install the .NET Framework, perform the following:

1. Download and install .NET Framework 3.5 SP1 from <http://www.microsoft.com/net/Download.aspx>.

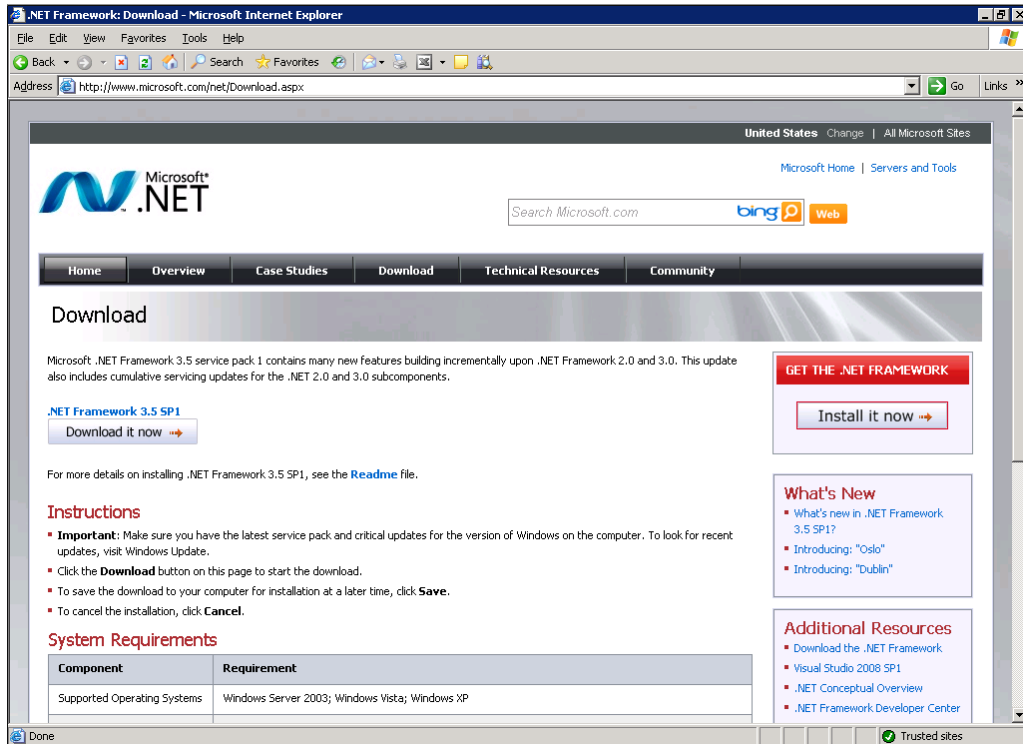

2. Verify .NET Framework 3.5 SP1 installed correctly by typing the following in a command prompt:

`%systemroot%\Microsoft.NET\Framework\v3.5\csc`

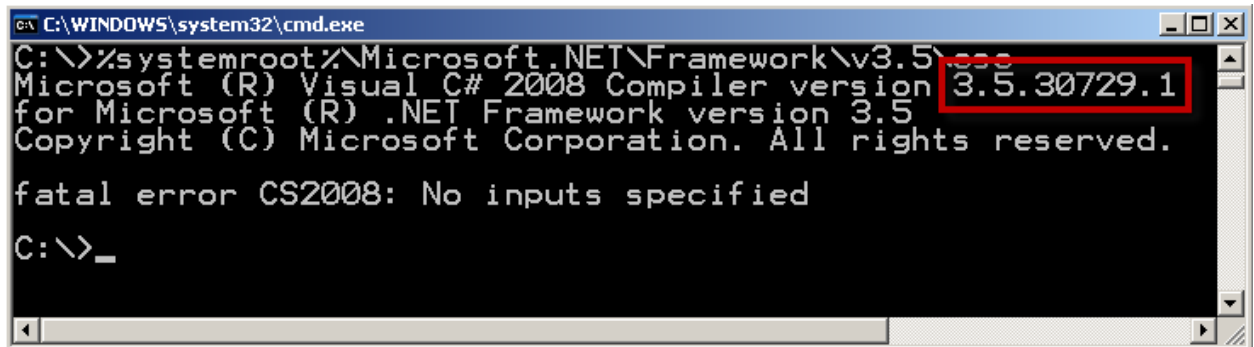

```
C:\WINDOWS\system32\cmd.exe
C:\>%systemroot%\Microsoft.NET\Framework\v3.5\csc
Microsoft (R) Visual C# 2008 Compiler version 3.5.30729.1
for Microsoft (R) .NET Framework version 3.5
Copyright (C) Microsoft Corporation. All rights reserved.

fatal error CS2008: No inputs specified


C:\>_
```

## 2.3 Validate IIS and ASP.NET


IIS combines and exposes many different technologies, and it can be a challenge to deploy. Certain subcomponents of IIS may not have been installed in the expected order. Furthermore, installing IIS after applying a Service Pack can lead to other subcomponents becoming unregistered. For this reason, the following steps are not always required, but may help if IIS is not functioning properly.

To verify ASP.NET is register and working with IIS, perform the following.


1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command `inetmgr`.

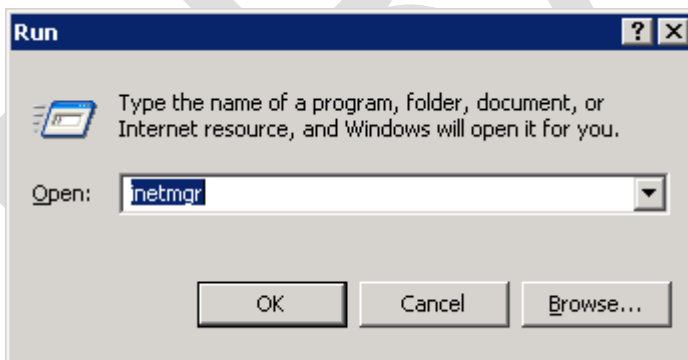


2. From the Web Sites folder, right-click on the target web site and select Properties.

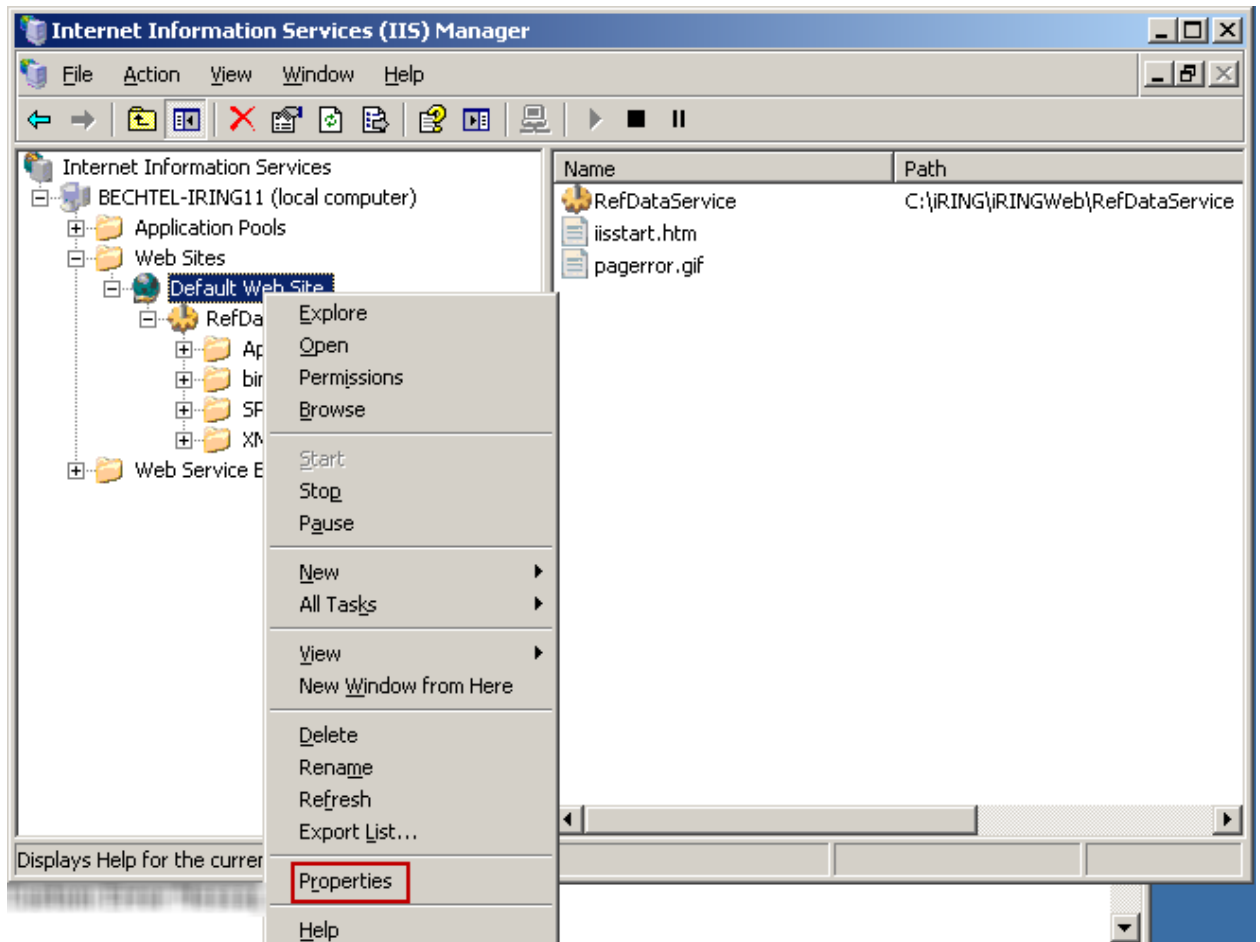


3. Select the ASP.NET tab in the Properties window.

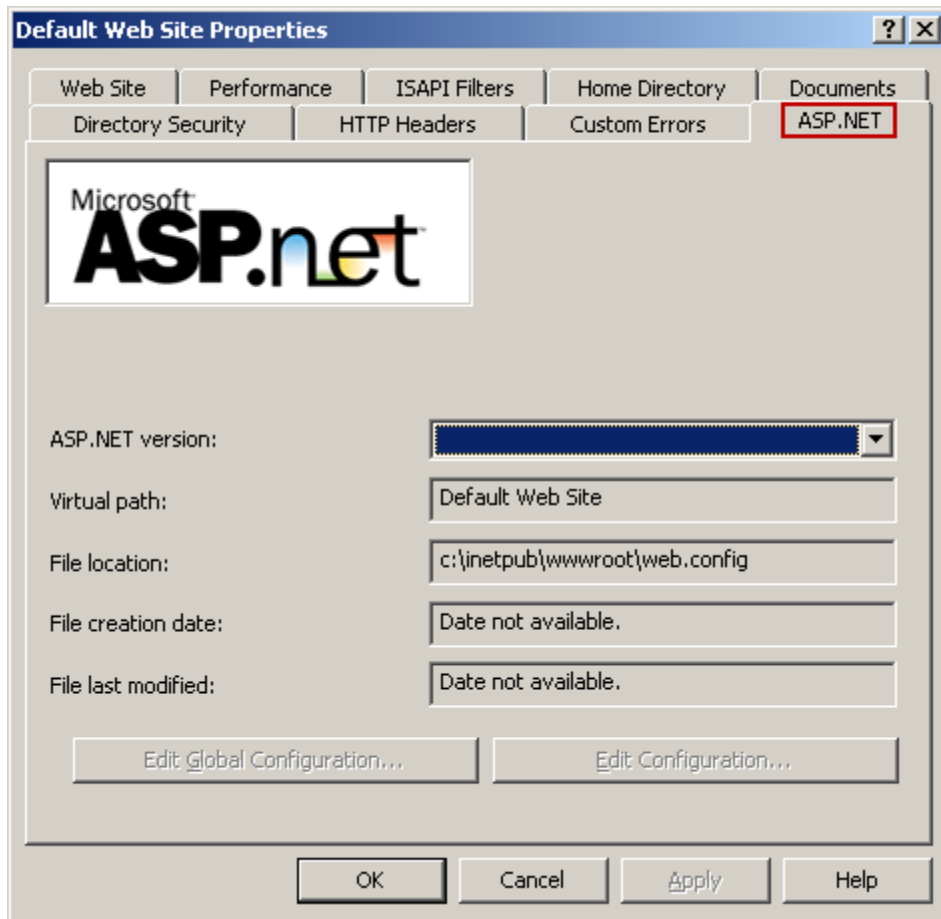


4. If an ASP.NET version is selected, then select it (the version should be 2.0). Click the OK button to complete.

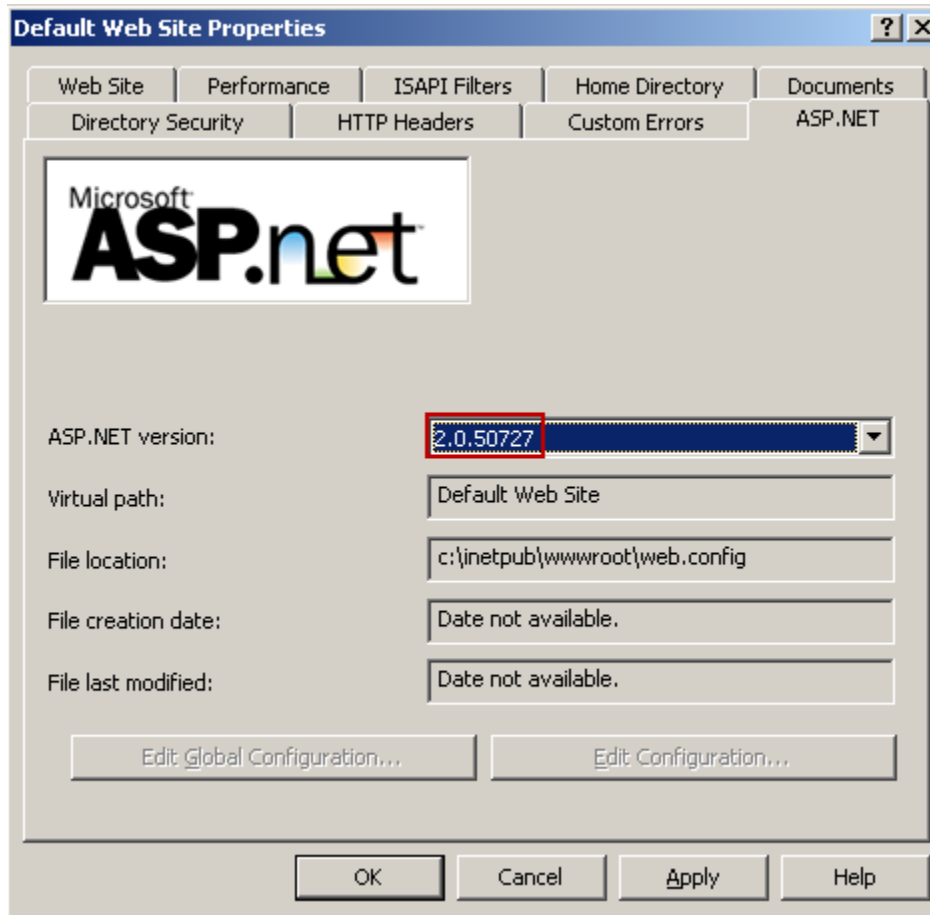

5. If ASP.NET was not selected, then IIS needs reset. Execute iisreset in a command window.

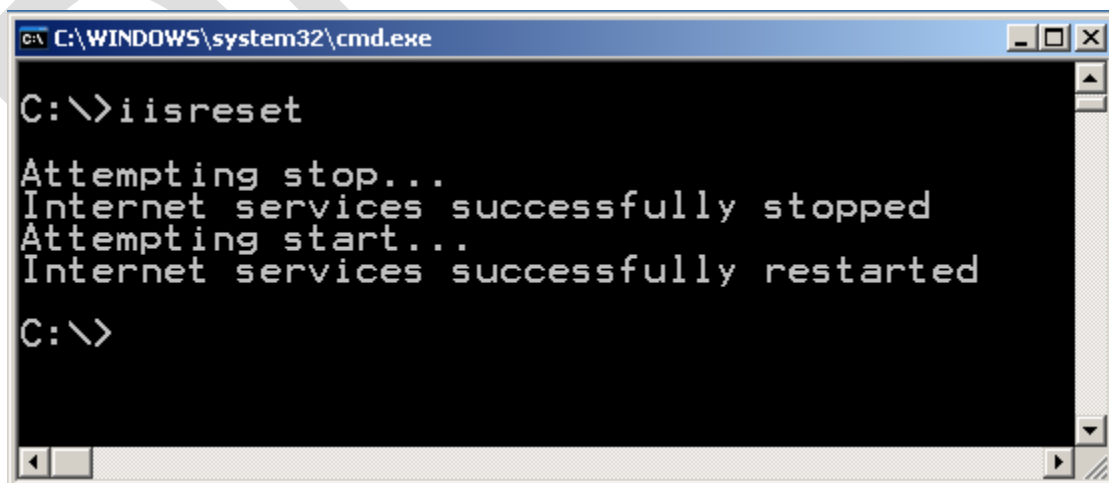

6. Additionally, ASP.NET will also need registering. Open a command window in the Windows folder `WINDOWS\Microsoft.NET\Framework\v2.0.50727` and execute the command `aspnet_regiis -r`.

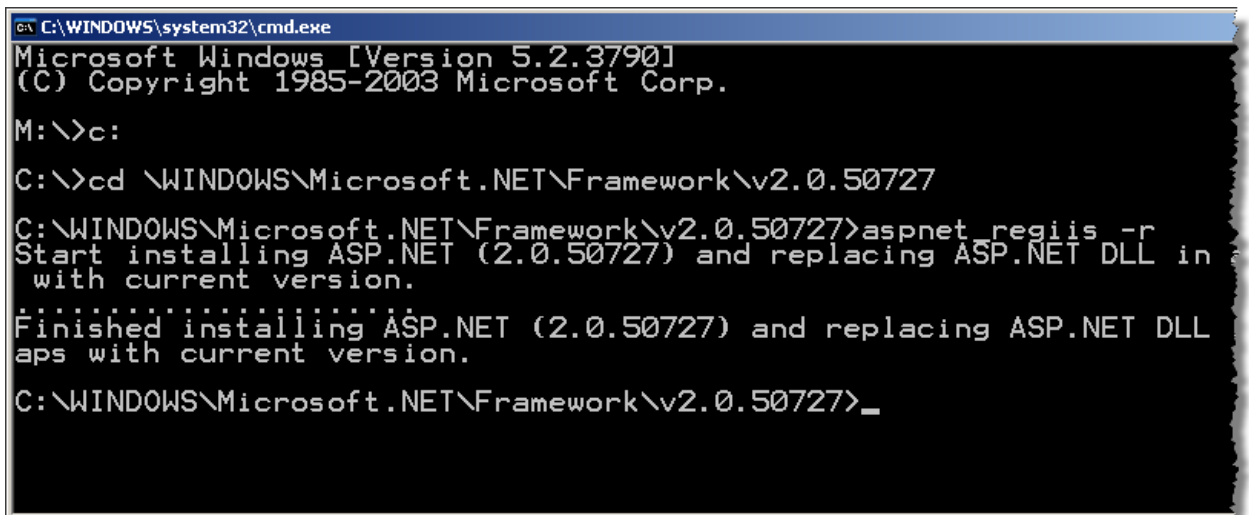

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows [Version 5.2.3790]
(C) Copyright 1985-2003 Microsoft Corp.

M:\>c:


C:\>cd \WINDOWS\Microsoft.NET\Framework\v2.0.50727

C:\WINDOWS\Microsoft.NET\Framework\v2.0.50727>aspnet_regiis -r
Start installing ASP.NET (2.0.50727) and replacing ASP.NET DLL in
  with current version.

Finished installing ASP.NET (2.0.50727) and replacing ASP.NET DLL
aps with current version.

C:\WINDOWS\Microsoft.NET\Framework\v2.0.50727>_
```

7. After registering ASP.NET, IIS needs reset again. Execute `iisreset` in a command window.

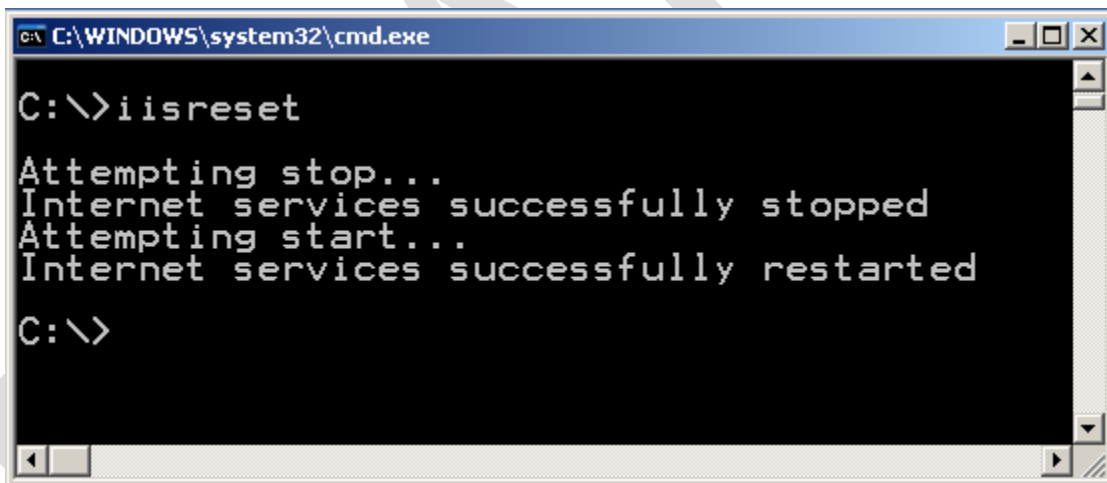


```
C:\WINDOWS\system32\cmd.exe

C:\>iisreset

Attempting stop...
Internet services successfully stopped
Attempting start...
Internet services successfully restarted

C:\>
```

8. From the IIS Manager, select the Web Service Extensions folder. ASP.NET needs to be enabled. Select ASP.NET v2.0.50727 in the right pane and click the Allow button.

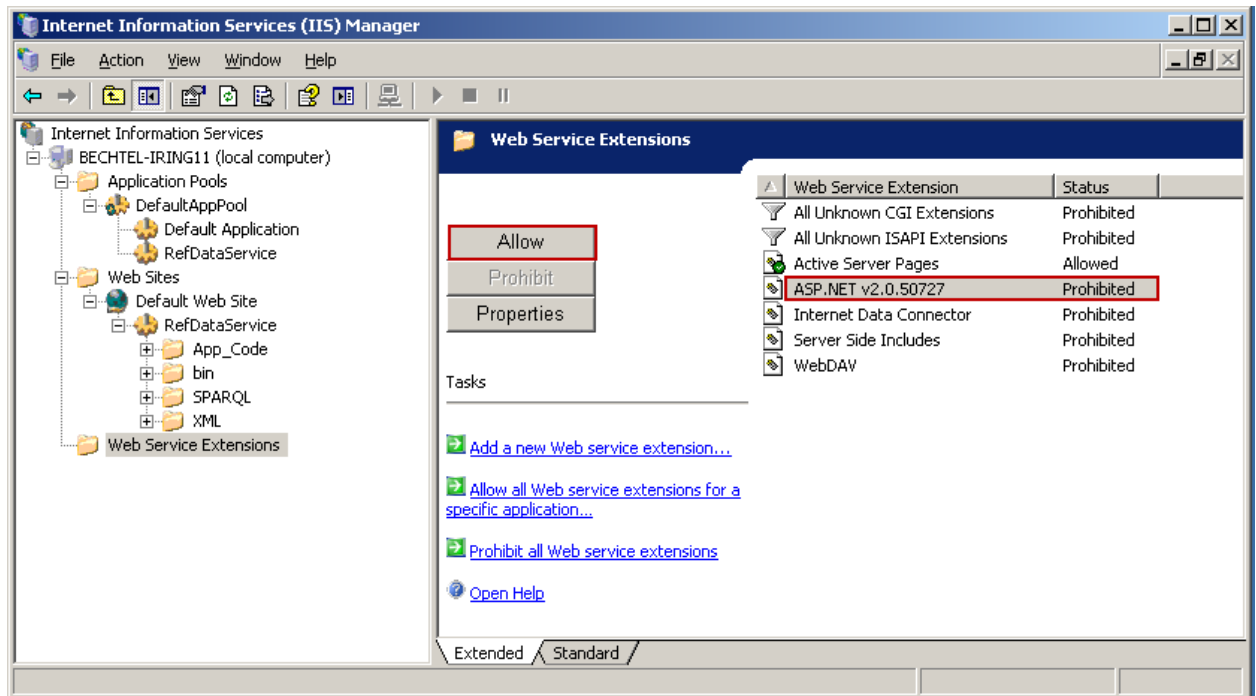

At this point IIS and ASP.NET should be working and synchronized.

The following Microsoft website links provide detailed instructions on this and other common IIS issues.

- Ensure that ASP.NET is installed:  
(<http://www.microsoft.com/technet/prodtechnol/WindowsServer2003/Library/IIS/01563a60-038c-46d8-9a63-5104f5816767.msp?mfr=true>)
- Ensure that Dynamic Content is enabled:  
(<http://www.microsoft.com/technet/prodtechnol/WindowsServer2003/Library/IIS/a9fc0395-f03b-4213-9c62-1592bcfcf53f.msp?mfr=true>)
- Ensure that ASP.NET 2.0 is registered (only do if necessary):  
([http://msdn.microsoft.com/en-us/library/k6h9cz8h\(VS.80\).aspx](http://msdn.microsoft.com/en-us/library/k6h9cz8h(VS.80).aspx))

## 2.4 Silverlight MIME Extensions

**iRingtools** use Silverlight for the Mapping Editor and Reference Data Editor. To host Silverlight on a web server that is not IIS version 7 (e.g., IIS version 6), you will need to add the MIME types to support the correct content type interpretation by the browser. In the case of Silverlight this is the XAML content type. IIS version 7 has these MIME types already added but if they're not there this will result in errors. There are three MIME types required:


1. .xaml application/xaml+xml
2. .xap application/x-silverlight-app




3. .xbap application/x-ms-xbap

To add (or verify) the three MIME types, perform the following steps:


1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

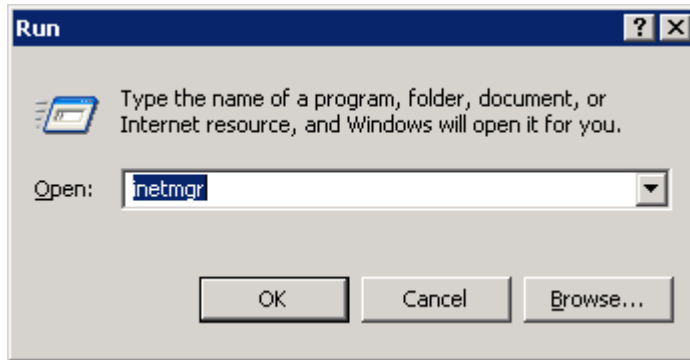


2. From the Web Sites folder, right-click on the target web site and select Properties.

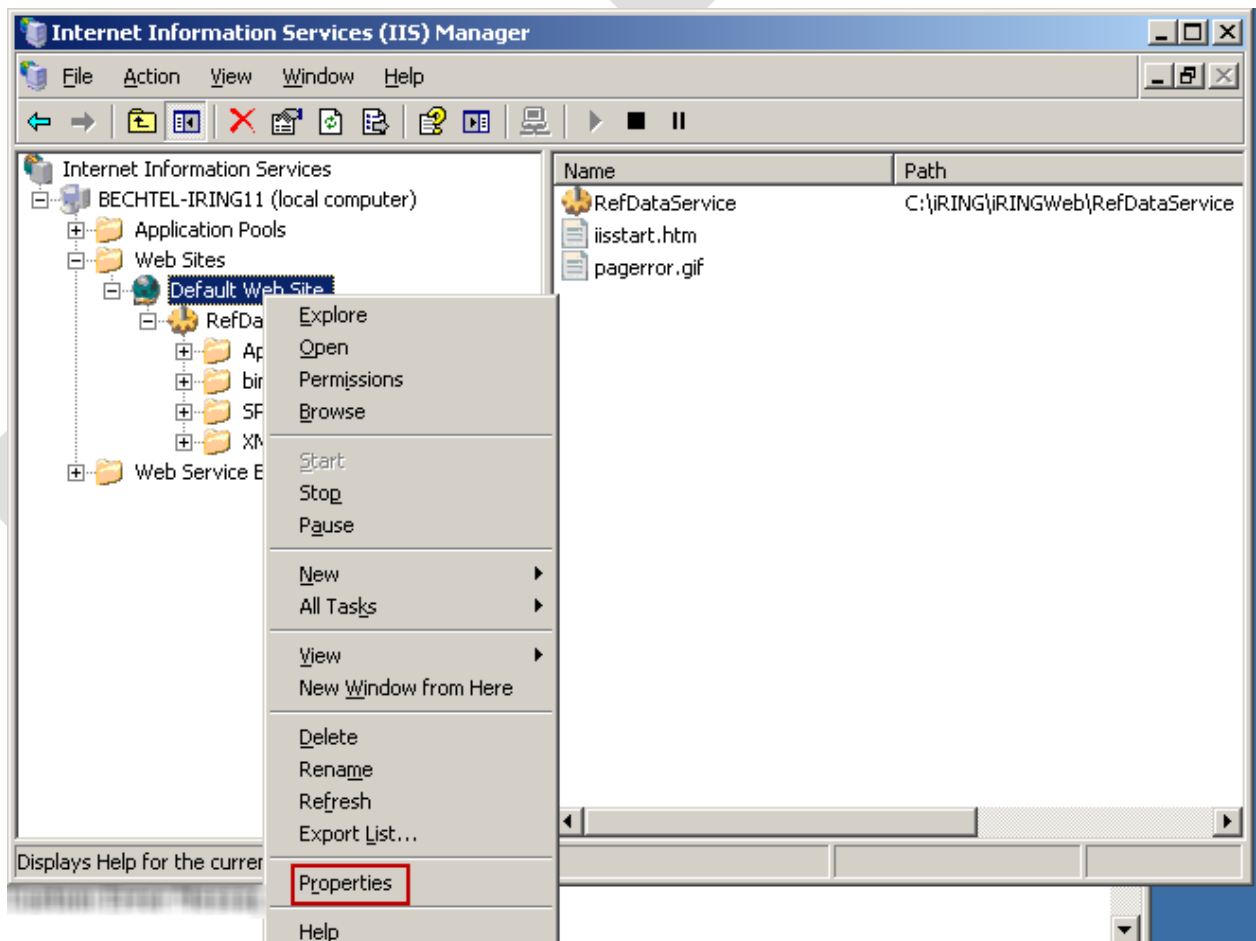



3. Select the HTTP Headers tab in the Properties window and then click on the MIME Types button.

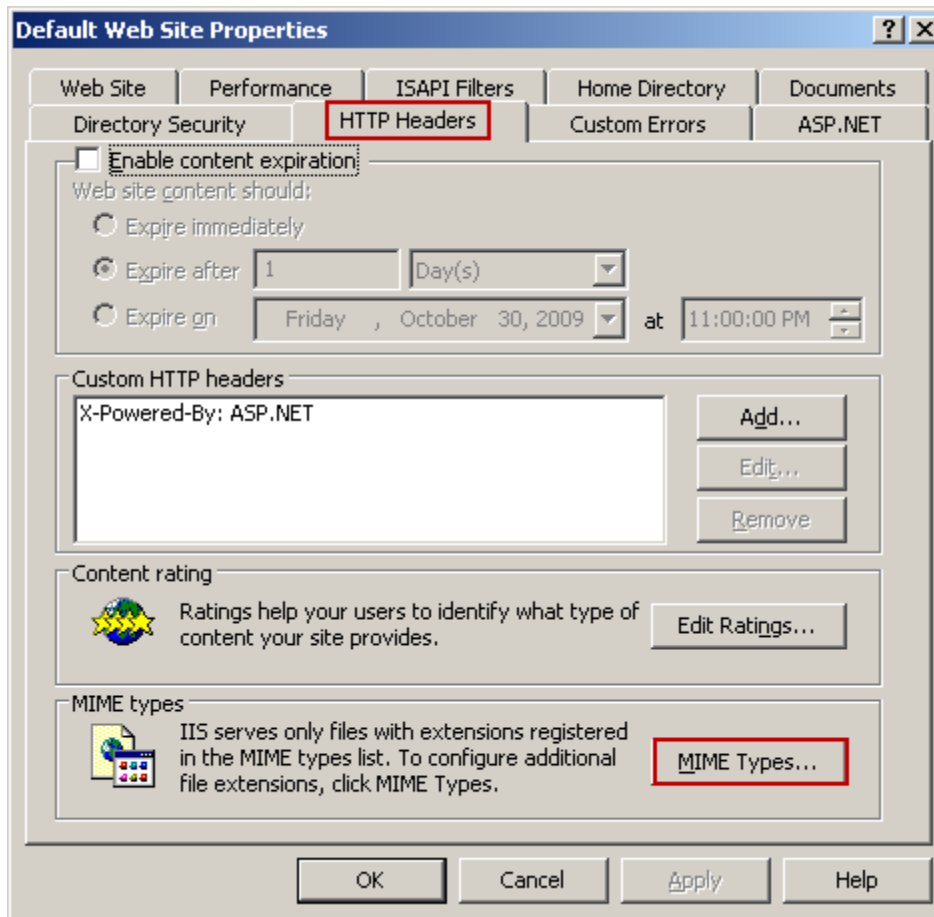


4. If one or more of the three required MIME types are not listed, then click on the New button.

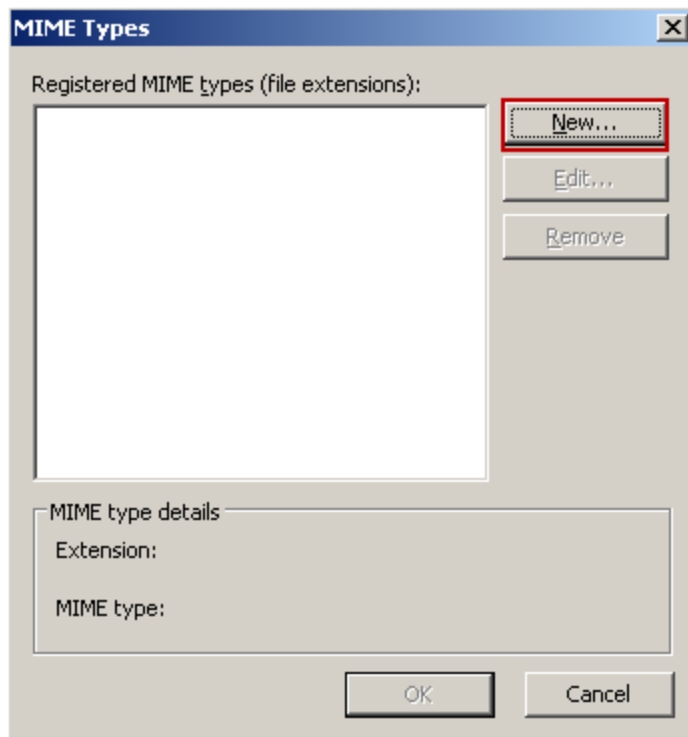


5. If necessary, enter the extension and MIME type for the three types.

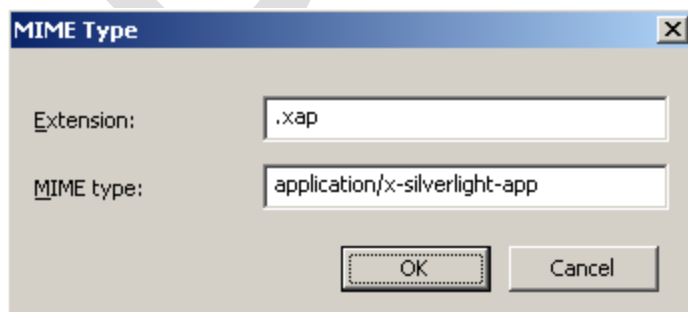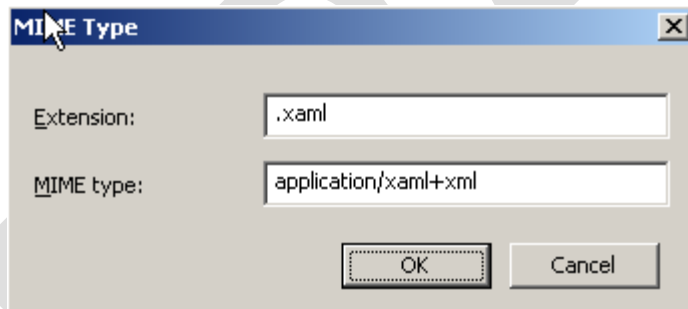

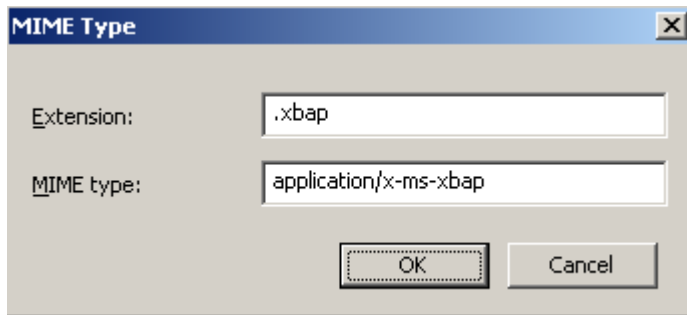


- When finished, verify the MIME types are added and then click the OK button.

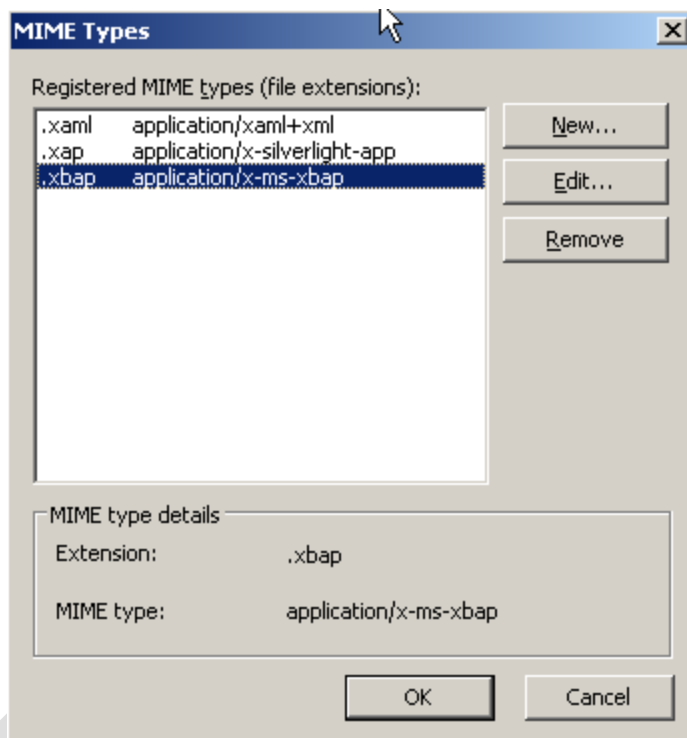


- Close the Properties window.

## 2.5 Application Extension Mapping for SemWeb


1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

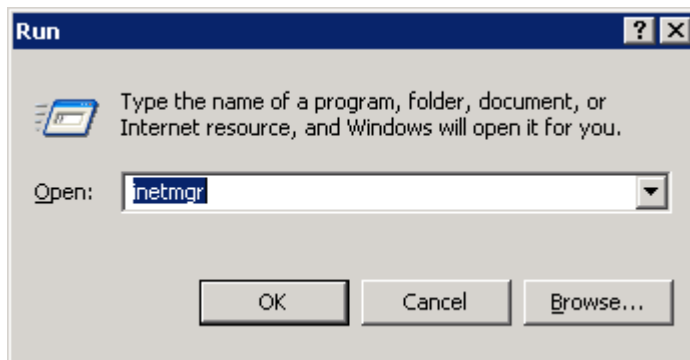


2. From the Web Sites folder, right-click on the target web site and select Properties.

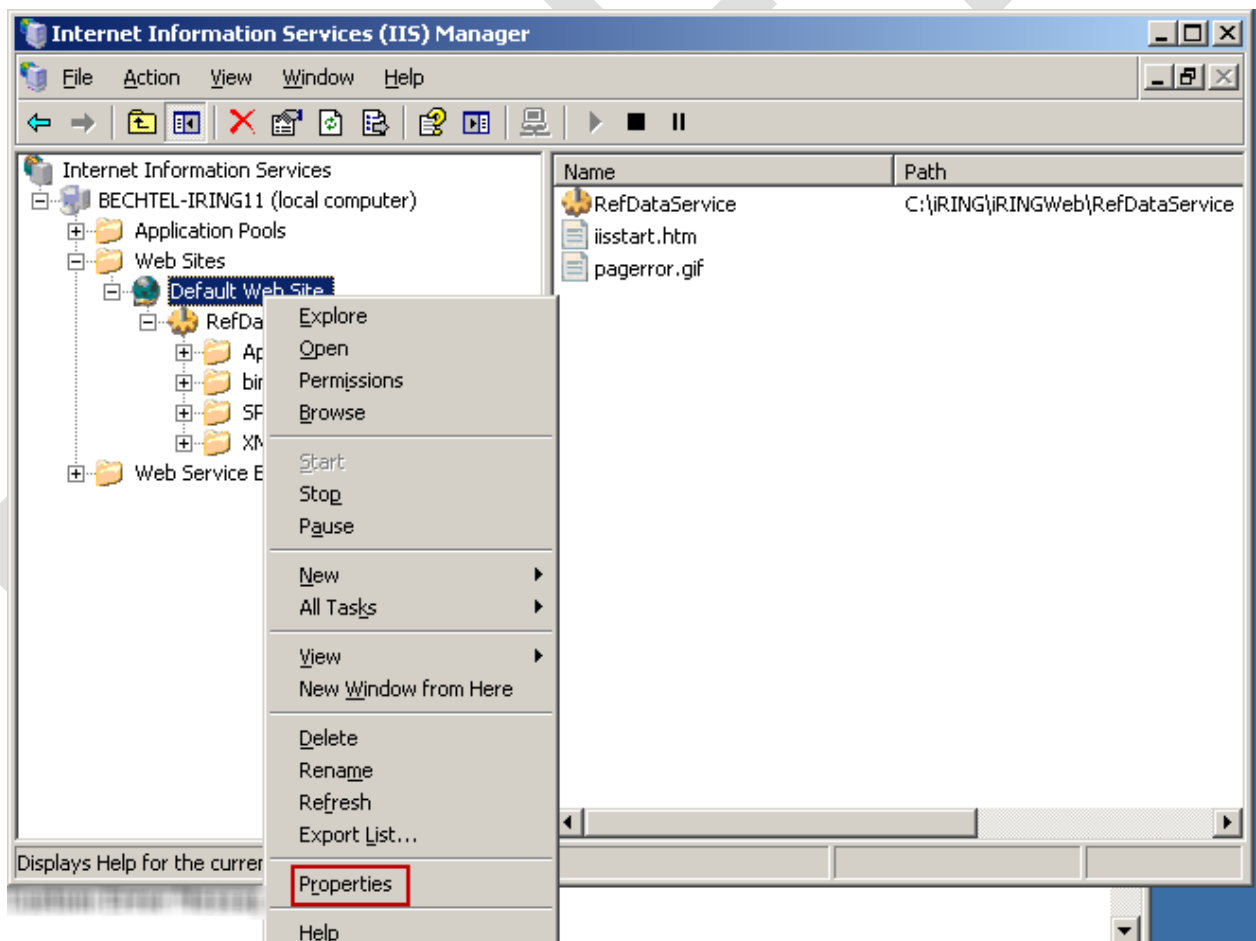


3. Select the Home Directory tab in the Properties window and then click on the Configuration button.

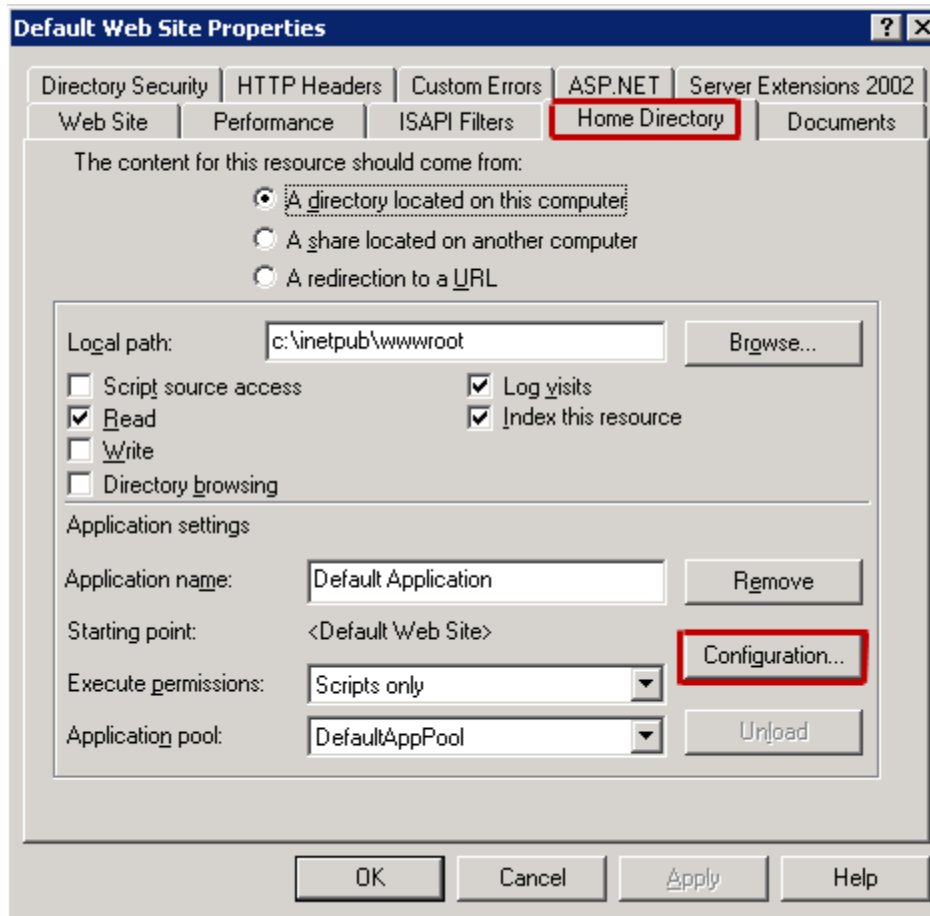


4. Under Wildcard application maps, click on Insert button.

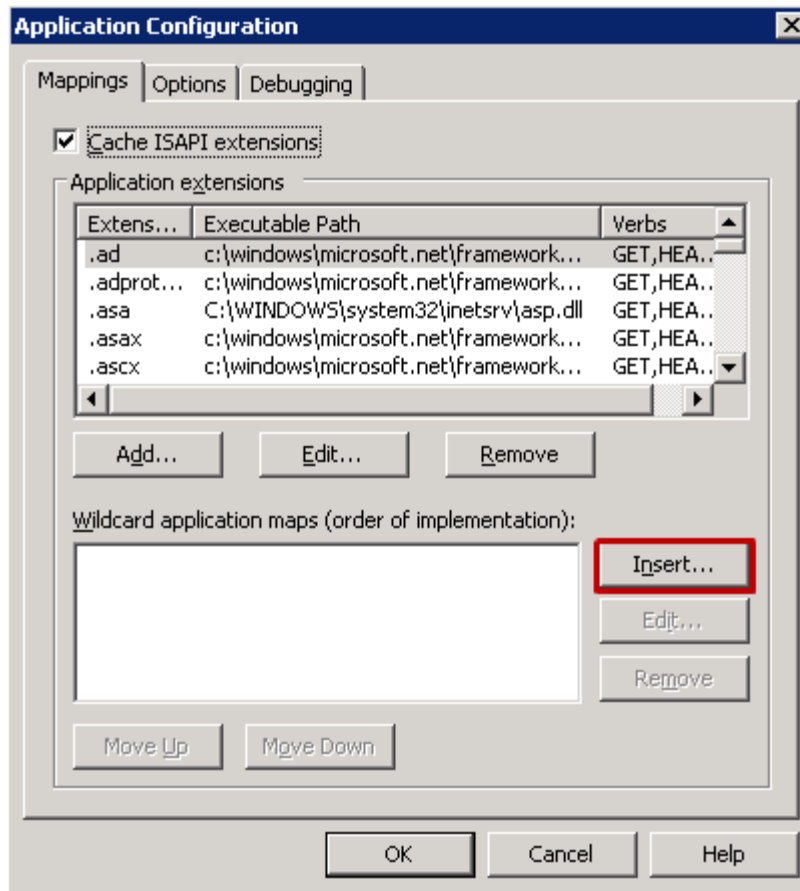

- Click on Browse button to browse to C:\WINDOWS\Microsoft.NET\Framework\v2.0.50727\aspnet\_isapi.dll

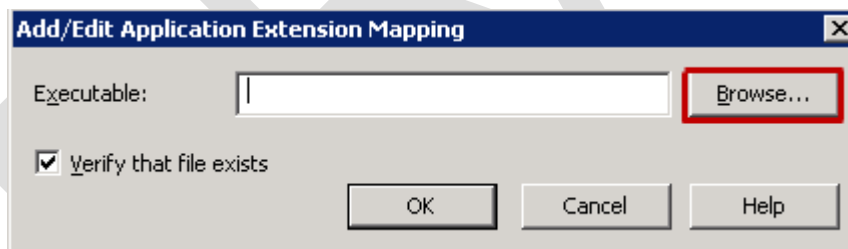


- Uncheck the Verify that file exists check box and click on OK button 3 times to accept the change

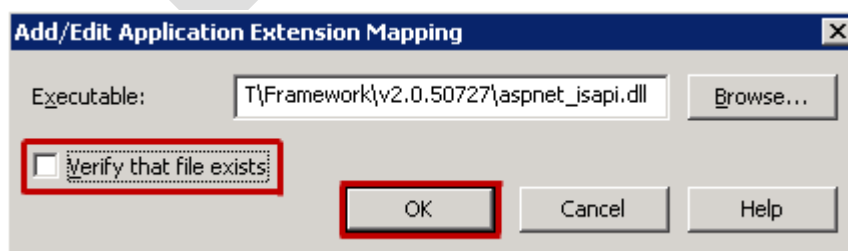


## 2.6 ClientAccessPolicy.xml

1. The ClientAccessPolicy.xml file can be found in the root of iRINGWeb.
2. Copy the ClientAccessPolicy.xml file into the clipboard.
3. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

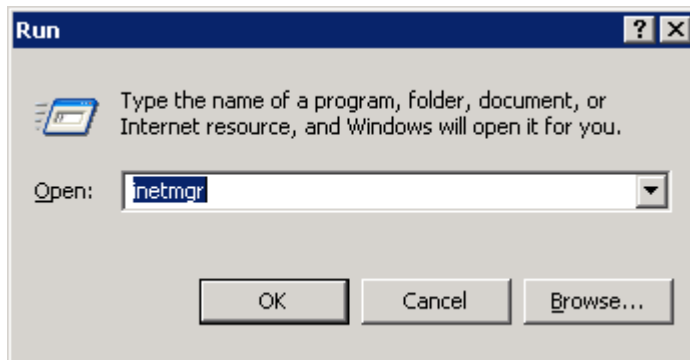

4. From the Web Sites folder, right-click on the target web site and select Explore.

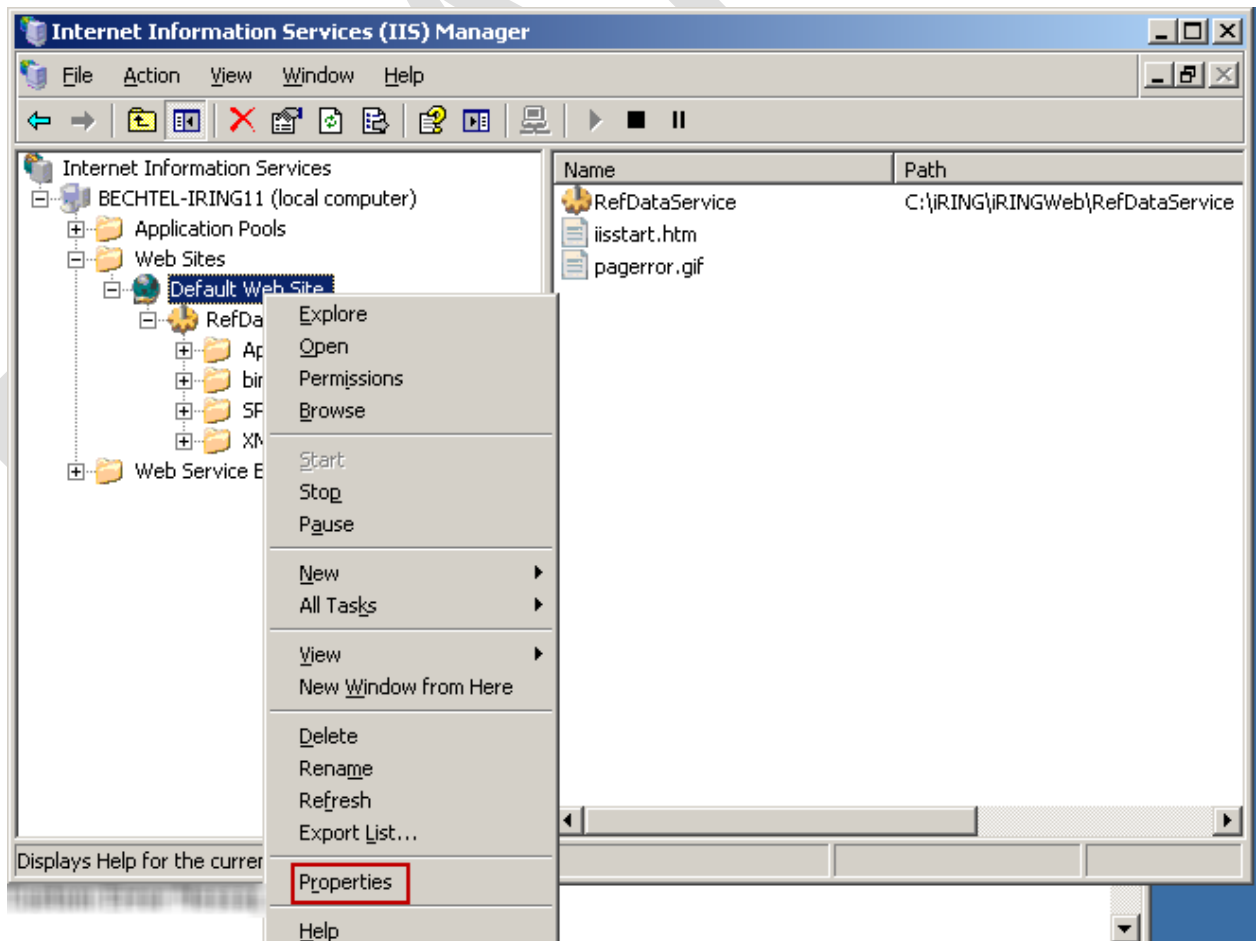



5. Paste the ClientAccessPolicy.xml file into the IIS Manager, copying the file into the root of the domain for your iRINGTools deployment.

## 2.7 SQL Server

A test database is needed to test and verify the **iRINGTools** AdapterService and SandboxService. **iRINGTools** supports the following SQL Server database versions.

- SQL Server 2005
- SQL Server 2008
- [SQL Server Express 2008](#)

Install these databases in accordance with the database installation instructions. Later in this document, a test database (SQL Server Express 2008) will be created for testing purposes.

### 3 Installation *iRINGTools* Sandbox

---


The following sections will describe the *iRINGTools* Sandbox components and provide detailed instructions on how to install and configure each component.

#### 3.1 *iRINGTools* Sandbox Components

The *iRINGTools* Sandbox is comprised of three components:

1. Sandbox Service
2. Reference Data Service
3. Reference Data Editor

These components interact with each other as well as the internet to manage the Reference Data contained in the *iRINGTools* Sandbox and provide federated search functionality.

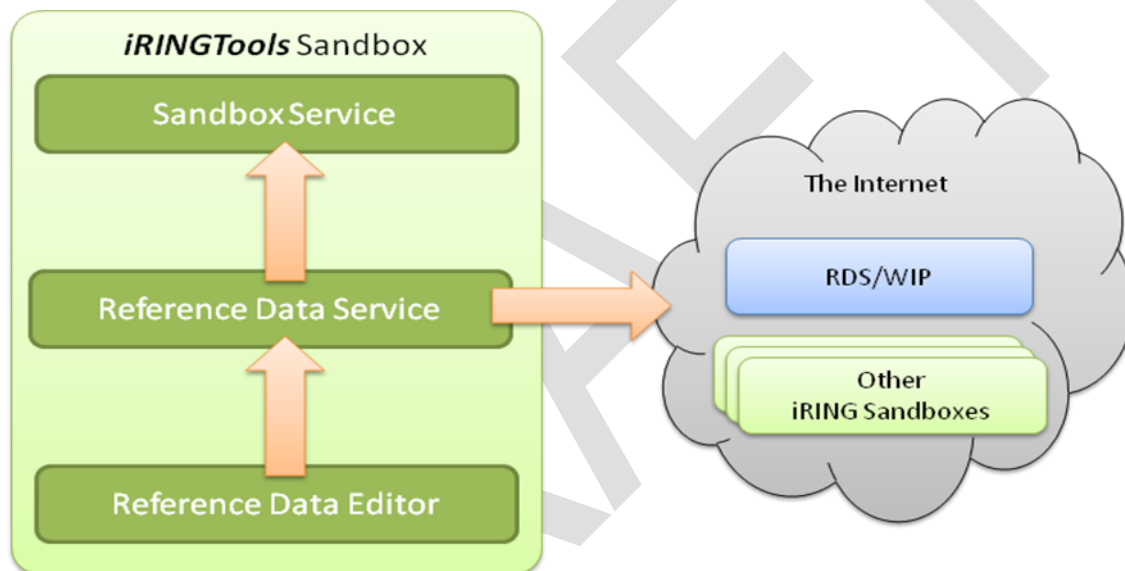

The Sandbox Service encapsulates the physical triple store and provides functionality for SPARQL Query and Update.

The Reference Data Service forms the core of the *iRINGTools* Sandbox and provides a web service API for performing federated searches across RDSWIP and other configured Sandboxes. The web service API also provides CRUD (Create, Read, Update and Delete) operations on the reference data stored within the Sandbox Service. In this way, the Reference Data Service depends on the Sandbox Service as well as access to the internet.

The Reference Data Editor provides a graphical user interface for searching, navigating, and managing (CRUD) reference data. It uses the Reference Data Service for all of its functionality.


### 3.2 Localhost versus Server Hostname

The **iRINGTools** Sandbox webconfig files use localhost as the initial hostname. It is best to keep localhost as the hostname during installation to making testing easier. Instructions will be provided later in this document on where and how to change the hostname.


### 3.3 Installing Sandbox Service

To set up the Sandbox Setup service, perform the following:


1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

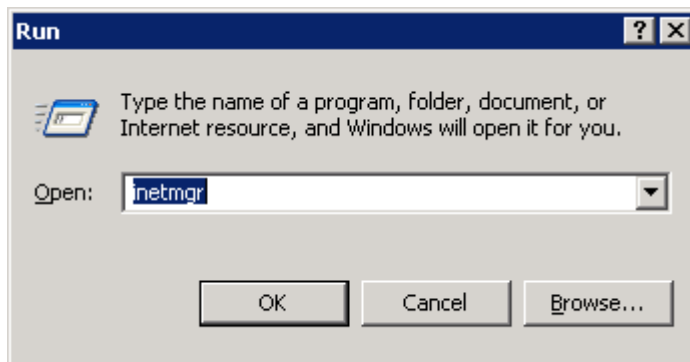

2. In IIS Manager, select the target web site in the Web Sites folder.

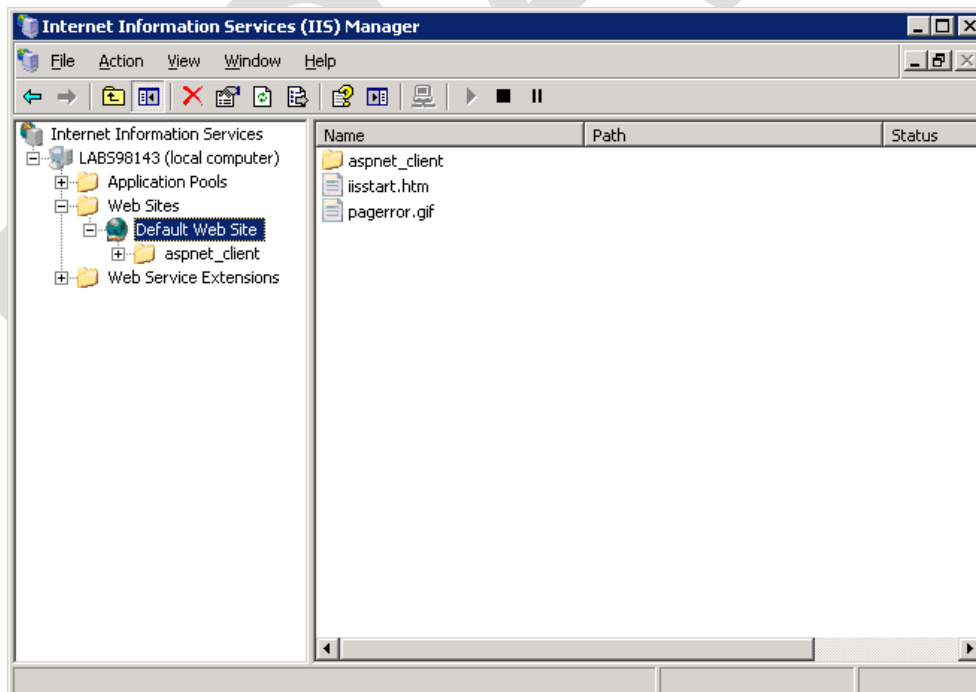


3. From the main menu, select Action > New > Virtual Directory.

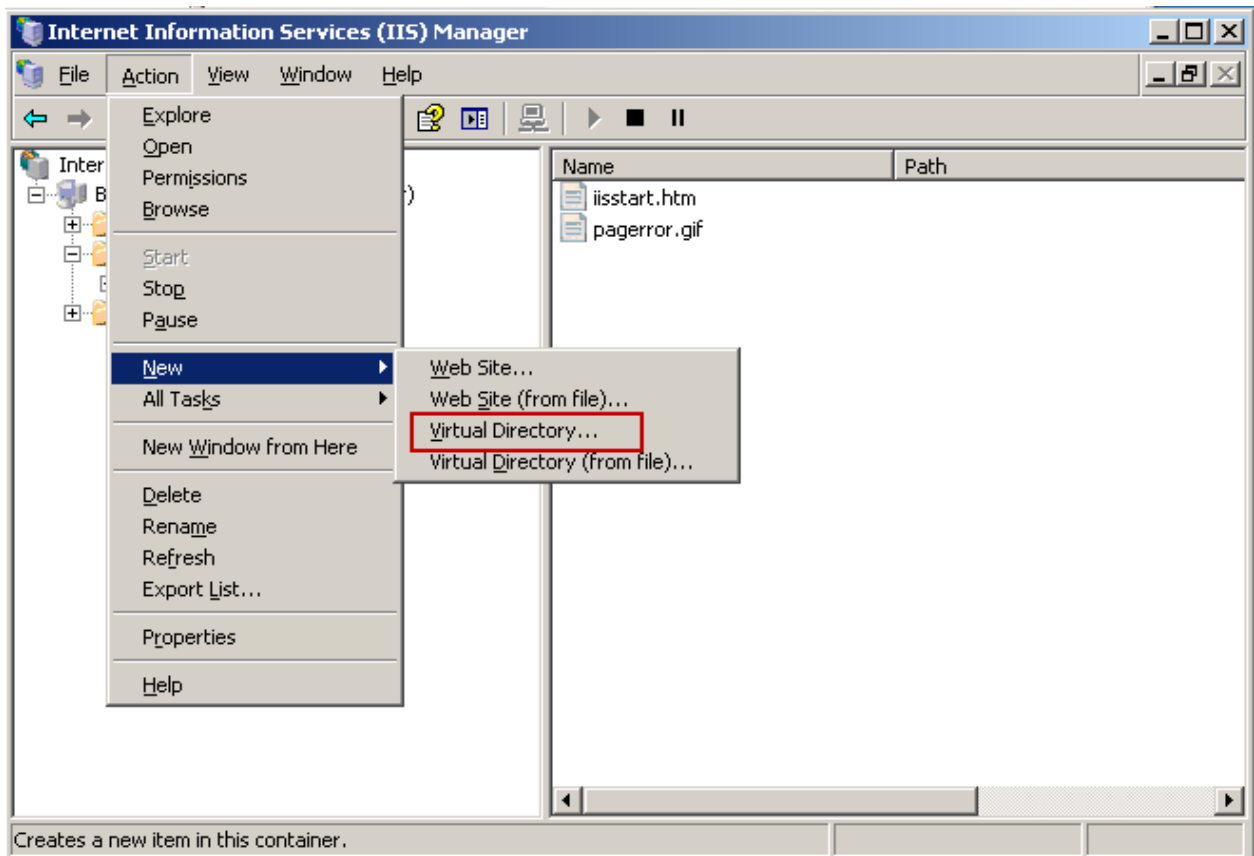

4. The Virtual Directory Creation wizard starts. Click the next button.




5. Name the virtual directory as SandboxService and then click the Next button.

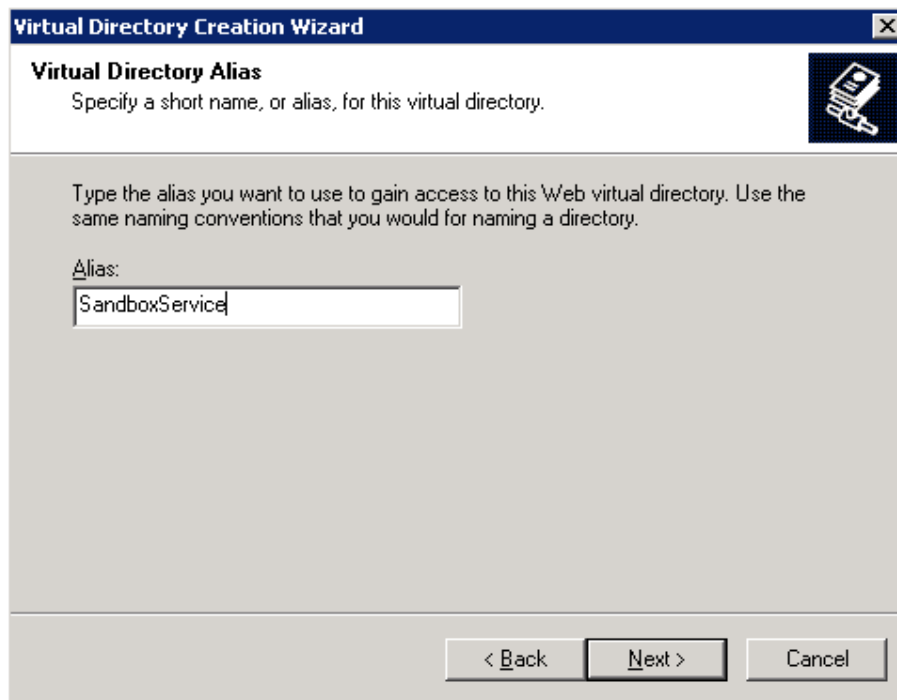


The screenshot shows a Windows-style dialog box titled "Virtual Directory Creation Wizard". The main heading is "Virtual Directory Alias". Below the heading, it says "Specify a short name, or alias, for this virtual directory." There is a small icon of a floppy disk in the top right corner. The main text area contains the instruction: "Type the alias you want to use to gain access to this Web virtual directory. Use the same naming conventions that you would for naming a directory." Below this, there is a label "Alias:" followed by a text input field containing the text "SandboxService". At the bottom of the dialog, there are three buttons: "< Back", "Next >", and "Cancel".


6. Browse to the iRingWeb\SandboxService folder (installed earlier).

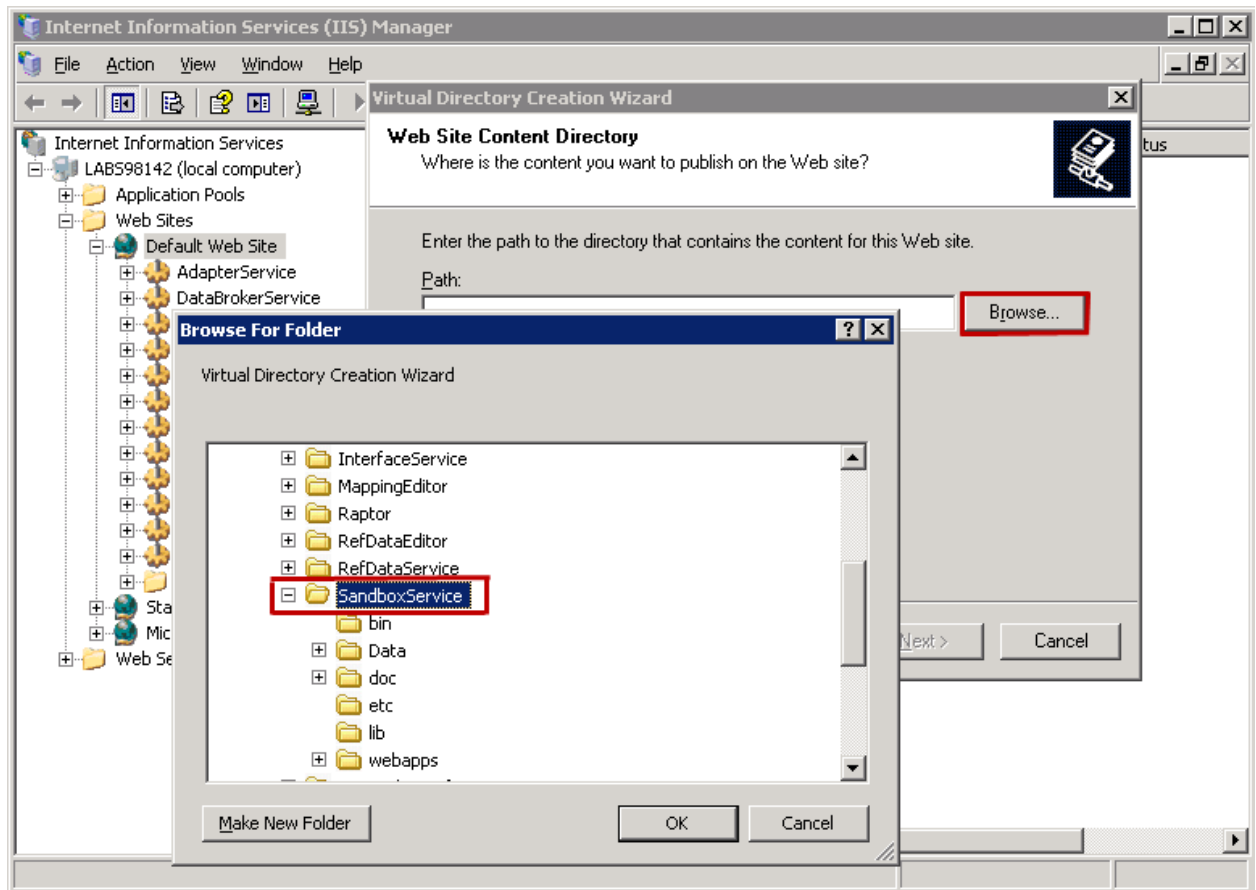


7. Click the Next button.

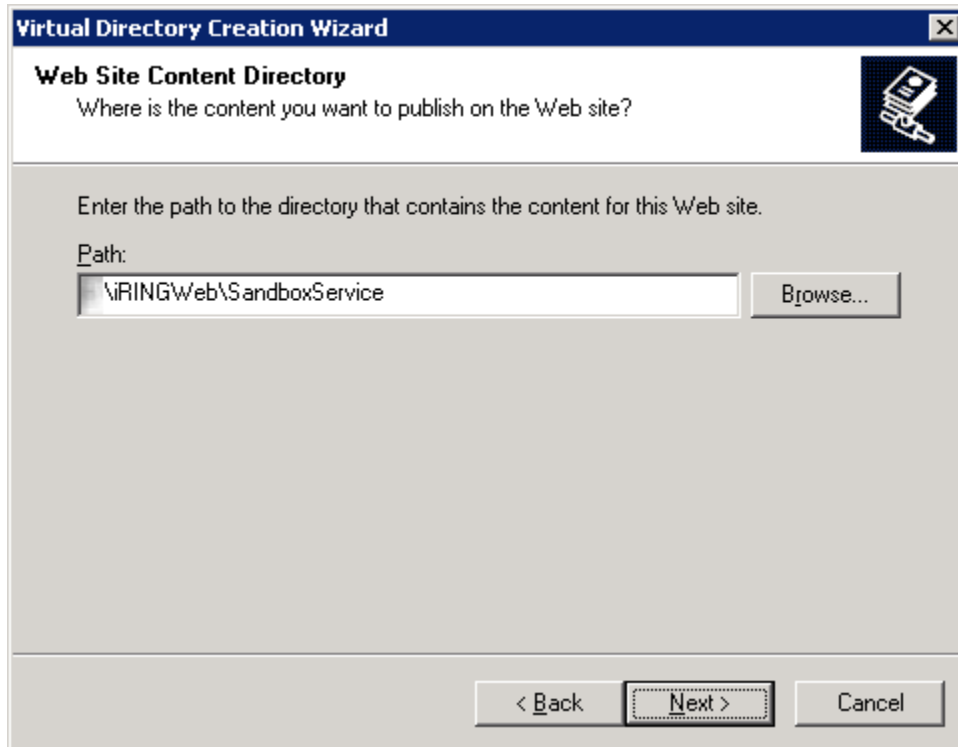

8. Select the permissions Read and Run Scripts and then click the Next button.

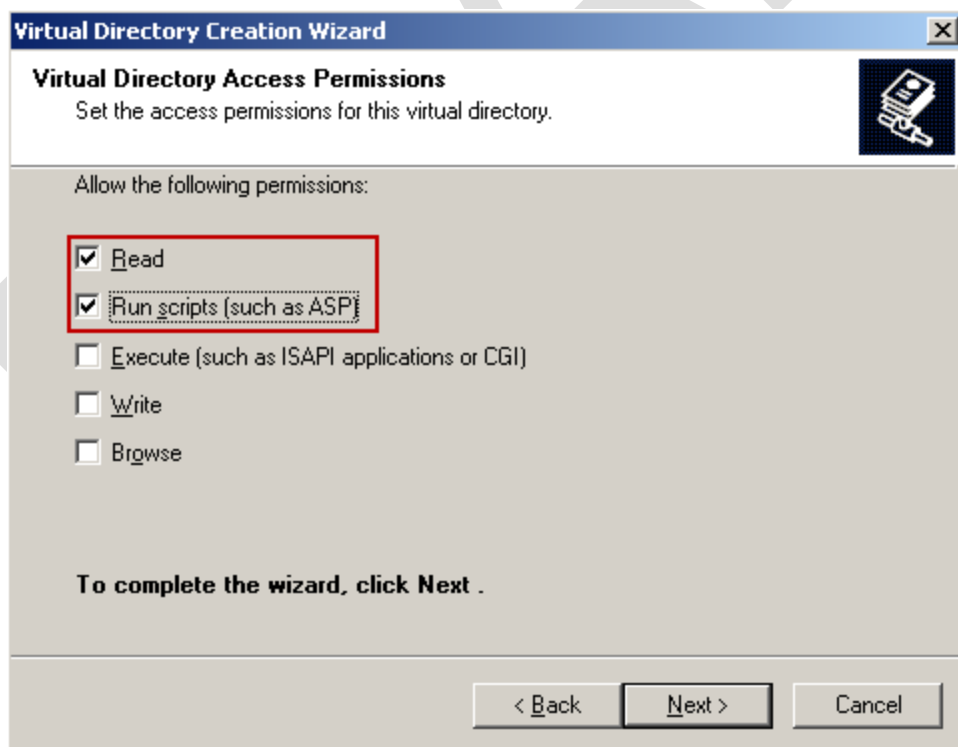


9. The virtual directory setup is complete. Click the Finish button to close the wizard.

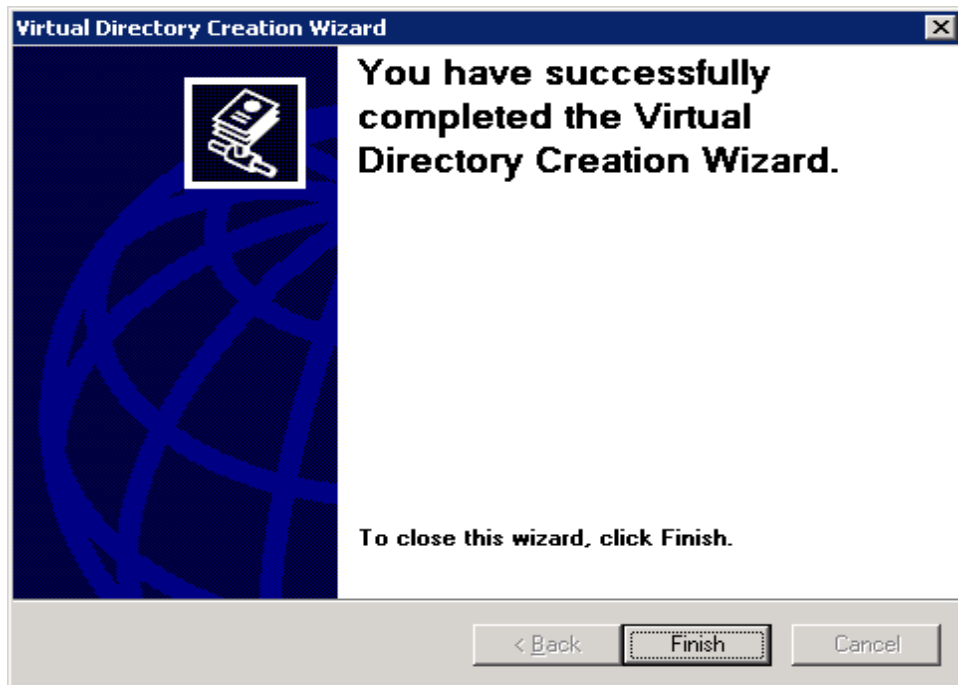

10. The virtual directory appears in the the target web site folder.




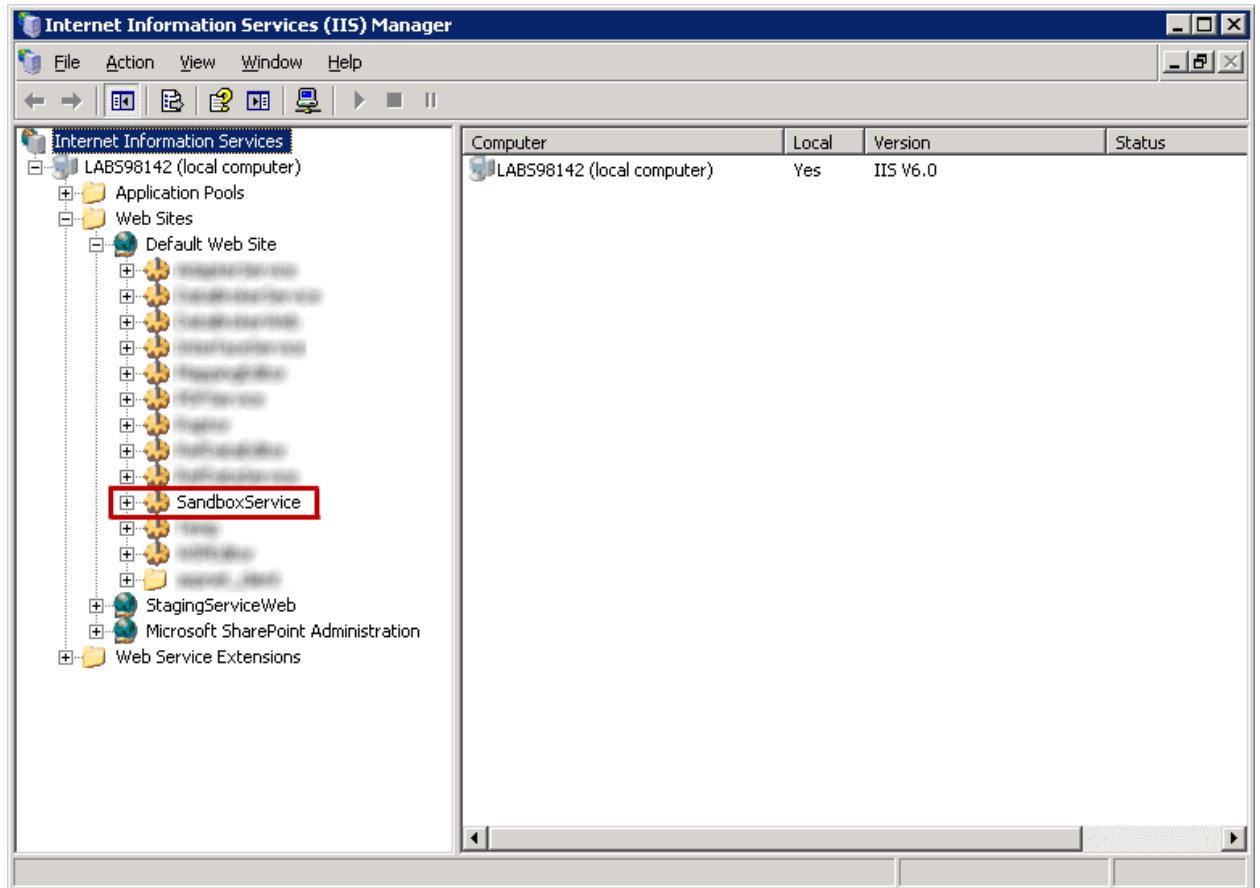


### 3.4 Sandbox Service Setup

To configure the Sandbox Setup service, perform the following:

1. Open the file iRINGWeb\SandboxService\setup.conf in a text editor (e.g., Notepad) and modify the contents to match your installation (i.e., SQL Server instance, admin username and password). Save the file.

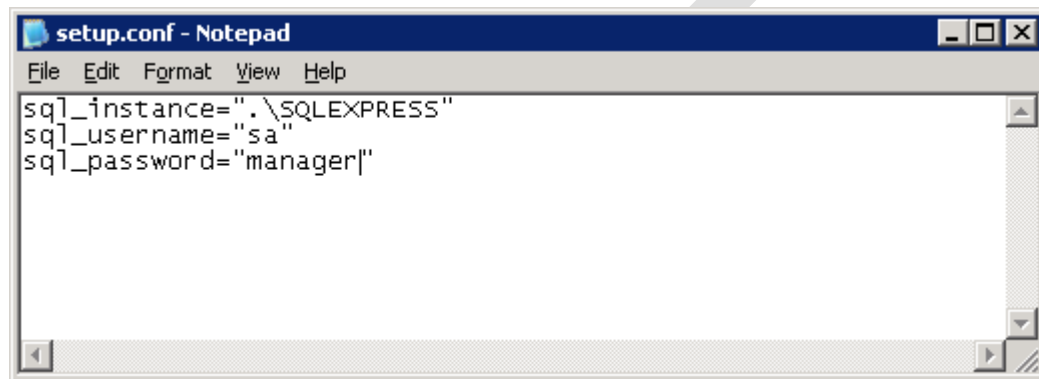


2. Open a command window and execute iRINGWeb\SandboxService\setup.cmd. This will create the SQL Server database and configure the SandboxService Web.config based on the settings in setup.conf.

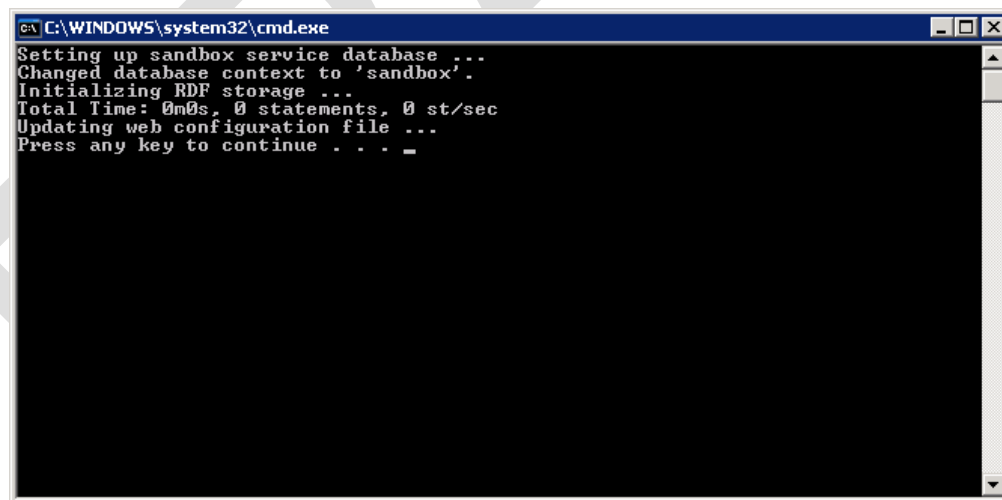


### 3.5 Testing Sandbox Service

To confirm the Sandbox Service installed correctly, perform the following.


**Note:** To access the localhost, you may need to configure your Internet Options first. Open Internet Options, select the Connections tab, select LAN Settings and ensure Bypass proxy server for local addresses is checked. Save the settings and close the browser before proceeding.

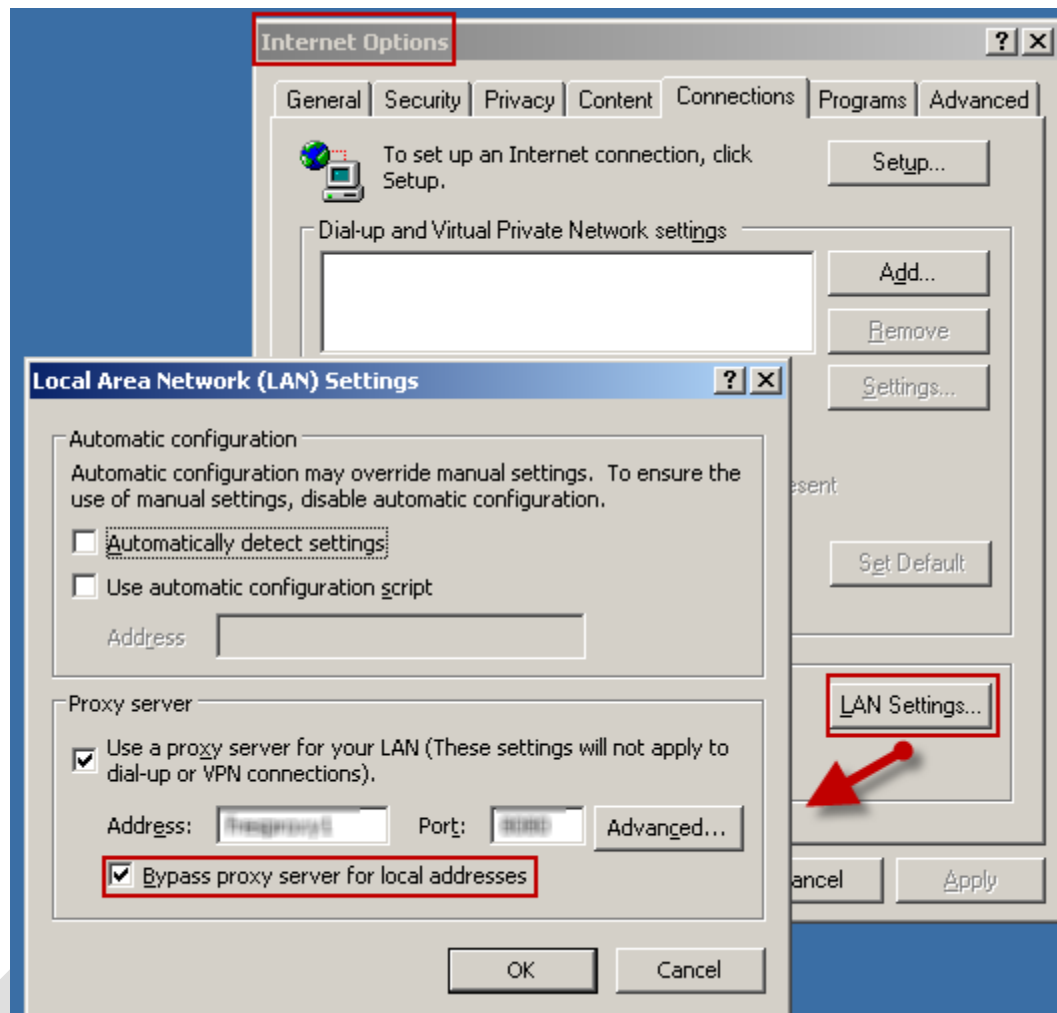

1. In your web browser, open the address <http://localhost/SandboxService/index.html>. You should see the following (or something very similar).

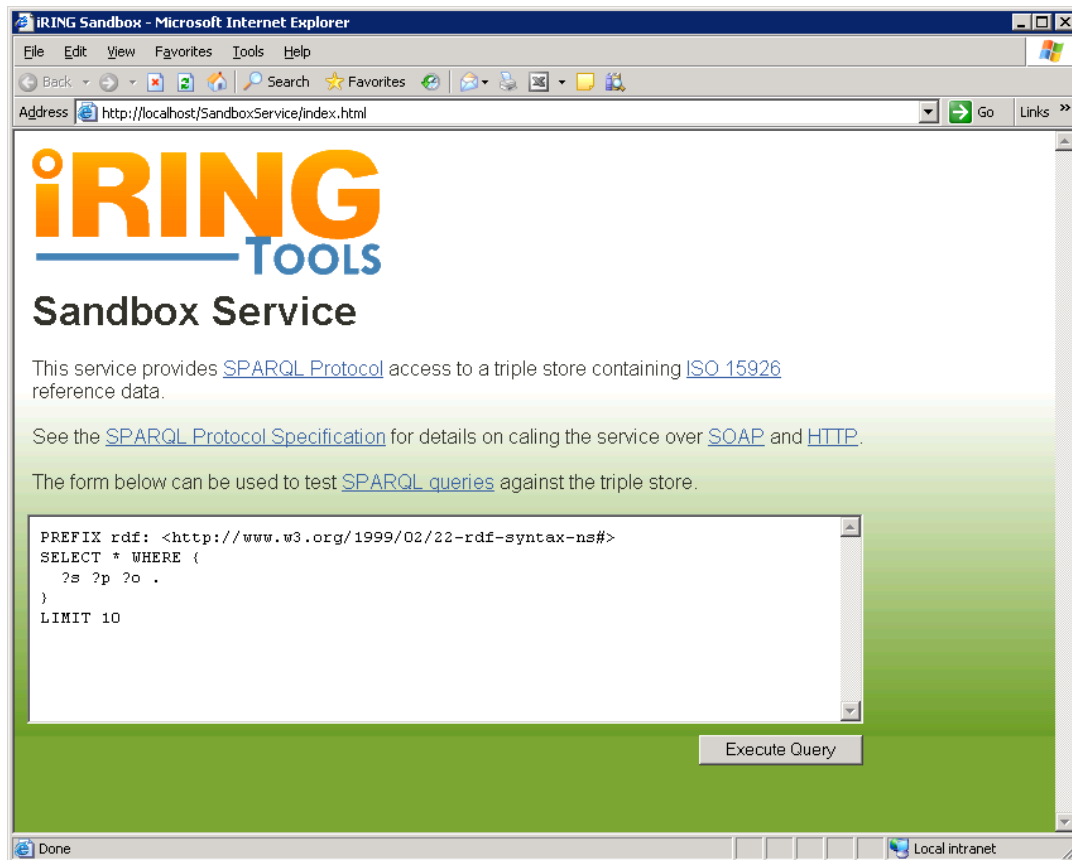


2. Click the Execute Query button. You should see the following result.

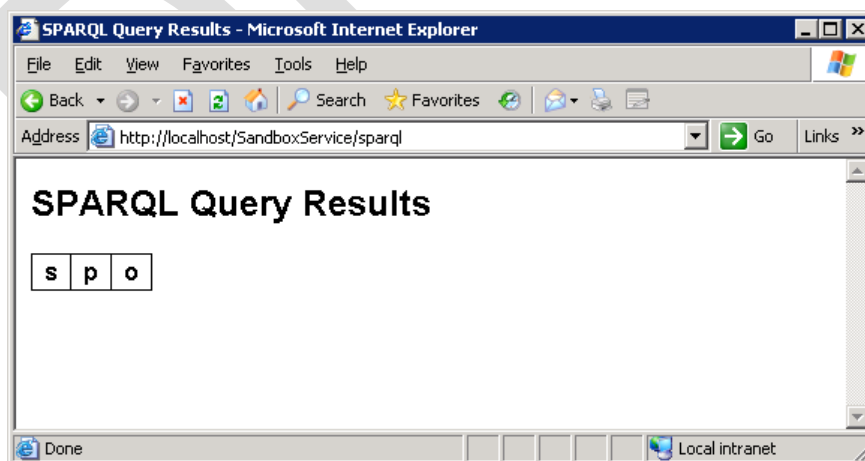


### 3.6 Creating Virtual Directory for RefDataService

Create the RefDataService virtual directory in IIS by performing the following steps.


1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

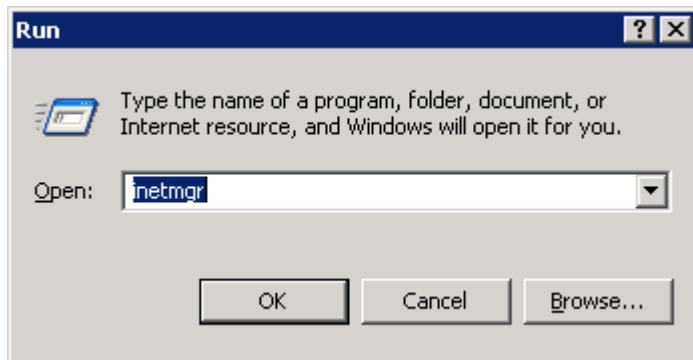

2. In IIS Manager, select the target web site in the Web Sites folder.

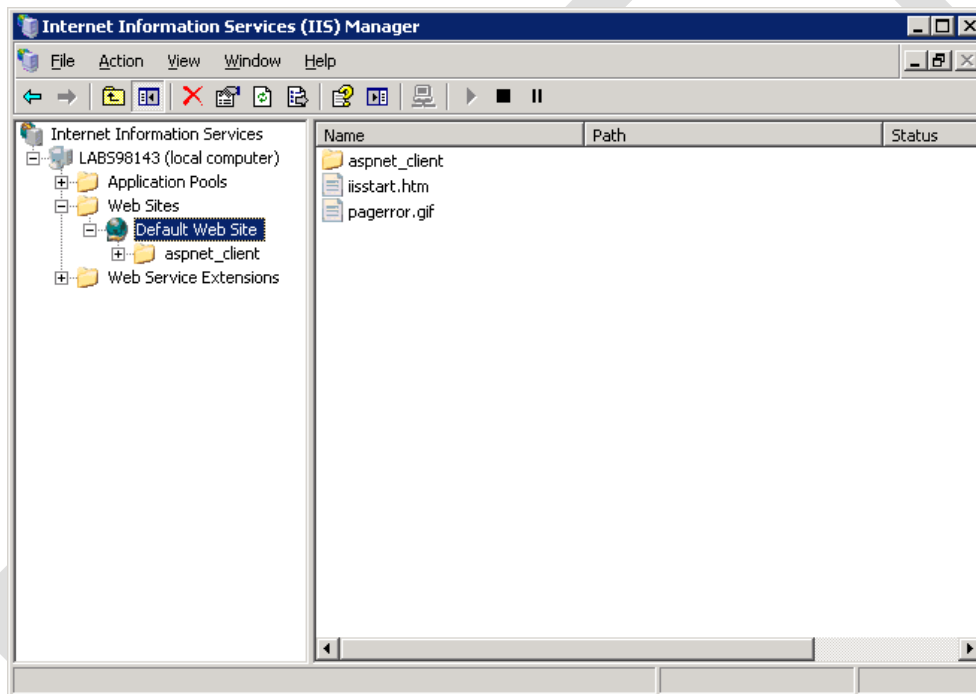


3. From the main menu, select Action > New > Virtual Directory.

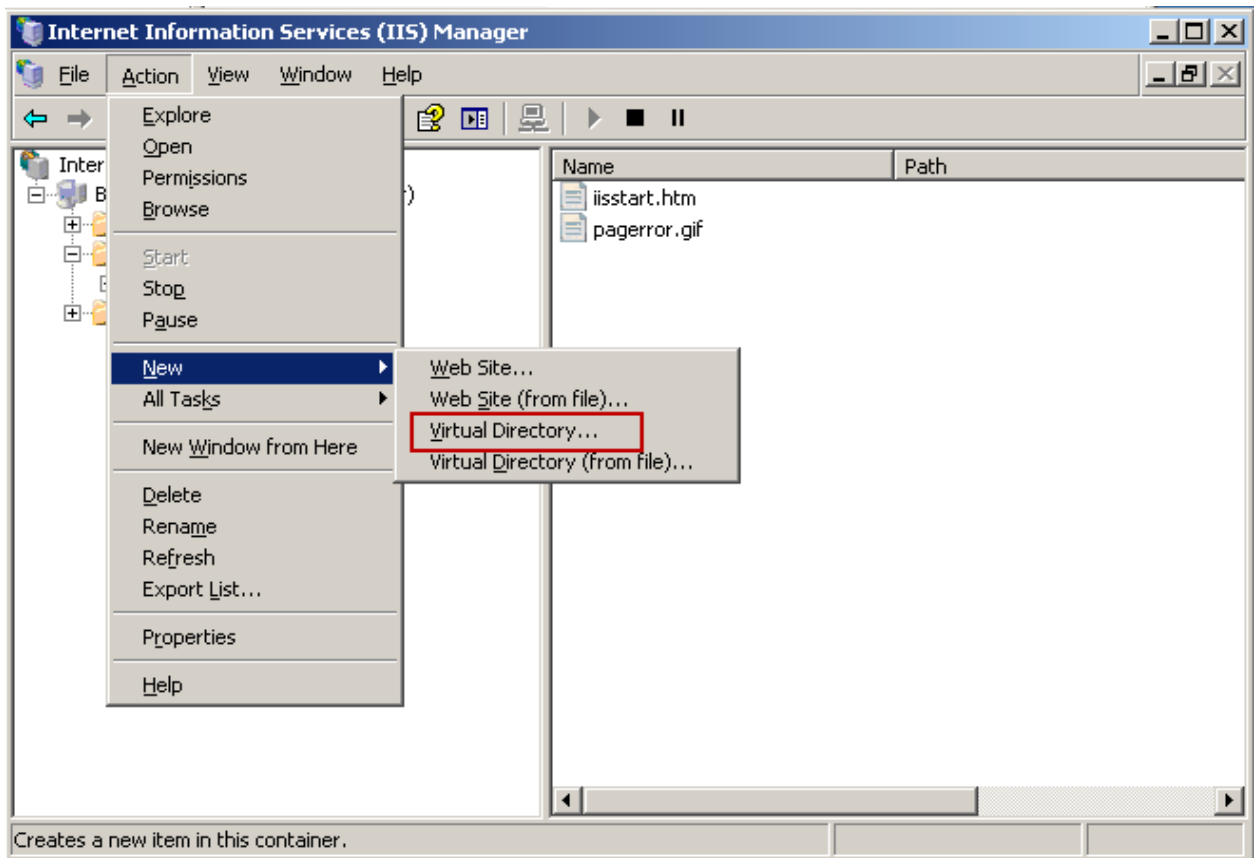


4. The Virtual Directory Creation wizard starts. Click the next button.




5. Name the virtual directory as RefDataService and then click the Next button.

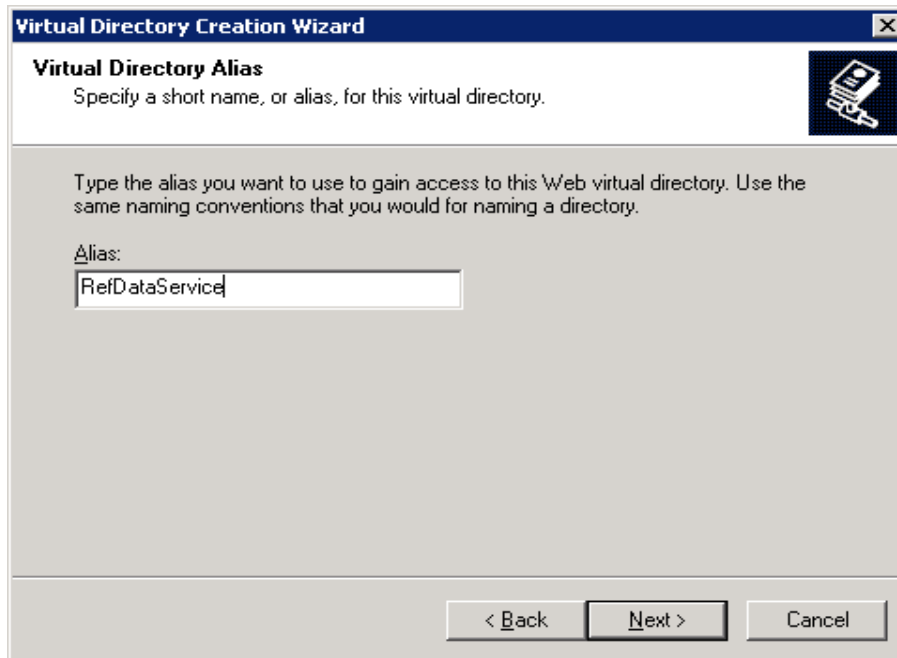


6. Browse to the iRingWeb\RefDataService folder (installed earlier).

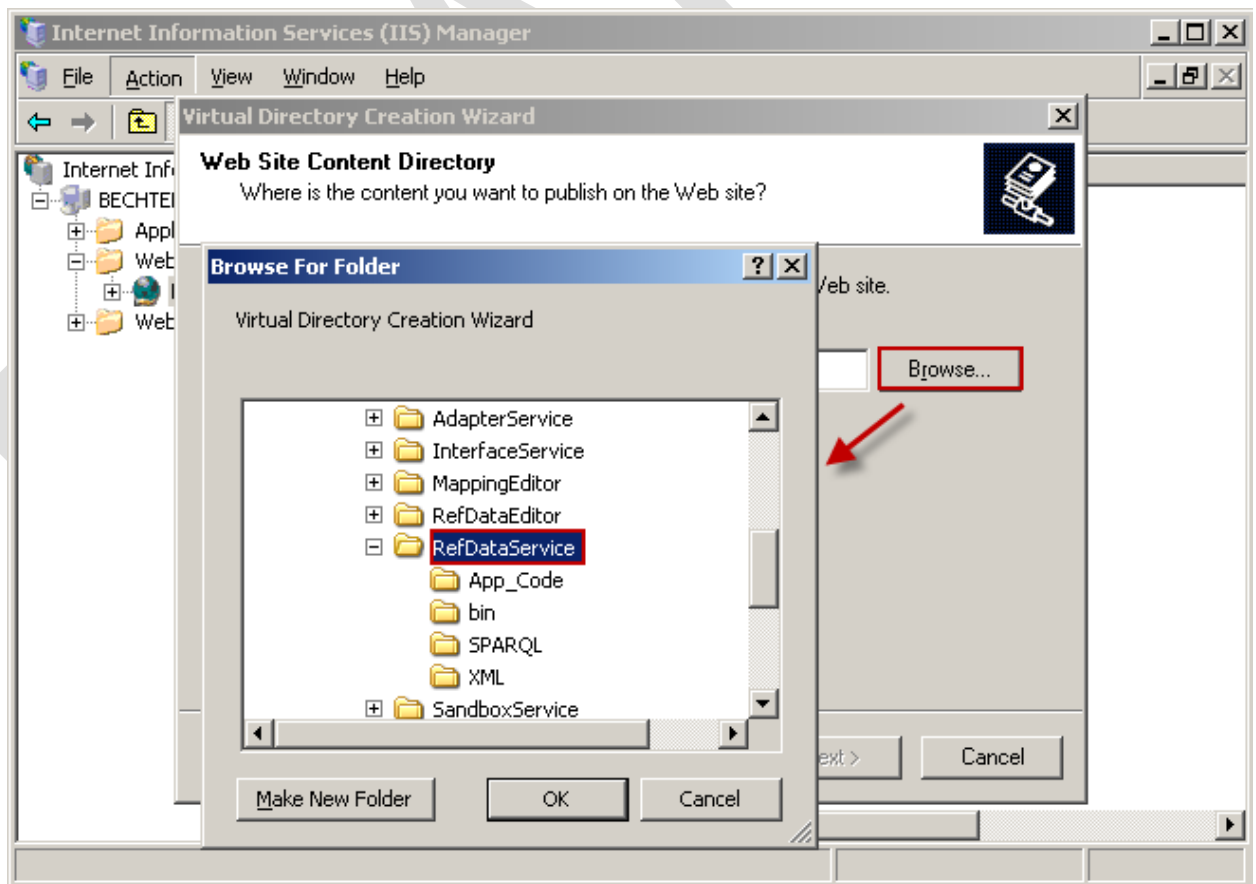

7. Click the Next button.

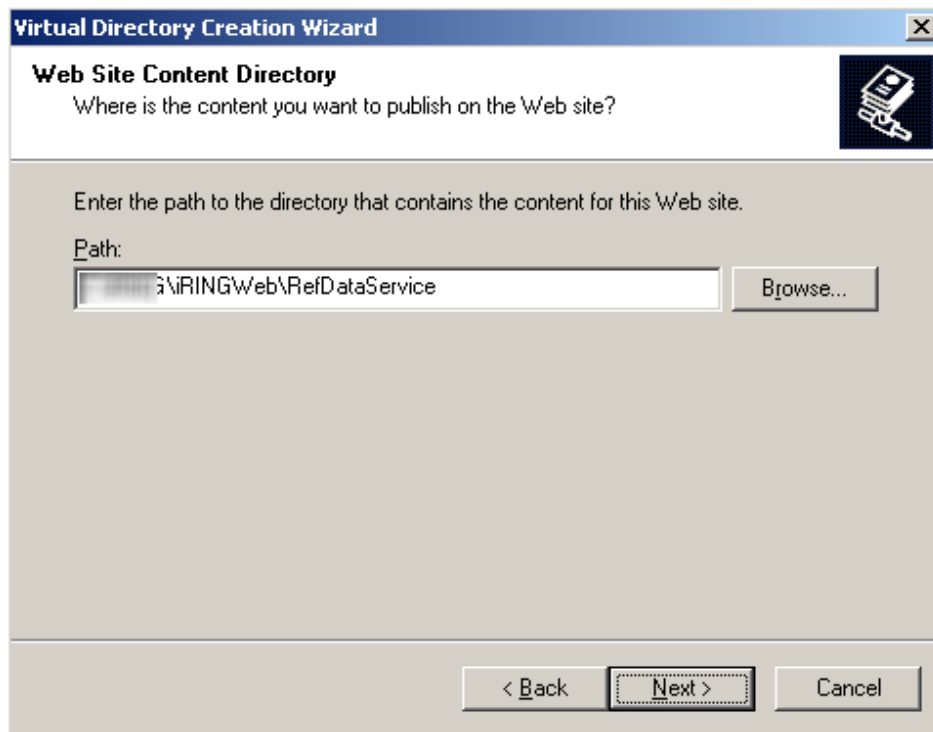


8. Select the permissions Read and Run Scripts and then click the Next button.

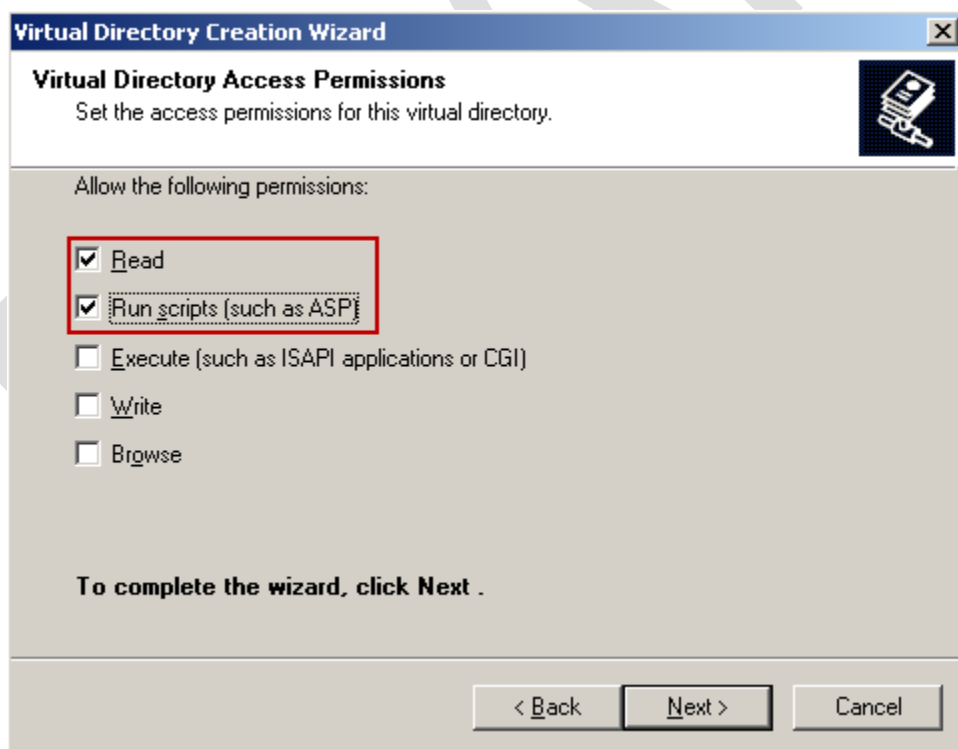


9. The virtual directory setup is complete. Click the Finish button to close the wizard.



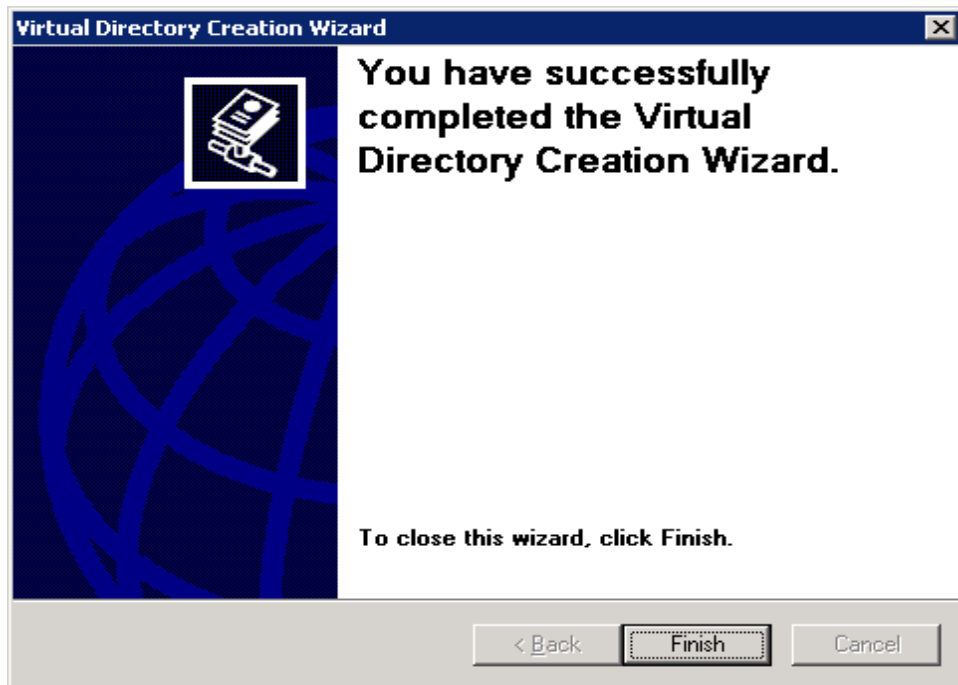

10. The virtual directory appears in the the target web site folder.

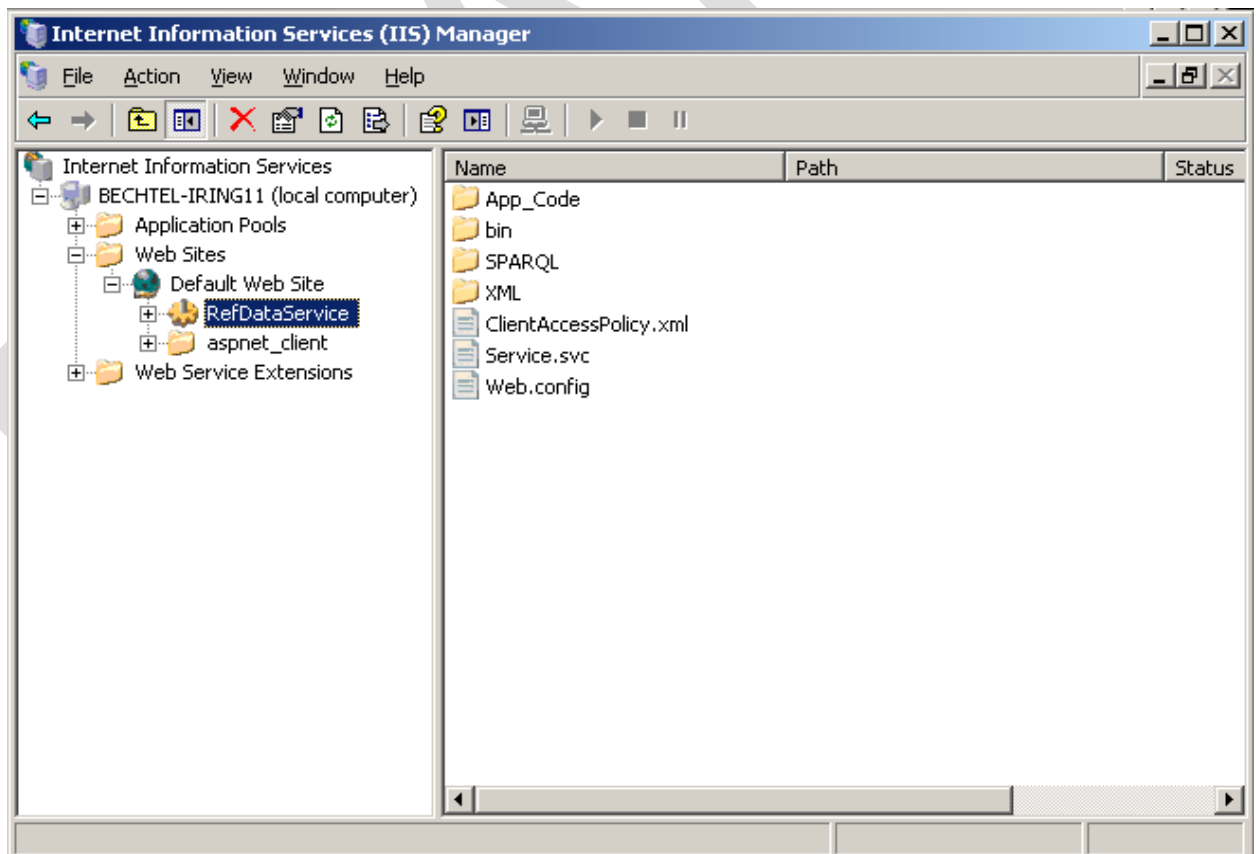


### 3.7 Configuring Reference Data Service

The following sections provide details for configuring the reference data service.

#### 3.7.1 Creating Credential Tokens

The parameters `RegistryCredentialToken` and `ProxyCredentialToken` in the `Web.config` provide credentials needed to access the internet (if the server is behind a firewall) and to generate IDs for new ISO 15926 classes. For security purposes, this information is encrypted with a FIPS 140-2 utility. The utility is called `EncryptCredentials` and it is located in `iRINGWeb\Tools`. The utility generates an encrypted string for the specified data.

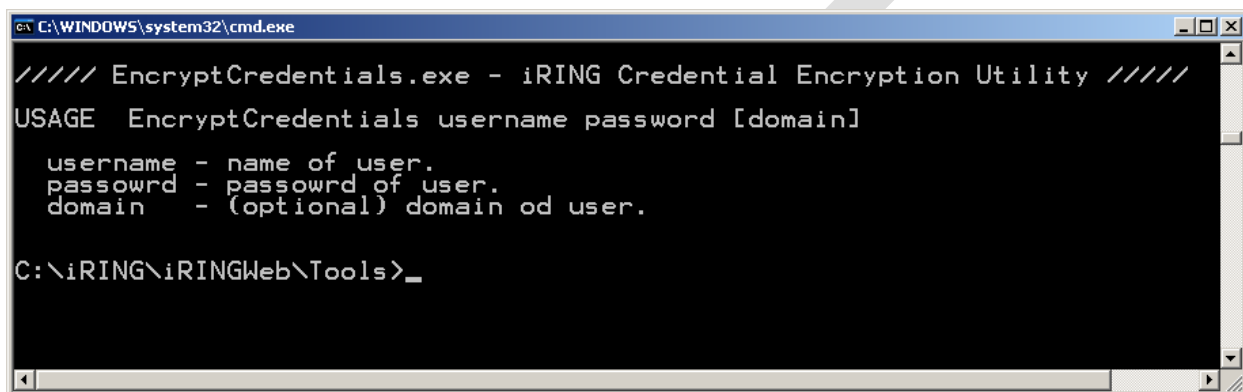

```
C:\WINDOWS\system32\cmd.exe

///// EncryptCredentials.exe - iRING Credential Encryption Utility /////
USAGE  EncryptCredentials username password [domain]

      username - name of user.
      password - password of user.
      domain   - (optional) domain of user.


C:\iRING\iRINGWeb\Tools>_
```

Use this utility when prompted to create encrypted tokens that will be stored in the `Web.config` file.


#### 3.7.2 Modify Reference Data Service Web.config

Modify the `RefDataService` `Web.config` file as follows.

1. Open the file `Web.config` file located in the `iRINGWeb\RefDataService` in a text editor.

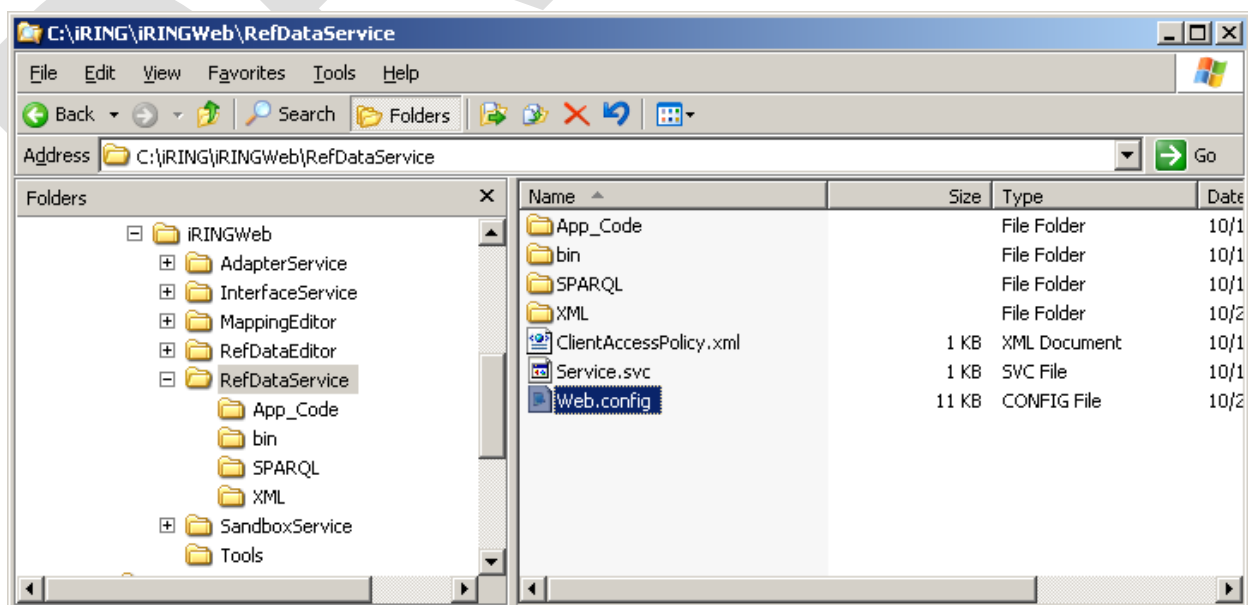


2. Credentials are needed to generate new IDs for classes, templates and roles. This requires a valid ids-adi identity. Create an encrypted token with the EncryptCredentials utility in iRingWeb\Tools. Enter the ids-adi account username and password. Copy the resulting encrypted string to the clipboard.

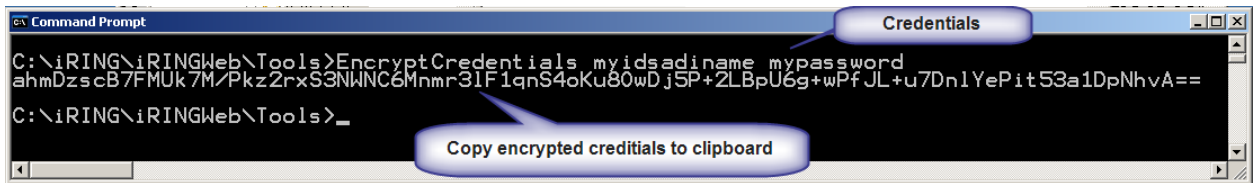

```
C:\iRING\iRINGWeb\Tools>EncryptCredentials myidsadiname mypassword
ahmDzscB7FMuk7M/Pkz2rxS3NkNC6Mnmr31F1qnS4oKu80wDj5P+2LBpU6g+wPfJL+u7Dn1YePit53a1DpNhvA==
C:\iRING\iRINGWeb\Tools>
```

3. In the file Web.config, locate the RegistryCredentialToken key in appSettings. Paste the token in the value between the double quotes. The RegistryCredentialToken value cannot be empty.

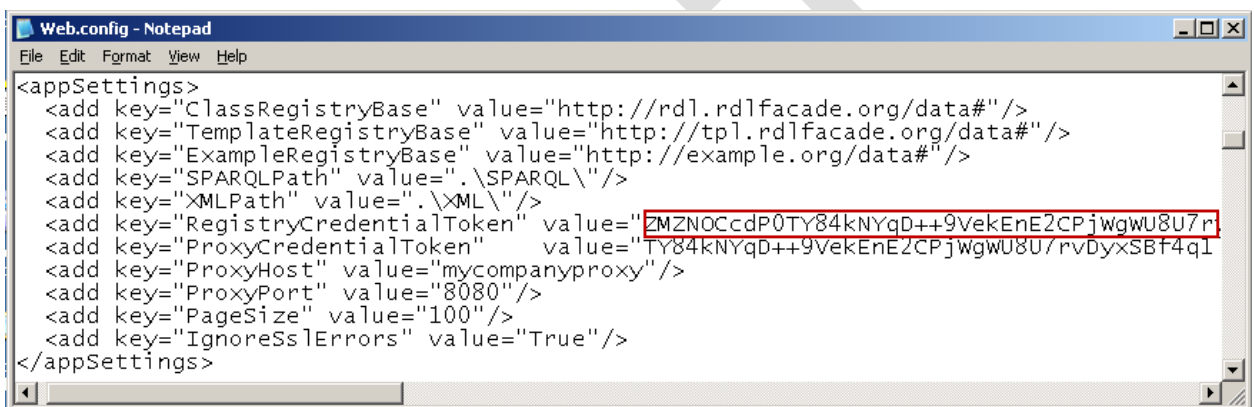


```
<appSettings>
  <add key="ClassRegistryBase" value="http://rdl.rdl facade.org/data#" />
  <add key="TemplateRegistryBase" value="http://tpl.rdl facade.org/data#" />
  <add key="ExampleRegistryBase" value="http://example.org/data#" />
  <add key="SPARQLPath" value=".\SPARQL\" />
  <add key="XMLPath" value=".\XML\" />
  <add key="RegistryCredentialToken" value="ZMZNOccDP0TY84kNYqD++9VekEnE2CPjWgWU8U7r" />
  <add key="ProxyCredentialToken" value="TY84kNYqD++9VekEnE2CPjWgWU8U7rvDyxSBf4q1" />
  <add key="ProxyHost" value="mycompanyproxy" />
  <add key="ProxyPort" value="8080" />
  <add key="PageSize" value="100" />
  <add key="IgnoreSslErrors" value="True" />
</appSettings>
```

4. If your server is behind a firewall, then credentials are needed to access the internet. Create an encrypted token with the EncryptCredentials utility in iRingWeb\Tools. Enter the username, password and optionally the domain. Copy the resulting encrypted string to the clipboard.




```
C:\>cd iRING\iRINGWeb\Tools
C:\iRING\iRINGWeb\Tools>EncryptCredentials myname mypassword mydomain
TY84kNYqD++9VekEnE2CPjWgWU8U7rvDyxSBf4q1loKn6ZF5ZMN0CcdP0k01580Vq470XPTi6ahEc8yoKh0cw==
C:\iRING\iRINGWeb\Tools>
```

5. In the file Web.config, locate the ProxyCredentialToken key in appSettings. Paste the token in the value between the double quotes. **Note:** If proxy credentials are not required, then leave the value empty.

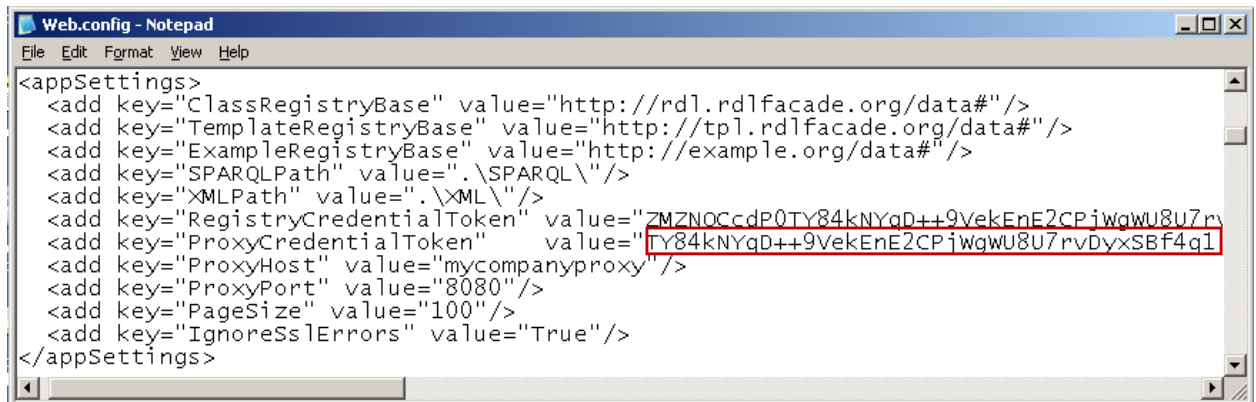


```
<?xml version='1.0' encoding='utf-8'>
<appSettings>
  <add key="ClassRegistryBase" value="http://rd1.rdlfacade.org/data#" />
  <add key="TemplateRegistryBase" value="http://tpl.rdlfacade.org/data#" />
  <add key="ExampleRegistryBase" value="http://example.org/data#" />
  <add key="SPARQLPath" value=".\SPARQL\" />
  <add key="XMLPath" value=".\XML\" />
  <add key="RegistryCredentialToken" value="7MZNOccDP0TY84kNYqD++9VekEnE2CPjWqWU8U7rvDyxSBf4q1" />
  <add key="ProxyCredentialToken" value="TY84kNYqD++9VekEnE2CPjWqWU8U7rvDyxSBf4q1" />
  <add key="ProxyHost" value="mycompanyproxy" />
  <add key="ProxyPort" value="8080" />
  <add key="PageSize" value="100" />
  <add key="IgnoreSSLerrors" value="True" />
</appSettings>
```

6. In the file Web.config, locate the ProxyHost key in appSettings. Enter the ProxyHost needed to access the internet. This can be found in Internet Options on the Connections tab in the LAN settings.

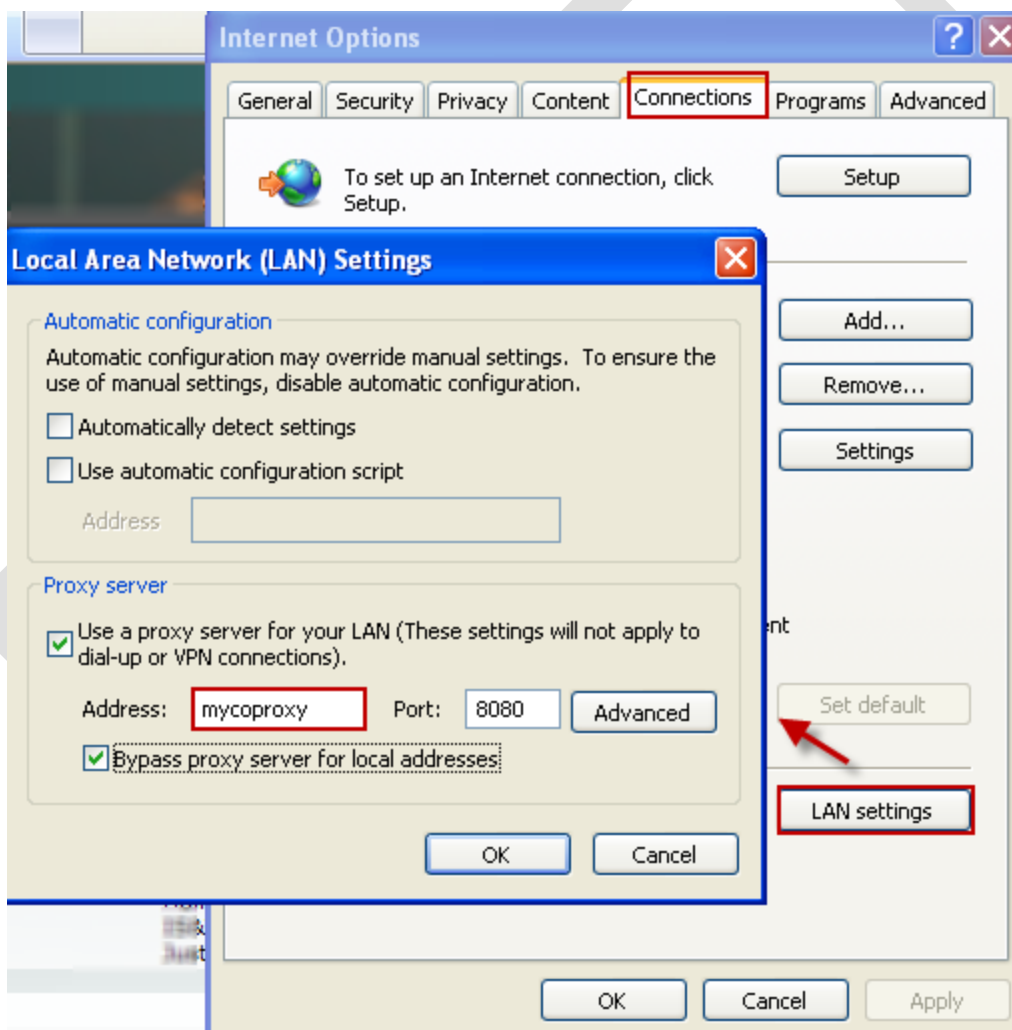


7. Enter the ProxyHost in the value between the double quotes. If there is no ProxyHost, then leave the value empty.

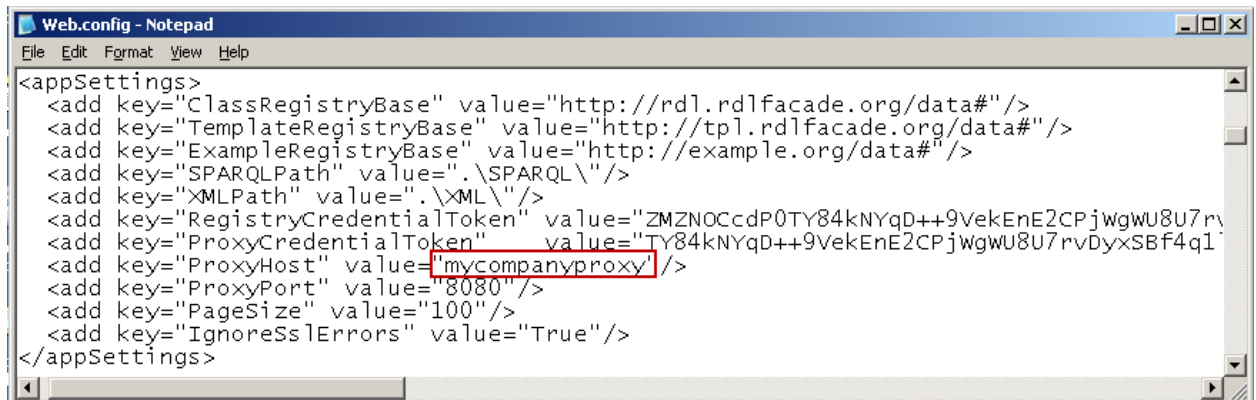


```
<?xml version='1.0' encoding='utf-8' ?>
<configuration>
  <appSettings>
    <add key="ClassRegistryBase" value="http://rdl.rdlfacade.org/data#" />
    <add key="TemplateRegistryBase" value="http://tpl.rdlfacade.org/data#" />
    <add key="ExampleRegistryBase" value="http://example.org/data#" />
    <add key="SPARQLPath" value=".\SPARQL\" />
    <add key="XMLPath" value=".\XML\" />
    <add key="RegistryCredentialToken" value="ZMZNOCcdP0TY84kNYqD++9VekEnE2CPjWgWU8U7rv" />
    <add key="ProxyCredentialToken" value="TY84kNYqD++9VekEnE2CPjWgWU8U7rvDyxSBf4q1" />
    <add key="ProxyHost" value="mycompanyproxy" />
    <add key="ProxyPort" value="8080" />
    <add key="PageSize" value="100" />
    <add key="IgnoreSslErrors" value="True" />
  </appSettings>
  <!-- Other configuration elements -->
</configuration>
```

8. In the file Web.config, locate the ProxyPort key in appSettings. Enter the ProxyPort needed to access the internet. This can be found in Internet Options on the Connections tab in the LAN settings.

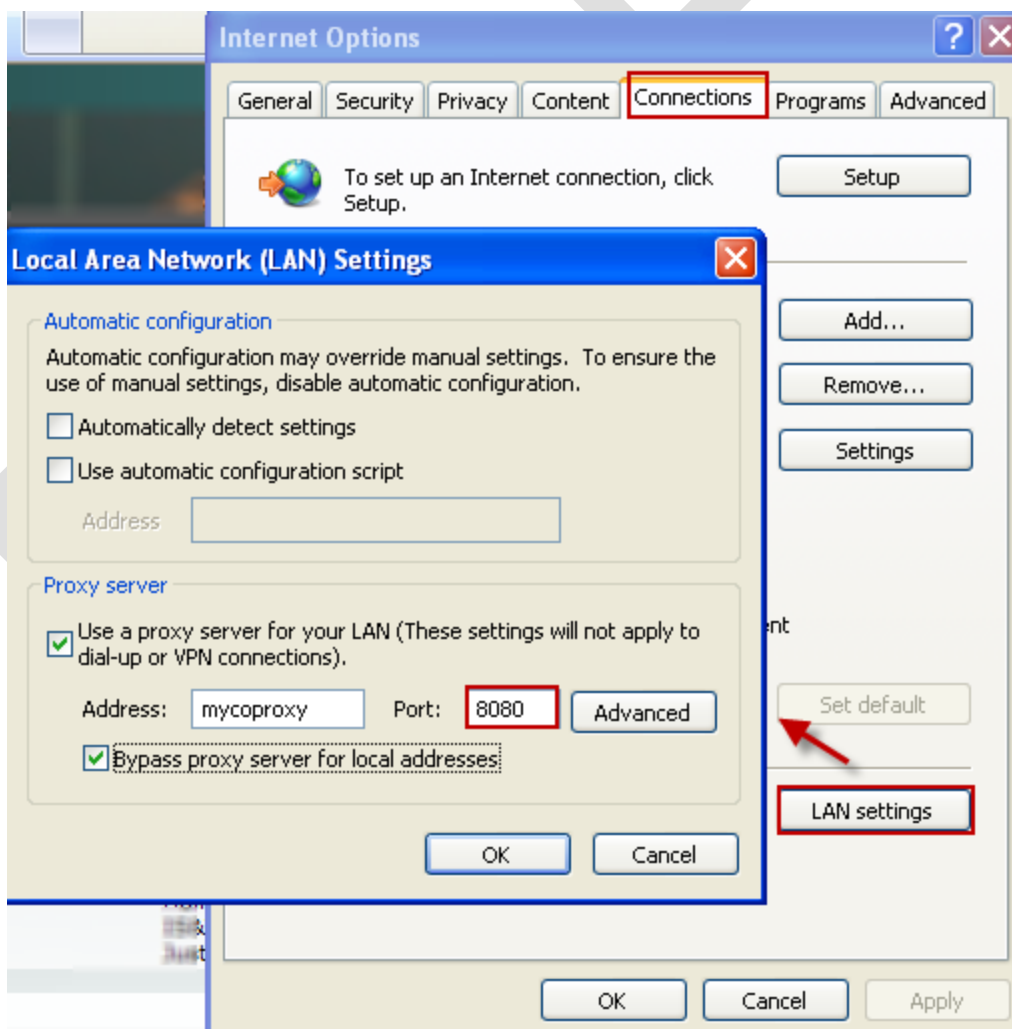

9. Enter the ProxyPort in the value between the double quotes. If there is no ProxyPort, then leave the value empty.

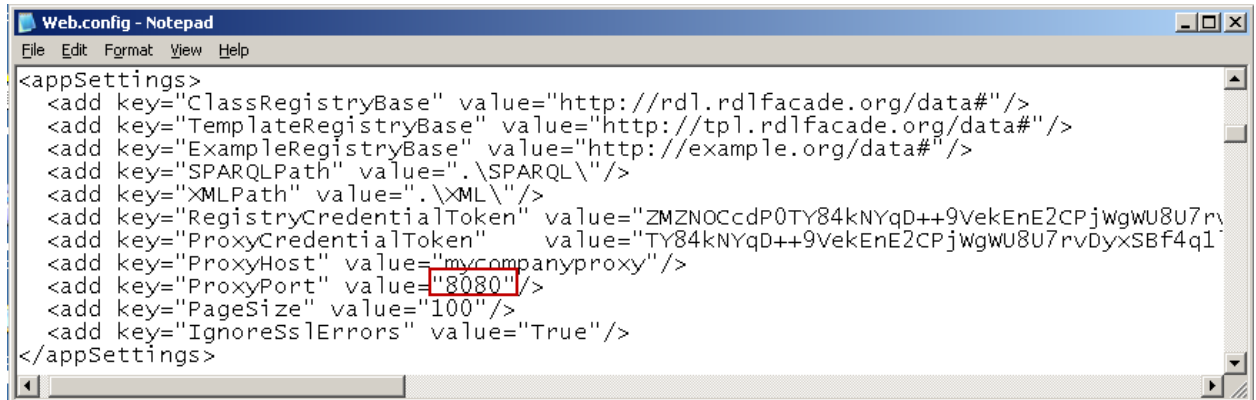


```
<appSettings>
  <add key="ClassRegistryBase" value="http://rd1.rdlfacade.org/data#" />
  <add key="TemplateRegistryBase" value="http://tpl.rdlfacade.org/data#" />
  <add key="ExampleRegistryBase" value="http://example.org/data#" />
  <add key="SPARQLPath" value=".\SPARQL\" />
  <add key="XMLPath" value=".\XML\" />
  <add key="RegistryCredentialToken" value="ZMZNOCdP0TY84kNYqD++9VekEnE2CPjWgWU8U7rv" />
  <add key="ProxyCredentialToken" value="TY84kNYqD++9VekEnE2CPjWgWU8U7rvDyxSBf4q1" />
  <add key="ProxyHost" value="mycompanyproxy" />
  <add key="ProxyPort" value="8080" />
  <add key="PageSize" value="100" />
  <add key="IgnoreSslErrors" value="True" />
</appSettings>
```


10. Save the changes to the file Web.config and close it.

### 3.8 Testing Reference Data Service

Test the Reference Data Service for IIS and compilation by opening your browser on the server and entering the address <http://localhost/RefDataService/Service.svc>. You should see the following.

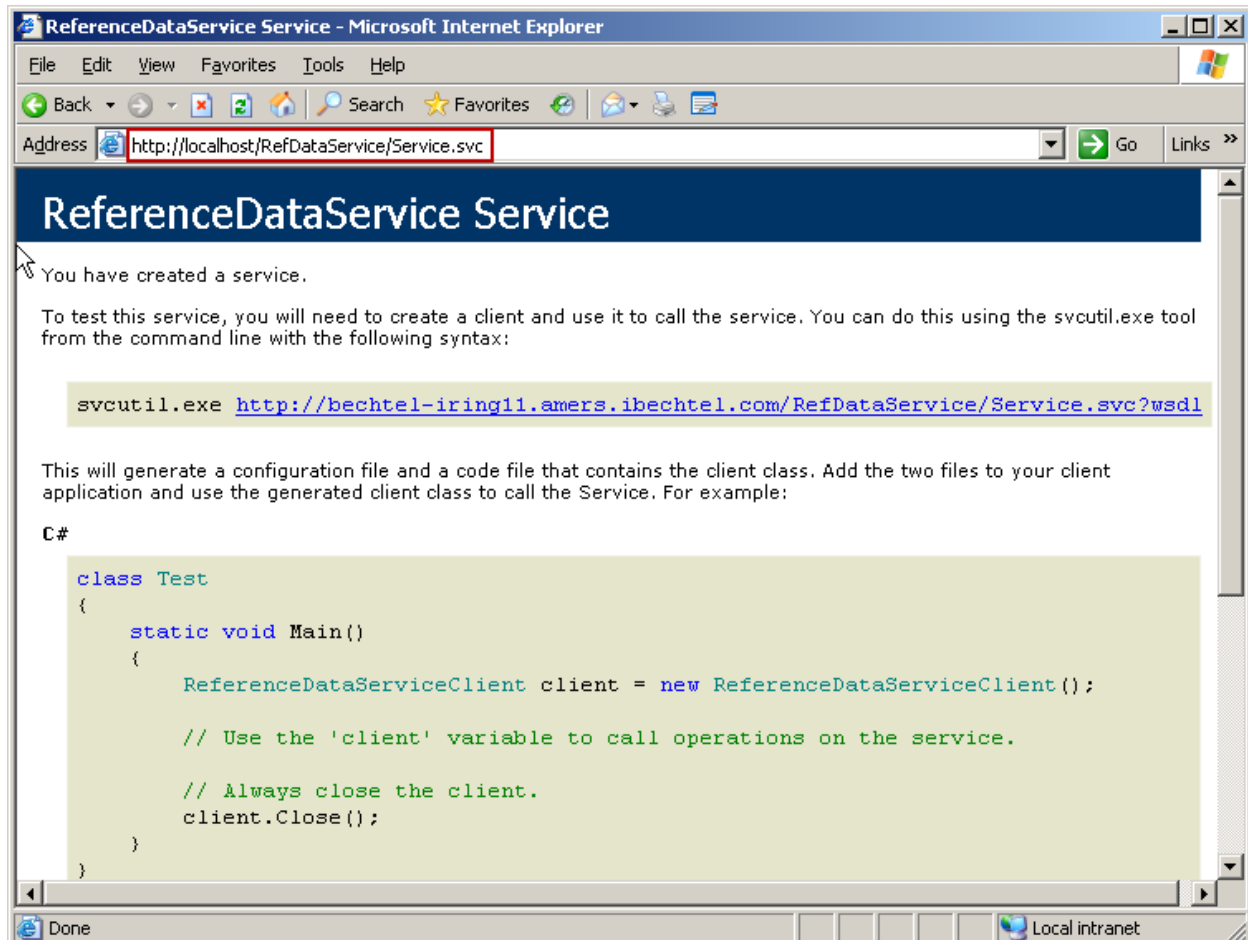


Test the Reference Data Service with each repository and federate the results by opening your browser on the server and entering the address <http://localhost/RefDataService/Service.svc/search/pump>. You should see the following.

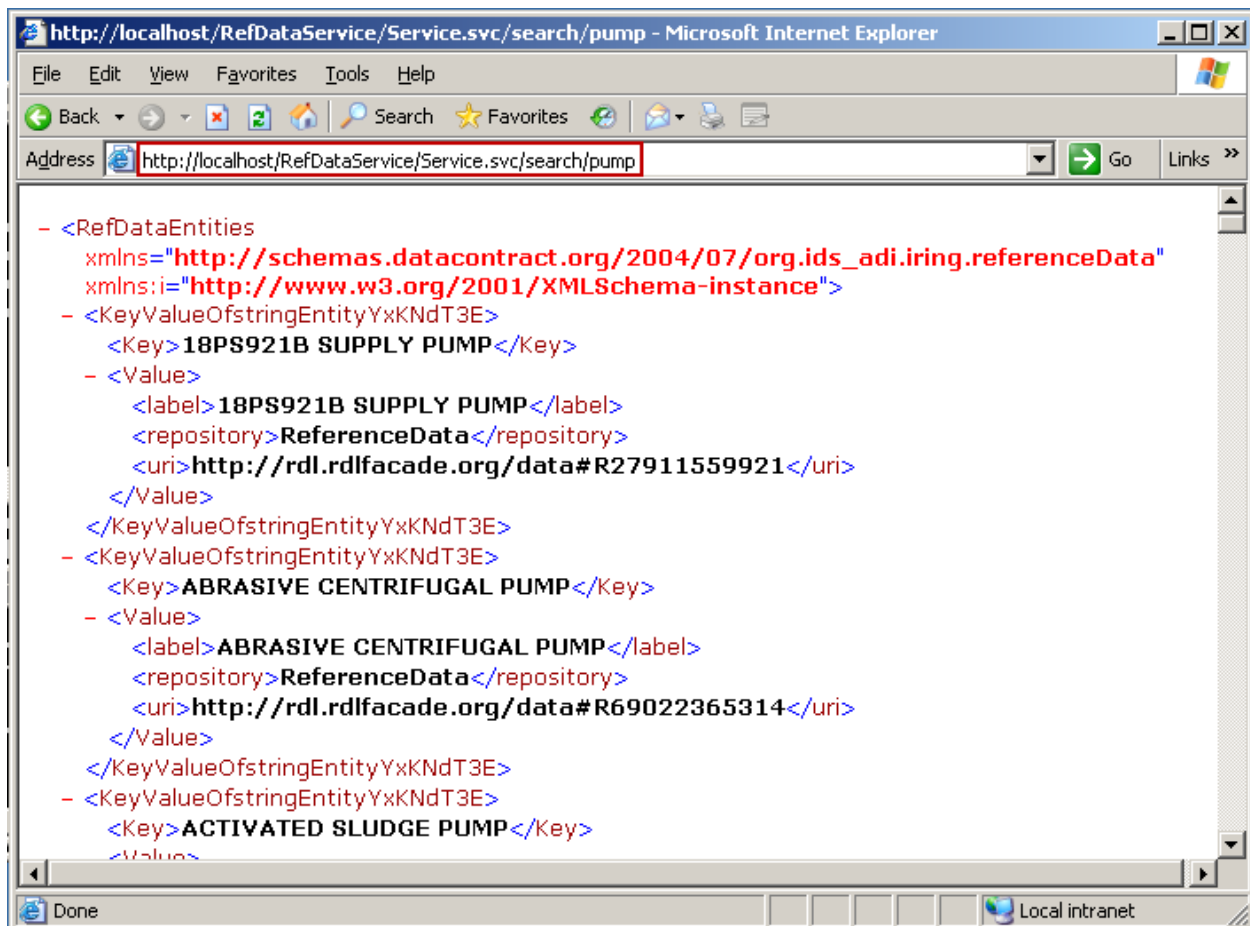

### 3.9 Creating Virtual Directory for Reference Data Editor


Create the RefDataEditor virtual directory in IIS by performing the following steps.

1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

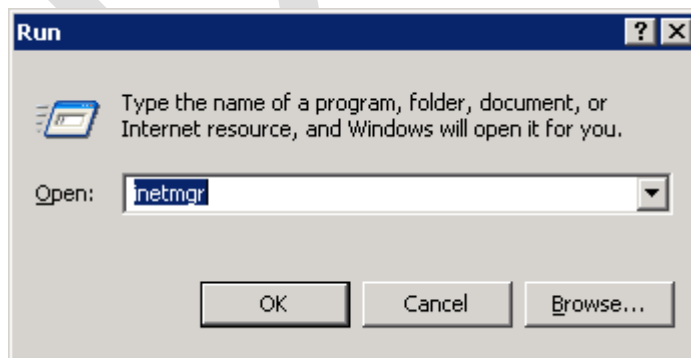


2. In IIS Manager, select the target web site in the Web Sites folder.



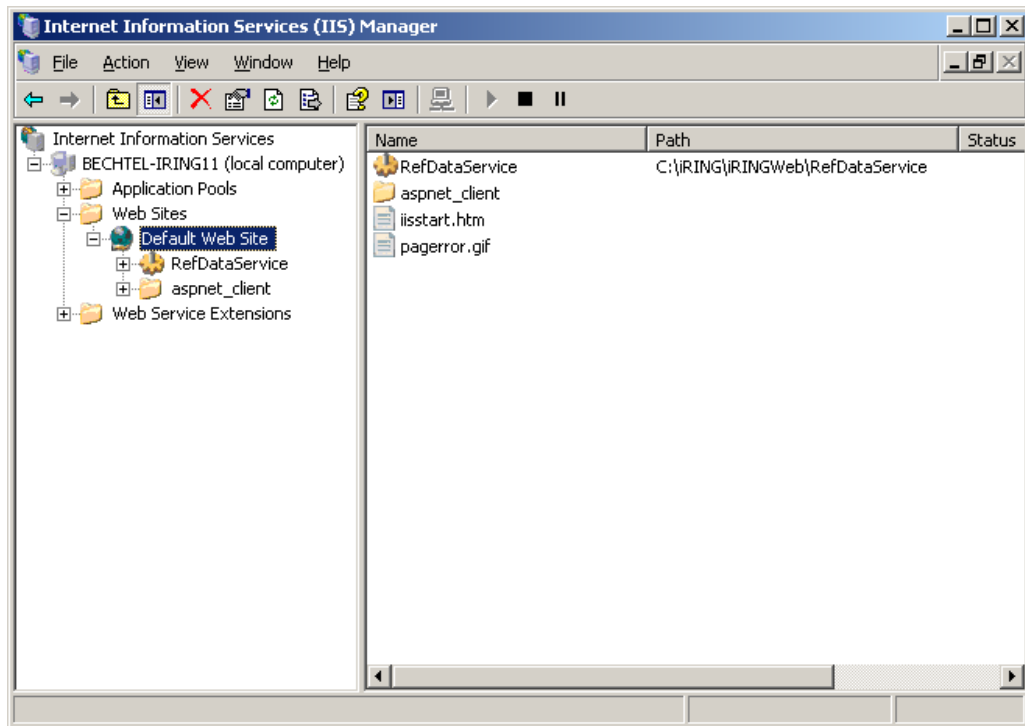


- From the main menu, select Action > New > Virtual Directory.

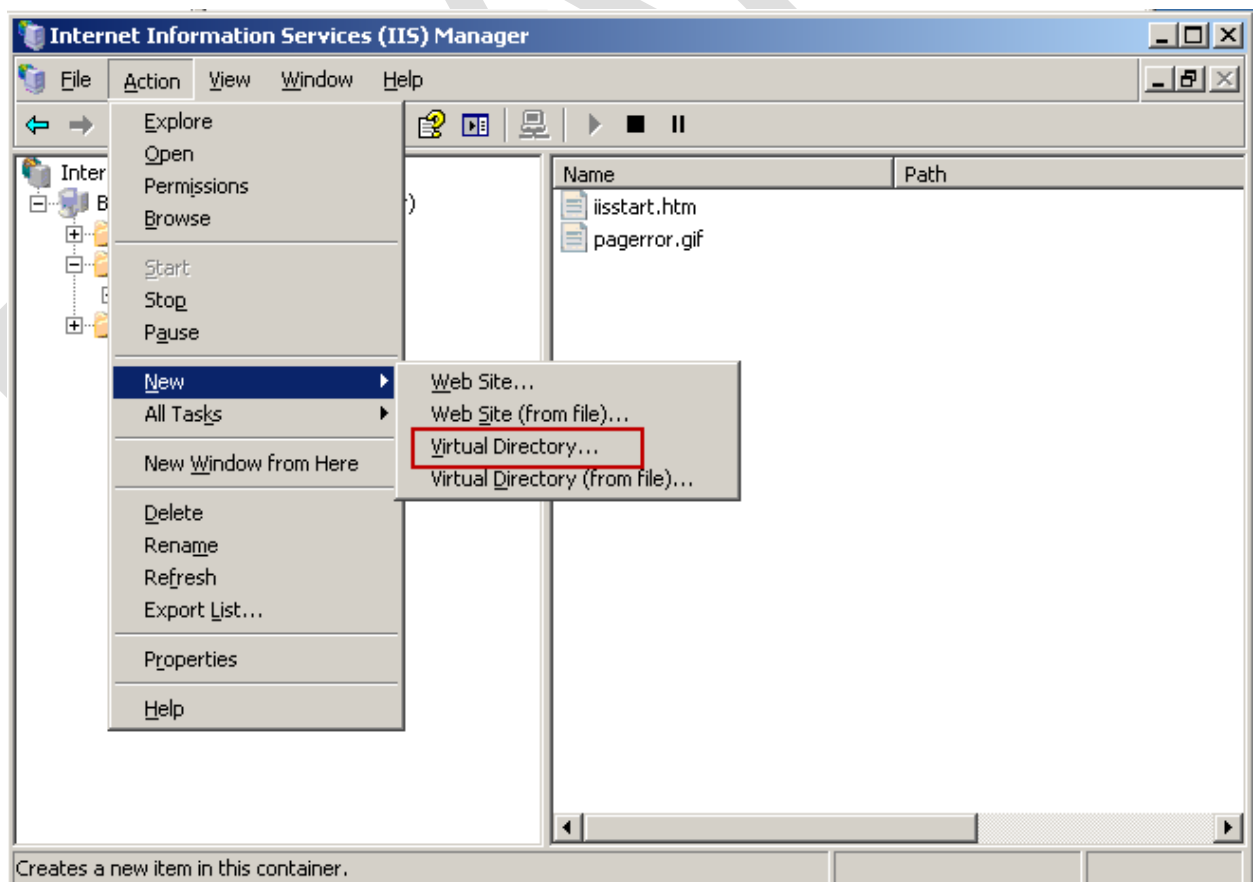


4. The Virtual Directory Creation wizard starts. Click the next button.



5. Name the virtual directory as RefDataEditor and then click the Next button.

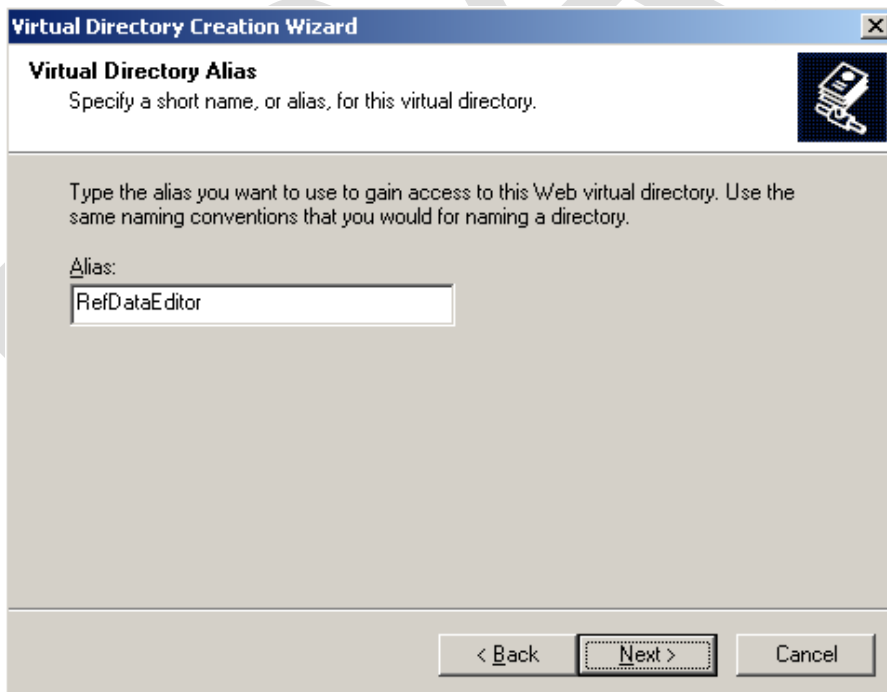

6. Browse to the iRingWeb\ RefDataEditor folder (installed earlier).

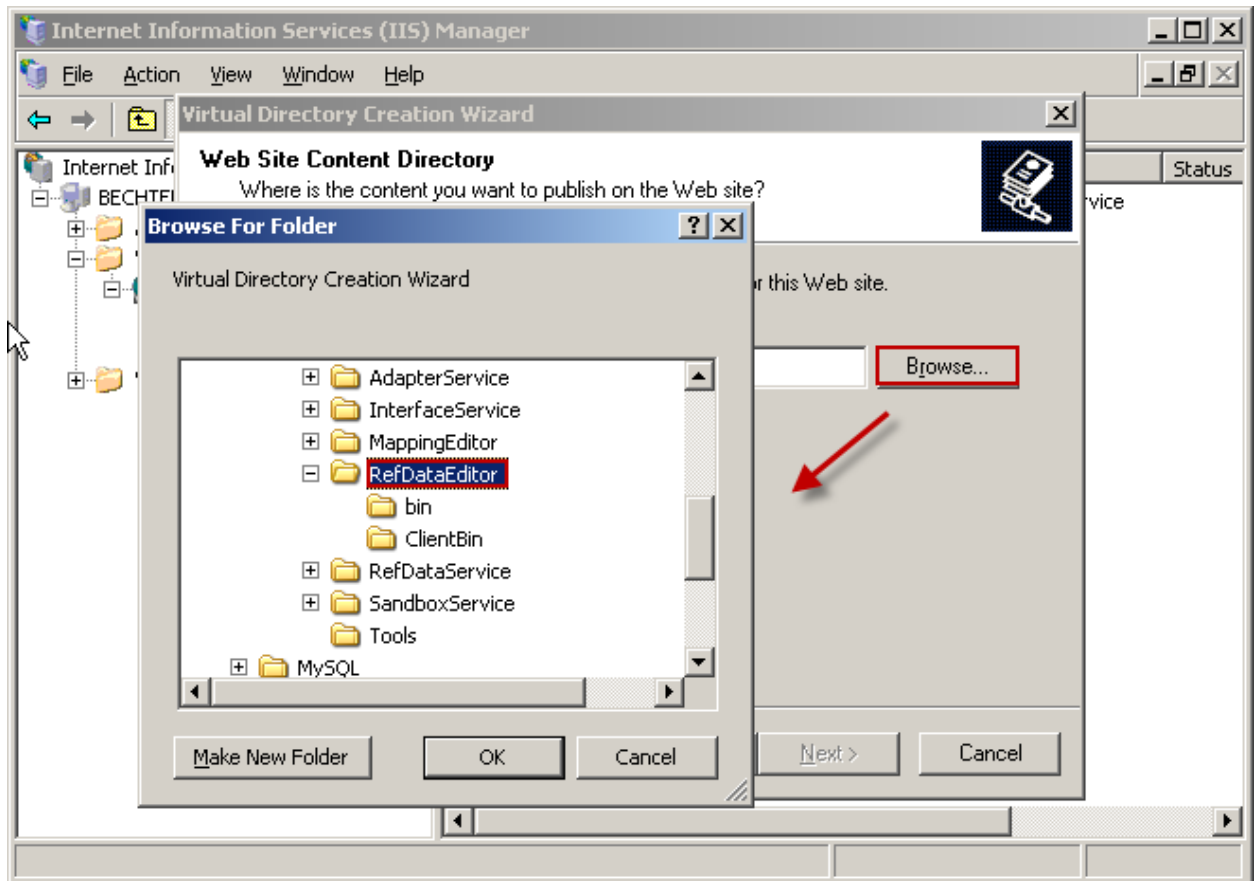

7. Click the Next button.

The screenshot shows the 'Virtual Directory Creation Wizard' window, specifically the 'Web Site Content Directory' step. The title bar reads 'Virtual Directory Creation Wizard'. The main heading is 'Web Site Content Directory' with a sub-question 'Where is the content you want to publish on the Web site?'. Below this, it says 'Enter the path to the directory that contains the content for this Web site.' There is a text box labeled 'Path:' containing the text '\\RING\\Web\\RefDataEditor'. To the right of the text box is a 'Browse...' button. At the bottom of the window are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a dashed border.


8. Select the permissions Read and Run Scripts and then click the Next button.

The screenshot shows the 'Virtual Directory Creation Wizard' window, specifically the 'Virtual Directory Access Permissions' step. The title bar reads 'Virtual Directory Creation Wizard'. The main heading is 'Virtual Directory Access Permissions' with a sub-instruction 'Set the access permissions for this virtual directory.' Below this, it says 'Allow the following permissions:'. There is a list of permissions with checkboxes: 'Read' (checked), 'Run scripts (such as ASP)' (checked), 'Execute (such as ISAPI applications or CGI)' (unchecked), 'Write' (unchecked), and 'Browse' (unchecked). The 'Read' and 'Run scripts (such as ASP)' checkboxes are enclosed in a red rectangular box. At the bottom of the window are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a dashed border.

9. The virtual directory setup is complete. Click the Finish button to close the wizard.



10. The virtual directory appears in the the target web site folder.

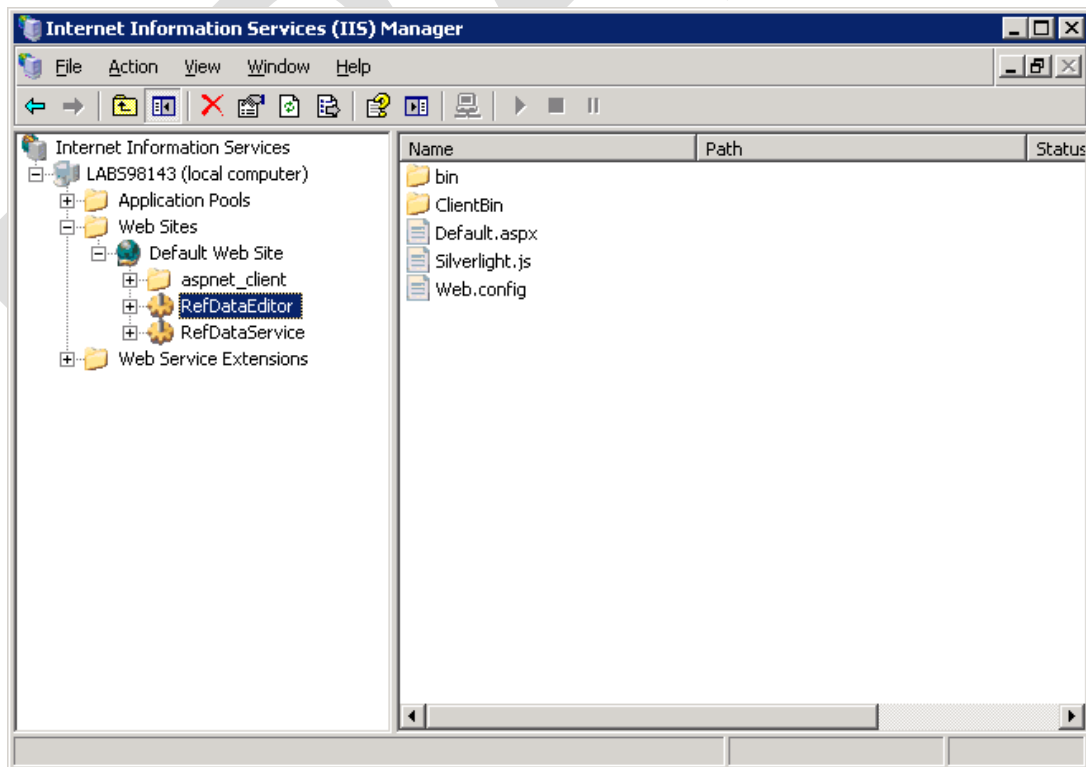


### 3.10 Configuring the Reference Data Editor

As long as the **iRINGTools** adapter and sandbox are on the same server, then no additional configuration is required. Otherwise the RefDataEditor Web.config file will need modifying. It is similar to what was done for the RefDataService. Consult the **iRINGTools** User Group for details on this advance setup.


### 3.11 Testing Reference Data Editor

The Reference Data Editor can be tested either from the server or a client computer. Whichever is used will require Microsoft Silverlight. If Microsoft Silverlight is not installed, a prompt will be provided to install it.


Test the Reference Data Editor by opening your browser and entering the following address <http://localhost/RefDataEditor/Default.aspx>. You should see the following (or something very similar):

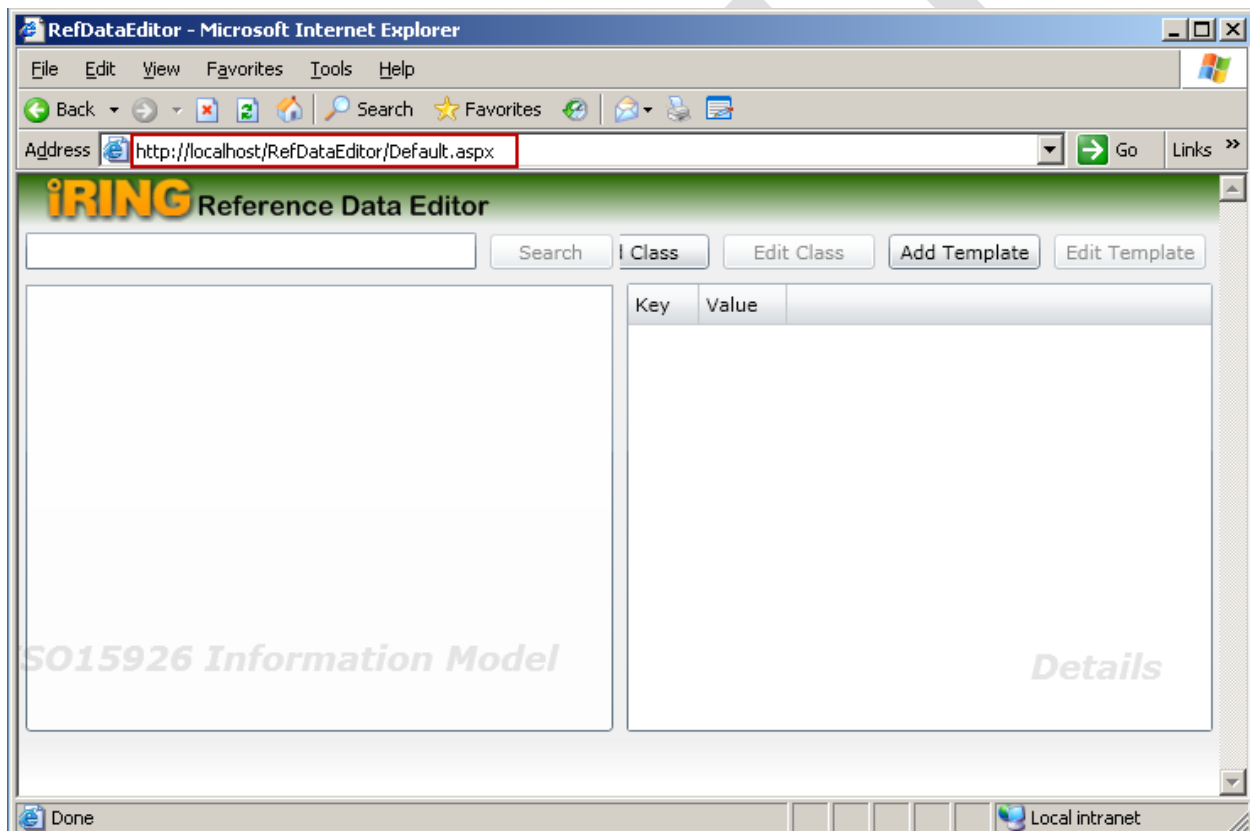

If Microsoft Silverlight is not installed, you should see the following. Install Microsoft Silverlight if necessary.

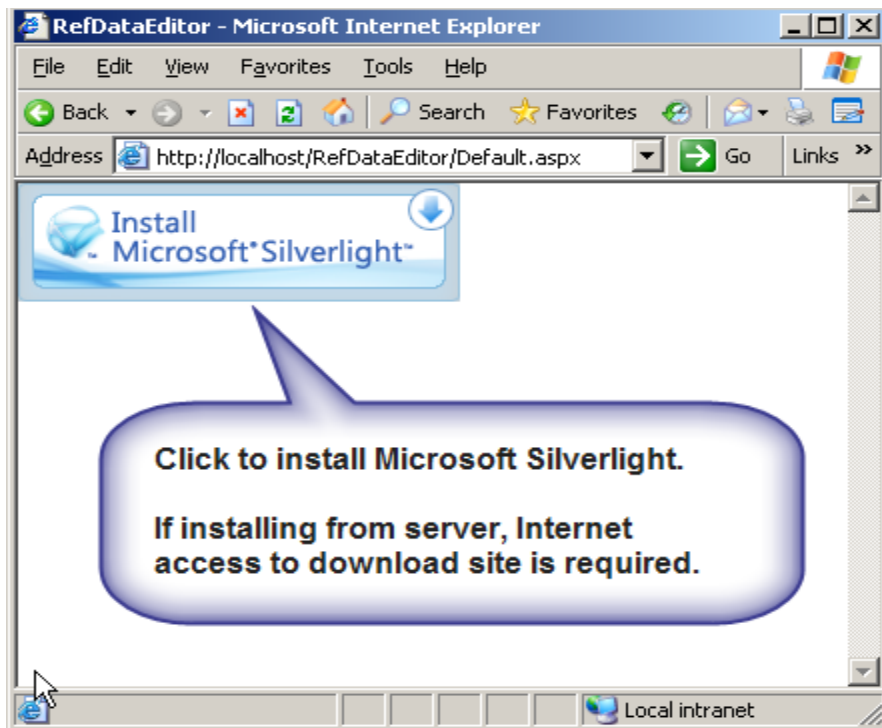

Finally, to verify the iRingSandBox with connection to the RDS-WIP, enter search criteria in the Reference Data Editor (e.g., Pump) and click on the Search button. You should see the following (or similar):

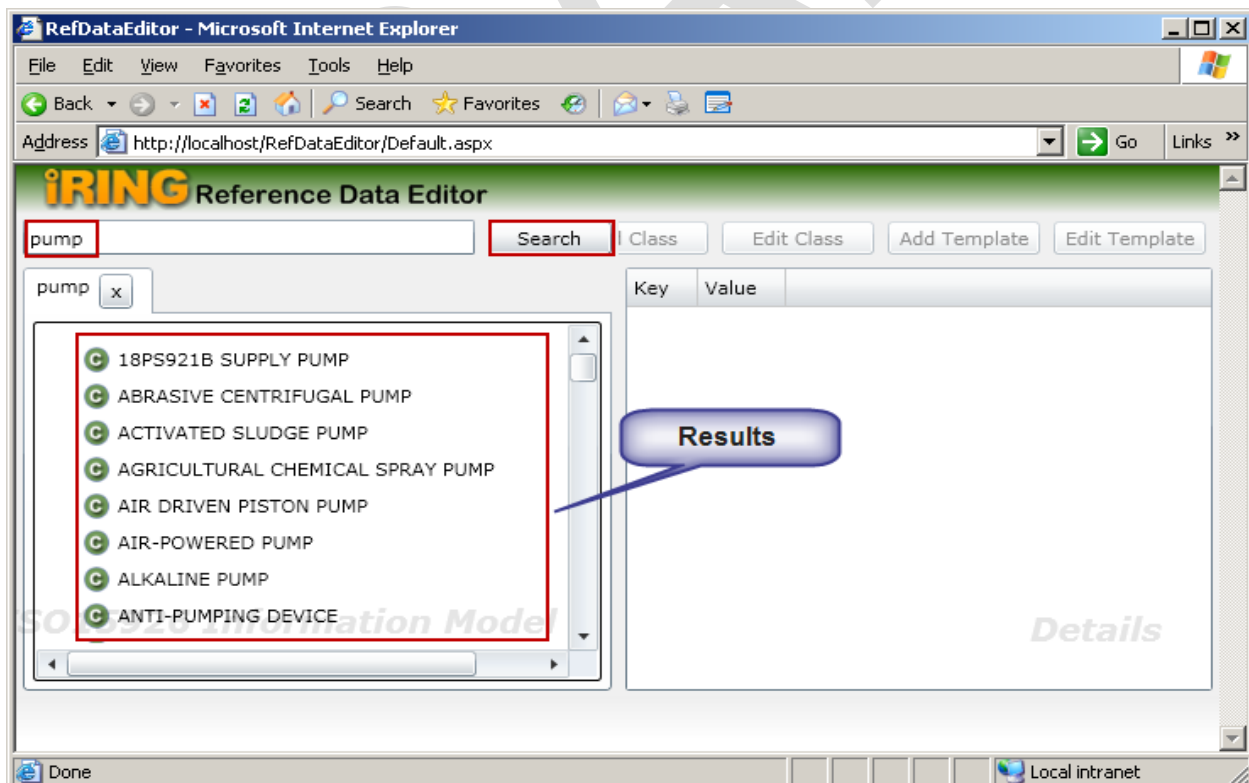

This completes the installation of iRingSandBox.

## 4 Installing *iRINGTools* Adapter

---

The following sections will describe the *iRINGTools* Adapter components and provide detailed instructions on how to install and configure each component.


### 4.1 *iRINGTools* Adapter Components

The remaining components in the *iRINGTools* Adapter are all web applications that will need to be setup and configured in IIS.

The *iRINGTools* Adapter is comprised of three components:

1. Interface Service
2. Adapter Service
3. Mapping Editor

These components interact with each other as well as the *iRINGTools* Sandbox.

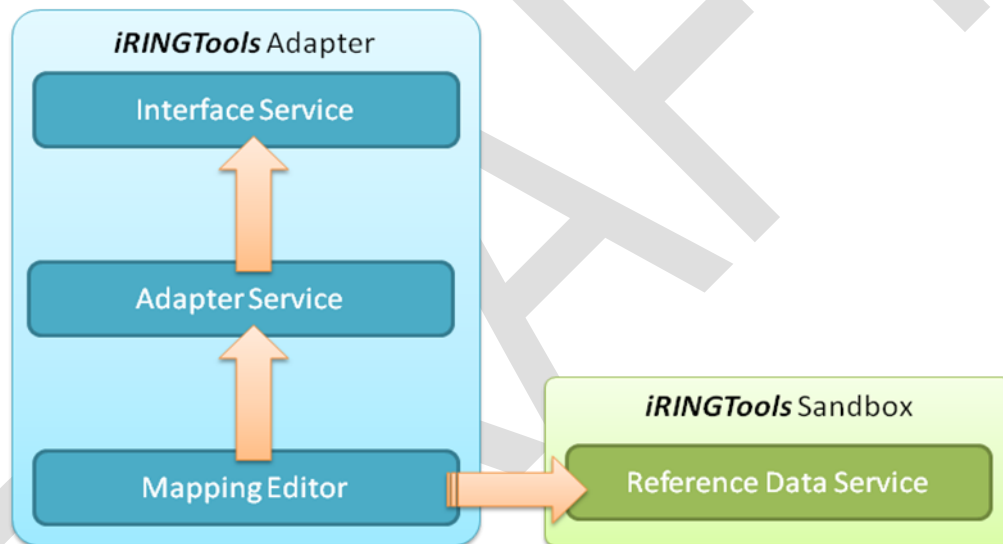

The Mapping Editor provides a graphical user interface for mapping your database to reference data.

### 4.2 Localhost versus Server Hostname


The *iRINGTools* Adapter webconfig files use localhost as the initial hostname. It is best to keep localhost as the hostname during installation to making testing easier. Instructions will be provided later in this document on where and how to change the hostname.




### 4.3 Creating the AdapterService Virtual Directory

Create the AdapterService virtual directory in IIS by performing the following steps.


1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

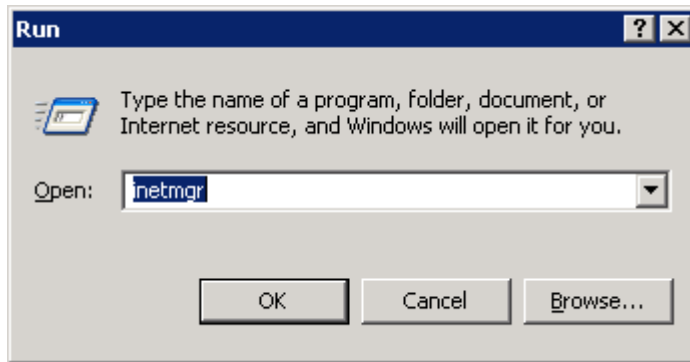

2. In IIS Manager, select the target web site in the Web Sites folder.

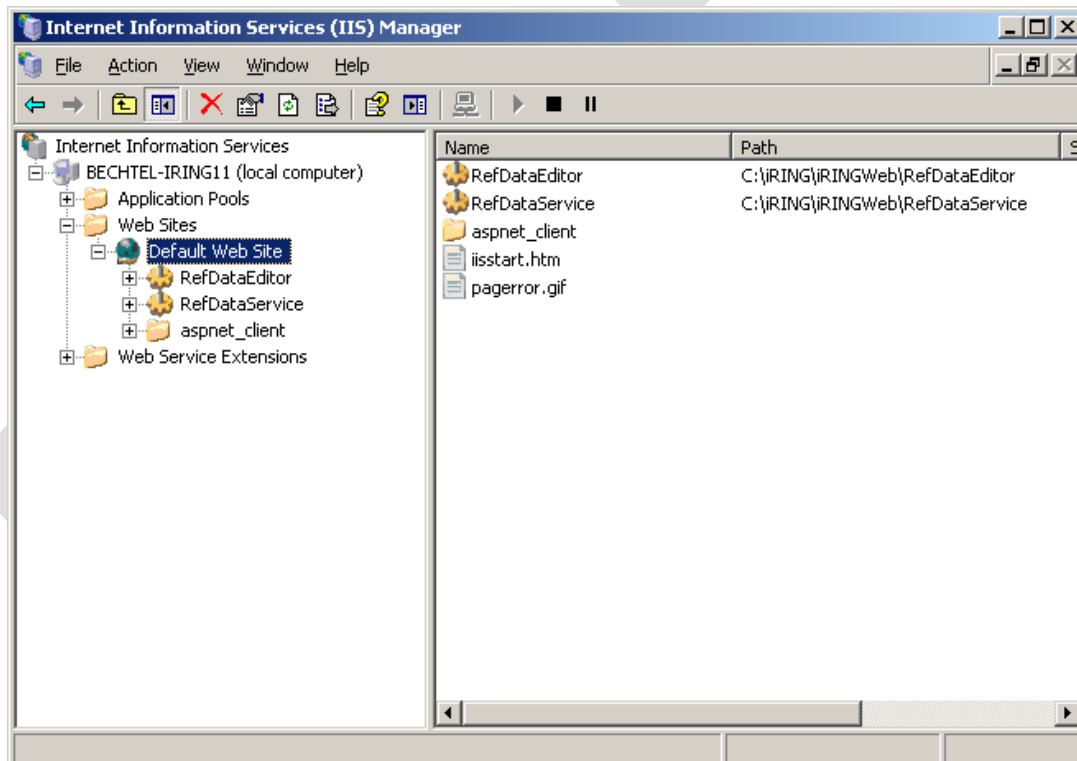


3. From the main menu, select Action > New > Virtual Directory.

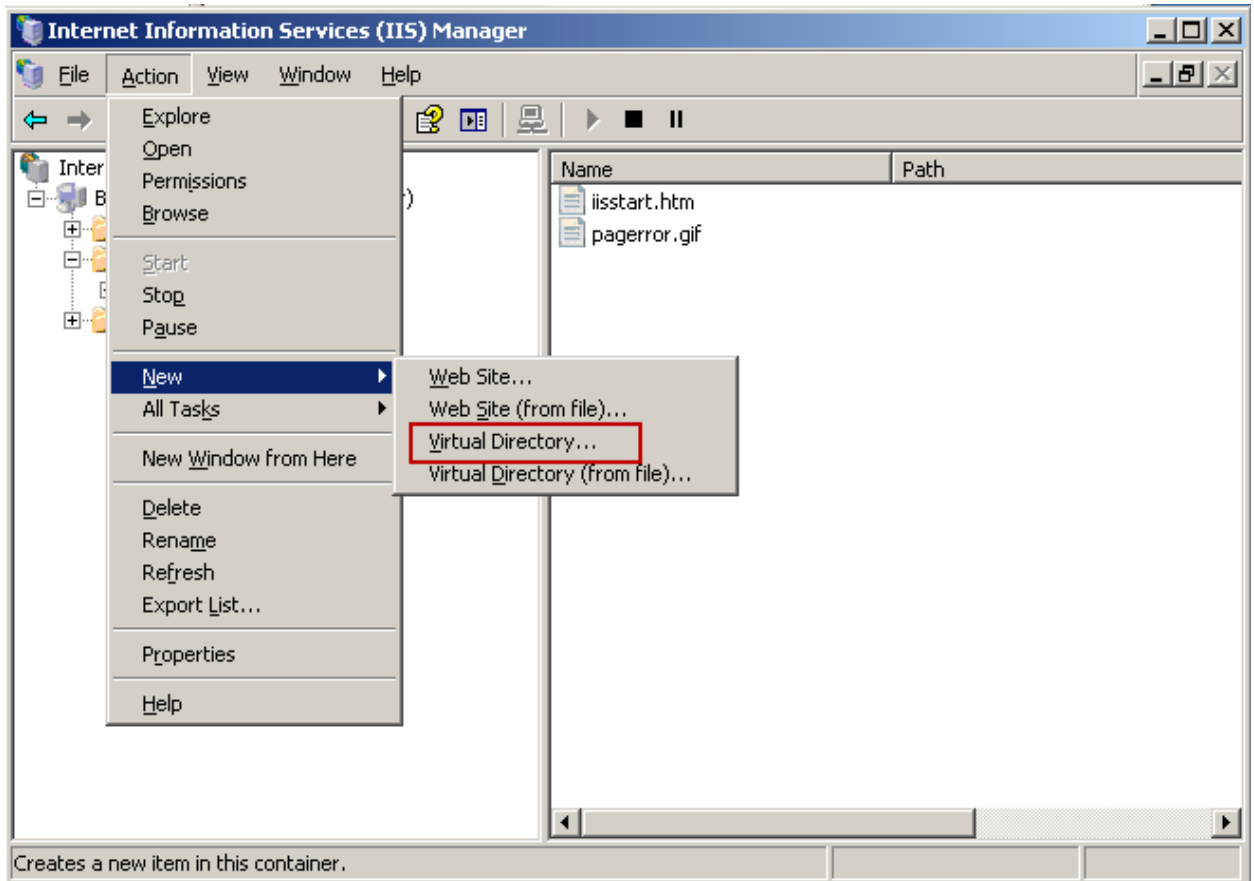


4. The Virtual Directory Creation wizard starts. Click the next button.




5. Name the virtual directory as AdapterService and then click the Next button.

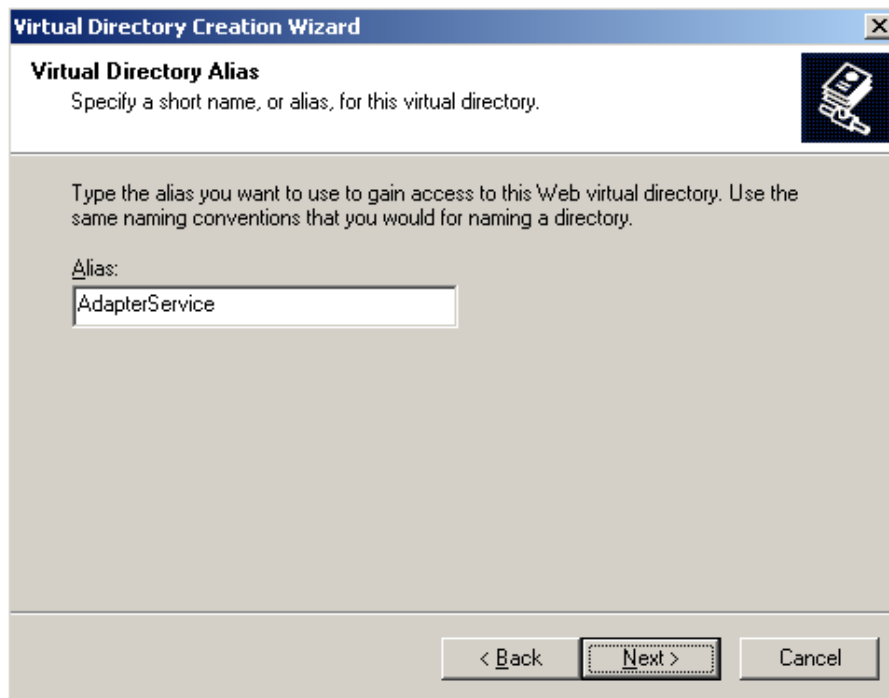

6. Browse to the iRingWeb\ AdapterService folder (installed earlier).

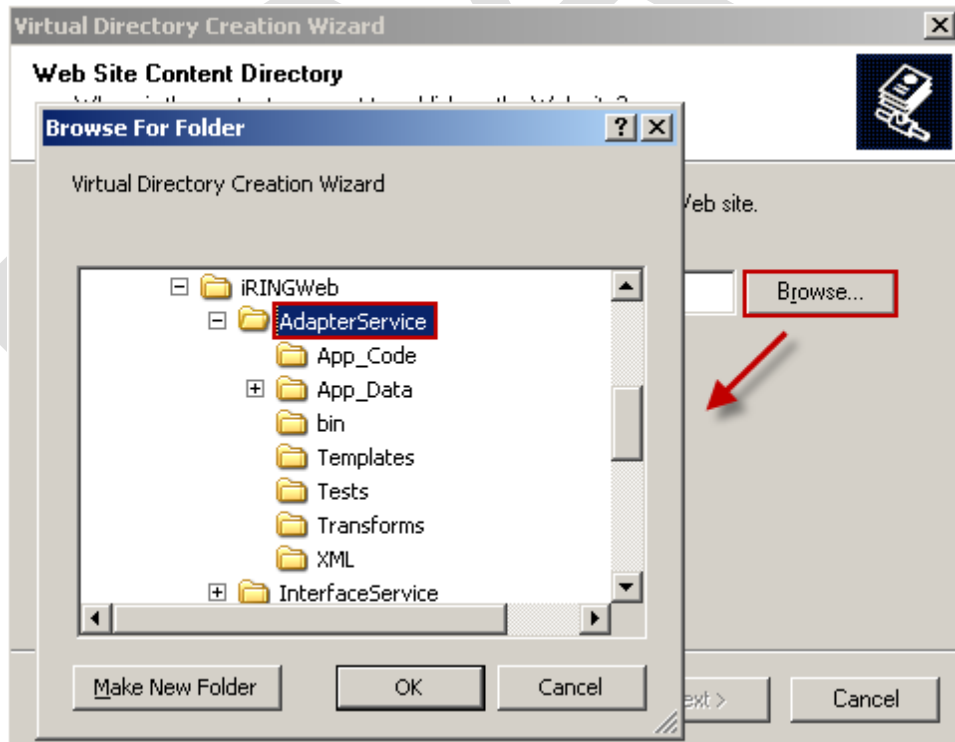


- Click the Next button.

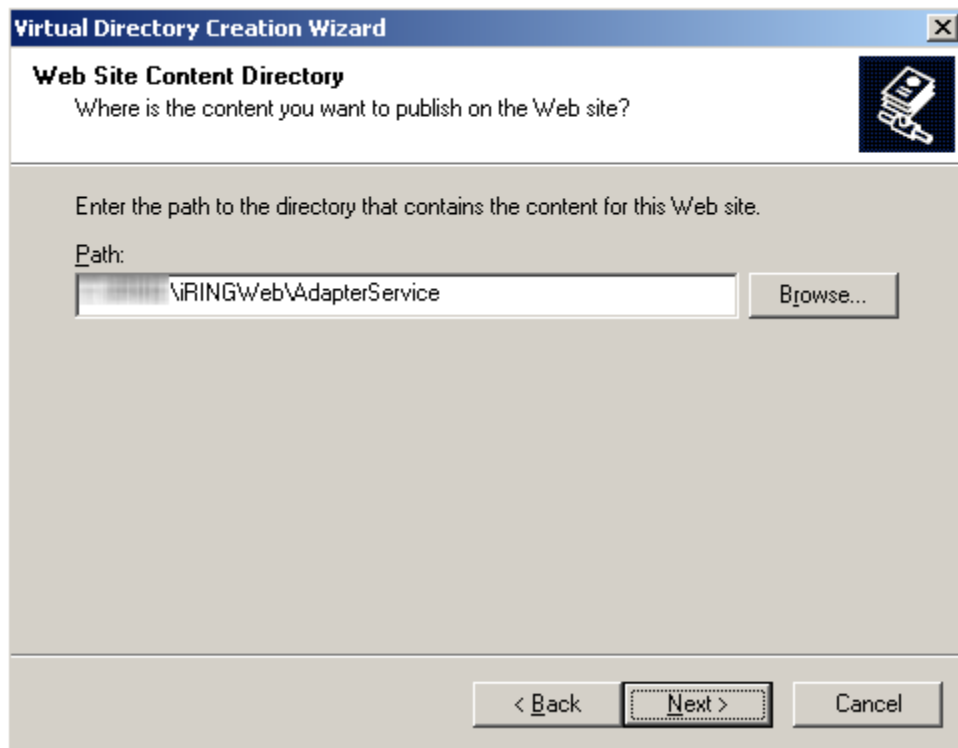

The screenshot shows the 'Virtual Directory Creation Wizard' window, specifically the 'Web Site Content Directory' step. The title bar reads 'Virtual Directory Creation Wizard'. The main heading is 'Web Site Content Directory' with a sub-question 'Where is the content you want to publish on the Web site?'. Below this, it says 'Enter the path to the directory that contains the content for this Web site.' There is a text box labeled 'Path:' containing the text '\\RING\Web\AdapterService'. To the right of the text box is a 'Browse...' button. At the bottom of the window are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a dashed border.

- Select the permissions Read and Run Scripts and then click the Next button.

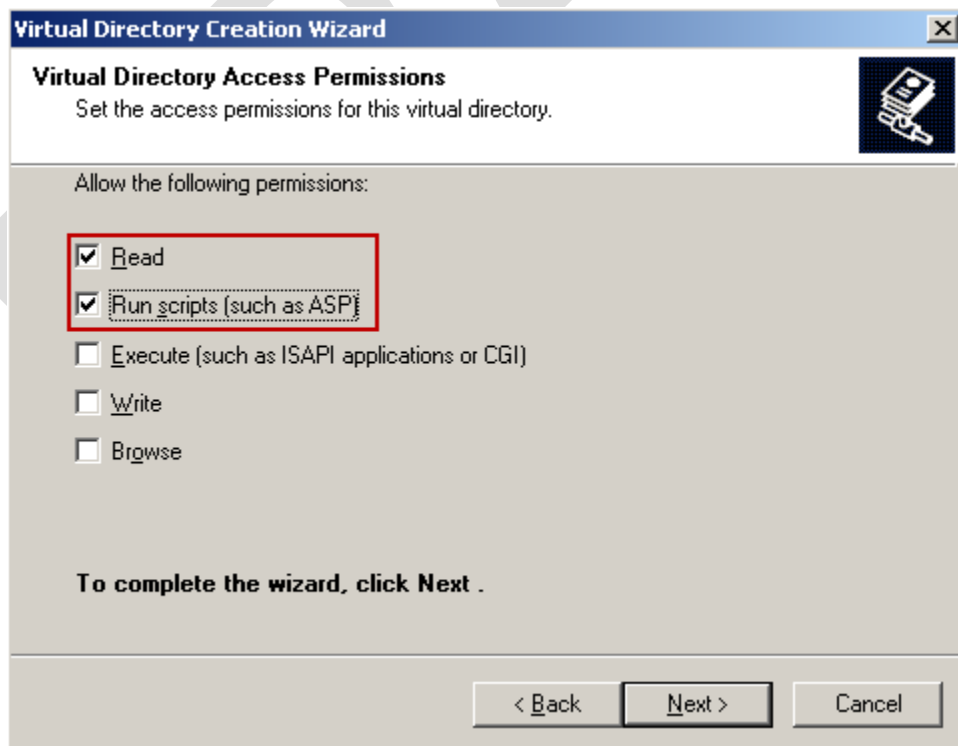


The screenshot shows the 'Virtual Directory Creation Wizard' window, specifically the 'Virtual Directory Access Permissions' step. The title bar reads 'Virtual Directory Creation Wizard'. The main heading is 'Virtual Directory Access Permissions' with a sub-instruction 'Set the access permissions for this virtual directory.' Below this, it says 'Allow the following permissions:'. There is a list of permissions with checkboxes: 'Read' (checked), 'Run scripts (such as ASP)' (checked), 'Execute (such as ISAPI applications or CGI)' (unchecked), 'Write' (unchecked), and 'Browse' (unchecked). The 'Read' and 'Run scripts (such as ASP)' checkboxes are highlighted with a red rectangle. At the bottom of the window are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a dashed border.

9. The virtual directory setup is complete. Click the Finish button to close the wizard.




10. The virtual directory appears in the the target web site folder.

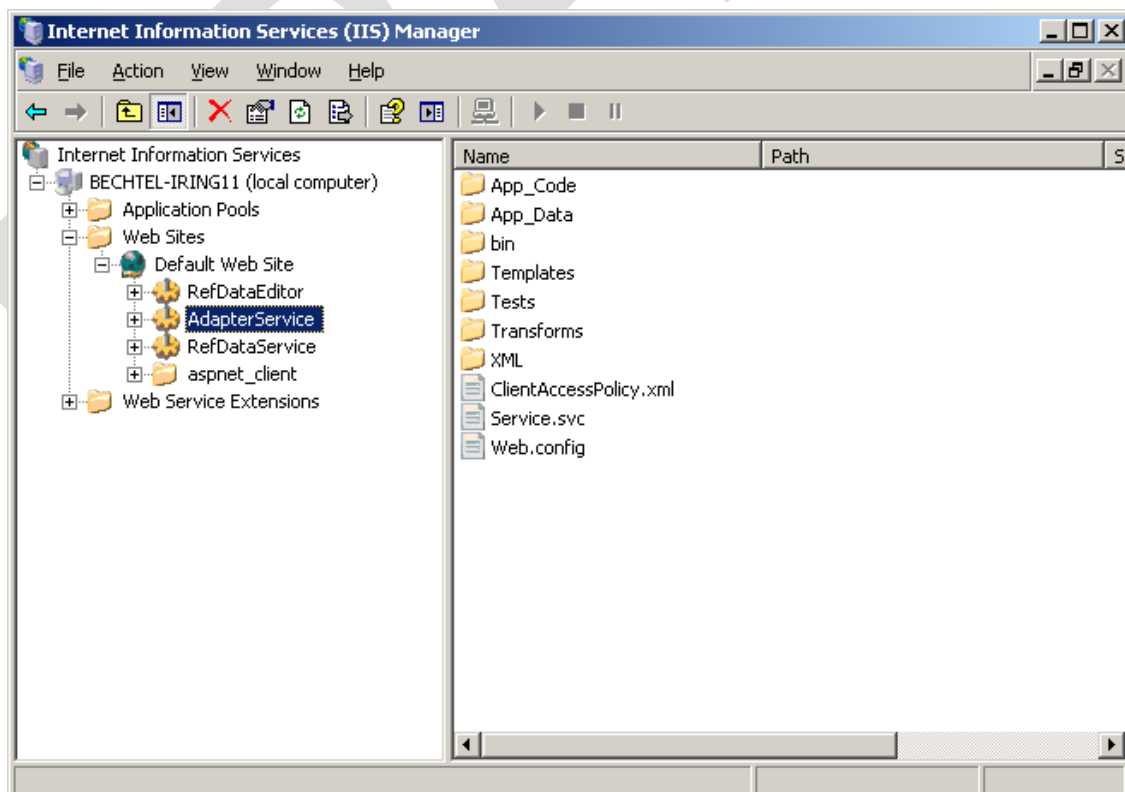


## 4.4 Creating the MappingEditor Virtual Directory

Create the MappingEditor virtual directory in IIS by performing the following steps.

1. Start IIS Manager. In IIS Manager, select the target web site in the Web Sites folder.

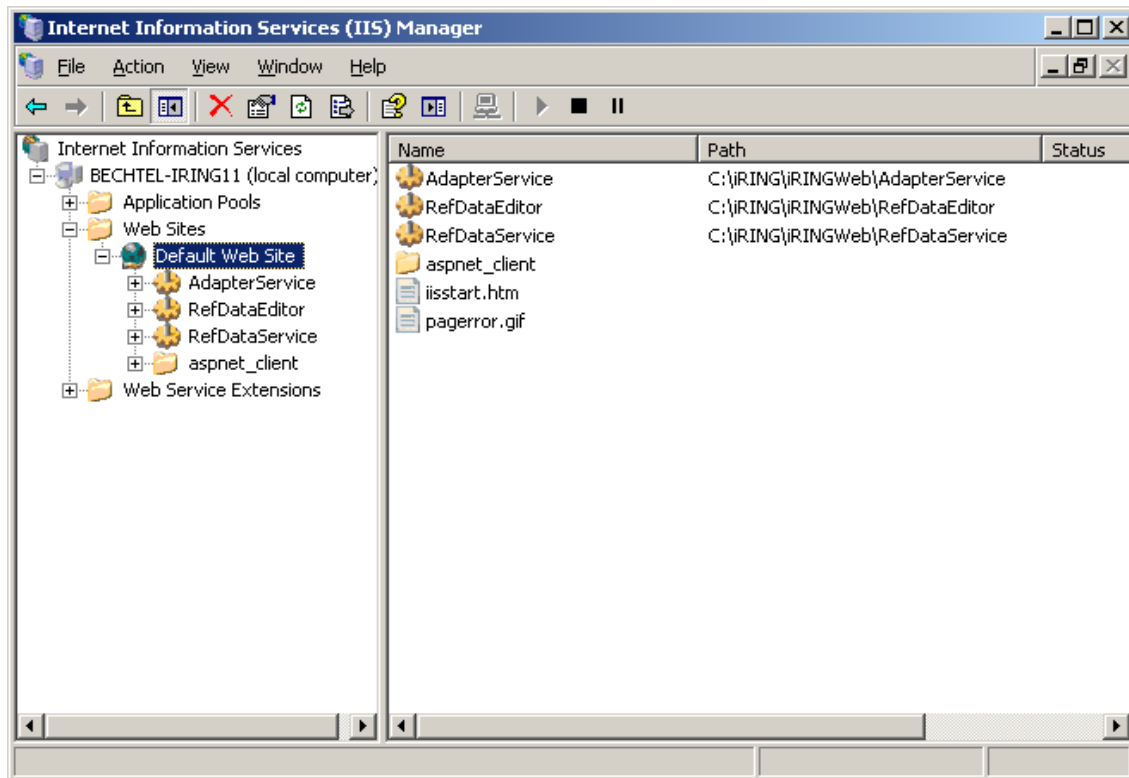


2. From the main menu, select Action > New > Virtual Directory.

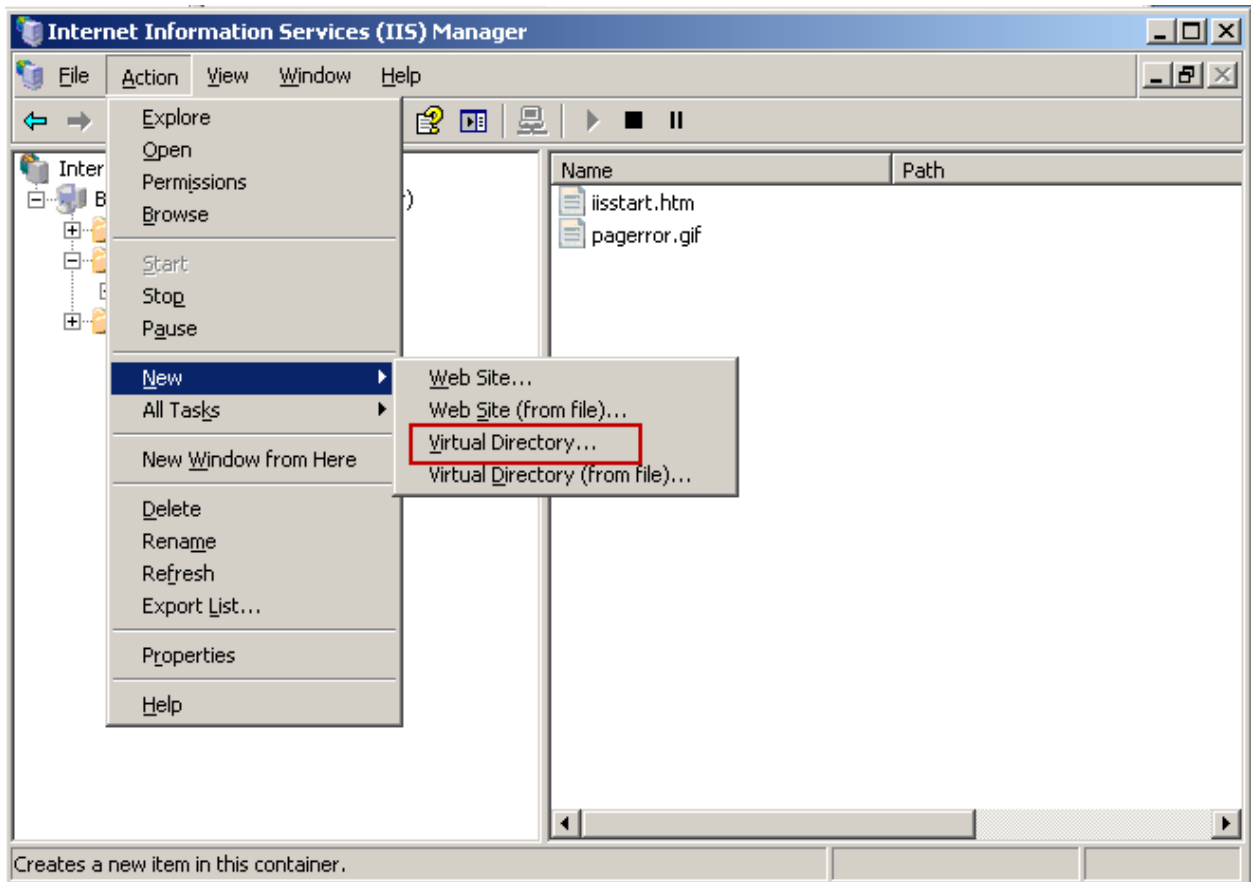

3. The Virtual Directory Creation wizard starts. Click the next button.




4. Name the virtual directory as MappingEditor and then click the Next button.

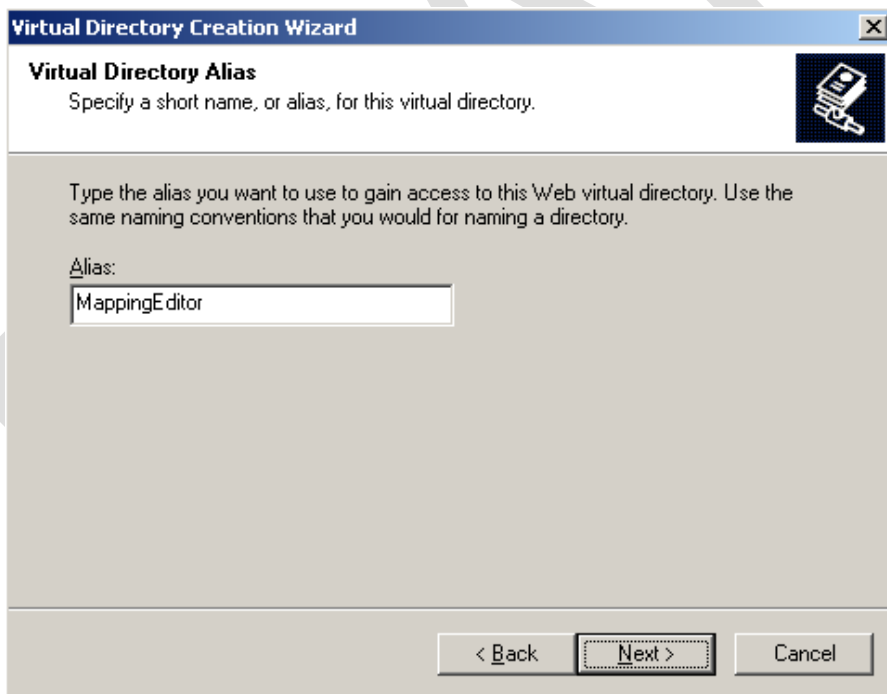


5. Browse to the iRingWeb\ MappingEditor folder (installed earlier).




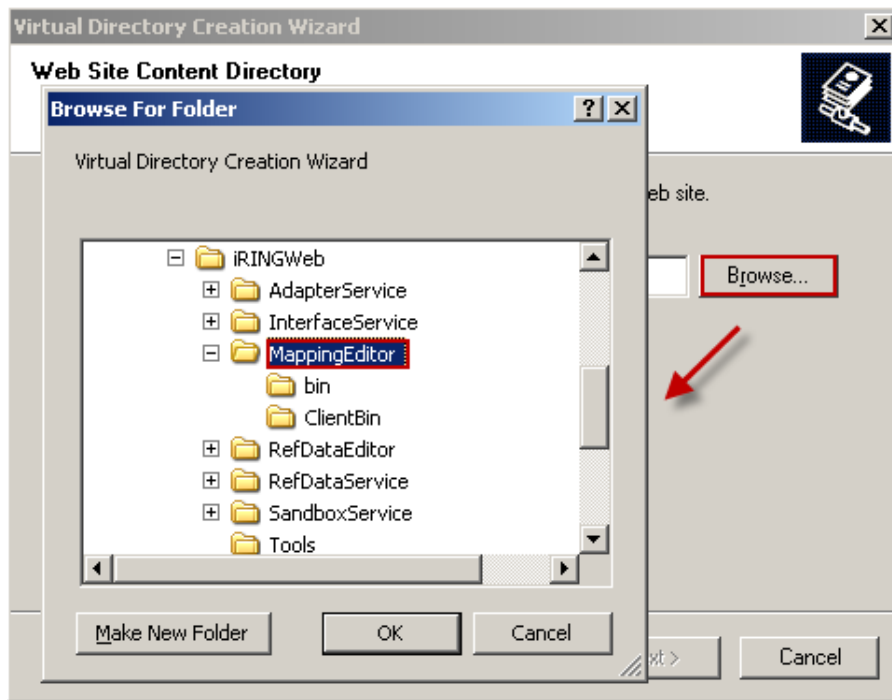

6. Click the Next button.

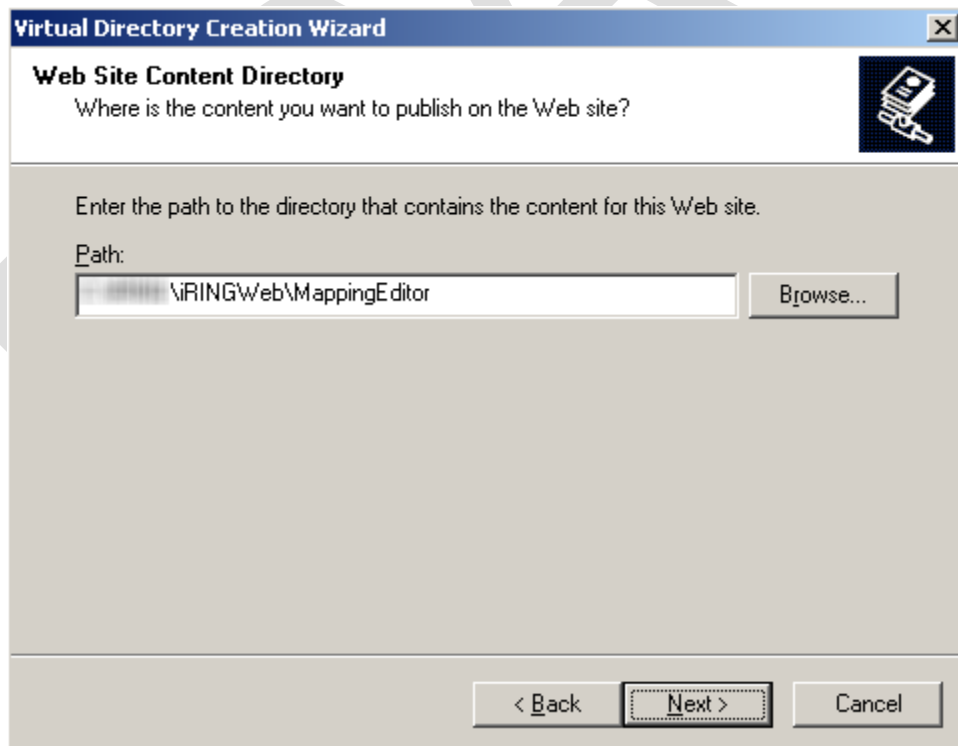


7. Select the permissions Read and Run Scripts and then click the Next button.

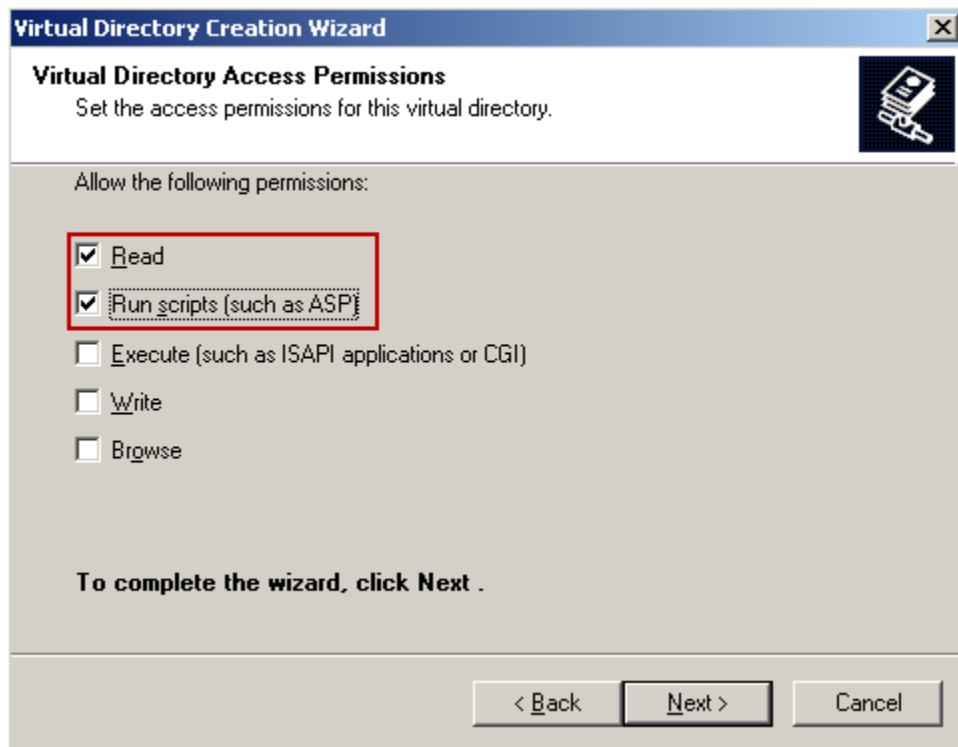

8. The virtual directory setup is complete. Click the Finish button to close the wizard.




9. The virtual directory appears in the the target web site folder.

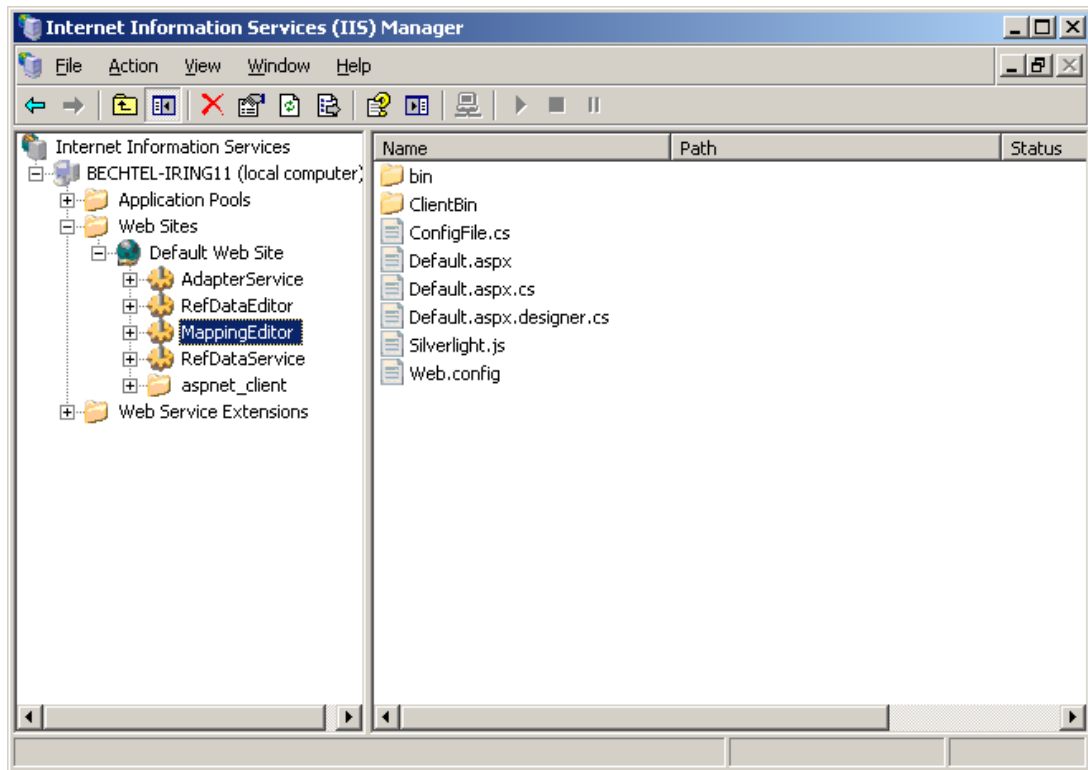


## 4.5 Installing Interface Service

To set up the Sandbox Setup service, perform the following:


1. Start IIS Manager. One way to do this is to use Run from the Start menu. Type the command inetmgr.

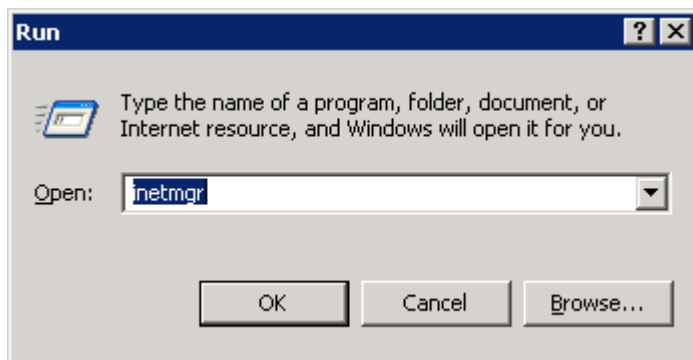

2. In IIS Manager, select the target web site in the Web Sites folder.

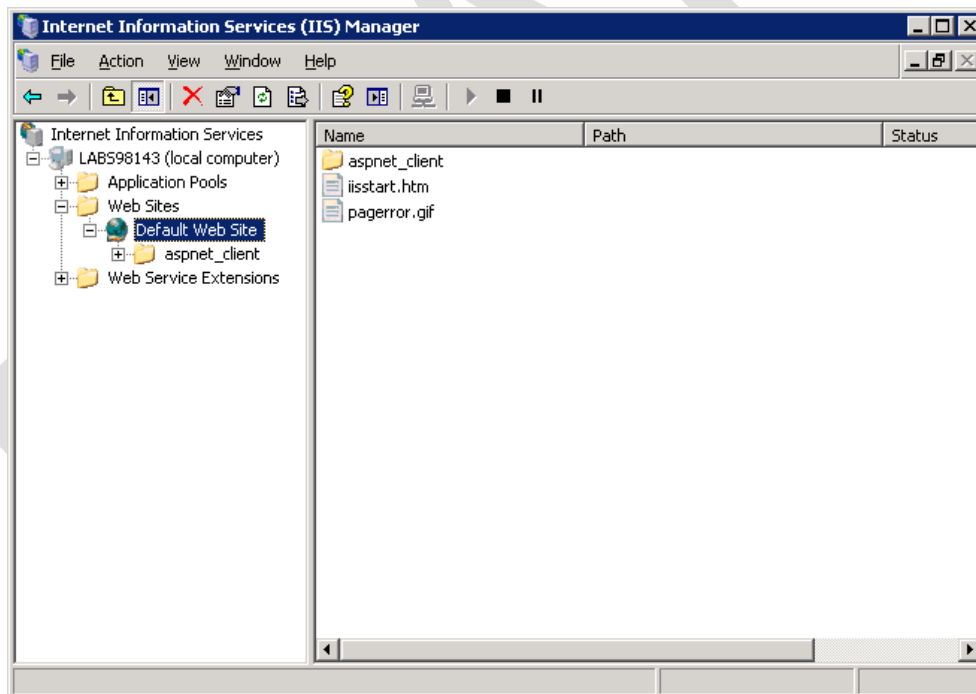


3. From the main menu, select Action > New > Virtual Directory.

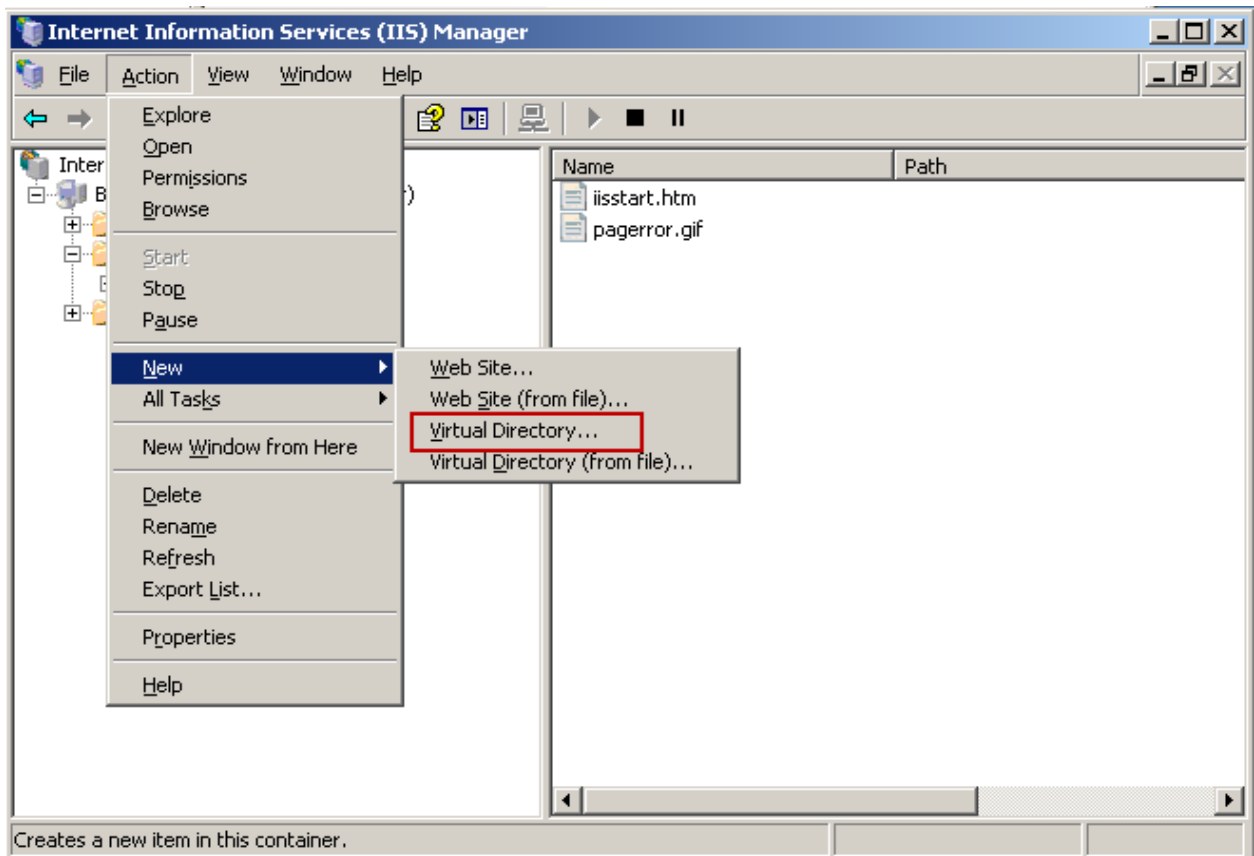


4. The Virtual Directory Creation wizard starts. Click the next button.




5. Name the virtual directory as InterfaceService and then click the Next button.

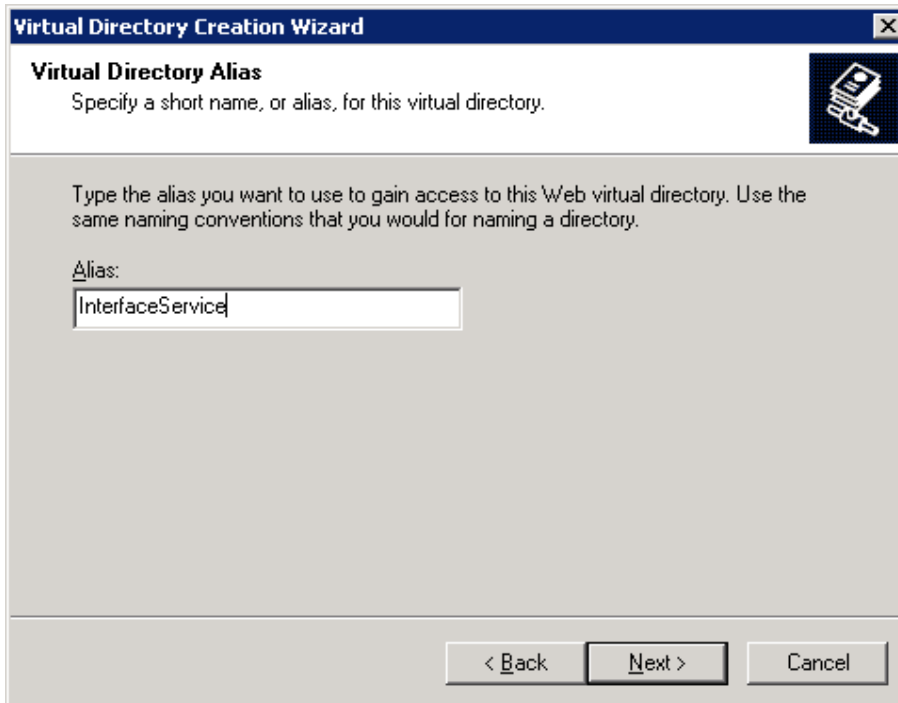

6. Browse to the iRingWeb\InterfaceService folder (installed earlier).

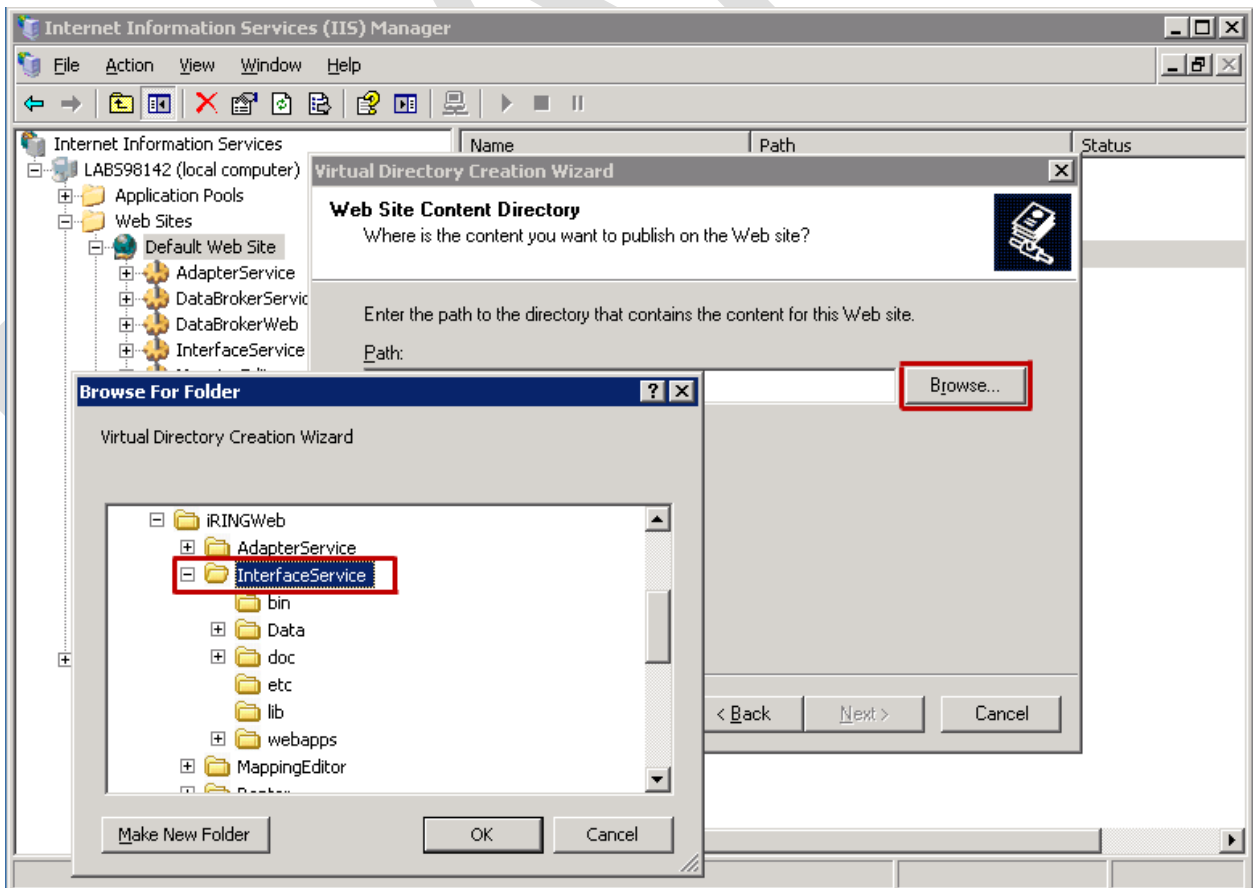


- Click the Next button.

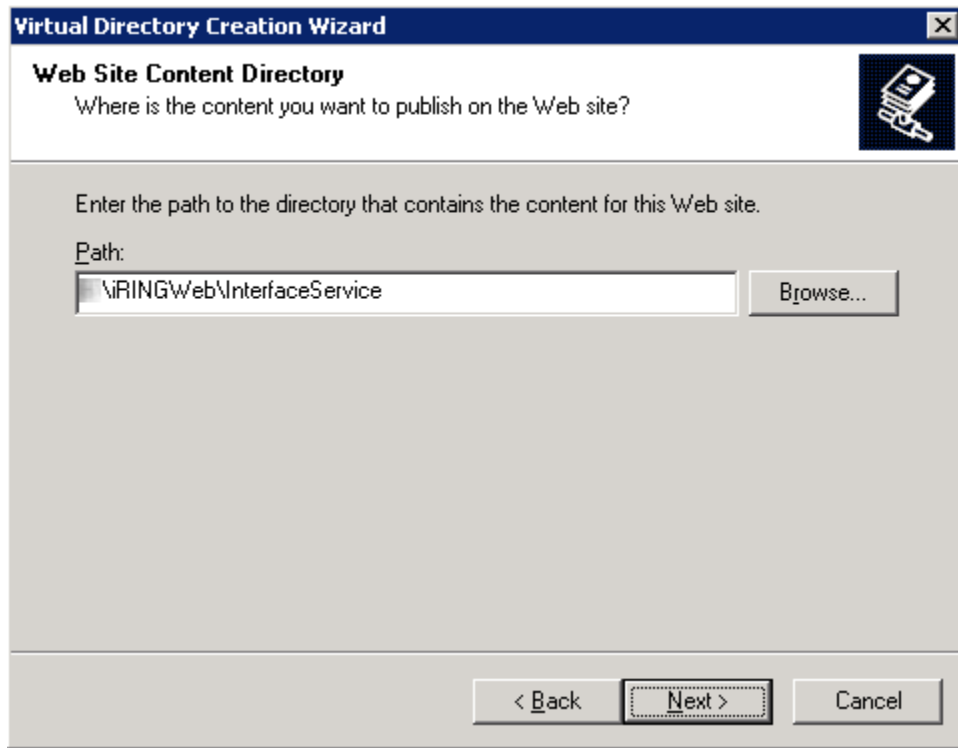


The screenshot shows the 'Virtual Directory Creation Wizard' window, specifically the 'Web Site Content Directory' step. The title bar reads 'Virtual Directory Creation Wizard'. The main heading is 'Web Site Content Directory' with a sub-question 'Where is the content you want to publish on the Web site?'. Below this, it says 'Enter the path to the directory that contains the content for this Web site.' There is a text box labeled 'Path:' containing the text '\\IRINGWeb\\InterfaceService'. To the right of the text box is a 'Browse...' button. At the bottom of the window are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a red rectangle.

- Select the permissions Read and Run Scripts and then click the Next button.

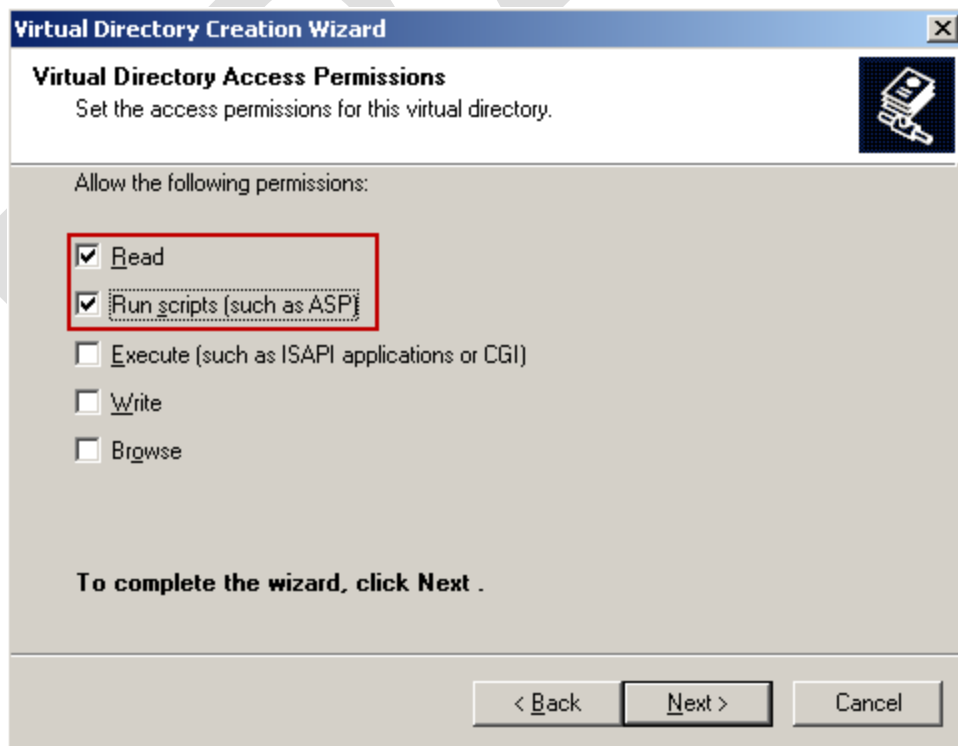

The screenshot shows the 'Virtual Directory Creation Wizard' window, specifically the 'Virtual Directory Access Permissions' step. The title bar reads 'Virtual Directory Creation Wizard'. The main heading is 'Virtual Directory Access Permissions' with a sub-instruction 'Set the access permissions for this virtual directory.' Below this, it says 'Allow the following permissions:'. There is a list of permissions with checkboxes: 'Read' (checked), 'Run scripts (such as ASP)' (checked), 'Execute (such as ISAPI applications or CGI)' (unchecked), 'Write' (unchecked), and 'Browse' (unchecked). The 'Read' and 'Run scripts (such as ASP)' checkboxes are highlighted with a red rectangle. At the bottom of the window are three buttons: '< Back', 'Next >', and 'Cancel'. The 'Next >' button is highlighted with a red rectangle.

9. The virtual directory setup is complete. Click the Finish button to close the wizard.

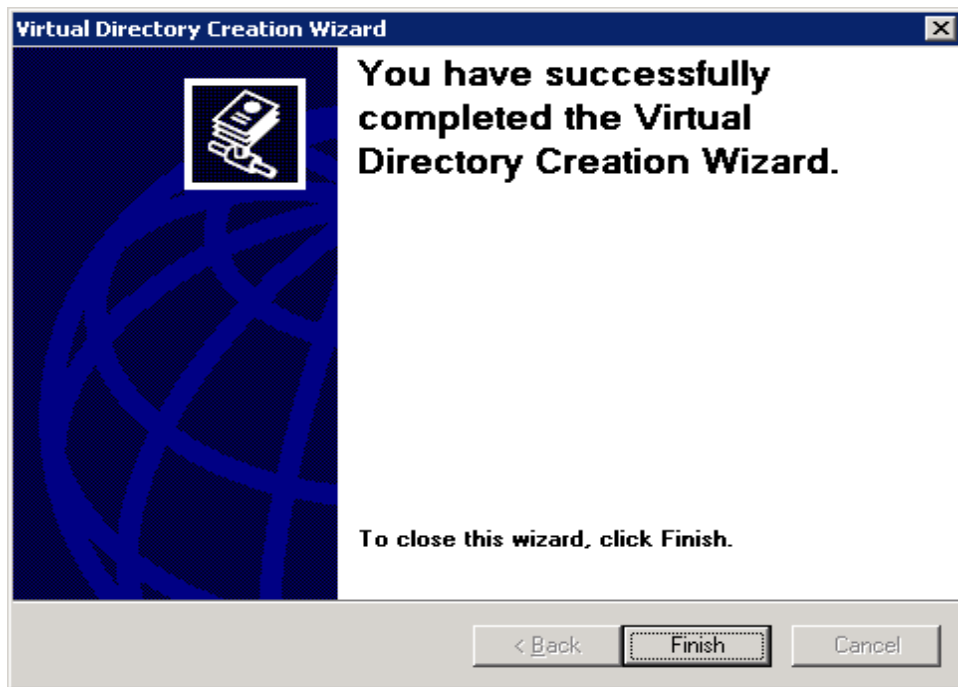

10. The virtual directory appears in the the target web site folder.







## 4.6 Interface Service Setup

To configure the Interface Service, perform the following:

1. Open the file iRINGWeb\InterfaceService\setup.conf in a text editor (e.g., Notepad) and modify the contents to match your installation (i.e., SQL Server instance, admin username and password). Save the file.

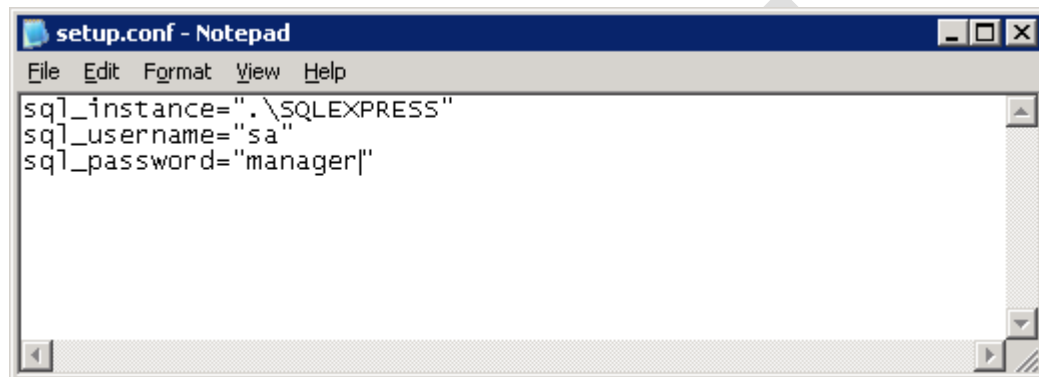


2. Open a command window and execute iRINGWeb\InterfaceService\setup.cmd. This will create the SQL Server database and configure the SandboxService Web.config based on the settings in setup.conf.

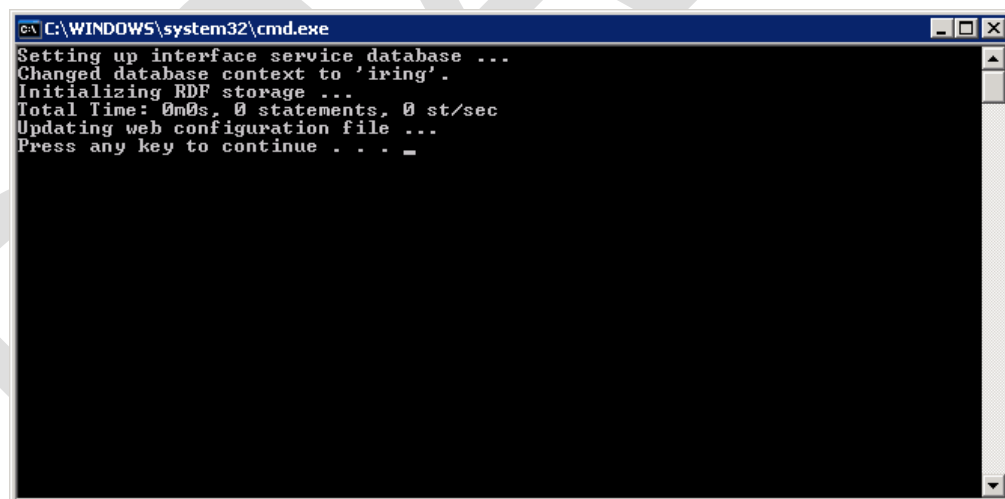


## 4.7 Testing Interface Service

To confirm the Interface Service installed correctly, perform the following.


**Note:** To access the localhost, you may need to configure your Internet Options first. Open Internet Options, select the Connections tab, select LAN Settings and ensure Bypass proxy server for local addresses is checked. Save the settings and close the browser before proceeding.

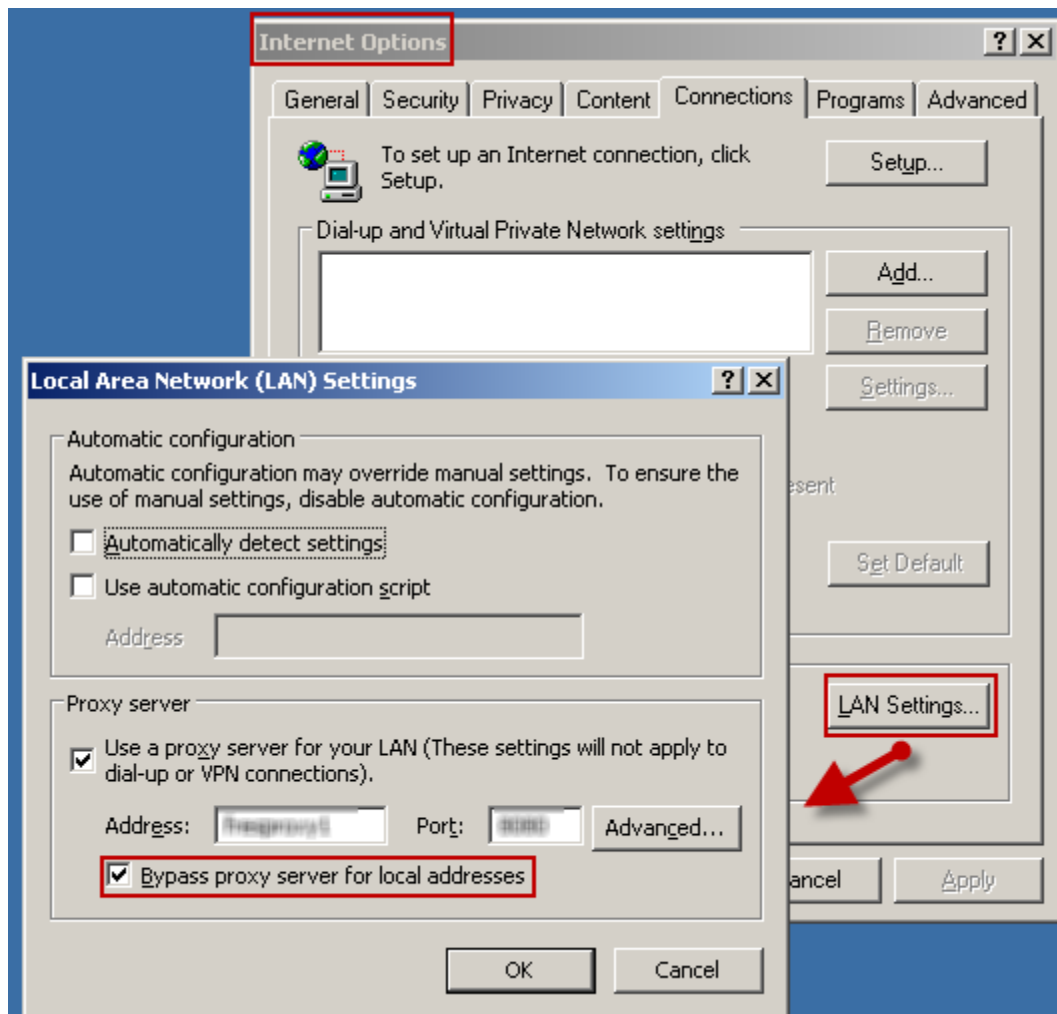

3. In your web browser, open the address <http://localhost/InterfaceService/index.html>. You should see the following (or something very similar).

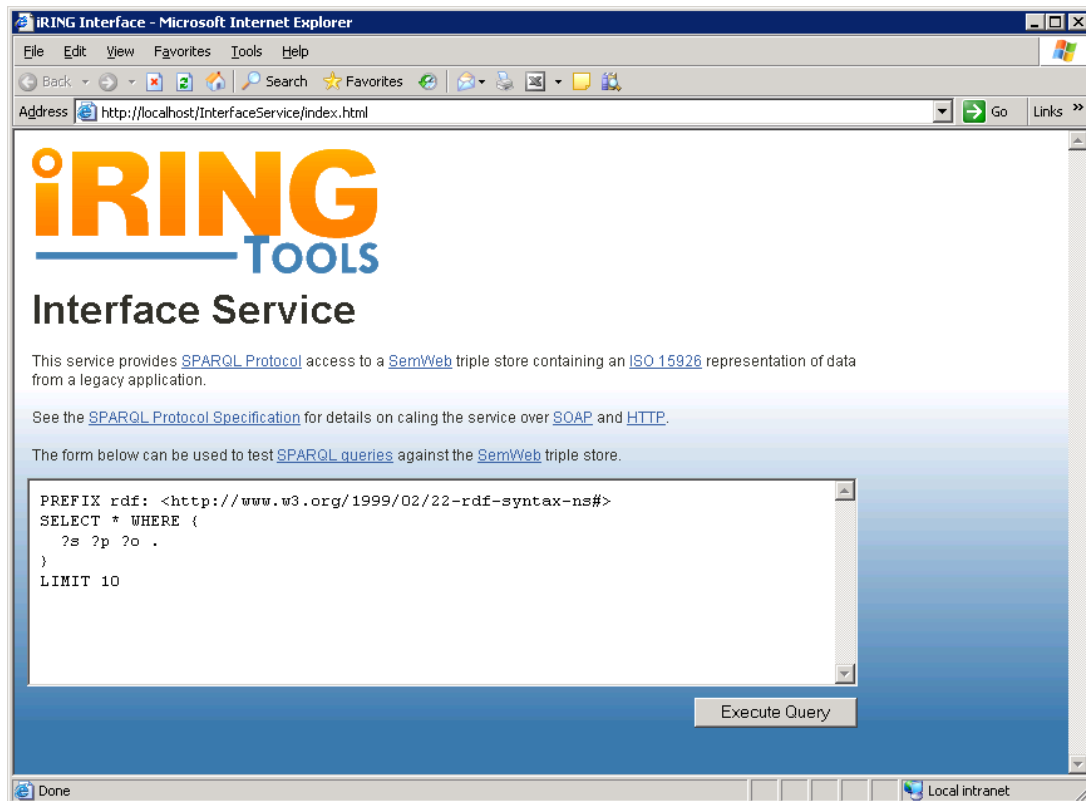


4. Click the Execute Query button. You should see the following result.

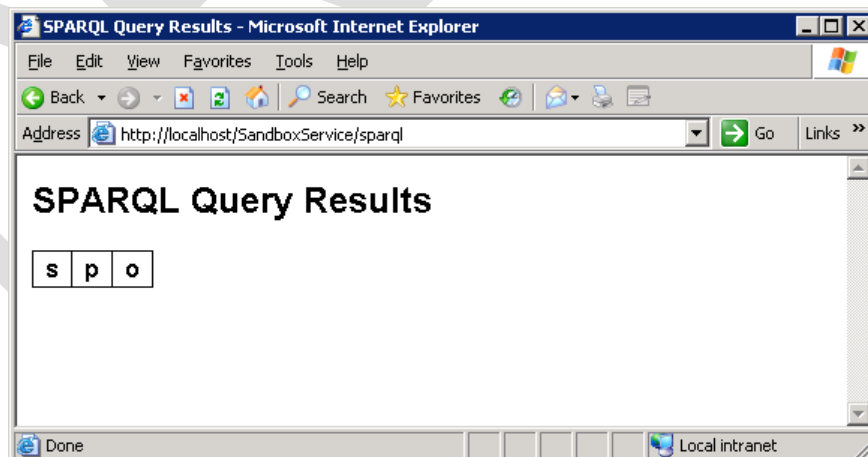


## 4.8 Configuring the AdapterService

Configure the adapter service by modifying the AdapterService Web.config file as follows.


1. Open the file Web.config file located in the iRINGWeb\AdapterService in a text editor.

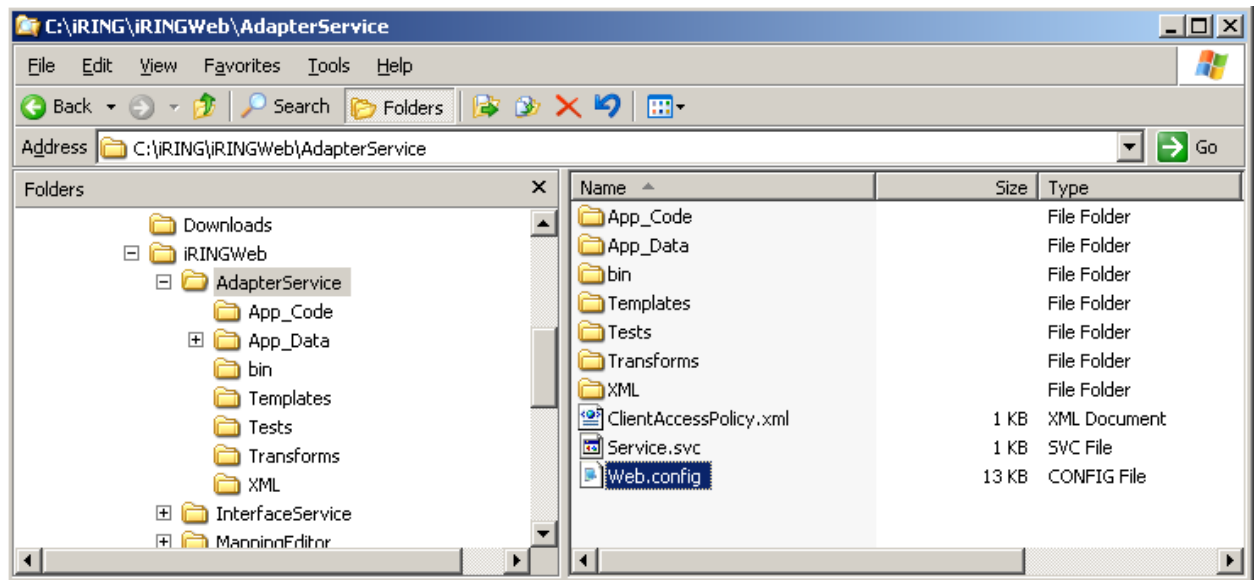

2. In the file Web.config, confirm the values of UseSemWeb and TriplestoreConnectionString key as follow (assuming that the data source is ".\SQLEXPRESS").

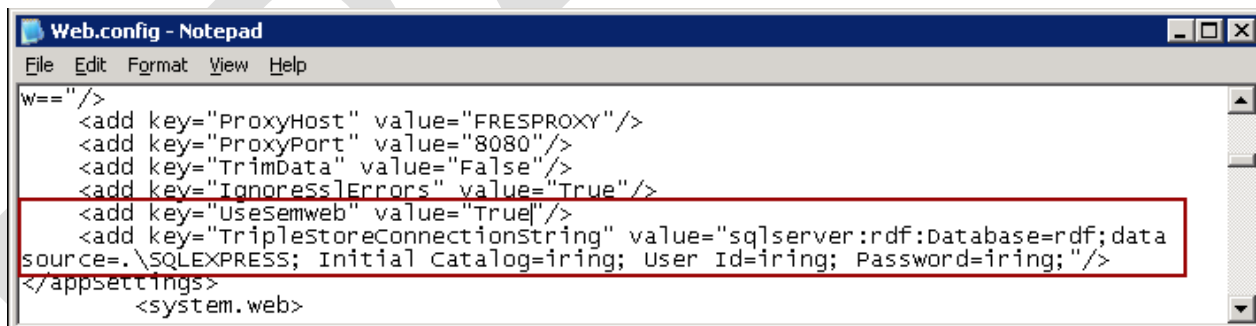


3. If your server is behind a firewall, then credentials are needed to access the internet. Create an encrypted token with the EncryptCredentials utility in iRingWeb\Tools. Enter the username, password and optionally the domain. Copy the resulting encrypted string to the clipboard.

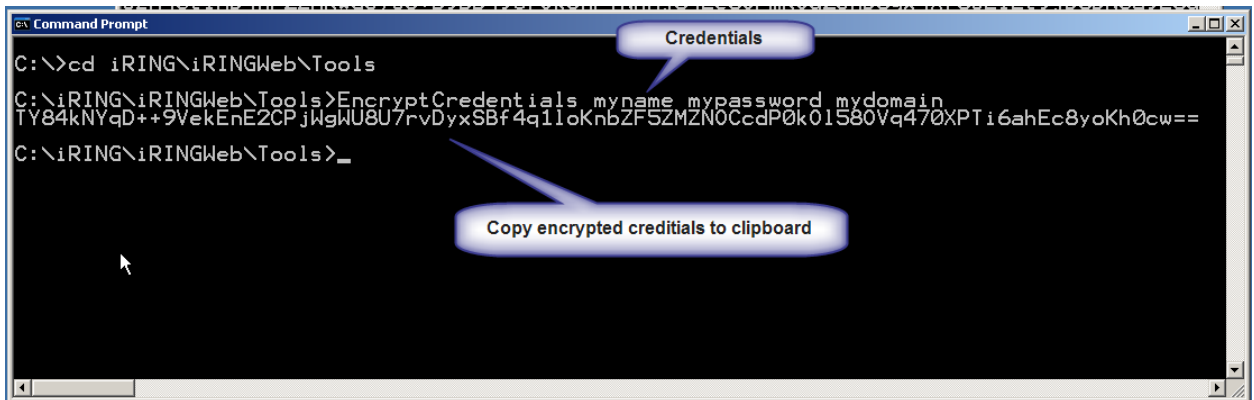


```
C:\>cd iRING\iRINGWeb\Tools
C:\iRING\iRINGWeb\Tools>EncryptCredentials myname mypassword mydomain
TY84kNYqD++9VekEnE2CPjWgkU8U7rvDyxSBf4q1loKn6ZF5ZMZN0CcdP0k0l580Vq470XPTi6ahEc8yoKh0cw==
C:\iRING\iRINGWeb\Tools>_
```

4. In the file Web.config, locate the ProxyCredentialTokey key. Paste the token in the value between the double quotes.

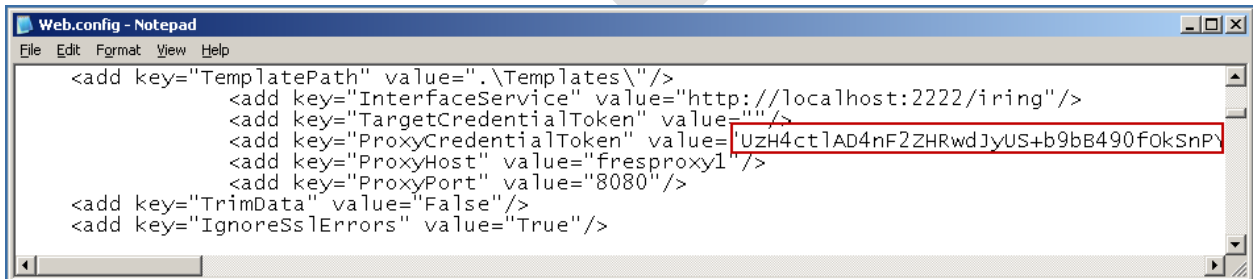


```
Web.config - Notepad
File Edit Format View Help
<add key="TemplatePath" value=".\\Templates\\"/>
  <add key="InterfaceService" value="http://localhost:2222/iring"/>
  <add key="TargetCredentialToken" value=""/>
  <add key="ProxyCredentialToken" value="UZH4ct1AD4nF2ZHRwdJyUS+b9bB490fokSnP"/>
  <add key="ProxyHost" value="fresproxy1"/>
  <add key="ProxyPort" value="8080"/>
</add key="TrimData" value="False"/>
<add key="IgnoreSslErrors" value="True"/>
```


5. In the file Web.config, locate the ProxyHost key. Enter the ProxyHost needed to access the internet. This can be found in Internet Options on the Connections tab in the LAN settings.

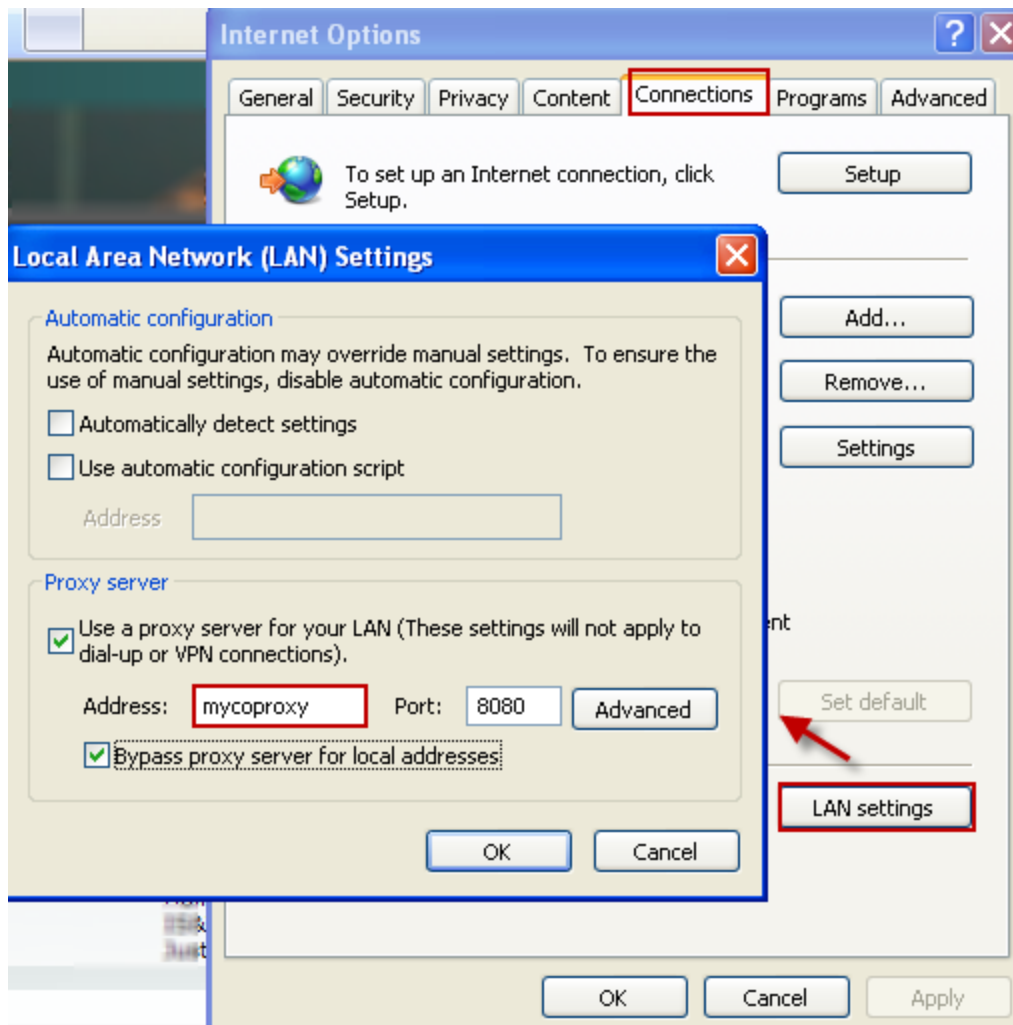


6. Enter the ProxyHost in the value between the double quotes. If there is no ProxyHost, then leave the value empty.

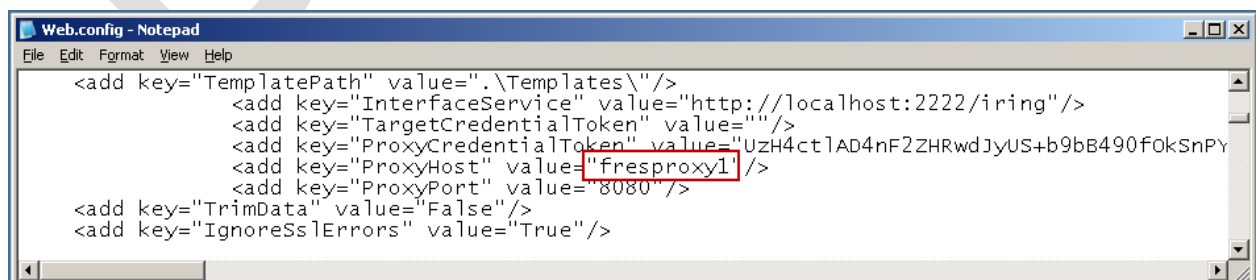

7. In the file Web.config, locate the ProxyPort key. Enter the ProxyPort needed to access the internet. This can be found in Internet Options on the Connections tab in the LAN settings.

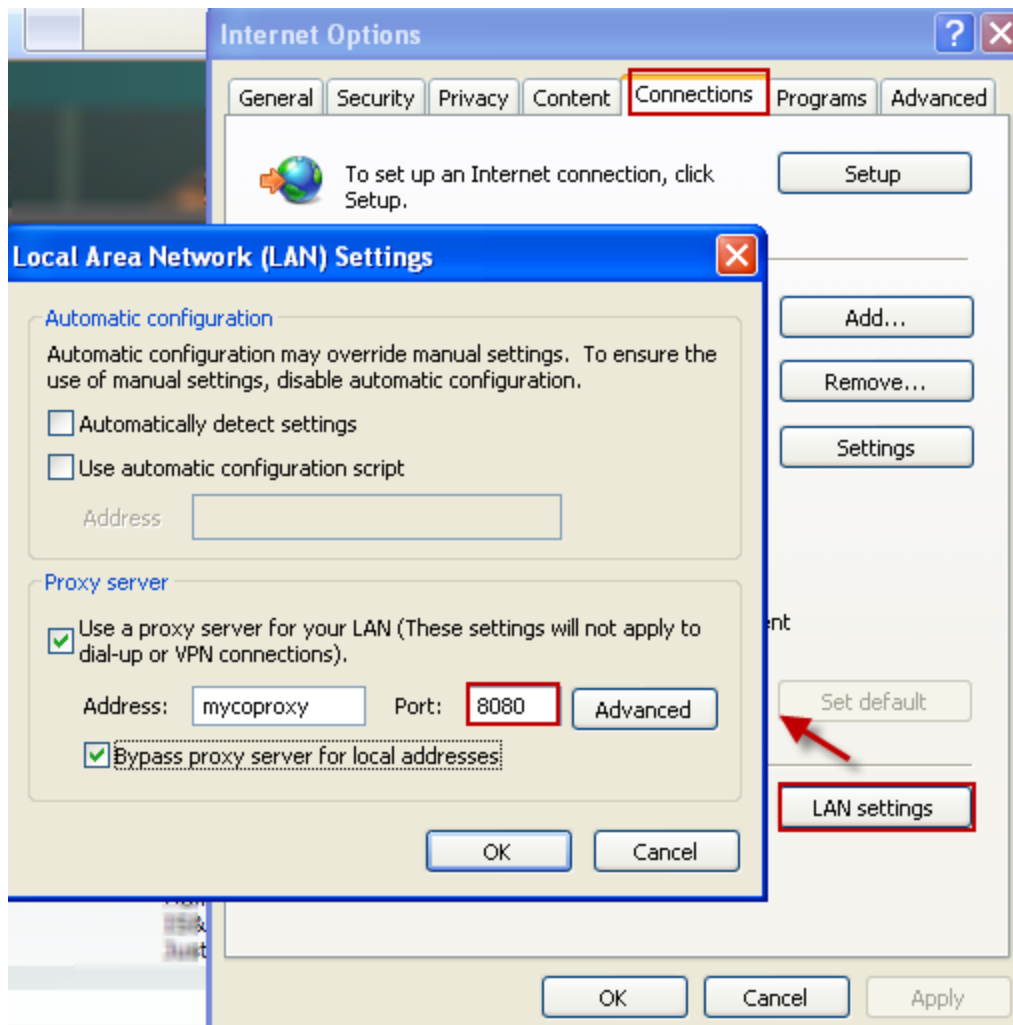

8. Enter the ProxyPort in the value between the double quotes. If there is no ProxyPort, then leave the value empty.

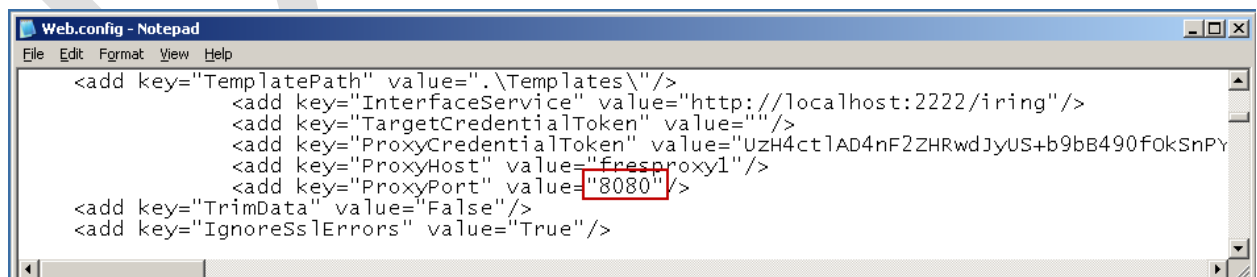





## 4.9 Creating the Test Database

Create a test database in SQL Server by performing the following steps.


1. Open the folder iRINGWeb\AdapterService\AppData\Scripts.

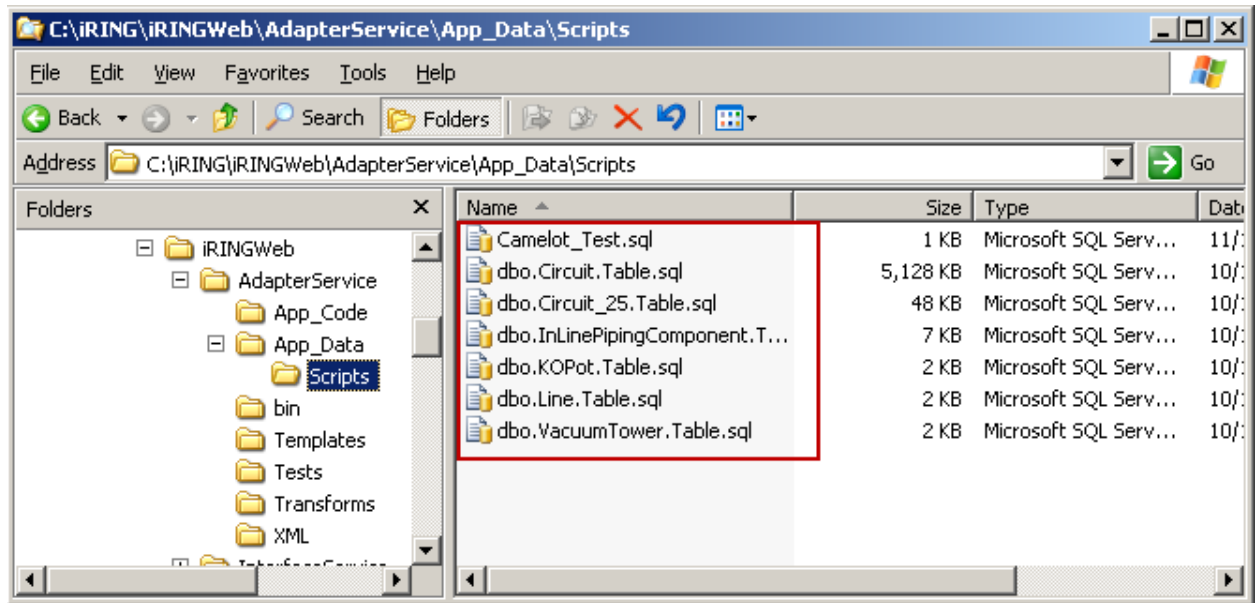

2. Open Microsoft SQL Server Management Studio.

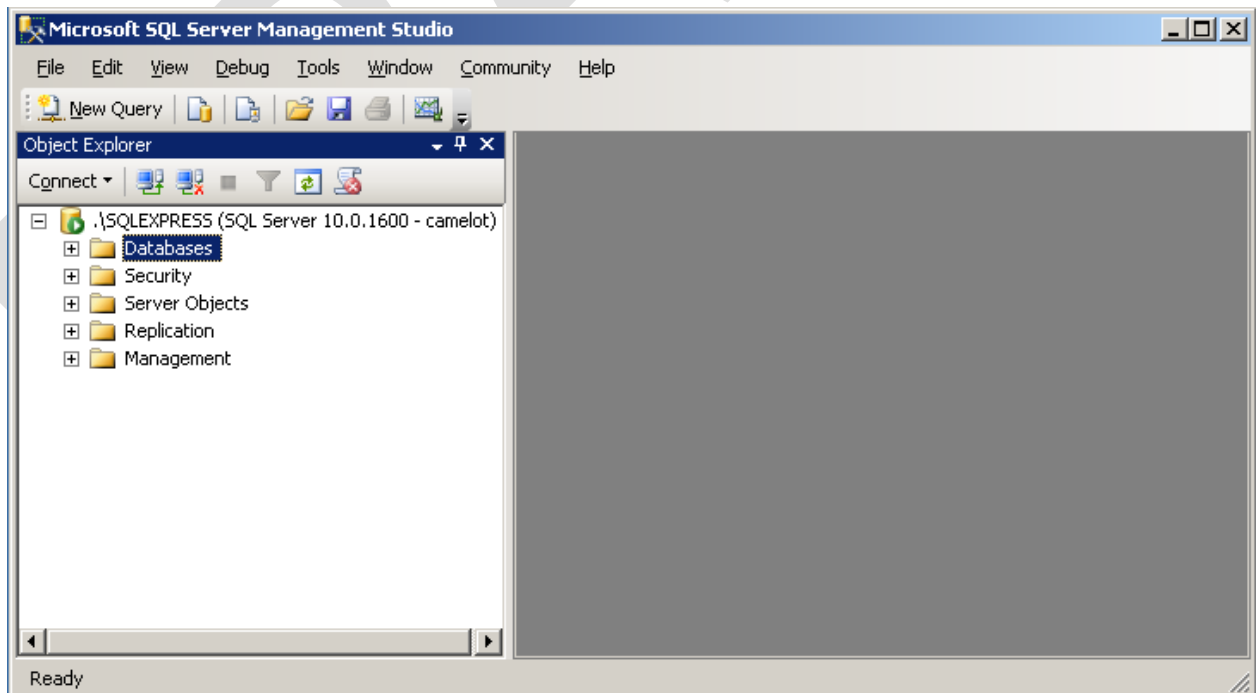


3. Drag the file Camelot\_Test.sql to Microsoft SQL Server Management Studio and then click the Execute button to create the test database.

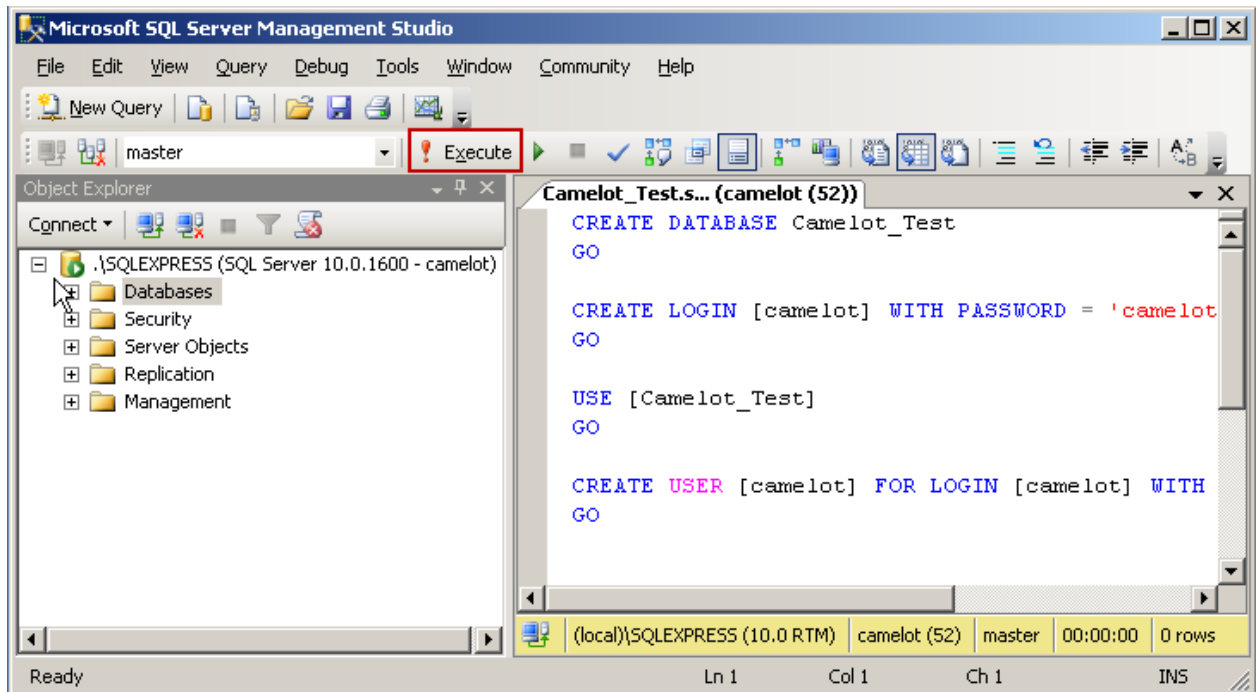

4. One by one, drag the following files from the folder to Microsoft SQL Server Management Studio and then click the Execute button to create data the database tables.
  - (a) dbo.Circuit.Table.sql
  - (b) dbo.Circuit\_25.Table.sql
  - (c) dbo.InLinePipingComponent.Table.sql
  - (d) dbo.KOPot.Table.sql
  - (e) dbo.Line.Table.sql
  - (f) dbo.VacuumTower.Table.sql


5. Verify the database, tables and data are created.

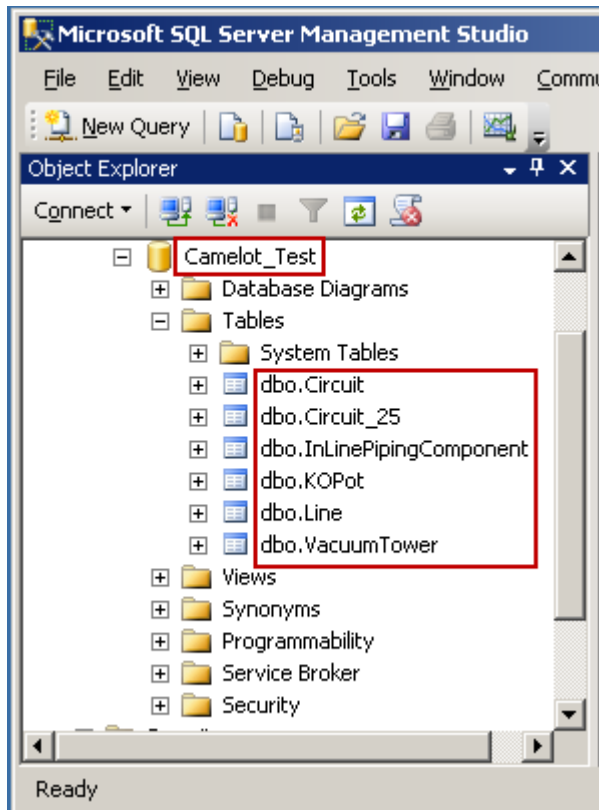


## 4.10 Testing the AdapterService

Perform the following tests for the *iRINGTools* AdapterService.


1. Test the AdapterService by opening your browser on the server and entering the address <http://localhost/AdapterService/Service.svc>. You should see the following.

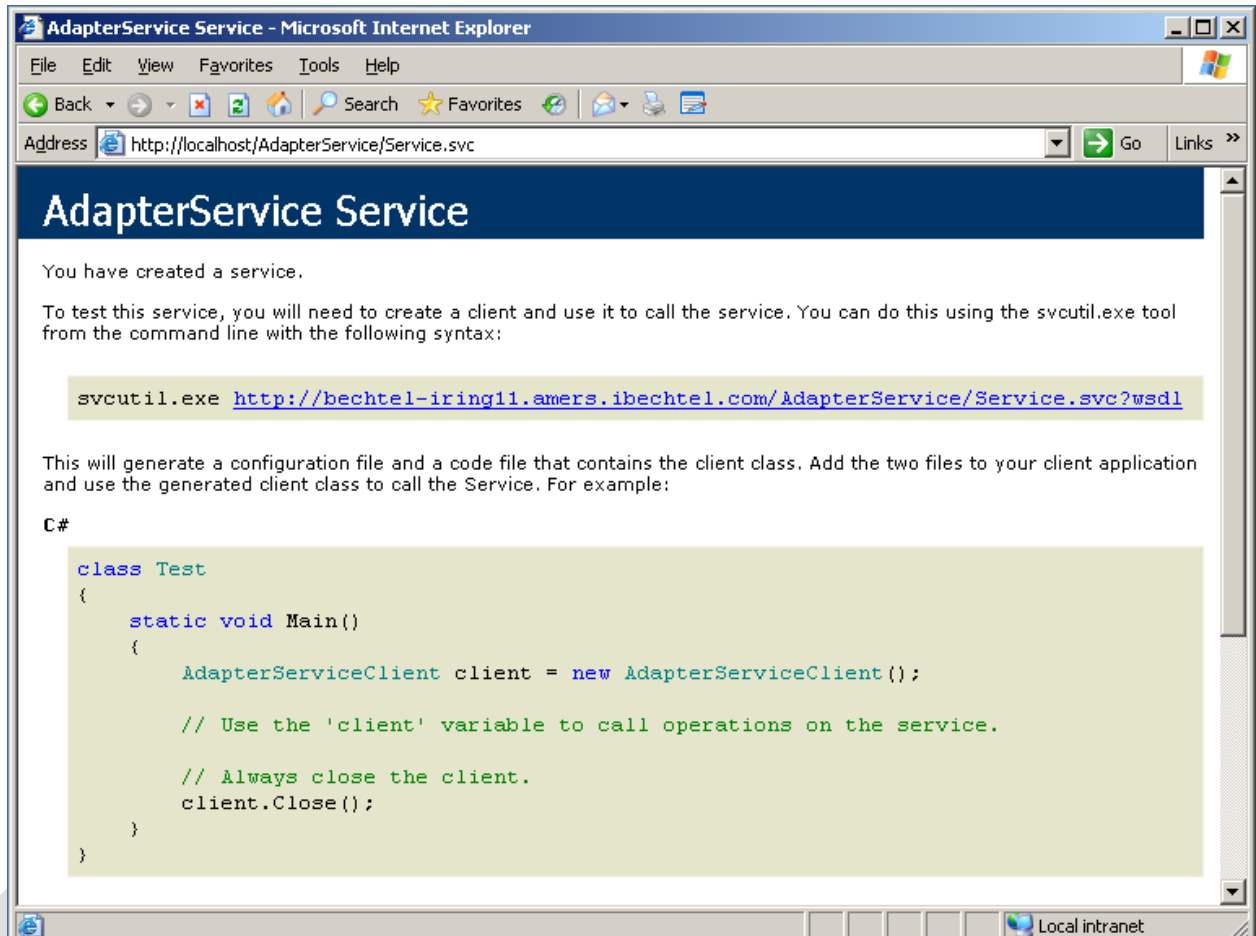

2. Modify Tools\DBDictionaryUtil.exe.config to verify the path to the AdapterService.
3. Run Tools\DBDictionaryUtil.exe to configure NHibernate for the test database, which uses the 12345\_000 project, and ABC application.
4. Test the data dictionary by entering the address [http://localhost/AdapterService/Service.svc/12345\\_000/ABC/DataDictionary](http://localhost/AdapterService/Service.svc/12345_000/ABC/DataDictionary) in your browser. You should see the following.

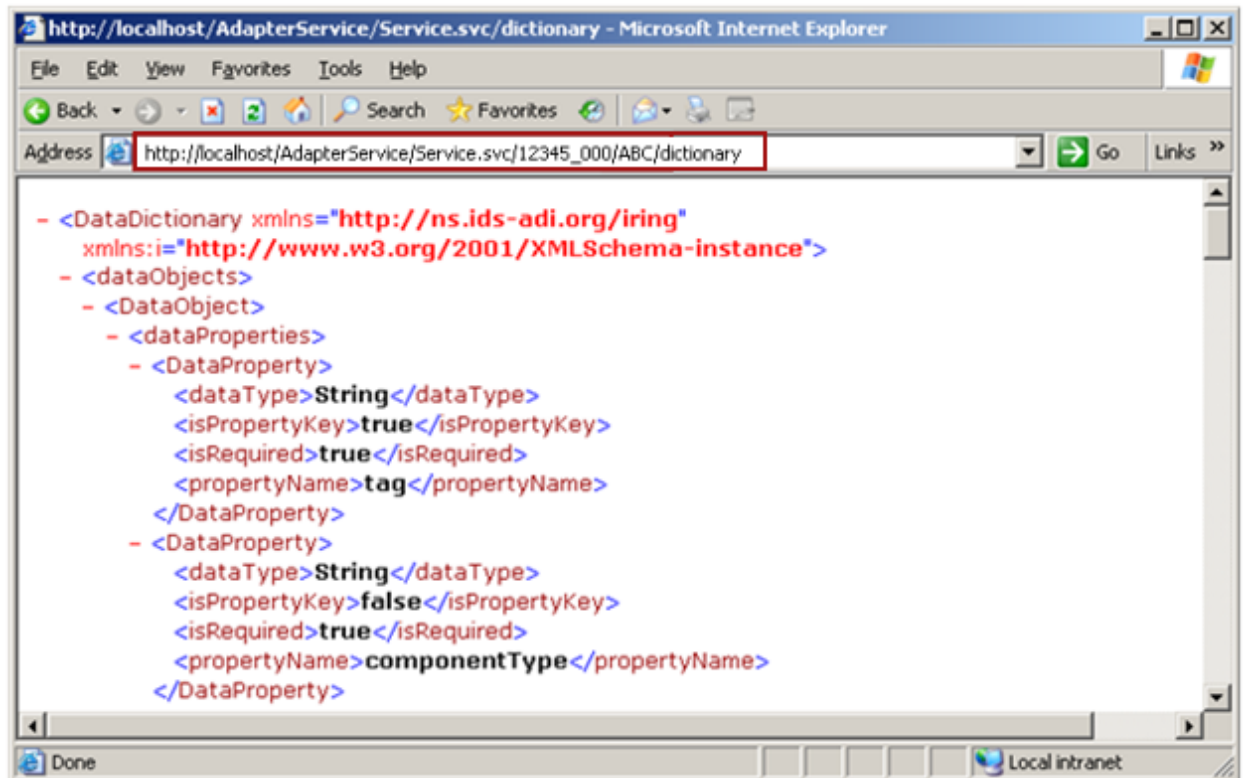


5. Test the mapping by entering the address [http://localhost/AdapterService/Service.svc/12345\\_000/ABC/mapping](http://localhost/AdapterService/Service.svc/12345_000/ABC/mapping) in your browser. You should see the following.

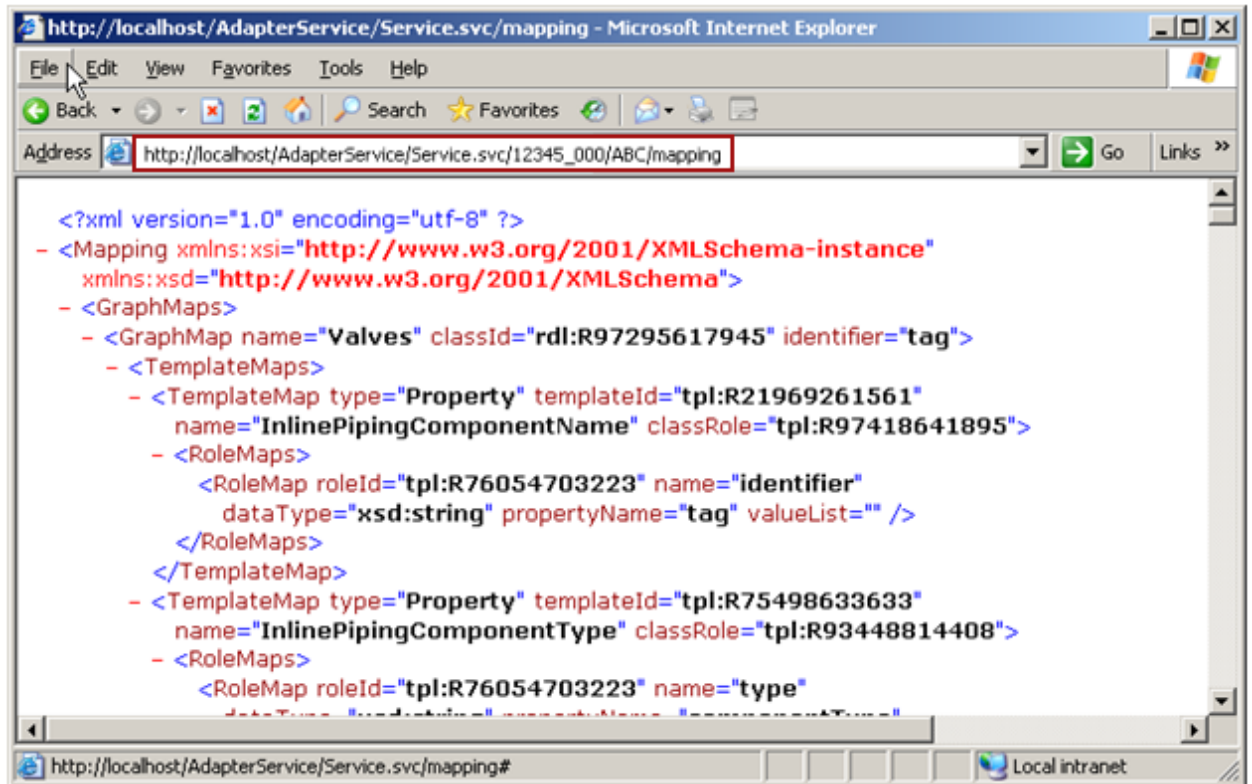

#### 4.11 Testing the Mapping Editor

Test the Mapping Editor by opening your browser on the server and entering the address <http://localhost/MappingEditor/Default.aspx>. Select project, 12345\_000, and application ABC. You should see the following.

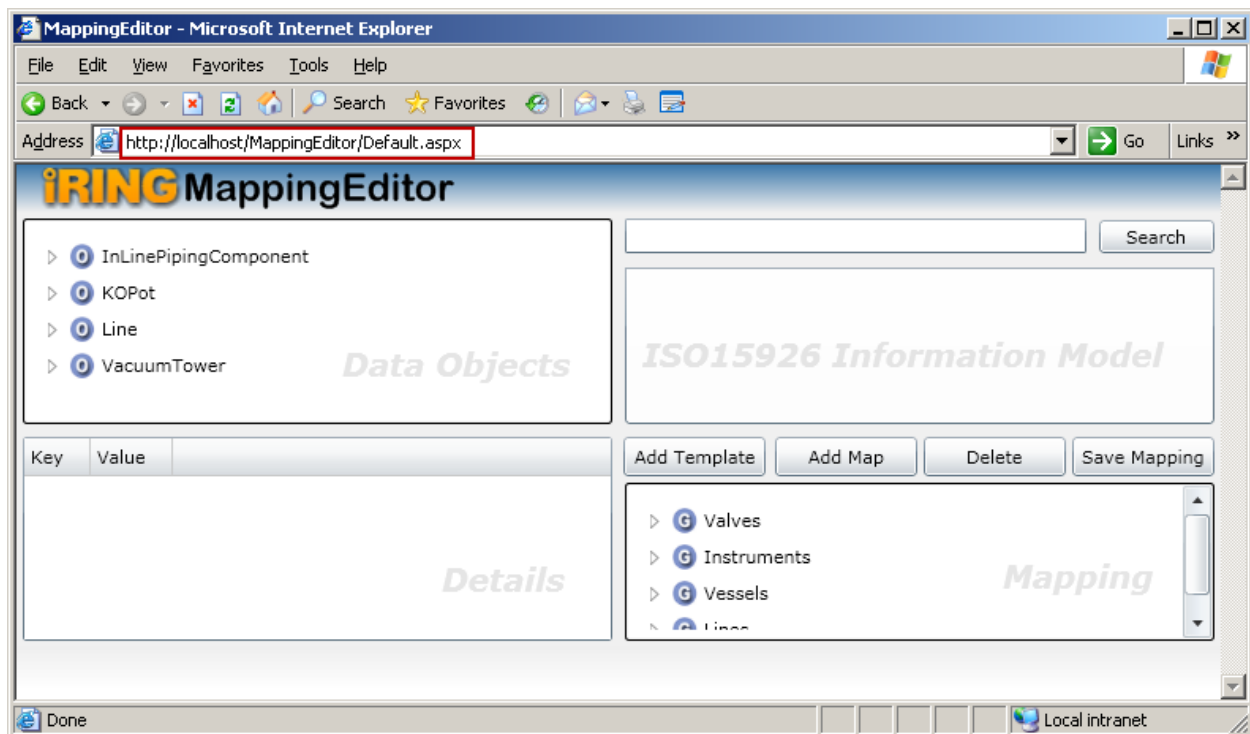

This completes the installation of **iRingTools** Adapter.


## 5 Hostname Setup

The final step in the installation is updating hostname in certain **iRINGTools** services for use with client browsers on the network.


### 5.1 iRINGTools Sandbox

If you installed the **iRINGTools** sandbox, then the RefDataEditor Web.config file needs updating for the server hostname. Modify the file as follows.

1. Open the file Web.config file located in the iRINGWeb\RefDataEditor in a text editor.

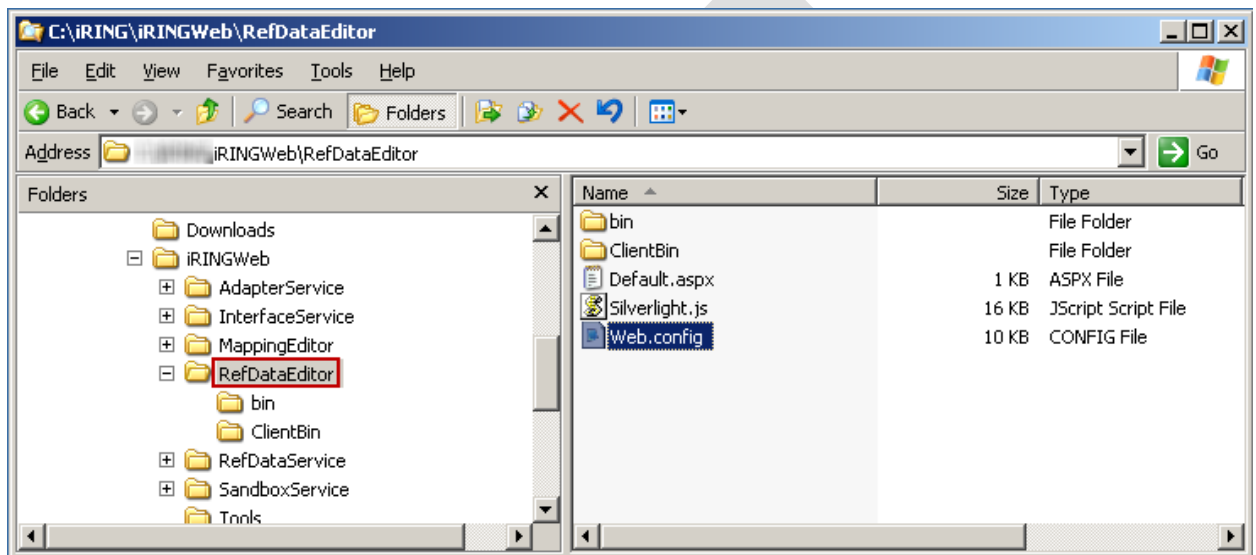

2. In the file Web.config, locate the ReferenceDataServiceUri key in appSettings. Change localhost in the value to the server hostname; preserve other portions of the value.

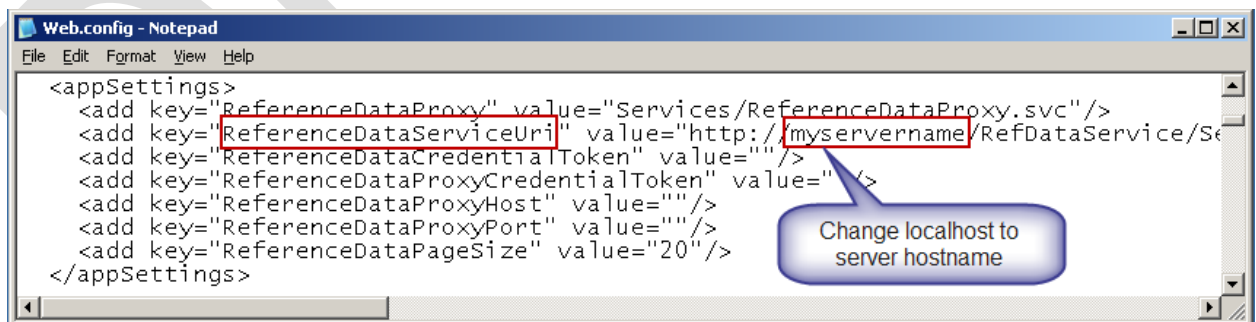


3. Save the changes to the file Web.config and close it.




## 5.2 iRINGTools Adapter

If you installed the **iRINGTools** Adapter, then the MappingEditor Web.config file needs updating for the server hostname. Modify the file as follows.


1. Open the file Web.config file located in the iRINGWeb\ MappingEditor in a text editor.

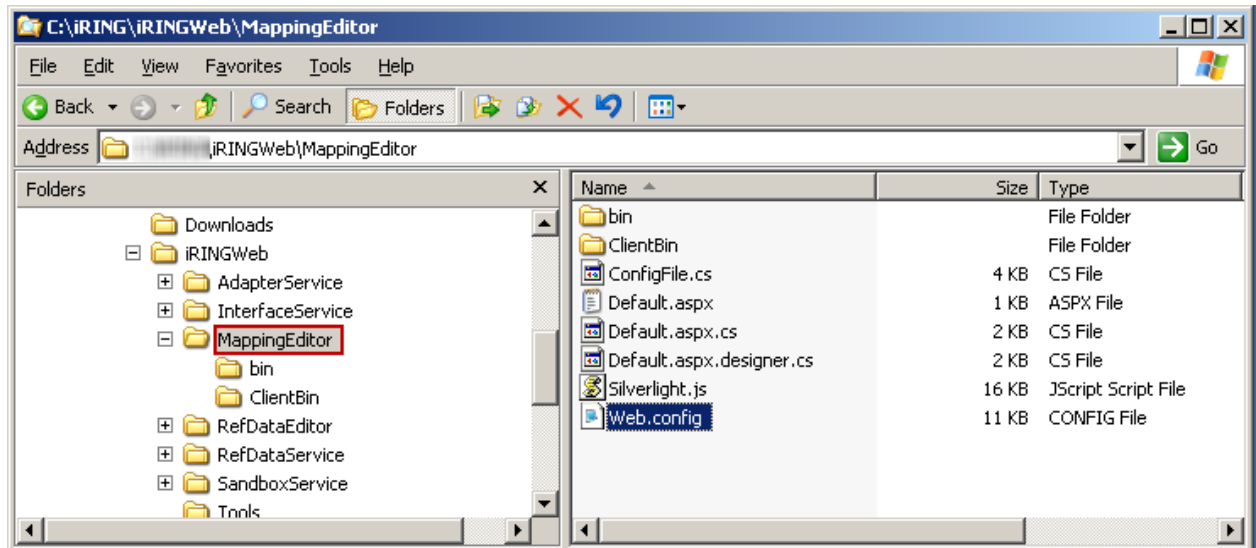

2. In the file Web.config, locate the AdapterServiceUri key in appSettings. Change localhost in the value to the server hostname; preserve other portions of the value.

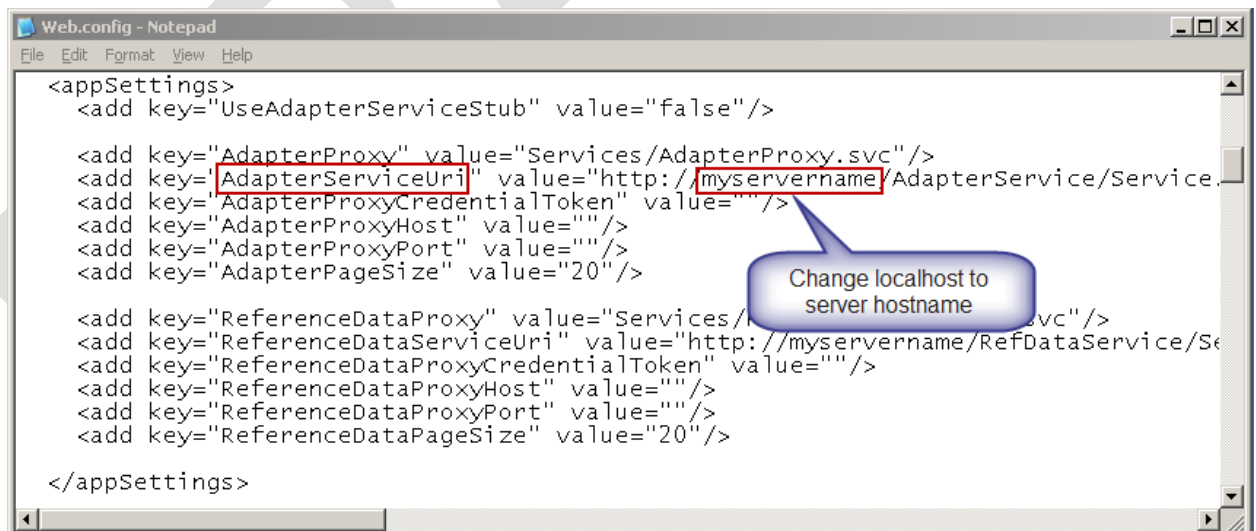

3. In the file Web.config, locate the ReferenceDataServiceUri key in appSettings. Change localhost in the value to the server hostname; preserve other portions of the value.

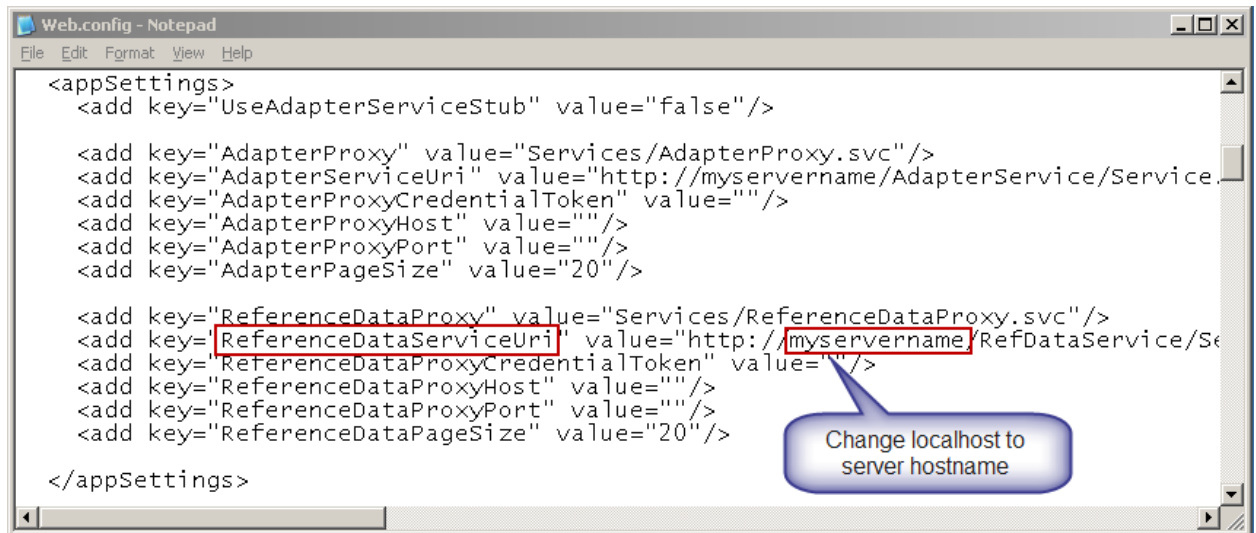

4. Save the changes to the file Web.config and close it.

Installation of **iRINGTools** sandbox and/or adapter is complete.