
Superstore Sales Report.

Authored by: SANA ANAS M



1.Tables Used


Table Name	Description	Key Columns
Orders	Contains sales transaction data	Order ID, Customer ID, Product ID, Order Date, Sales, Profit
Customers	Stores customer details	Customer ID, Customer Name, Segment, Region
Products	Product-related details	Product ID, Category, Sub-Category, Product Name
Time	Calendar or date table for time-based analysis	Date, Month, Year, Quarter

2.Relationship

Relationship	Type	Description
Orders[Customer ID] → Customers[Customer ID]	One-to-Many	Links each order to the corresponding customer
Orders[Product ID] → Products[Product ID]	One-to-Many	Connects each order to the product purchased
Orders[Order Date] → Time[Date]	Many-to-One	Enables time-based reporting
[Add more if applicable]		

3. Key Calculations / Measures

Measure Name	Formula / Logic	Purpose
Total Sales	SUM(Orders[Sales])	Shows total revenue generated
Total Profit	SUM(Orders[Profit])	Displays net profit across transactions
Average Order Value (AOV)	DIVIDE(SUM(Orders[Sales]), DISTINCTCOUNT(Orders[Order ID]))	Measures average sales per order
Profit Margin %	DIVIDE(SUM(Orders[Profit]), SUM(Orders[Sales]))	Shows profit percentage
Sales Growth %	(([Total Sales] - [Previous Period Sales]) / [Previous Period Sales])	Tracks sales increase/decrease over time

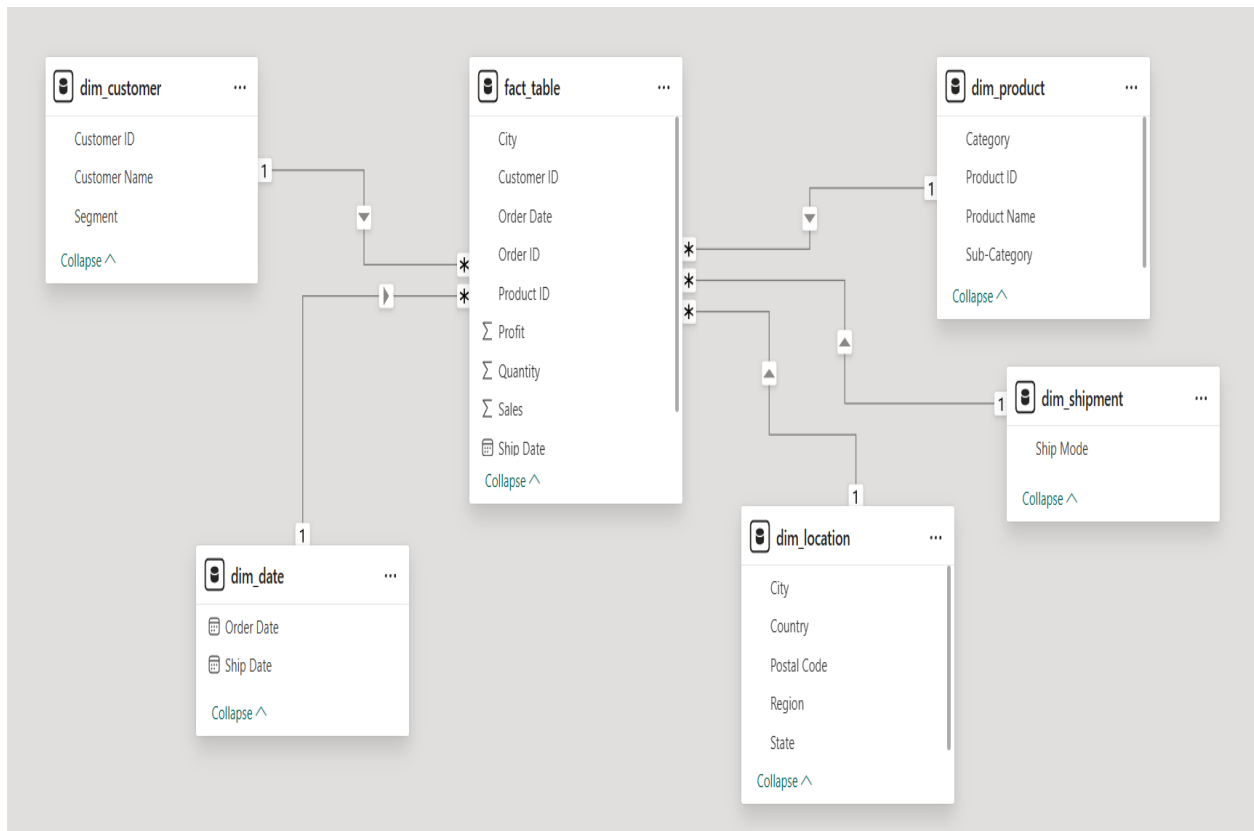

4. Notes

- **Assumptions:** Missing values in `Profit` are treated as 0.
- **Transformations:** Dates formatted to `DD-MM-YYYY`. Negative profit values retained to highlight losses.
- **Data Refresh:** Dataset auto-updated weekly from the source file `Orders_2024.csv`.
- **Other Info:** Slicers used for filtering by Category, Region, and Year.

