



Machine Learning

Machine learning system design

Prioritizing what to
work on: Spam
classification example

Building a spam classifier

From: cheapsales@buystufffromme.com
To: ang@cs.stanford.edu
Subject: Buy now!

Deal of the week! Buy now!
Rolex w4tchs - \$100
Medicine (any kind) - \$50
Also low cost M0rgages
available.

Spam (1)

From: Alfred Ng
To: ang@cs.stanford.edu
Subject: Christmas dates?

Hey Andrew,
Was talking to Mom about plans
for Xmas. When do you get off
work. Meet Dec 22?
Alf

Non-spam (0)

Building a spam classifier

Supervised learning. x = features of email. y = spam (1) or not spam (0).

Features x : Choose 100 words indicative of spam/not spam.

E.g. deal, buy, discount, andrew, now, ...

$$x = \begin{bmatrix} 0 \\ 1 \\ 1 \\ 0 \\ \vdots \\ 1 \\ \vdots \end{bmatrix} \begin{matrix} \text{andrew} \\ \text{buy} \\ \text{deal} \\ \text{discount} \\ \vdots \\ \text{now} \\ \vdots \end{matrix} \quad x \in \mathbb{R}^{100}$$

$$x_j = \begin{cases} 1 & \text{if word } j \text{ appears in email} \\ 0 & \text{otherwise} \end{cases}$$

From: cheapsales@buystufffromme.com
To: ang@cs.stanford.edu
Subject: Buy now!

Deal of the week! Buy now!

Note: In practice, take most frequently occurring n words (10,000 to 50,000) in training set, rather than manually pick 100 words.

Building a spam classifier

improve the accuracy of this classifier

How to spend your time to make it have low error?

- Collect lots of data
 - E.g. “honeypot” project. doesn't always work
- Develop sophisticated features based on email routing information (from email header).
- Develop sophisticated features for message body, e.g. should “discount” and “discounts” be treated as the same word? How about “deal” and “Dealer”? Features about punctuation?
- Develop sophisticated algorithm to detect misspellings (e.g. m0rtgage, med1cine, w4tches.)



Machine Learning

Machine learning
system design

Error analysis

Recommended approach

- Start with a simple algorithm that you can implement quickly. Implement it and test it on your cross-validation data.
- Plot learning curves to decide if more data, more features, etc. are likely to help.
- Error analysis: Manually examine the examples (in cross validation set) that your algorithm made errors on. See if you spot any systematic trend in what type of examples it is making errors on.

Error Analysis

$m_{CV} = 500$ examples in cross validation set

Algorithm misclassifies 100 emails.

Manually examine the 100 errors, and categorize them based on:

- (i) What type of email it is *pharma, replica, steal passwords, ...*
- (ii) What cues (features) you think would have helped the algorithm classify them correctly.

Pharma: *12*

Replica/fake: *4*

→ Steal passwords: *53*

Other: *31*

→ Deliberate misspellings: *5*
(m0rgage, med1cine, etc.)

→ Unusual email routing: *16*

→ Unusual (spamming) punctuation: *32*

The importance of numerical evaluation

Should discount/discounts/discounted/discounting be treated as the same word?

词干提取法

Can use “stemming” software (E.g. “Porter stemmer”)

universe/university.

Error analysis may not be helpful for deciding if this is likely to improve performance. Only solution is to try it and see if it works.

It is very important to get error results as a single, numerical value. Otherwise it is difficult to assess your algorithm's performance.

Need numerical evaluation (e.g., cross validation error) of algorithm's performance with and without stemming.

Without stemming: 5% error With stemming: 3% error

Distinguish upper vs. lower case (Mom/mom): 3.2%

If we develop new features by examining the test set, then we may end up choosing features that work well specifically for the test set, so $J_{\text{test}}(\theta)$ is no longer a good estimate of how well we generalize to new examples.



Machine Learning

Machine learning system design

Error metrics for skewed classes

Cancer classification example

Train logistic regression model $h_{\theta}(x)$. ($y = 1$ if cancer, $y = 0$ otherwise)

Find that you got 1% error on test set.
(99% correct diagnoses)

Only 0.50% of patients have cancer.

→ skewed classes.

```
function y = predictCancer(x)
```

```
    → y = 0; %ignore x!
```

```
    return
```


→ 0.5% error

→ 99.2% accuracy (0.8% error)

→ 99.5% accuracy (0.5% error)

Precision/Recall

$y = 1$ in presence of rare class that we want to detect

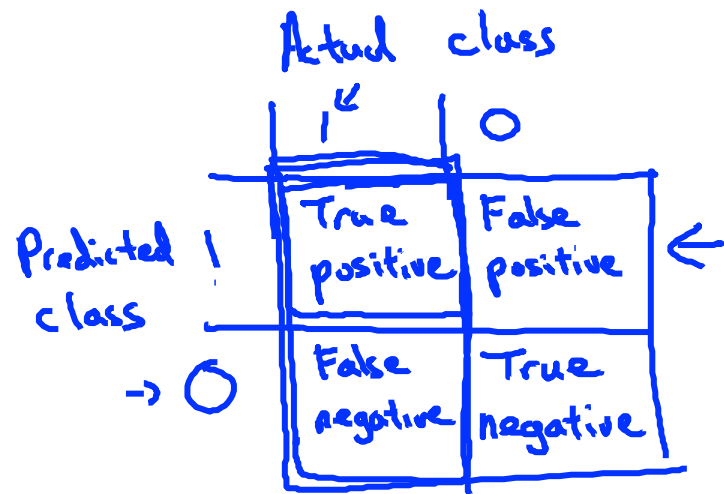

→ **Precision** 在认为有cancer的人群中有多大的概率他们真的有cancer
(Of all patients where we predicted $y = 1$, what fraction actually has cancer?)

$$\frac{\text{True positives}}{\text{\#predicted positive}} = \frac{\text{True positive}}{\text{True pos} + \text{False pos}}$$

→ **Recall** 在真正有cancer的人群中有多少被告知得了cancer
(Of all patients that actually have cancer, what fraction did we correctly detect as having cancer?)

$y = 0$
recall = 0

意味着algorithm只是简单的设定y输出0.

$$\frac{\text{True positives}}{\text{\#actual positives}} = \frac{\text{True positives}}{\text{True pos} + \text{False neg}}$$



Machine Learning

Machine learning system design

Trading off precision
and recall

Trading off precision and recall

→ Logistic regression: $0 \leq h_{\theta}(x) \leq 1$

Predict 1 if $h_{\theta}(x) \geq 0.5$ ~~0.7~~ ~~0.9~~ 0.3 ←

Predict 0 if $h_{\theta}(x) < 0.5$ ~~0.7~~ ~~0.9~~ 0.3

→ Suppose we want to predict $y = 1$ (cancer) only if very confident.

→ Higher precision, lower recall


→ Suppose we want to avoid missing too many cases of cancer (avoid false negatives).

→ Higher recall, lower precision.

More generally: Predict 1 if $h_{\theta}(x) \geq \text{threshold}$ ←

$$\rightarrow \text{precision} = \frac{\text{true positives}}{\text{no. of predicted positive}}$$

$$\rightarrow \text{recall} = \frac{\text{true positives}}{\text{no. of actual positive}}$$

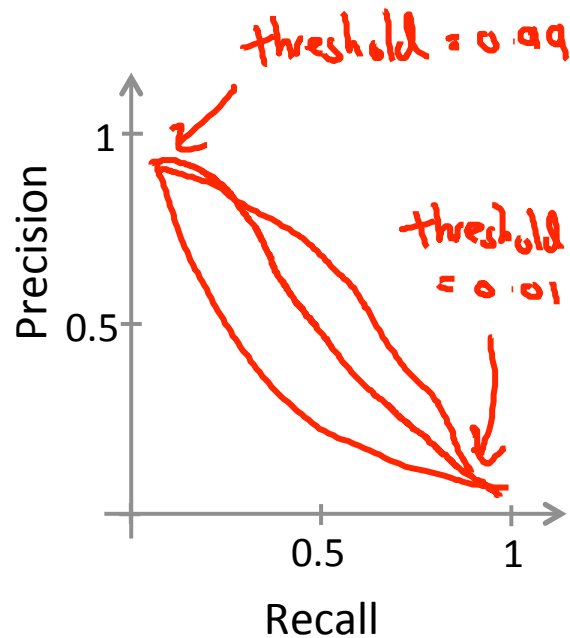

F_1 Score (F score)


How to compare precision/recall numbers?

	Precision(P)	Recall (R)
→ Algorithm 1	<u>0.5</u>	<u>0.4</u>
→ Algorithm 2	<u>0.7</u>	<u>0.1</u>
Algorithm 3	<u>0.02</u>	1.0

Average: ~~$\frac{P+R}{2}$~~

F_1 Score:

$$2 \frac{PR}{P+R}$$

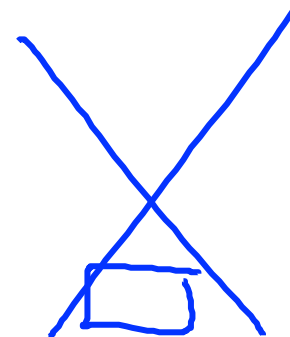 Predict $y=1$ all the time

$P=0$ or $R=0 \Rightarrow F\text{-score} = 0$
 $P=1$ and $R=1 \Rightarrow F\text{-score} = 1$



Machine Learning

Machine learning system design

Data for machine learning

Designing a high accuracy learning system


E.g. Classify between confusable words.

{to, two, too}, {then, than}

→ For breakfast I ate two eggs.

Algorithms

- - Perceptron (Logistic regression)
- - Winnow
- - Memory-based
- - Naïve Bayes

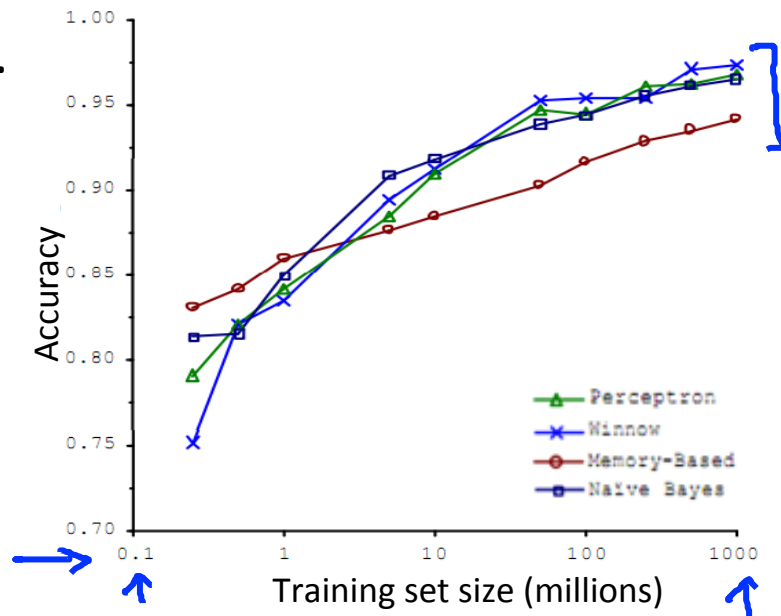

“It’s not who has the best algorithm that wins.

It’s who has the most data.”

Large data rationale

→ Assume feature $x \in \mathbb{R}^{n+1}$ has sufficient information to predict y accurately. ↗

Example: For breakfast I ate two eggs. ↗

Counterexample: Predict housing price from only size (feet²) and no other features. ←

Useful test: Given the input x , can a human expert confidently predict y ?

Large data rationale

→ Use a learning algorithm with many parameters (e.g. logistic regression/linear regression with many features; neural network with many hidden units). low bias algorithms. ←

→ $J_{\text{train}}(\theta)$ will be small.

Use a very large training set (unlikely to overfit) low variance ←

→ $J_{\text{train}}(\theta) \approx J_{\text{test}}(\theta)$

→ $J_{\text{test}}(\theta)$ will be small