

Xlib

Nathan Warner



**Northern Illinois
University**

Computer Science
Northern Illinois University
United States

Contents

1	1. Introduction	2
2	2. Display functions	11
3	3. Window functions	40
4	4. Window information functions	70
5	5. Pixmap and cursor functions	88
6	6. Color management functions	99
7	7. Graphics context functions	123
8	8. Graphics functions	126
9	9. Window and session manager functions	127
10	10. Events	135
11	11. Event handling functions	171
12	12. Input device functions	185
13	16. Application Utility Functions	203
14	ICCCM Functions	206

1. Introduction

- **The X Window System (X11):** The X Window System, often called X11, is the general windowing system design and protocol. It defines things like:
 - how graphical programs communicate with a display server,
 - how windows are created, moved, resized, and drawn into,
 - how keyboard and mouse input is delivered,
 - how clients and the display server exchange messages.

There is a distinction between a specification/standard and a concrete program that implements it.

- **X.Org display server:** The X.Org display server, usually called Xorg, is an actual open-source program that implements the X11 server side of that system. It is the software process that runs on your machine and speaks the X11 protocol to graphical applications
- **X clients:** The X.Org display server, usually called Xorg, is an actual open-source program that implements the X11 server side of that system. It is the software process that runs on your machine and speaks the X11 protocol to graphical applications
- **Windowing system:** A windowing system is the overall graphical environment model that lets programs use windows, input devices, and the screen in a coordinated way.
- **Display server:** A display server is the actual program that sits between graphical applications and the hardware/display system.
 - **Windowing system:** X Window System / X11
 - **Display server:** X.Org Server

A display server is responsible for managing access to the screen, keyboard, mouse, touchpad, and sometimes GPU/display hardware. Graphical applications usually do not draw directly to the physical screen. Instead, they communicate with the display server.

A windowing system is broader. It is the architecture that defines how graphical applications, windows, input, drawing, and the display server/compositor interact.

It includes concepts such as:

- windows;
 - graphical clients;
 - input events;
 - drawing surfaces;
 - focus;
 - stacking order;
 - protocols for communication between apps and the graphical environment.
- **Intro:** The X Window System is a network-transparent window system that was designed at MIT. X display servers run on computers with either monochrome or color bitmap display hardware. The server distributes user input to and accepts output requests from various client programs located either on the same machine or elsewhere in the network. Xlib is a C subroutine library that application programs (clients) use to interface with the window system by means of a stream connection. Although a client usually runs on the same machine as the X server it is talking to, this need not be the case.

Note: Monochrome means **one color**. It describes any visual, design, or medium that is constructed using only a single base hue along with its various tints, tones, and shades. While black-and-white is the most common example, a monochrome palette can be built entirely around any color

- **Network-transparent:** In general, network-transparent means that a system lets you use some resource over a network as if it were local, while hiding most of the networking details from the user or program.
- **Color bitmap:** A color bitmap is an image represented as a rectangular grid of pixels, where each pixel stores color information. A color bitmap uses more bits per pixel so that each pixel can represent many possible colors. In a common 24-bit RGB color bitmap, each pixel stores three color components:

$$(R, G, B).$$

Each component uses 8 bits, so each ranges from 0 to 255.

- **Screens and Display:** The X Window System supports one or more screens containing overlapping windows or subwindows. A screen is a physical monitor and hardware that can be color, grayscale, or monochrome. There can be multiple screens for each display or workstation. A single X server can provide display services for any number of screens. A set of screens for a single user with one keyboard and one pointer (usually a mouse) is called a **display**.
- **Window hierarchy:** All the windows in an X server are arranged in strict hierarchies. At the top of each hierarchy is a root window, which covers each of the display screens. Each root window is partially or completely covered by child windows. All windows, except for root windows, have parents. There is usually at least one window for each application program. Child windows may in turn have their own children. In this way, an application program can create an arbitrarily deep tree on each screen. X provides graphics, text, and raster operations for windows.

A child window can be larger than its parent. That is, part or all of the child window can extend beyond the boundaries of the parent, but all output to a window is clipped by its parent.

That means X will only actually display the part of the child window that lies inside the parent window. Anything outside the parent's visible rectangle is not drawn on the screen.

Children of a window have overlapping locations, one of the children is considered to be on top of or raised over the others, thus obscuring them. Output to areas covered by other windows is suppressed by the window system unless the window has backing store.

Child windows obscure their parents, and graphic operations in the parent window usually are clipped by the children

- **Border:** A window has a border zero or more pixels in width, which can be any pattern (pixmap) or solid color you like. A window usually but not always has a background pattern, which will be repainted by the window system when uncovered.
- **Coordinates:** Each window and pixmap has its own coordinate system. The coordinate system has the X axis horizontal and the Y axis vertical with the origin $[0, 0]$ at the upper-left corner. Coordinates are integral, in terms of pixels, and coincide with pixel centers. For a window, the origin is inside the border at the inside, upper-left corner.

- **Expose event:** X does not guarantee to preserve the contents of windows. When part or all of a window is hidden and then brought back onto the screen, its contents may be lost. The server then sends the client program an Expose event to notify it that part or all of the window needs to be repainted. Programs must be prepared to regenerate the contents of windows on demand.
- **Drawables:** X also provides off-screen storage of graphics objects, called pixmaps. Single plane (depth 1) pixmaps are sometimes referred to as bitmaps. Pixmaps can be used in most graphics functions interchangeably with windows and are used in various graphics operations to define patterns or tiles. Windows and pixmaps together are referred to as drawables.
- **Xlib function requests:** Most of the functions in Xlib just add requests to an output buffer. These requests later execute asynchronously on the X server. Functions that return values of information stored in the server do not return (that is, they block) until an explicit reply is received or an error occurs. You can provide an error handler, which will be called when the error is reported.
- **XSync:** If a client does not want a request to execute asynchronously, it can follow the request with a call to XSync, which blocks until all previously buffered asynchronous events have been sent and acted on. As an important side effect, the output buffer in Xlib is always flushed by a call to any function that returns a value from the server or waits for input.
- **Resource ID:** Many Xlib functions will return an integer resource ID, which allows you to refer to objects stored on the X server. These can be of type **Window**, **Font**, **Pixmap**, **Colormap**, **Cursor**, and **GContext**, as defined in the file `<X11/X.h>`. These resources are created by requests and are destroyed (or freed) by requests or when connections are closed. Most of these resources are potentially sharable between applications, and in fact, windows are manipulated explicitly by window manager programs. Fonts and cursors are shared automatically across multiple screens. Fonts are loaded and unloaded as needed and are shared by multiple clients. Fonts are often cached in the server. Xlib provides no support for sharing graphics contexts between applications
- **Client programs and events:** Client programs are informed of events. Events may either be side effects of a request (for example, restacking windows generates Expose events) or completely asynchronous (for example, from the keyboard). A client program asks to be informed of events. Because other applications can send events to your application, programs must be prepared to handle (or ignore) events of all types.

Input events (for example, a key pressed or the pointer moved) arrive asynchronously from the server and are queued until they are requested by an explicit call (for example, **XNextEvent** or **XWindowEvent**). In addition, some library functions (for example, **XRaiseWindow**) generate Expose and **ConfigureRequest** events. These events also arrive asynchronously, but the client may wish to explicitly wait for them by calling **XSync** after calling a function that can cause the server to generate events.

- **Errors:** Some functions return **Status**, an integer error indication. If the function fails, it returns a zero. If the function returns a status of zero, it has not updated the return arguments. Because C does not provide multiple return values, many functions must return their results by writing into clientpassed storage. By default, errors are handled either by a standard library function or by one that you provide. Functions that return pointers to strings return NULL pointers if the string does not exist.

The X server reports **protocol errors** at the time that it detects them. If more than one error could be generated for a given request, the server can report any of them.

Because Xlib usually does not transmit requests to the server immediately (that is, it buffers them), errors can be reported much later than they actually occur. For debugging purposes, however, Xlib provides a mechanism for forcing synchronous behavior. When synchronization is enabled, errors are reported as they are generated.

When Xlib detects an error, it calls an error handler, which your program can provide. If you do not provide an error handler, the error is printed, and your program terminates.

- **Standard Header Files:** The following include files are part of the Xlib standard:
 - **<X11/Xlib.h>:** This is the main header file for Xlib. The majority of all Xlib symbols are declared by including this file. This file also contains the preprocessor symbol `XlibSpecificationRelease`. This symbol is defined to have the 6 in this release of the standard. (Release 5 of Xlib was the first release to have this symbol.)
 - **<X11/X.h>:** This file declares types and constants for the X protocol that are to be used by applications. It is included automatically from `<X11/Xlib.h>`, so application code should never need to reference this file directly.
 - **<X11/Xcms.h>:** This file contains symbols for much of the color management facilities. All functions, types, and symbols with the prefix “Xcms”, plus the Color Conversion Contexts macros, are declared in this file. `<X11/Xlib.h>` must be included before including this file.
 - **<X11/Xutil.h>:** This file declares various functions, types, and symbols used for inter-client communication and application utility functions, which are described in chapters 14 and 16. `<X11/Xlib.h>` must be included before including this file.
 - **<X11/Xresource.h>:** This file declares all functions, types, and symbols for the resource manager facilities. `<X11/Xlib.h>` must be included before including this file.
 - **<X11/Xatom.h>:** This file declares all predefined atoms, which are symbols with the prefix “XA_”.
 - **<X11/cursorfont.h>:** This file declares the cursor symbols for the standard cursor font. All cursor symbols have the prefix “XC_”.
 - **<X11/keysymdef.h>:** This file declares all standard KeySym values, which are symbols with the prefix “XK_”. The KeySyms are arranged in groups, and a preprocessor symbol controls inclusion of each group. The preprocessor symbol must be defined prior to inclusion of the file to obtain the associated values. The preprocessor symbols are
 - * `XK_MISCELLANY`
 - * `XK_XKB_KEYS`
 - * `XK_3270`
 - * `XK_LATIN1`
 - * `XK_LATIN2`
 - * `XK_LATIN3`
 - * `XK_LATIN4`
 - * `XK_KATAKANA`

- * XK_ARABIC
- * XK_CYRILLIC
- * XK_GREEK
- * XK_TECHNICAL
- * XK_SPECIAL
- * XK_PUBLISHING
- * XK_APL
- * XK_HEBREW
- * XK_THAI
- * XK_KOREAN

- **<X11/keysym.h>**: This file defines the preprocessor symbols listed above and then includes **<X11/keysymdef.h>**.
- **<X11/Xlibint.h>**: This file declares all the functions, types, and symbols used for extensions. This file automatically includes **<X11/Xlib.h>**.
- **<X11/Xproto.h>**: This file declares types and symbols for the basic X protocol, for use in implementing extensions. It is included automatically from **<X11/Xlibint.h>**, so application and extension code should never need to reference this file directly.
- **<X11/Xprotostr.h>**: This file declares types and symbols for the basic X protocol, for use in implementing extensions. It is included automatically from **<X11/Xproto.h>**, so application and extension code should never need to reference this file directly.
- **<X11/X10.h>**: This file declares all the functions, types, and symbols used for the X10 compatibility functions.

- **KeySyms**: A KeySym is X11’s symbolic meaning for a keyboard key.

A keyboard event gives you a **KeyCode**, which is closer to “which physical/logical key was pressed.” A **KeySym** is closer to “what symbol does that key currently mean?” The Xlib docs define a KeyCode as a physical or logical key code and a KeySym as the encoding of the symbol on the keycap.

A keycode by itself is not enough, because the same physical key can mean different things depending on keyboard layout and modifiers.

- **Atoms**: An Atom is an integer ID that stands for a string name known to the X server.

X11 uses atoms heavily for **window properties**, **property types**, **selections**, and **ClientMessage** protocols. Xlib’s documentation describes a window property as named, typed data; the property name has a unique identifier called an atom, and property types are also represented using atoms.

Instead of constantly sending strings like:

```
0  "WM_DELETE_WINDOW"
1  "_NET_WM_NAME"
2  "UTF8_STRING"
3  "WM_PROTOCOLS"
```

clients ask the server for an integer identifier:

```
0 Atom wm_delete = XInternAtom(display, "WM_DELETE_WINDOW",  
  ↪ False);  
1 Atom wm_protocols = XInternAtom(display, "WM_PROTOCOLS",  
  ↪ False);
```

Then they use those Atom values in later protocol requests.

- **Extensions:** An **X extension** is an addition to the core X11 protocol. The core X protocol has a fixed set of requests, events, errors, and objects. Extensions allow the server and clients to support extra functionality without changing the original core protocol.

Examples include

```
0 RANDR      resizing/rotating screens, monitor layout  
1 XRender    improved 2D rendering/compositing primitives  
2 XInput2    advanced input devices/events  
3 XFixes     fixes and additions to older X behavior  
4 Composite  off-screen window compositing support  
5 Shape      non-rectangular windows  
6 GLX        OpenGL integration with X
```

Before using an extension, a client usually checks whether the server supports it. Xlib provides functions such as:

```
0 XQueryExtension(display, "RANDR", &major, &first_event,  
  ↪ &first_error);
```

- **Generic values and types:** The following symbols are defined by Xlib and used throughout the manual.
 - Xlib defines the type **Bool** and the Boolean values **True** and **False**.
 - **None** is the universal null resource ID or atom.
 - The type **XID** is used for generic resource IDs.
 - The type **XPointer** is defined to be `char*` and is used as a generic opaque pointer to data.
- **Naming and Argument Conventions within Xlib:** Xlib follows a number of conventions for the naming and syntax of the functions. Given that you remember what information the function requires, these conventions are intended to make the syntax of the functions more predictable.

The major naming conventions are:

- To differentiate the X symbols from the other symbols, the library uses mixed case for external symbols. It leaves lowercase for variables and all uppercase for user macros, as per existing convention.
- All Xlib functions begin with a capital X.
- The beginnings of all function names and symbols are capitalized.
- All user-visible data structures begin with a capital X. More generally, anything that a user might dereference begins with a capital X.
- Macros and other symbols do not begin with a capital X. To distinguish them from all user symbols, each word in the macro is capitalized.
- All elements of or variables in a data structure are in lowercase. Compound words, where needed, are constructed with underscores (_).
- The display argument, where used, is always first in the argument list.
- All resource objects, where used, occur at the beginning of the argument list immediately after the display argument.
- When a graphics context is present together with another type of resource (most commonly, drawable), the graphics context occurs in the argument list after the other resource. Drawables outrank all other resources.
- Source arguments always precede the destination arguments in the argument list.
- The *x* argument always precedes the *y* argument in the argument list.
- The width argument always precedes the height argument in the argument list.
- Where the *x*, *y*, width, and height arguments are used together, the *x* and *y* arguments
- always precede the width and height arguments.
- Where a mask is accompanied with a structure, the mask always precedes the pointer to the structure in the argument list.

• **Programming Considerations:** The major programming considerations are:

- Coordinates and sizes in X are actually 16-bit quantities. This decision was made to minimize the bandwidth required for a given level of performance. Coordinates usually are declared as an int in the interface. Values larger than 16 bits are truncated silently. Sizes (width and height) are declared as unsigned quantities.
- Keyboards are the greatest variable between different manufacturers' workstations. If you want your program to be portable, you should be particularly conservative here.
- Many display systems have limited amounts of off-screen memory. If you can, you should minimize use of pixmaps and backing store.
- The user should have control of his screen real estate. Therefore, you should write your applications to react to window management rather than presume control of the entire screen. What you do inside of your top-level window, however, is up to your application. For further information, see chapter 14 and the Inter-Client Communication Conventions

• **Character Sets and Encodings:** Some of the Xlib functions make reference to specific character sets and character encodings. The following are the most common:

- **X Portable Character Set:** A basic set of 97 characters, which are assumed to exist in all locales supported by Xlib. This set contains the following characters:

a..z A..Z 0..9
 !"#\$%&'()*+,-./:;<=>?@[\]^_`{|}~
 <space>, <tab>, <newline>

This set is the left/lower half of the graphic character set of ISO8859-1 plus space, tab, and newline. It is also the set of graphic characters in 7-bit ASCII plus the same three control characters. The actual encoding of these characters on the host is system dependent.

- **Host Portable Character Encoding:** The encoding of the X Portable Character Set on the host. The encoding itself is not defined by this standard, but the encoding must be the same in all locales supported by Xlib on the host. If a string is said to be in the Host Portable Character Encoding, then it only contains characters from the X Portable Character Set, in the host encoding.
 - * **Latin-1:** The coded character set defined by the ISO8859-1 standard.
 - * **Latin Portable Character Encoding:** The encoding of the X Portable Character Set using the Latin-1 codepoints plus ASCII control characters. If a string is said to be in the Latin Portable Character Encoding, then it only contains characters from the X Portable Character Set, not all of Latin-1.
 - * **STRING Encoding:** Latin-1, plus tab and newline.
 - * **POSIX Portable Filename Character Set:** The set of 65 characters, which can be used in naming files on a POSIX-compliant host, that are correctly processed in all locales. The set is:

a..z A..Z 0..9 ._ - .

- **Formatting Conventions:**

- Global symbols are printed in this special font. These can be either function names, symbols defined in include files, or structure names. When declared and defined, function arguments are printed in italics. In the explanatory text that follows, they usually are printed in regular type.
- Each function is introduced by a general discussion that distinguishes it from other functions. The function declaration itself follows, and each argument is specifically explained. Although ANSI C function prototype syntax is not used, Xlib header files normally declare functions using function prototypes in ANSI C environments. General discussion of the function, if any is required, follows the arguments. Where applicable, the last paragraph of the explanation lists the possible Xlib error codes that the function can generate.
- To eliminate any ambiguity between those arguments that you pass and those that a function returns to you, the explanations for all arguments that you pass start with the word **specifies** or, in the case of multiple arguments, the word **specify**. The explanations for all arguments that are returned to you start with the word **returns** or, in the case of multiple arguments, the word **return**. The explanations for all arguments that you can pass and are returned start with the words **specifies** and **returns**.
- Any pointer to a structure that is used to return a value is designated as such by the `_return` suffix as part of its name. All other pointers passed to these functions are used for reading only. A few arguments use pointers to structures that are used for both input and output and are indicated by using the `_in_out` suffix.

- **Clients:** A client is any program that connects to the X server and sends it requests.

The X server controls the display, keyboard, mouse, screens, windows, pixmaps, graphics contexts, fonts, cursors, and other X resources. A client is a program using that server.

So in x , the “client” is not necessarily a remote machine. It is usually just a local process on your own computer.

2. Display functions

- **Intro:** Before your program can use a display, you must establish a connection to the X server. Once you have established a connection, you then can use the Xlib macros and functions discussed in this chapter to return information about the display. We will discuss how to
 - Open (connect to) the display
 - Obtain information about the display, image formats, or screens
 - Generate a **NoOperation** protocol request
 - Free client-created data
 - Close (disconnect from) a display
 - Use X Server connection close operations
 - Use Xlib with threads
 - Use internal connections
- **Opening the Display:** To open a connection to the X server that controls a display, use **XOpenDisplay**

```
o Display *XOpenDisplay(char* display_name)
```

- **display_name** Specifies the hardware display name, which determines the display and communications domain to be used. On a POSIX-conformant system, if the display_name is NULL, it defaults to the value of the DISPLAY environment variable.

Note: The encoding and interpretation of the display name are implementation-dependent. Strings in the Host Portable Character Encoding are supported; support for other characters is implementation-dependent. On POSIX-conformant systems, the display name or DISPLAY environment variable can be a string in the format:

protocol/hostname:number.screen_number

- **protocol:** Specifies a protocol family or an alias for a protocol family. Supported protocol families are implementation dependent. The protocol entry is optional. If protocol is not specified, the / separating protocol and hostname must also not be specified.
- **hostname:** Specifies the name of the host machine on which the display is physically attached. You follow the hostname with either a single colon (:) or a double colon (::).
- **number:** Specifies the number of the display server on that host machine. You may optionally follow this display number with a period (.). A single CPU can have more than one display. Multiple displays are usually numbered starting with zero.
- **screen_number:** Specifies the screen to be used on that server. Multiple screens can be controlled by a single X server. The screen_number sets an internal variable that can be accessed by using the **DefaultScreen** macro or the **XDefaultScreen** function if you are using languages other than C

For example, the following would specify screen 1 of display 0 on the machine named “dualheaded”:

The **XOpenDisplay** function returns a **Display** structure that serves as the connection to the X server and that contains all the information about that X server. **XOpenDisplay** connects your application to the X server through TCP or DECnet communications protocols, or through some local inter-process communication protocol. If the protocol is specified as "tcp", "inet", or "inet6", or if no protocol is specified and the hostname is a host machine name and a single colon (:) separates the hostname and display number, **XOpenDisplay** connects using **TCP streams**.

If the protocol is specified as "inet", TCP over IPv4 is used. If the protocol is specified as "inet6", TCP over IPv6 is used. Otherwise, the implementation determines which IP version is used. If the hostname and protocol are both not specified, Xlib uses whatever it believes is the fastest transport. If the hostname is a host machine name and a double colon (::) separates the hostname and display number, **XOpenDisplay** connects using DECnet. A single X server can support any or all of these transport mechanisms simultaneously. A particular Xlib implementation can support many more of these transport mechanisms.

If successful, **XOpenDisplay** returns a pointer to a **Display** structure, which is defined in `<X11/Xlib.h>`. If **XOpenDisplay** does not succeed, it returns NULL. After a successful call to **XOpenDisplay**, all of the screens in the display can be used by the client. The screen number specified in the `display_name` argument is returned by the **DefaultScreen** macro (or the **XDefaultScreen** function). You can access elements of the **Display** and **Screen** structures only by using the information macros or functions.

- **Obtaining Information about the Display, Image Formats, or Screens:** The Xlib library provides a number of useful macros and corresponding functions that return data from the Display structure. The macros are used for C programming, and their corresponding function equivalents are for other language bindings.

All other members of the Display structure (that is, those for which no macros are defined) are private to Xlib and must not be used. Applications must never directly modify or inspect these private members of the Display structure.

- **Planes:** In the X11 graphics model, a pixel value is not treated only as a color; it is also a group of bits. Each bit position is a plane. For example, on a drawable with depth 24, a pixel has 24 meaningful bits, so conceptually there are 24 planes.

Note that here **depth** is the number of meaningful bits used to represent one pixel's value in a drawable.

- **Plane mask:** A plane mask chooses which bit positions of the destination pixel value are affected.

Wherever the mask has a 1, that pixel bit plane may be changed. Wherever the mask has a 0, that pixel bit is preserved.

- **Colormaps:** A colormap is an X server object that describes how pixel values map to actual colors. In Xlib, many drawing functions do not directly use RGB colors. They use pixel values. A colormap is what lets the X server interpret those pixel values as colors.

Pixel value → colormap → actual display color

- **Graphics contexts:** A graphics context in Xlib is an object that stores the drawing state used by graphics operations.

Instead of passing every drawing option directly to functions like `XDrawLine`, `XFillRectangle`, or `XDrawString`, Xlib groups many of those options into a **GC (graphics context)**.

```
o XDrawLine(display, window, gc, x1, y1, x2, y2);
```

The coordinates are passed directly, but things like the line color, line width, fill style, clipping region, drawing function, font, and plane mask are taken from the gc.

The Xlib documentation describes a graphics context as holding most graphics operation attributes, including line width, line style, plane mask, foreground, background, tile, stipple, clipping region, end style, and join style. The internal contents of a GC are private to Xlib.

- **Default screen:** The default screen in Xlib is the screen number that Xlib chooses as the main screen for a given `Display*`.
- **Visuals:** A visual describes how a pixel value should be interpreted as a color on a particular screen.

The visual describes the format/rules for interpreting pixel values, while the colormap provides the actual color mapping data when that visual class uses a lookup table.

- **Visual:** What kind of pixel-to-color interpretation is used
- **Colormap:** The table/mapping used by that interpretation

The core Xlib visual classes are:

- `StaticGray`
- `GrayScale`
- `StaticColor`
- `PseudoColor`
- `TrueColor`
- `DirectColor`

A `Visual*` is an Xlib object describing one supported color interpretation scheme.

- **Display Macros:** Applications should not directly modify any part of the `Display` and `Screen` structures. The members should be considered read-only, although they may change as the result of other operations on the display.

```
o AllPlanes
1 unsigned long XAllPlanes()
```

Both return a value with all bits set to 1 suitable for use in a plane argument to a procedure.

Both `BlackPixel` and `WhitePixel` can be used in implementing a monochrome application. These pixel values are for permanently allocated entries in the default colormap. The actual RGB (red, green, and blue) values are settable on some screens and, in any case, may not actually be black or white. The names are intended to convey the expected relative intensity of the colors.

```
0 BlackPixel(display, screen_number)
1 unsigned long XBlackPixel (display, screen_number)
```

- `display` Specifies the connection to the X server.
- `screen_number` Specifies the appropriate screen number on the host server.

Both return the black pixel value for the specified screen.

```
0 WhitePixel (display, screen_number)
1 unsigned long XWhitePixel (display, screen_number)
```

Both return the white pixel value for the specified screen.

```
0 ConnectionNumber(display)
1 int XConnectionNumber(display)
```

Both return a connection number for the specified display. On a POSIX-conformant system, this is the file descriptor of the connection.

Internally, Xlib is communicating with the X server over something like a Unix-domain socket or TCP socket, and `ConnectionNumber` exposes that descriptor.

```
0 DefaultColormap(display, screen_number)
1 Colormap XDefaultColormap(display, screen_number)
```

Both return the default colormap ID for allocation on the specified screen. Most routine allocations of color should be made out of this colormap.

```
0 DefaultDepth(display, screen_number)
1 int XDefaultDepth(display, screen_number)
```

Both return the depth (number of planes) of the default root window for the specified screen. Other depths may also be supported on this screen (see `XMatchVisualInfo`).

```
0  int* XListDepths(display, screen_number, count_return)
```

– count_return returns the number of depths

The **XListDepths** function returns the array of depths that are available on the specified screen. If the specified screen_number is valid and sufficient memory for the array can be allocated, **XListDepths** sets count_return to the number of available depths. Otherwise, it does not set count_return and returns NULL. To release the memory allocated for the array of depths, use **XFree**.

XListDepths ask the *X* server:

"For this screen, what drawable/window depths are supported"

```
0  DefaultGC(display, screen_number)
1  GC XDefaultGC(display, screen_number)
```

Both return the default graphics context for the root window of the specified screen. This GC is created for the convenience of simple applications and contains the default GC components with the foreground and background pixel values initialized to the black and white pixels for the screen, respectively. You can modify its contents freely because it is not used in any Xlib function. This GC should never be freed.

```
0  DefaultRootWindow(display)
1  Window XDefaultRootWindow(display)
```

Both return the root window for the default screen.

```
0  DefaultScreenOfDisplay(display)
1  Screen* XDefaultScreenOfDisplay(display)
```

Both return a pointer to the default screen.

```
0  ScreenOfDisplay(display, screen_number)
1  Screen* XScreenOfDisplay(display, screen_number)
```

Both return a pointer to the indicated screen

```
0  DefaultScreen(display)
1  int XDefaultScreen(display)
```

Both return the default screen number referenced by the **XOpenDisplay** function. This macro or function should be used to retrieve the screen number in applications that will use only a single screen.


```
0 DefaultVisual(display, screen_number)
1 Visual* XDefaultVisual(display, screen_number)
```

Both return the default visual type for the specified screen.

```
0 DisplayCells(display, screen_number)
1 int XDisplayCells(display, screen_number)
```

Both return the number of entries in the default colormap.

```
0 DisplayPlanes(display, screen_number)
1 int XDisplayPlanes(display, screen_number)
```

Both return the depth of the root window of the specified screen.

```
0 DisplayString(display)
1 char* XDisplayString(display)
```

Both return the string that was passed to `XOpenDisplay` when the current display was opened. On POSIX-conformant systems, if the passed string was `NULL`, these return the value of the `DISPLAY` environment variable when the current display was opened. These are useful to applications that invoke the `fork` system call and want to open a new connection to the same display from the child process as well as for printing error messages.

```
0 long XExtendedMaxRequestSize(display)
```

The **`XExtendedMaxRequestSize`** function returns zero if the specified display does not support an extended-length protocol encoding; otherwise, it returns the maximum request size (in 4-byte units) supported by the server using the extended-length encoding. The Xlib functions **`XDrawLines`**, **`XDrawArcs`**, **`XFillPolygon`**, **`XChangeProperty`**, **`XSetClipRectangles`**, and **`XSetRegion`** will use the extended-length encoding as necessary, if supported by the server. Use of the extended-length encoding in other Xlib functions (for example, **`XDrawPoints`**, **`XDrawRectangles`**, **`XDrawSegments`**, **`XFillArcs`**, **`XFillRectangles`**, **`XPutImage`**) is permitted but not required; an Xlib implementation may choose to split the data across multiple smaller requests instead.

```
0 long XMaxRequestSize(display)
```

The `XMaxRequestSize` function returns the maximum request size (in 4-byte units) supported by the server without using an extended-length protocol encoding. Single protocol requests to the server can be no larger than this size unless an extended-length protocol encoding is supported by the server. The protocol guarantees the size to be no smaller than 4096 units (16384 bytes). Xlib automatically breaks data up into multiple protocol requests as necessary for the following functions: **XDrawPoints**, **XDrawRectangles**, **XDrawSegments**, **XFillArcs**, **XFillRectangles**, and **XPutImage**

```
0 LastKnownRequestProcessed(display)
1 unsigned long XLastKnownRequestProcessed(display)
```

Both extract the full serial number of the last request known by Xlib to have been processed by the X server. Xlib automatically sets this number when replies, events, and errors are received.

```
0 NextRequest (display)
1 unsigned long XNextRequest (display)
```

Both extract the full serial number that is to be used for the next request. Serial numbers are maintained separately for each display connection.

Note: In Xlib, the **serial number** of a request is the sequence number assigned to each protocol request sent from your client to the X server.

```
0 ProtocolVersion(display)
1 int XProtocolVersion(display)
```

Both return the major version number (11) of the X protocol associated with the connected display.

```
0 ProtocolRevision (display)
1 int XProtocolRevision (display)
```

Both return the minor protocol revision number of the X server.

```
0 QLength (display)
1 int XQLength(display)
```

Both return the length of the event queue for the connected display. Note that there may be more events that have not been read into the queue yet (see **XEventsQueued**).

```

0 RootWindow(display, screen_number)
1 Window XRootWindow(display, screen_number)

```

Both return the root window. These are useful with functions that need a drawable of a particular screen and for creating top-level windows.

```

0 ScreenCount(display)
1 int XScreenCount(display)

```

Both return the number of available screens.

```

0 ServerVendor (display)
1 char* XServerVendor (display)

```

Both return a pointer to a null-terminated string that provides some identification of the owner of the X server implementation. If the data returned by the server is in the Latin Portable Character Encoding, then the string is in the Host Portable Character Encoding. Otherwise, the contents of the string are implementation-dependent.

```

0 VendorRelease (display)
1 int XVendorRelease (display)

```

Both return a number related to a vendor's release of the X server.

- **Image data formats:** In Xlib, **XY format** and **Z format** are two different memory layouts for image data. They mainly matter when using functions like:

```

0 XGetImage(...)
1 XCreateImage(...)
2 XPutImage(...)

```

and constants such as

```

0 XYBitmap
1 XYPixmap
2 ZPixmap

```

- **Z format (ZPixmap):** ZPixmap stores pixels pixel-by-pixel. Each pixel value contains all of its plane bits together. For a 24-bit image, one pixel might contain something like:

```

RRRRRRRRR   GGGGGGGG   BBBBBBBB

```

So the image is stored as a normal packed array of pixel values. This is usually the easiest format to understand and use. If you want to read or write individual pixels with **XGetPixel** / **XPutPixel**, ZPixmap is the common choice.

- **XY format (XYPixmap)**: Instead of storing whole pixels together, it stores one bit-plane at a time. In a 4-bit-deep pixmap, each pixel has 4 bits. In XYPixmap, the image data is stored as separate planes.

plane 0: bit 0 of every pixel
plane 1: bit 1 of every pixel
plane 2: bit 2 of every pixel
plane 3: bit 3 of every pixel

So,

plane 0: pixel0_bit0 pixel1_bit0 pixel2_bit0 ...
plane 1: pixel0_bit1 pixel1_bit1 pixel2_bit1 ...
plane 2: pixel0_bit2 pixel1_bit2 pixel2_bit2 ...
plane 3: pixel0_bit3 pixel1_bit3 pixel2_bit3 ...

This is why it is called XY format: it stores bitmap-style x/y image planes, one plane after another.

- **XY format (XYBitmap)**: XYBitmap is a special case of XY format for depth 1 images. A bitmap has only one bit per pixel. So, there is only one plane. This is used for masks, stipples, cursors, icons, and other monochrome data.

- **Scanlines**: A scanline is one horizontal row of pixels in an image. If an image is

width = 640
height = 480

then it has 480 scanlines, each containing 640 pixels.

In Xlib, the scanline unit is the size, in bits, of the storage chunks used to represent a scanline, especially for bitmap/plane-style image data.

Suppose you have a 1-bit bitmap image

pixel: 0 1 2 3 4 5 6 7 8 9 ...
value: 1 0 1 1 0 0 1 0 1 1 ...

The pixels are individual bits, but memory is addressed in bytes or words, not individual bits. So X needs to know how the bits are grouped.

If the scanline unit is 8, the scanline is grouped like this:

bits 0-7 | bits 8-15 | bits 16-23 | ...

That grouping affects how X interprets the bits in memory.

If the image width is not a multiple of the scanline unit/padding requirement, the scanline is padded at the end. The extra bits are not pixels; they are just unused storage so that the next scanline starts at the required boundary.

- **Image format functions and macros**: Applications are required to present data to the X server in a format that the server demands. To help simplify applications, most of the work required to convert the data is provided by Xlib

The **XPixmapFormatValues** structure provides an interface to the pixmap format information that is returned at the time of a connection setup. It contains:

```
0  typedef struct {
1      int depth;
2      int bits_per_pixel;
3      int scanline_pad;
4  } XPixmapFormatValues;
```

To obtain the pixmap format information for a given display, use **XListPixmapFormats**.

```
0  XPixmapFormatValues* XListPixmapFormats (display,
      ↪ count_return)
```

The **XListPixmapFormats** function returns an array of **XPixmapFormatValues** structures that describe the types of Z format images supported by the specified display. If insufficient memory is available, **XListPixmapFormats** returns NULL. To free the allocated storage for the **XPixmapFormatValues** structures, use **XFree**.

```
0  ImageByteOrder(display)
1  int XImageByteOrder(display)
```

Both specify the required byte order for images for each scanline unit in XY format (bitmap) or for each pixel value in Z format. The macro or function can return either **LSBFirst** or **MSBFirst**.

```
0  BitmapUnit (display)
1  int XBitmapUnit(display)
```

Both return the size of a bitmap's scanline unit in bits. The scanline is calculated in multiples of this value.

```
0  BitmapBitOrder (display)
1  int XBitmapBitOrder(display)
```

Within each bitmap unit, the left-most bit in the bitmap as displayed on the screen is either the least significant or most significant bit in the unit. This macro or function can return **LSBFirst** or **MSBFirst**.

```
0  BitmapPad (display)
1  int XBitmapPad (display)
```

Each scanline must be padded to a multiple of bits returned by this macro or function.

```
0 DisplayHeight(display, screen_number)
1 int XDisplayHeight(display, screen_number)
```

Both return an integer that describes the height of the screen in pixels.

```
0 DisplayHeightMM (display, screen_number)
1 int XDisplayHeightMM(display, screen_number)
```

Both return the height of the specified screen in millimeters.

```
0 DisplayWidth (display, screen_number)
1 int XDisplayWidth (display, screen_number)
```

Both return the width of the screen in pixels.

```
0 DisplayWidthMM (display, screen_number)
1 int XDisplayWidthMM (display, screen_number)
```

Both return the width of the specified screen in millimeters.

- **Backing stores:** A backing store is an optional server-side saved copy of a window's contents.

Normally, if part of your window is covered and then uncovered, the X server may not remember what was there. Instead, it sends your program an Expose event telling you:

"this part of your window became visible again; redraw it."

With backing store, the server may keep a copy of the obscured window contents. Then, when the window becomes visible again, the server can restore the pixels itself without requiring your client to redraw.

Important: backing store is only a hint. Your program must still handle Expose events correctly. The X server is allowed not to preserve the contents, especially if it decides the backing store would be too expensive.

- **Save-under:** A save-under is also a server-side pixel preservation hint, but it is used for a different purpose.


Backing store preserves the contents of the window itself.

Save-under preserves the contents of whatever is underneath a temporary window.


This is mainly for things like:

- menus
- tooltips
- popup windows
- drag boxes
- temporary overlays

Without save-under:

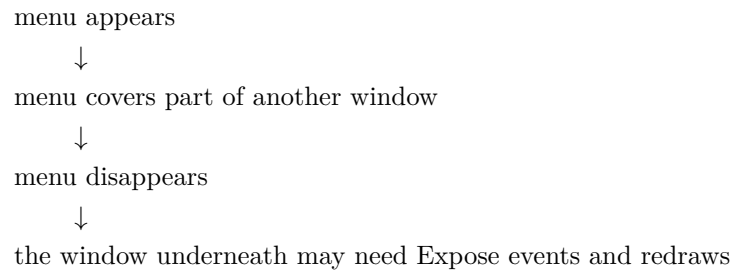

With save-under:

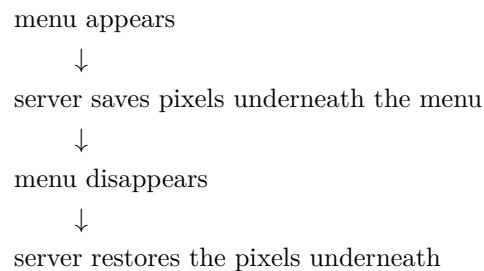

- **Event masks:** An event mask tells the X server which events your client wants to receive for a window. X is event-driven. Your program usually waits for events like:

- key press
- mouse click
- mouse movement
- window exposure
- resize
- map/unmap
- destroy
- focus changes
- property changes

But the server does not automatically send every possible event to every client. You select the events you care about using an event mask.

For example,

```

0  XSelectInput(
1      display,
2      window,
3      ExposureMask KeyPressMask ButtonPressMask |
        ↳ StructureNotifyMask
4  );

```

If you want to redraw your window when it becomes visible or damaged, you must select:

```

0  ExposureMask

```

Then the server can send you **Expose** events.

- **Screen information macros:** The following lists the C language macros, their corresponding function equivalents that are for other language bindings, and what data they both can return. These macros or functions all take a pointer to the appropriate screen structure.

```

0  BlackPixelOfScreen (screen)
1  unsigned long XBlackPixelOfScreen (screen)

```

Both return the black pixel value of the specified screen.

```

0  WhitePixelOfScreen (screen)
1  unsigned long XWhitePixelOfScreen (screen)

```

Both return the white pixel value of the specified screen.

```

0  CellsOfScreen (screen)
1  int XCellsOfScreen(screen)

```

Both return the number of colormap cells in the default colormap of the specified screen.

```

0  DefaultColormapOfScreen (screen)
1  Colormap XDefaultColormapOfScreen (screen)

```

- **Screen* screen:** screen Specifies the appropriate Screen structure.

Both return the default colormap of the specified screen.

```

0  DefaultDepthOfScreen (screen)
1  int XDefaultDepthOfScreen (screen)

```


Both return the depth of the root window.

```
0 DefaultGCOfScreen (screen)
1 GC XDefaultGCOfScreen (screen)
```

Both return a default graphics context (GC) of the specified screen, which has the same depth as the root window of the screen. The GC must never be freed.

```
0 DefaultVisualOfScreen (screen)
1 Visual *XDefaultVisualOfScreen (screen)
```

Both return the default visual of the specified screen. For information on visual types

```
0 DoesBackingStore (screen)
1 int XDoesBackingStore(screen)
```

Both return a value indicating whether the screen supports backing stores. The value returned can be one of **WhenMapped**, **NotUseful**, or **Always**

```
0 DoesSaveUnders (screen)
1 Bool XDoesSaveUnders (screen)
```

Both return a Boolean value indicating whether the screen supports save unders. If **True**, the screen supports save unders. If **False**, the screen does not support save unders

```
0 DisplayOfScreen (screen)
1 Display *XDisplayOfScreen(screen)
```

Both return the display of the specified screen.

```
0 int XScreenNumberOfScreen(screen)
```

The **XScreenNumberOfScreen** function returns the screen index number of the specified screen.

```
0 EventMaskOfScreen (screen)
1 long XEventMaskOfScreen (screen)
```

Both return the event mask of the root window for the specified screen at connection setup time.

```
0 WidthOfScreen (screen)
1 int XWidthOfScreen (screen)
```

Both return the width of the specified screen in pixels.

```
0 HeightOfScreen (screen)
1 int XHeightOfScreen(screen)
```

Both return the height of the specified screen in pixels.

```
0 WidthMMOfScreen (screen)
1 int XWidthMMOfScreen (screen)
```

Both return the width of the specified screen in millimeters.

```
0 HeightMMOfScreen (screen)
1 int XHeightMMOfScreen(screen)
```

Both return the height of the specified screen in millimeters.

```
0 MaxCmapsOfScreen (screen)
1 int XMaxCmapsOfScreen(screen)
```

Both return the maximum number of installed colormaps supported by the specified screen

```
0 MinCmapsOfScreen (screen)
1 int XMinCmapsOfScreen(screen)
```

Both return the minimum number of installed colormaps supported by the specified screen

```
0 PlanesOfScreen (screen)
1 int XPlanesOfScreen(screen)
```

Both return the depth of the root window.

```

0 RootWindowOfScreen (screen)
1 Window XRootWindowOfScreen (screen)

```

Both return the root window of the specified screen.

- **Generating a NoOperation Protocol Request:** To execute a **NoOperation** protocol request, use **XNoOp**

```

0 XNoOp(display)

```

The **XNoOp** function sends a **NoOperation** protocol request to the X server, thereby exercising the connection.

- **Freeing client-created data:** To free in-memory data that was created by an Xlib function, use **XFree**.

```

0 XFree(void* data)

```

The **XFree** function is a general-purpose Xlib routine that frees the specified data. You must use it to free any objects that were allocated by Xlib, unless an alternate function is explicitly specified for the object. A NULL pointer cannot be passed to this function.

- **Closing the Display:** To close a display or disconnect from the X server, use **XCloseDisplay**.

```

0 XCloseDisplay(Display* display)

```

The **XCloseDisplay** function closes the connection to the X server for the display specified in the **Display** structure and destroys all windows, resource IDs (**Window**, **Font**, **Pixmap**, **Colormap**, **Cursor**, and **GContext**), or other resources that the client has created on this display, unless the close-down mode of the resource has been changed (see **XSetCloseDownMode**). Therefore, these windows, resource IDs, and other resources should never be referenced again or an error will be generated. Before exiting, you should call **XCloseDisplay** explicitly so that any pending errors are reported as **XCloseDisplay** performs a final **XSync** operation.

XCloseDisplay can generate a **BadGC** error.

Xlib provides a function to permit the resources owned by a client to survive after the client's connection is closed. To change a client's close-down mode, use **XSetCloseDownMode**

```

0 XSetCloseDownMode (Display* display, int close_mode)

```

- **close_mode:** `close_mode` Specifies the client close-down mode. You can pass **DestroyAll**, **RetainPermanent**, or **RetainTemporary**.

The **XSetCloseDownMode** defines what will happen to the client's resources at connection close. A connection starts in **DestroyAll** mode.

XSetCloseDownMode can generate a **BadValue** error.

- **Selections:** A selection is the X Window System's mechanism for clipboard-like data transfer.

The important point is that the selected data is usually not stored in the X server. Instead, one client owns a selection, and another client requests that data from the owner.

Common selections are

```
0 PRIMARY
1 SECONDARY
2 CLIPBOARD
```

- **PRIMARY** usually the currently highlighted text
- **CLIPBOARD** usually explicit copy/paste, like Ctrl+C / Ctrl+V
- **SECONDARY** older, rarely used

The selection itself is named by an Atom, for example

```
0 Atom clipboard = XInternAtom(display, "CLIPBOARD", False);
```

A client becomes the owner of a selection with

```
0 XSetSelectionOwner(display, selection_atom, owner_window,
  ↪ timestamp);
```

For example,

```
0 XSetSelectionOwner(display, clipboard, window, CurrentTime)
```

You can ask who owns a selection with:

```
0 Window owner = XGetSelectionOwner(display, clipboard)
```

Another client requests the selection using:

```

0  XConvertSelection(
1      display,
2      selection,
3      target,
4      property,
5      requestor,
6      time
7  );

```

This asks the selection owner:

"Please convert your selection data to this target type and store it on this property of my window."

So the flow is

```

client A owns CLIPBOARD
    ↓
client B calls XConvertSelection
    ↓
client A receives SelectionRequest
    ↓
client A writes data to a property on client B's window
    ↓
client A sends SelectionNotify
    ↓
client B reads the property
.

```

This is why selections are more like negotiated inter-client data transfer than a simple global clipboard buffer.

The main events are

```

0  SelectionClear
1  SelectionRequest
2  SelectionNotify

```

- **SelectionClear**: You lost ownership of the selection.
- **SelectionRequest**: Another client is asking you for the selection data.
- **SelectionNotify**: The selection conversion request completed.

A correct clipboard owner must handle **SelectionRequest**. If it exits, the selected data may disappear unless a clipboard manager has saved it.

- **Grabs**: A grab gives one client temporary exclusive control over some input.

There are two major kinds:

1. Pointer grabs
2. Keyboard grabs

A grab can be **active** or **passive**.

- **Active:** Happens immediately when you request it
- **Passive:** A passive grab does not take effect immediately. Instead, it activates when some input pattern occurs

For the pointer:

```
0  int XGrabPointer(  
1      Display* display,  
2      Window grab_window,  
3      bool owner_events,  
4      unsigned int event_mask,  
5      int pointer_mode,  
6      int keyboard_mode,  
7      Window confine_to,  
8      Cursor cursor,  
9      Time time  
10 );
```

- display Specifies the connection to the X server.
- grab_window Specifies the grab window.
- owner_events Specifies a Boolean value that indicates whether the pointer events are to be reported as usual or reported with respect to the grab window if selected by the event mask.
- event_mask Specifies which pointer events are reported to the client. The mask is the bitwise inclusive OR of the valid pointer event mask bits.
- pointer_mode Specifies further processing of pointer events. You can pass **GrabModeSync** or **GrabModeAsync**.
- keyboard_mode Specifies further processing of keyboard events. You can pass **GrabModeSync** or **GrabModeAsync**.
- confine_to Specifies the window to confine the pointer in or None.
- cursor Specifies the cursor that is to be displayed during the grab or None.
- time Specifies the time. You can pass either a timestamp or CurrentTime

The XGrabPointer() function actively grabs control of the pointer and returns GrabSuccess if the grab was successful. Further pointer events are reported only to the grabbing client. XGrabPointer() can generate **BadCursor**, **BadValue**, and **BadWindow** errors.

For the keyboard:

```

0  int XGrabKeyboard(
1      Display* display,
2      Window grab_window,
3      Bool owner_events,
4      int pointer_mode,
5      int keyboard_mode,
6      Time time
7  );

```

- display Specifies the connection to the X server.
- grab_window Specifies the grab window.
- owner_events Specifies a Boolean value that indicates whether the keyboard events are to be reported as usual.
- pointer_mode Specifies further processing of pointer events. You can pass `GrabModeSync` or `GrabModeAsync`.
- keyboard_mode Specifies further processing of keyboard events. You can pass `GrabModeSync` or `GrabModeAsync`.
- time Specifies the time. You can pass either a timestamp or `CurrentTime`.

The **XGrabKeyboard()** function actively grabs control of the keyboard and generates **FocusIn** and **FocusOut** events. Further key events are reported only to the grabbing client.

Once a client has an active pointer grab, pointer events are directed according to the grab rules rather than normal window picking. Typical uses are

- menus
- drag-and-drop
- resizing a window
- moving a window
- modal interactions
- screen lockers

For example, while dragging a scrollbar, you do not want pointer events to suddenly go to another window just because the pointer moved outside the scrollbar. A pointer grab lets the scrollbar continue receiving motion/release events until the drag finishes.

You release grabs with:

```

0  XUngrabPointer(display, time)
1  XUngrabKeyboard(display, time)

```

A passive grab does not take effect immediately. Instead, it activates when some input pattern occurs.

For keyboard shortcuts:

```

0  int XGrabKey(
1      Display* display,
2      int keycode,
3      unsigned int modifiers,
4      Window grab_window,
5      Bool owner_events,
6      int pointer_mode,
7      int keyboard_mode
8  );

```

- display Specifies the connection to the X server.
- keycode Specifies the `KeyCode` or **AnyKey**.
- modifiers Specifies the set of keymasks or **AnyModifier**. The mask is the bitwise inclusive OR of the valid keymask bits.
- grab_window Specifies the grab window.
- owner_events Specifies a Boolean value that indicates whether the keyboard events are to be reported as usual.
- pointer_mode Specifies further processing of pointer events. You can pass **GrabModeSync** or **GrabModeAsync**.
- keyboard_mode Specifies further processing of keyboard events. You can pass **GrabModeSync** or **GrabModeAsync**.

The **XGrabKey()** function establishes a passive grab on the keyboard. **XGrabKey()** can generate **BadAccess**, **BadValue**, and **BadWindow** errors.

For mouse buttons:

```

0  int XGrabButton(
1      Display* display,
2      unsigned int button,
3      unsigned int modifiers,
4      Window grab_window,
5      Bool owner_events,
6      unsigned int event_mask,
7      int pointer_mode,
8      int keyboard_mode,
9      Window confine_to,
10     Cursor cursor
11 );

```

- display Specifies the connection to the X server.
- button Specifies the pointer button that is to be grabbed or **AnyButton**.
- modifiers Specifies the set of keymasks or **AnyModifier**. The mask is the bitwise inclusive OR of the valid keymask bits.
- grab_window Specifies the grab window.
- owner_events Specifies a Boolean value that indicates whether the pointer events are to be reported as usual or reported with respect to the grab window if selected by the event mask.

- `event_mask` Specifies which pointer events are reported to the client. The mask is the bitwise inclusive OR of the valid pointer event mask bits.
- `pointer_mode` Specifies further processing of pointer events. You can pass **GrabModeSync** or **GrabModeAsync**.
- `keyboard_mode` Specifies further processing of keyboard events. You can pass **GrabModeSync** or **GrabModeAsync**.
- `confine_to` Specifies the window to confine the pointer in or None.
- `cursor` Specifies the cursor that is to be displayed or None.

The `XGrabButton()` function establishes a passive grab. **XGrabButton()** can generate **BadCursor**, **BadValue**, and **BadWindow** errors.

Xlib defines constants for the standard mouse buttons:

- **Button1**: Typically the left mouse button.
- **Button2**: Typically the middle mouse button (or scroll wheel click).
- **Button3**: Typically the right mouse button.
- **Button4** / **Button5**: Often assigned to the scroll wheel up/down actions.
- **AnyButton**: A special constant used in functions like `XGrabButton` to indicate that the operation should apply to any mouse button

This is how a window manager can say:

”When Mod1 + Button1 is pressed over this window, give me control.”

The grab becomes active only when the specified key/button/modifier combination occurs.

- **Keymask modifiers**: In Xlib, keymask modifiers are bitwise constants used to describe the state of modifier keys (like Shift, Control, or Alt) during an input event. These masks are commonly found in the state member of event structures such as `XKeyEvent` or used as arguments in functions like **XGrabKey**.
 - **ShiftMask**: The Shift key is pressed.
 - **LockMask**: The Caps Lock key is active.
 - **ControlMask**: The Control key is pressed.
 - **Mod1Mask**: Usually mapped to Alt or Meta.
 - **Mod2Mask**: Often mapped to Num Lock.
 - **Mod3Mask**: Sometimes mapped to AltGr.
 - **Mod4Mask**: Commonly mapped to the Super/Windows key.
 - **Mod5Mask**: Often mapped to Scroll Lock or other custom modifiers.
- **Synchronous vs asynchronous grabs**: Grabs can freeze or not freeze event processing. The modes are usually:

```
0  GrabModeAsync
1  GrabModeSync
```

With `GrabModeAsync`, events continue normally. With `GrabModeSync`, the server may freeze pointer or keyboard event processing until the grabbing client explicitly allows it to continue with:

```
0  int XAllowEvents(  
1      Display* display,  
2      int mode,  
3      Time time  
4  );
```

- `display` Specifies the connection to the X server.
- `event_mode` Specifies the event mode. You can pass **AsyncPointer**, **SyncPointer**, **AsyncKeyboard**, **SyncKeyboard**, **ReplayPointer**, **ReplayKeyboard**, **AsyncBoth**, or **SyncBoth**.
- `time` Specifies the time. You can pass either a timestamp or `CurrentTime`.

The `XAllowEvents()` function releases some queued events if the client has caused a device to freeze. It has no effect if the specified time is earlier than the last-grab time of the most recent active grab for the client or if the specified time is later than the current X server time. Depending on the `event_mode` argument, the following occurs:

- **AsyncPointer**: If the pointer is frozen by the client, pointer event processing continues as usual. If the pointer is frozen twice by the client on behalf of two separate grabs, `AsyncPointer` thaws for both. `AsyncPointer` has no effect if the pointer is not frozen by the client, but the pointer need not be grabbed by the client.
- **SyncPointer**: If the pointer is frozen and actively grabbed by the client, pointer event processing continues as usual until the next `ButtonPress` or `ButtonRelease` event is reported to the client. At this time, the pointer again appears to freeze. However, if the reported event causes the pointer grab to be released, the pointer does not freeze. `SyncPointer` has no effect if the pointer is not frozen by the client or if the pointer is not grabbed by the client.
- **ReplayPointer**: If the pointer is actively grabbed by the client and is frozen as the result of an event having been sent to the client (either from the activation of a `XGrabButton()` or from a previous `XAllowEvents()` with mode `SyncPointer` but not from a `XGrabPointer()`), the pointer grab is released and that event is completely reprocessed. This time, however, the function ignores any passive grabs at or above (towards the root of) the `grab_window` of the grab just released. The request has no effect if the pointer is not grabbed by the client or if the pointer is not frozen as the result of an event.
- **AsyncKeyboard**: If the keyboard is frozen by the client, keyboard event processing continues as usual. If the keyboard is frozen twice by the client on behalf of two separate grabs, `AsyncKeyboard` thaws for both. `AsyncKeyboard` has no effect if the keyboard is not frozen by the client, but the keyboard need not be grabbed by the client.
- **SyncKeyboard**: If the keyboard is frozen and actively grabbed by the client, keyboard event processing continues as usual until the next `KeyPress` or `KeyRelease` event is reported to the client. At this time, the keyboard again appears to freeze. However, if the reported event causes the keyboard grab to be released, the keyboard does not freeze. `SyncKeyboard` has no effect if the keyboard is not frozen by the client or if the keyboard is not grabbed by the client.

- **ReplayKeyboard:** If the keyboard is actively grabbed by the client and is frozen as the result of an event having been sent to the client (either from the activation of a `XGrabKey()` or from a previous `XAllowEvents()` with mode `SyncKeyboard` but not from a `XGrabKeyboard()`), the keyboard grab is released and that event is completely reprocessed. This time, however, the function ignores any passive grabs at or above (towards the root of) the `grab_window` of the grab just released. The request has no effect if the keyboard is not grabbed by the client or if the keyboard is not frozen as the result of an event.
- **SyncBoth:** If both pointer and keyboard are frozen by the client, event processing for both devices continues as usual until the next `ButtonPress`, `ButtonRelease`, `KeyPress`, or `KeyRelease` event is reported to the client for a grabbed device (button event for the pointer, key event for the keyboard), at which time the devices again appear to freeze. However, if the reported event causes the grab to be released, then the devices do not freeze (but if the other device is still grabbed, then a subsequent event for it will still cause both devices to freeze). `SyncBoth` has no effect unless both pointer and keyboard are frozen by the client. If the pointer or keyboard is frozen twice by the client on behalf of two separate grabs, `SyncBoth` thaws for both (but a subsequent freeze for `SyncBoth` will only freeze each device once).
- **AsyncBoth:** If the pointer and the keyboard are frozen by the client, event processing for both devices continues as usual. If a device is frozen twice by the client on behalf of two separate grabs, `AsyncBoth` thaws for both. `AsyncBoth` has no effect unless both pointer and keyboard are frozen by the client.

This is useful when a client wants to inspect an event before deciding whether it should be replayed or swallowed.

`XAllowEvents()` can generate a **BadValue** error.

- **Grab result codes:** A grab can fail, for example

```
0  int status = XGrabPointer(...);
```

Possible result values include:

```
0  GrabSuccess
1  AlreadyGrabbed
2  GrabInvalidTime
3  GrabNotViewable
4  GrabFrozen
```


So a grab is not guaranteed.

- **Save-set:** A save-set is a mechanism used mainly by window managers to avoid destroying or orphaning client windows if the window manager exits. This matters because window managers often reparent client windows.

Normally, an application creates a top-level window as a child of the root window:



A reparenting window manager inserts a frame window around it:



The application window is now a child of a window owned by the window manager. Now, we have a problem...

If the window manager dies, what happens to the application windows inside its frame windows?

Without protection, those client windows could be destroyed or left in a bad state when the frame windows disappear. So the window manager adds application windows to its save-set:

```
o XAddToSaveSet(display, client_window)
```

If the window manager exits or its connection to the X server closes, the server automatically reparents those save-set windows, usually back to a safe ancestor such as the root, and maps them if appropriate.

You can remove a window from the save-set with

```
o XRemoveFromSaveSet(display, client_window);
```

- **Superior and inferior:** A window's **inferiors** are its descendants. A window's **superiors** are its ancestors.
- **Using X Server Connection Close Operations:** When the X server's connection to a client is closed either by an explicit call to **XCloseDisplay** or by a process that exits, the X server performs the following automatic operations:
 - It disowns all selections owned by the client (see **XSetSelectionOwner**).

- It performs an **XUngrabPointer** and **XUngrabKeyboard** if the client has actively grabbed the pointer or the keyboard.
- It performs an **XUngrabServer** if the client has grabbed the server.
- It releases all passive grabs made by the client.
- It marks all resources (including colormap entries) allocated by the client either as permanent or temporary, depending on whether the close-down mode is **RetainPermanent** or **RetainTemporary**. However, this does not prevent other client applications from explicitly destroying the resources (see **XSetCloseDownMode**).

When the close-down mode is **DestroyAll**, the X server destroys all of a client's resources as follows:

- It examines each window in the client's save-set to determine if it is an inferior (subwindow) of a window created by the client. (The save-set is a list of other clients' windows that are referred to as save-set windows.) If so, the X server reparents the save-set window to the closest ancestor so that the save-set window is not an inferior of a window created by the client. The reparenting leaves unchanged the absolute coordinates (with respect to the root window) of the upper-left outer corner of the save-set window.
- It performs a **MapWindow** request on the save-set window if the save-set window is unmapped. The X server does this even if the save-set window was not an inferior of a window created by the client.
- It destroys all windows created by the client.
- It performs the appropriate free request on each nonwindow resource created by the client in the server (for example, **Font**, **Pixmap**, **Cursor**, **Colormap**, and **GContext**).
- It frees all colors and colormap entries allocated by a client application

Additional processing occurs when the last connection to the X server closes. An X server goes through a cycle of having no connections and having some connections. When the last connection to the X server closes as a result of a connection closing with the close_mode of **DestroyAll**, the X server does the following:

- It resets its state as if it had just been started. The X server begins by destroying all lingering resources from clients that have terminated in **RetainPermanent** or **RetainTemporary** mode.
- It deletes all but the predefined atom identifiers.
- It deletes all properties on all root windows
- It resets all device maps and attributes (for example, key click, bell volume, and acceleration) as well as the access control list.
- It restores the standard root tiles and cursors.
- It restores the default font path.
- It restores the input focus to state **PointerRoot**

However, the X server does not reset if you close a connection with a close-down mode set to **RetainPermanent** or **RetainTemporary**

- **Locking a display:** To lock a display in Xlib means take a mutex-like lock on the **Display*** so only one thread in your process uses that X connection at a time.

```
o XLockDisplay(display)
```

While the display is locked, other threads in the same process that try to use the same Display * will block until it is unlocked.

```
o XUnlockDisplay(display)
```

- **Using Xlib with threads:** To initialize support for concurrent threads, use **XInitThreads**

```
o Status XInitThreads();
```

The **XInitThreads** function initializes Xlib support for concurrent threads. This function must be the first Xlib function a multi-threaded program calls, and it must complete before any other Xlib call is made. This function returns a nonzero status if initialization was successful; otherwise, it returns zero. On systems that do not support threads, this function always returns zero.

It is only necessary to call this function if multiple threads might use Xlib concurrently. If all calls to Xlib functions are protected by some other access mechanism (for example, a mutual exclusion lock in a toolkit or through explicit client programming), Xlib thread initialization is not required. It is recommended that single-threaded programs not call this function.

To lock a display across several Xlib calls, use **XLockDisplay**

```
o void XLockDisplay(display)
```

The **XLockDisplay** function locks out all other threads from using the specified display. Other threads attempting to use the display will block until the display is unlocked by this thread. Nested calls to **XLockDisplay** work correctly; the display will not actually be unlocked until **XUnlockDisplay** has been called the same number of times as **XLockDisplay**. This function has no effect unless Xlib was successfully initialized for threads using **XInitThreads**.

To unlock a display, use **XUnlockDisplay**

```
o void XUnlockDisplay(display)
```

The **XUnlockDisplay** function allows other threads to use the specified display again. Any threads that have blocked on the display are allowed to continue. Nested locking works correctly; if **XLockDisplay** has been called multiple times by a thread, then **XUnlockDisplay** must be called an equal number of times before the display is actually unlocked. This function has no effect unless Xlib was successfully initialized for threads using **XInitThreads**.

- **Using Internal Connections:** In addition to the connection to the X server, an Xlib implementation may require connections to other kinds of servers. Toolkits and clients that use multiple displays, or that use displays in combination with other inputs, need to obtain these additional connections to correctly block until input is available and need to process that input when it is available. Simple clients that use a single display and block for input in an Xlib event function do not need to use these facilities.

To track internal connections for a display, use **XAddConnectionWatch**.

```
0  typedef void (*XConnectionWatchProc) (Display* display,
    ↪  XPointer client_data, int fd, Bool opening, XPointer
    ↪  watch_data)
1
2  Status XAddConnectionWatch (Display* display,
    ↪  XConnectionWatchProc procedure, XPointer client_data)
```

- procedure Specifies the procedure to be called.
- client_data Specifies the additional client data.

The **XAddConnectionWatch** function registers a procedure to be called each time Xlib opens or closes an internal connection for the specified display. The procedure is passed the display, the specified client_data, the file descriptor for the connection, a Boolean indicating whether the connection is being opened or closed, and a pointer to a location for private watch data. If opening is **True**, the procedure can store a pointer to private data in the location pointed to by watch_data; when the procedure is later called for this same connection and opening is **False**, the location pointed to by watch_data will hold this same private data pointer.

This function can be called at any time after a display is opened. If internal connections already exist, the registered procedure will immediately be called for each of them, before **XAddConnectionWatch** returns. **XAddConnectionWatch** returns a nonzero status if the procedure is successfully registered; otherwise, it returns zero.

The registered procedure should not call any Xlib functions. If the procedure directly or indirectly causes the state of internal connections or watch procedures to change, the result is not defined. If Xlib has been initialized for threads, the procedure is called with the display locked and the result of a call by the procedure to any Xlib function that locks the display is not defined unless the executing thread has externally locked the display using **XLockDisplay**.

To stop tracking internal connections for a display, use **XRemoveConnectionWatch**.

```
0  Status XRemoveConnectionWatch (display, procedure,
    ↪  client_data)
```

The **XRemoveConnectionWatch** function removes a previously registered connection watch procedure. The `client_data` must match the `client_data` used when the procedure was initially registered.

To process input on an internal connection, use **XProcessInternalConnection**

```
o void XProcessInternalConnection(Display* display, int fd)
```

The **XProcessInternalConnection** function processes input available on an internal connection. This function should be called for an internal connection only after an operating system facility (for example, select or poll) has indicated that input is available; otherwise, the effect is not defined.

To obtain all of the current internal connections for a display, use **XInternalConnectionNumbers**.

```
o Status XInternalConnectionNumbers(Display* display, int**  
  ↪ fd_return, int* count_return)
```

The **XInternalConnectionNumbers** function returns a list of the file descriptors for all internal connections currently open for the specified display. When the allocated list is no longer needed, free it by using **XFree**. This function returns a nonzero status if the list is successfully allocated; otherwise, it returns zero.

3. Window functions

- **Intro:** In the *X* Window System, a window is a rectangular area on the screen that lets you view graphic output. Client applications can display overlapping and nested windows on one or more screens that are driven by *X* servers on one or more machines. Clients who want to create windows must first connect their program to the *X* server by calling **XOpenDisplay**. This chapter begins with a discussion of visual types and window attributes. The chapter continues with a discussion of the Xlib functions you can use to:
 - Create windows
 - Destroy windows
 - Map windows
 - Unmap windows
 - Configure windows
 - Change window stacking order
 - Change window attributes
- **ICCCM / EWMH conventions:**
 - **ICCCM (Inter-client communication conventions):** The Inter-Client Communication Conventions Manual (ICCMM) is a foundational standard protocol for the X Window System. It establishes the rules that graphical applications (clients) must follow to cooperate, share resources (like cut and paste selections), and interact smoothly with window managers.

The ICCCM focuses on a few core areas of client behavior to ensure a stable and predictable desktop experience:

- * **Selections and Cut Buffers:** Defines how clients share data across the global X server, enabling universal copy and paste operations between different applications.
 - * **Window Manager Communication:** Establishes the rules for how applications request window sizes, positions, and decorations, ensuring that a window manager can successfully control top-level windows without relying on private protocols.
 - * **Session Management:** Provides protocols for applications to interact with session managers, allowing users to safely save their workspace state, restart programs, or shut down without losing functionality.
 - * **Shared Resources:** Details the conventions for sharing input focus and color maps, ensuring that apps don't compete or lock each other out of basic system resources.
- **EWMH (Extended window manager hints):** EWMH stands for Extended Window Manager Hints. It is a standard for the X Window System that dictates how desktop environments, window managers, and applications communicate with one another. It builds upon older standards to let modern apps request specific behaviors (like going fullscreen or creating custom docks).

The foundational standard for X11 communication (ICCMM) is notoriously complex and lacks the features we expect from modern operating systems, such as virtual desktops, docks, and window tabbing. EWMH bridges this gap by defining properties and messages (called "hints") that allow programs and the window manager to understand each other perfectly.

Under EWMH, the window manager exposes specific pieces of information on the root window, and applications use those to request states or react to desktop events. Key functions include:

- * **Window Types & States:** Apps can declare what they are (e.g., a normal app, a dock, a splash screen, or a utility tool) or request states like `_NET_WM_STATE_FULLSCREEN` or `_NET_WM_STATE_MODAL`.
- * **Virtual Desktops:** It defines protocols for managing workspaces, including how many virtual screens exist and which desktop a specific window lives on.
- * **Window Tabbing & Grouping:** It specifies how windows can be logically grouped together (often seen in advanced tiling or tabbed window managers).
- * **Desktop Properties:** It standardizes the retrieval of desktop dimensions, work areas (reserving space for taskbars), and active window tracking.

Developers working directly with window operations rely on specific EWMH messages (denoted by the `__NET` prefix):

- * `__NET_ACTIVE_WINDOW`: Tells the window manager to give focus to a specific window.
- * `__NET_CLOSE_WINDOW`: Requests a graceful closure of an application window.
- * `__NET_WM_PING`: Allows the window manager to check if an application has stopped responding.

Note: EWMH is not standalone in the strict compliance sense. The EWMH spec explicitly says it builds on ICCCM, and that window managers and clients that aim to fulfill EWMH must also adhere to ICCCM, except where EWMH explicitly modifies ICCCM behavior.

- **Opaque structures:** An opaque struct is a design pattern in C where a structure is declared but its internal fields are hidden from the user. The user only interacts with the struct via pointers and a provided set of API functions, making it the primary way to achieve encapsulation and object-oriented "data hiding" in C.

A **transparent (exposed) struct** is the opposite. The fields are fully visible to the user.

- **Visual types:** On some display hardware, it may be possible to deal with color resources in more than one way. For example, you may be able to deal with a screen of either 12-bit depth with arbitrary mapping of pixel to color (pseudo-color) or 24-bit depth with 8 bits of the pixel dedicated to each of red, green, and blue. These different ways of dealing with the visual aspects of the screen are called visuals. For each screen of the display, there may be a list of valid visual types supported at different depths of the screen. Because default windows and visual types are defined for each screen, most simple applications need not deal with this complexity.

Xlib uses an opaque Visual structure that contains information about the possible color mapping. The visual utility functions use an **XVisualInfo** structure to return this information to an application. The members of this structure pertinent to this discussion are `class`, `red_mask`, `green_mask`, `blue_mask`, `bits_per_rgb`, and `colormap_size`. The `class` member specified one of the possible visual classes of the screen and can be **StaticGray**, **StaticColor**, **TrueColor**, **GrayScale**, **PseudoColor**, or **DirectColor**.

A pixel value in X11 is usually just an integer. The Visual tells Xlib and the X server what that integer means. For example, does the integer directly encode red/green/blue components? Or is it an index into a colormap? Are the colors fixed, or can the client modify them?

The **Visual** describes the color interpretation model available for windows and pixmaps of a certain depth.

```
0  typedef struct {
1      Visual *visual;
2      VisualID visualid;
3      int screen;
4      int depth;
5      int class;
6      unsigned long red_mask;
7      unsigned long green_mask;
8      unsigned long blue_mask;
9      int colormap_size;
10     int bits_per_rgb;
11 } XVisualInfo;
```

There is no direct “convert Visual* to XVisualInfo” function, but you can get the VisualID from the Visual *, then ask Xlib for the matching XVisualInfo.

```
0  VisualID XVisualIDFromVisual(Visual* visual);
1  XVisualInfo* XGetVisualInfo(
2      Display* display,
3      long vinfo_mask,
4      XVisualInfo* vinfo_template,
5      int* nitens_return
6  );
```

- vinfo_mask Specifies the visual mask value.
- vinfo_template Specifies the visual attributes that are to be used in matching the visual structures.
- nitens_return Returns the number of matching visual structures.

Regarding the vinfo_mask: In Xlib, vinfo_mask is a bitwise mask value used as an argument in the XGetVisualInfo function to specify which fields of an XVisualInfo template structure the X server should evaluate when searching for available window visuals. When you use XGetVisualInfo, you pass a template structure containing the display criteria you want. The vinfo_mask tells the function exactly which of those template fields matter for your query

- **VisualNoMask**: No fields are matched (returns all available visuals)
- **VisualIDMask**: Matches the explicit visualid
- **IDVisualScreenMask**: Matches the specified screen
- **numberVisualDepthMask**: Matches the pixel bit depth (e.g., 24-bit, 32-bit color)

- **VisualClassMask**: Matches the color class (e.g., TrueColor, PseudoColor)
- **VisualRedMaskMask**: Matches the red_mask bit
- **positionsVisualGreenMaskMask**: Matches the green_mask bit
- **positionsVisualBlueMaskMask**: Matches the blue_mask bit
- **positionsVisualColormapSizeMask**: Matches the total entries in the colormap_size
- **VisualBitsPerRGBMask**: Matches the bits_per_rgb value
- **VisualAllMask**: Combines all masks to check every field in the structure

For example,

```

0  XVisualInfo template;
1  template.screen = screen;
2  template.depth = 32;
3  template.class = TrueColor;
4
5  int nitems;
6  XVisualInfo *matches = XGetVisualInfo(
7      dpy,
8      VisualScreenMask VisualDepthMask VisualClassMask,
9      &template,
10     &nitems
11 );

```

- **Class**: The class field tells you what kind of color model the visual uses. There are six visual classes

1. **StaticGray**: A StaticGray visual represents fixed grayscale colors. The pixel value selects a gray value from a read-only colormap.

You cannot change what gray value a pixel maps to. This is mostly relevant to old or limited displays.

2. **GrayScale**: A GrayScale visual is like StaticGray, except the colormap entries can be changed. The colors are grayscale, but the client may allocate or change entries.
3. **StaticColor**: A StaticColor visual uses a fixed color colormap. The pixel value indexes into a predefined table of colors. The client cannot redefine those colors.
4. **PseudoColor**: A PseudoColor visual uses a modifiable colormap. For example, pixel value 42 does not inherently mean red or blue. It means “look at entry 42 in the colormap.”

The client may allocate/change colormap entries, depending on availability. This was common on older 8-bit indexed-color displays.

5. **TrueColor**: A TrueColor visual means the pixel value directly contains RGB components. For example, with a common 24-bit / 32-bit visual.

[pixel bits]: [[red bits] [green bits] [blue bits]]

The masks say where the components are stored. For example,

```

0  red_mask    = 0x00ff0000
1  green_mask  = 0x0000ff00
2  blue_mask   = 0x000000ff

```

So a pixel value like

`0x00ff0000`.

means full red, zero green, zero blue.

In TrueColor, the mapping from component value to actual intensity is fixed. You cannot redefine what “red component 255” means. This is the usual modern visual class.

6. **DirectColor**: DirectColor is similar to TrueColor because the pixel value contains separate red, green, and blue fields.

But instead of those fields directly giving final intensities, each component indexes into a separate modifiable lookup table.

The main distinction is

- * **Static* classes**: colormap entries are fixed/read-only
 - * **Non-static classes**: colormap entries can be changed by the client
 - * **TrueColor / DirectColor**: pixel value contains separate RGB component fields
 - * **PseudoColor / StaticColor / GrayScale / StaticGray**: pixel value indexes into a colormap
- **red_mask, green_mask, blue_mask**: Described above in the *class* explanation.
 - **bits_per_rgb**: Tells you the number of significant bits used for each RGB value in the colormap. For example, if

```
o bits_per_rgb = 8;
```

then each color component has 8 meaningful bits, giving values from 0 to 255.

- **colormap_size**: The number of entries available in the colormap for that visual.

For example, an 8-bit PseudoColor visual might have:

```
o colormap_size = 256;
```

because 8-bit pixels can index 256 possible entries.

For TrueColor, the meaning is slightly different. It usually refers to the number of entries per primary color map, not the total number of possible RGB colors.

So for a 24-bit TrueColor visual with 8 bits per channel, you might see:

```
o colormap_size = 256;
```

Even though the visual can represent approximately

$$256^3 = 16777216$$

colors.

Note: An X11 client cannot define a custom **Visual**. A **Visual** is advertised by the X server as part of the screen's capabilities. When your program connects to the X server, the server tells the client which visuals exist for each screen. Your program can then choose from those visuals, but it cannot create a new one.

- **Top-level windows:** A top-level window is any window that is a direct subwindow of your screen's root window and is independently managed by your desktop's window manager.
- **Window attributes:** All **InputOutput** windows have a border width of zero or more pixels, an optional background, an event suppression mask (which suppresses propagation of events from children), and a property list. The window border and background can be a solid color or a pattern, called a tile. All windows except the root have a parent and are clipped by their parent. If a window is stacked on top of another window, it obscures that other window for the purpose of input.

If a window has a background (almost all do), it obscures the other window for purposes of output. Attempts to output to the obscured area do nothing, and no input events (for example, pointer motion) are generated for the obscured area.

Both **InputOutput** and **InputOnly** windows have the following common attributes, which are the only attributes of an **InputOnly** window:

- win-gravity
- event-mask
- do-not-propagate-mask
- override-redirect
- cursor

If you specify any other attributes for an **InputOnly** window, a **BadMatch** error results.

InputOnly windows are used for controlling input events in situations where **InputOutput** windows are unnecessary. **InputOnly** windows are invisible; can only be used to control such things as cursors, input event generation, and grabbing; and cannot be used in any graphics requests. Note that **InputOnly** windows cannot have **InputOutput** windows as inferiors

Windows have borders of a programmable width and pattern as well as a background pattern or tile. Pixel values can be used for solid colors. The background and border pixmaps can be destroyed immediately after creating the window if no further explicit references to them are to be made. The pattern can either be relative to the parent or absolute. If **ParentRelative**, the parent's background is used.

When windows are first created, they are not visible (not mapped) on the screen. Any output to a window that is not visible on the screen and that does not have backing store will be discarded. An application may wish to create a window long before it is mapped to the screen. When a window is eventually mapped to the screen (using **XMapWindow**), the X server generates an **Expose** event for the window if backing store has not been maintained.

A window manager can override your choice of size, border width, and position for a top-level window. Your program must be prepared to use the actual size and position of the top window. It is not acceptable for a client application to resize itself unless in direct response to a human command to do so. Instead, either your program should use the space given to it, or if the space is too small for any useful work, your program might ask the user to resize the window. The border of your top-level window is considered fair game for window managers.

To set an attribute of a window, set the appropriate member of the **XSetWindowAttributes** structure and OR in the corresponding value bitmask in your subsequent calls to **XCreateWindow** and **XChangeWindowAttributes**, or use one of the other convenience functions that set the appropriate attribute. The symbols for the value mask bits and the **XSetWindowAttributes** structure are:

```
0  /* Window attribute value mask bits */
1  #define CWBackPixmap      (1L<<0)
2  #define CWBackPixel      (1L<<1)
3  #define CWBorderPixmap   (1L<<2)
4  #define CWBorderPixel    (1L<<3)
5  #define CWBitGravity      (1L<<4)
6  #define CWWinGravity      (1L<<5)
7  #define CWBackingStore    (1L<<6)
8  #define CWBackingPlanes  (1L<<7)
9  #define CWBackingPixel    (1L<<8)
10 #define CWOverrideRedirect (1L<<9)
11 #define CWSaveUnder       (1L<<10)
12 #define CWEventMask       (1L<<11)
13 #define CWDontPropagate    (1L<<12)
14 #define CWColormap         (1L<<13)
15 #define CWCursor           (1L<<14)
```

```

0  typedef struct {
1      Pixmap background_pixmap;      /* background, None, or
        ↳ ParentRelative */
2      unsigned long background_pixel; /* background pixel */
3      Pixmap border_pixmap;          /* border of the window
        ↳ or CopyFromParent */
4      unsigned long border_pixel;    /* border pixel value */
5      int bit_gravity;               /* one of bit gravity
        ↳ values */
6      int win_gravity;               /* one of the window
        ↳ gravity values */
7      int backing_store;             /* NotUseful, WhenMapped,
        ↳ Always */
8      unsigned long backing_planes; /* planes to be preserved
        ↳ if possible */
9      unsigned long backing_pixel;   /* value to use in
        ↳ restoring planes */
10     Bool save_under;               /* should bits under be
        ↳ saved? (popups) */
11     long event_mask;              /* set of events that
        ↳ should be saved */
12     long do_not_propagate_mask;    /* set of events that
        ↳ should not propagate */
13     Bool override_redirect;        /* boolean value for
        ↳ override_redirect */
14     Colormap colormap;            /* color map to be
        ↳ associated with window */
15     Cursor cursor;               /* cursor to be displayed
        ↳ (or None) */
16 } XSetWindowAttributes;

```

- **background_pixmap**: Background_pixmap is a pixmap resource used as a tiled background. It can be:

```

0  None
1  ParentRelative
2  some_pixmap

```

- * **None**: None means the window has no automatic background. X will not repaint the background for you.
 - * **ParentRelative**: ParentRelative means the window uses the parent window's background. This is only valid for windows with the same depth as the parent.
 - * **real pixmap**: A real pixmap means the server tiles that pixmap across the window background.
- **long background_pixel**: background_pixel is simpler: it fills the background with one pixel value. The meaning of that pixel value depends on the window's colormap and visual. In a TrueColor visual, it usually encodes RGB bits. In PseudoColor, it is an index into a colormap.
 - **border_pixmap**: border_pixmap uses a pixmap as the border pattern. It can also be CopyFromParent in some creation contexts.
 - **long border_pixel**: border_pixel uses a single pixel value for the border color.

The border is the X window border specified by the `border_width` argument to `XCreateWindow`. Many modern window managers ignore or replace client-side borders for top-level windows because they draw their own decorations.

- **bit_gravity**: Bit gravity controls what happens to the contents of the window when the window is resized.

For example, suppose your window gets larger. Should the old pixels stay in the upper-left corner? Center? Bottom-right? Or should X discard them?

Common values include

```
0  ForgetGravity
1  NorthWestGravity
2  NorthGravity
3  NorthEastGravity
4  WestGravity
5  CenterGravity
6  EastGravity
7  SouthWestGravity
8  SouthGravity
9  SouthEastGravity
10 StaticGravity
```

So,

```
0  attrs.bit_gravity = NorthWestGravity;
```

This means that when the window is resized, X tries to keep the old pixel contents attached to the upper-left corner.

ForgetGravity means X does not preserve the old bits. You should repaint when you receive an Expose event.

In modern applications, you usually repaint explicitly instead of relying heavily on bit gravity.

- **win_gravity**: Window gravity controls what happens to a child window's position when its parent is resized.

```
0  attrs.win_gravity = SouthEastGravity;
```

means that when the parent resizes, X tries to keep the child attached to the parent's bottom-right region.

This matters mostly for child-window layout. It is not usually used as the primary layout mechanism in modern GUI toolkits.

A win-gravity of **UnmapGravity** is like **NorthWestGravity** (the window is not moved), except the child is also unmapped when the parent is resized, and an **UnmapNotify** event is generated.

- **backing_store**: Backing store asks the *X* server to preserve obscured or unmapped window contents, so that when the window becomes visible again, the server may restore pixels without requiring the client to repaint.

Possible values are

```
0  NotUseful
1  WhenMapped
2  Always
```

- * NotUseful means you do not request backing store.
- * WhenMapped means the server may preserve contents while the window is mapped.
- * Always means the server should try to preserve contents more aggressively.

However, this is only a hint. The server is not required to honor it. Modern systems often ignore backing store or implement it differently because compositors already keep window buffers.

- **backing_planes**: `backing_planes` specifies which bit planes should be preserved.
- **backing_pixel**: `backing_pixel` gives a fallback pixel value for restoring planes that were not preserved.

Most modern Xlib programs simply handle `Expose` events and repaint instead of relying on backing store.

- **save_under**: `save_under` is a hint to the server that it should save the pixels underneath this window while it is visible.

This was intended for temporary popup windows, menus, tooltips, and similar small transient windows.

Like backing store, this is only a hint. The server may ignore it.

- **event_mask**: This selects which events your client wants to receive for this window.

Some common masks are

```
0  ExposureMask
1  KeyPressMask
2  KeyReleaseMask
3  ButtonPressMask
4  ButtonReleaseMask
5  PointerMotionMask
6  EnterWindowMask
7  LeaveWindowMask
8  StructureNotifyMask
9  SubstructureNotifyMask
10 SubstructureRedirectMask
11 PropertyChangeMask
12 FocusChangeMask
```

For example, if you do not select **KeyPressMask**, then your client will not receive **KeyPress** events for that window.

Some event masks are exclusive. For example, only one client can select **SubstructureRedirectMask** on a given window. That is how a window manager claims control over the root window's child-window management.

- **do_not_propagate_mask**: This controls which input events should not propagate upward to ancestor windows.

In x , some events can propagate from a child window to its parent if no client selected them on the child.

For example, suppose a button press occurs in a child window. If nobody selected **ButtonPressMask** on that child, the event may propagate to the parent.

The **do_not_propagate_mask** can stop that propagation.

- **override_redirect**: This tells the X server whether the window manager should be bypassed for this window. If true, then the window manager normally does not manage the window. That means no decorations, no placement policy, no focus policy, no normal reparenting, and no window-manager intervention.
- **colormap**: This is the colormap associated with the window.

A colormap maps pixel values to actual colors, depending on the visual class.

For common TrueColor visuals, you usually use the default colormap:

But if you create a window using a non-default visual, you often need to create and assign a matching colormap:

```
0 Colormap cmap = XCreateColormap(display, root, visual,  
  ↪ AllocNone);  
1 attrs.colormap = cmap;
```

This is especially important when creating windows with 32-bit ARGB visuals for transparency. The window's visual and colormap must be compatible.

- **cursor**: This specifies the cursor shown when the pointer is inside the window.

You can use a cursor created with functions like:

```
0 XCreateFontCursor  
1 XCreatePixmapCursor  
2 XcursorLibraryLoadCursor
```

If the cursor is None, the cursor is inherited from the parent window.

The following lists the defaults for each window attribute and indicates whether the attribute is applicable to **InputOutput** and **InputOnly** windows:

Attribute	Default	InputOutput	InputOnly
background-pixmap	None	Yes	No
background-pixel	Undefined	Yes	No
border-pixmap	CopyFromParent	Yes	No
border-pixel	Undefined	Yes	No
bit-gravity	ForgetGravity	Yes	No
win-gravity	NorthWestGravity	Yes	Yes
backing-store	NotUseful	Yes	No
backing-planes	All ones	Yes	No
backing-pixel	zero	Yes	No
save-under	False	Yes	No
event-mask	empty set	Yes	Yes
do-not-propagate-mask	empty set	Yes	Yes
override-redirect	False	Yes	Yes
colormap	CopyFromParent	Yes	No
cursor	None	Yes	Yes

- **Background Attribute:** Only **InputOutput** windows can have a background. You can set the background of an **InputOutput** window by using a pixel or a pixmap.
- **Pixel centers:** In graphics, to **coincide with pixel centers** means that some geometric coordinate, such as a line, point, or sample location, falls exactly at the center of a pixel, not on the boundary between pixels.
- **Creating Windows:** Xlib provides basic ways for creating windows, and toolkits often supply higher-level functions specifically for creating and placing top-level windows, which are discussed in the appropriate toolkit documentation. If you do not use a toolkit, however, you must provide some standard information or hints for the window manager by using the Xlib inter-client communication functions

If you use Xlib to create your own top-level windows (direct children of the root window), you must observe the following rules so that all applications interact reasonably across the different styles of window management:

- You must never fight with the window manager for the size or placement of your top-level window.
- You must be able to deal with whatever size window you get, even if this means that your application just prints a message like “Please make me bigger” in its window.
- You should only attempt to resize or move top-level windows in direct response to a user request. If a request to change the size of a top-level window fails, you must be prepared to live with what you get. You are free to resize or move

the children of top-level windows as necessary. (Toolkits often have facilities for automatic relayout.)

- If you do not use a toolkit that automatically sets standard window properties, you should set these properties for top-level windows before mapping them.

XCreateWindow is the more general function that allows you to set specific window attributes when you create a window. **XCreateSimpleWindow** creates a window that inherits its attributes from its parent window.

The X server acts as if **InputOnly** windows do not exist for the purposes of graphics requests, exposure processing, and **VisibilityNotify** events. An **InputOnly** window cannot be used as a drawable (that is, as a source or destination for graphics requests). **InputOnly** and **InputOutput** windows act identically in other respects (properties, grabs, input control, and so on). Extension packages can define other classes of windows.

To create an unmapped window and set its window attributes, use **XCreateWindow**

```
0 Window XCreateWindow(  
1     Display* display,  
2     Window parent,  
3     int x, y,  
4     unsigned int width, height,  
5     unsigned int border_width,  
6     int depth,  
7     unsigned int class,  
8     Visual* visual,  
9     unsigned long valuemask,  
10    XSetWindowAttributes* attributes  
11 )
```

- **display**: Specifies the connection to the X server.
- **parent**: Specifies the parent window.
- **x,y**: Specify the *x* and *y* coordinates, which are the top-left outside corner of the created window's borders and are relative to the inside of the parent window's borders.
- **width, height**: Specify the width and height, which are the created window's inside dimensions and do not include the created window's borders. The dimensions must be nonzero, or a **BadValue** error results.
- **border_width**: Specifies the width of the created window's border in pixels.
- **depth**: Specifies the window's depth. A depth of **CopyFromParent** means the depth is taken from the parent.
- **class**: Specifies the created window's class. You can pass **InputOutput**, **InputOnly**, or **CopyFromParent**. A class of **CopyFromParent** means the class is taken from the parent.
- **visual**: Specifies the visual type. A visual of **CopyFromParent** means the visual type is taken from the parent.
- **valuemask**: Specifies which window attributes are defined in the attributes argument. This mask is the bitwise inclusive OR of the valid attribute mask bits. If valuemask is zero, the attributes are ignored and are not referenced.

- **attributes**: Specifies the structure from which the values (as specified by the value mask) are to be taken. The value mask should have the appropriate bits set to indicate which attributes have been set in the structure.

The **XCreateWindow** function creates an unmapped subwindow for a specified parent window, returns the window ID of the created window, and causes the X server to generate a **CreateNotify** event. The created window is placed on top in the stacking order with respect to siblings.

The coordinate system has the *X* axis horizontal and the *Y* axis vertical with the origin [0, 0] at the upper-left corner. Coordinates are integral, in terms of pixels, and coincide with pixel centers. Each window and pixmap has its own coordinate system. For a window, the origin is inside the border at the inside, upper-left corner.

The `border_width` for an **InputOnly** window must be zero, or a **BadMatch** error results. For class **InputOutput**, the visual type and depth must be a combination supported for the screen, or a **BadMatch** error results. The depth need not be the same as the parent, but the parent must not be a window of class **InputOnly**, or a **BadMatch** error results. For an **InputOnly** window, the depth must be zero, and the visual must be one supported by the screen. If either condition is not met, a **BadMatch** error results. The parent window, however, may have any depth and class. If you specify any invalid window attribute for a window, a **BadMatch** error results.

- **Creating simple windows**: The created window is not yet displayed (mapped) on the user's display. To display the window, call **XMapWindow**. The new window initially uses the same cursor as its parent. A new cursor can be defined for the new window by calling **XDefineCursor**. The window will not be visible on the screen unless it and all of its ancestors are mapped and it is not obscured by any of its ancestors.

XCreateWindow can generate **BadAlloc**, **BadColor**, **BadCursor**, **BadMatch**, **BadPixmap**, **BadValue**, and **BadWindow** errors.

To create an unmapped **InputOutput** subwindow of a given parent window, use **XCreateSimpleWindow**

```

0 Window XCreateSimpleWindow(
1     Display* display,
2     Window parent,
3     int x, y,
4     unsigned int width, height,
5     unsigned int border_width,
6     unsigned long border,
7     unsigned long background
8 )

```

- **display**: Specifies the connection to the *X* server.
- **parent**: Specifies the parent window.
- *x*, *y*: Specify the *x* and *y* coordinates, which are the top-left outside corner of the new window's borders and are relative to the inside of the parent window's borders.

- **width, height**: Specify the width and height, which are the created window's inside dimensions and do not include the created window's borders. The dimensions must be nonzero, or a **BadValue** error results.
- **border_width**: Specifies the width of the created window's border in pixels.
- **border**: Specifies the border pixel value of the window.
- **background**: Specifies the background pixel value of the window.

The **XCreateSimpleWindow** function creates an unmapped **InputOutput** subwindow for a specified parent window, returns the window ID of the created window, and causes the X server to generate a **CreateNotify** event. The created window is placed on top in the stacking order with respect to siblings. Any part of the window that extends outside its parent window is clipped. The **border_width** for an **InputOnly** window must be zero, or a **BadMatch** error results. **XCreateSimpleWindow** inherits its depth, class, and visual from its parent. All other window attributes, except background and border, have their default values.

XCreateSimpleWindow can generate **BadAlloc**, **BadMatch**, **BadValue**, and **BadWindow** errors.

- **Destroying Windows**: Xlib provides functions that you can use to destroy a window or destroy all subwindows of a window.

To destroy a window and all of its subwindows, use **XDestroyWindow**.

```
o XDestroyWindow(Display* display, Window w)
```

The **XDestroyWindow** function destroys the specified window as well as all of its subwindows and causes the X server to generate a **DestroyNotify** event for each window. The window should never be referenced again. If the window specified by the *w* argument is mapped, it is unmapped automatically. The ordering of the **DestroyNotify** events is such that for any given window being destroyed, **DestroyNotify** is generated on any inferiors of the window before being generated on the window itself. The ordering among siblings and across **subhierarchies** is not otherwise constrained. If the window you specified is a root window, no windows are destroyed. Destroying a mapped window will generate Expose events on other windows that were obscured by the window being destroyed.

XDestroyWindow can generate a **BadWindow** error

To destroy all subwindows of a specified window, use **XDestroySubwindows**

```
o XDestroySubwindows(Display* display, Window w)
```

The **XDestroySubwindows** function destroys all inferior windows of the **specified** window, in bottom-to-top stacking order. It causes the X server to generate a **DestroyNotify** event for each window. If any mapped subwindows were actually destroyed, **XDestroySubwindows** causes the X server to generate **Expose** events on the specified window. This is much more efficient than deleting many windows one at a time because much of the work need be performed only once for all of the windows, rather than for each window. The subwindows should never be referenced again.

XDestroySubwindows can generate a **BadWindow** error.

- **Window stacking order:** The window stacking order is the front-to-back ordering of sibling windows on the screen.

A window can have many child windows. Among those children, X keeps an ordering that determines which windows appear above or below the others when they overlap.

Think of it like a stack of sheets of paper:

```
Topmost window
↑
|
Window C
Window B
Window A
|
↓
Bottommost window.
```

If Window *C* overlaps Window *B*, and Window *C* is higher in the stacking order, then Window *C* visually covers that part of Window *B*.

The important point is that stacking order is defined relative to windows with the same parent.

```
Root window
|-- A
|-- B
|-- C
```

Here, *A*, *B*, and *C* are siblings. Their stacking order determines which one appears above the others when they overlap.

But, if *A* has children:

```
Root window
|--A
|  |--A1
|  |--A2
|--B
|--C
```

Then *A*₁ and *A*₂ have their own stacking order relative to each other. They are not directly stacked against *B* and *C*; they are inside the subtree of *A*.

If two sibling windows overlap, the one higher in the stack obscures the lower one.

Top-level application windows are usually children of the root window. So the stacking order of top-level windows is the stacking order of the root window's children.

A window manager manipulates this order constantly. When you focus a window, open a menu, raise a dialog, or move a window to the front, the window manager changes the stacking order.

- **Mapping windows:** A window is considered mapped if an **XMapWindow** call has been made on it. It may not be visible on the screen for one of the following reasons:
 - It is obscured by another opaque window.
 - One of its ancestors is not mapped.
 - It is entirely clipped by an ancestor.

Expose events are generated for the window when part or all of it becomes visible on the screen. A client receives the Expose events only if it has asked for them. Windows retain their position in the stacking order when they are unmapped.

A window manager may want to control the placement of subwindows. If **SubstructureRedirectMask** has been selected by a window manager on a parent window (usually a root window), a map request initiated by other clients on a child window is not performed, and the window manager is sent a **MapRequest** event. However, if the override-redirect flag on the child had been set to True (usually only on pop-up menus), the map request is performed.

A tiling window manager might decide to reposition and resize other clients' windows and then decide to map the window to its final location. A window manager that wants to provide decoration might reparent the child into a frame first. Only a single client at a time can select for **SubstructureRedirectMask**.

Similarly, a single client can select for **ResizeRedirectMask** on a parent window. Then, any attempt to resize the window by another client is suppressed, and the client receives a **ResizeRequest** event.

To map a given window, use **XMapWindow**

```
◦ XMapWindow(display, w)
```

The **XMapWindow** function maps the window and all of its subwindows that have had map requests. Mapping a window that has an unmapped ancestor does not display the window but marks it as eligible for display when the ancestor becomes mapped. Such a window is called **unviewable**. When all its ancestors are mapped, the window becomes viewable and will be visible on the screen if it is not obscured by another window. This function has no effect if the window is already mapped.

If the override-redirect of the window is **False** and if some other client has selected **SubstructureRedirectMask** on the parent window, then the X server generates a **MapRequest** event, and the **XMapWindow** function does not map the window. Otherwise, the window is mapped, and the X server generates a **MapNotify** event.

If the window becomes viewable and no earlier contents for it are remembered, the X server tiles the window with its background. If the window's background is undefined, the existing screen contents are not altered, and the X server generates zero or more **Expose** events. If backing-store was maintained while the window was unmapped, no **Expose** events are generated. If backing-store will now be maintained, a full-window exposure is always generated. Otherwise, only visible regions may be reported. Similar tiling and exposure take place for any newly viewable inferiors.

If the window is an InputOutput window, **XMapWindow** generates Expose events on each InputOutput window that it causes to be displayed. If the client maps and paints the window and if the client begins processing events, the window is painted twice. To avoid this, first ask for Expose events and then map the window, so the client processes input events as usual. The event list will include Expose for each window that has appeared on the screen. The client's normal response to an Expose event should be to repaint the window. This method usually leads to simpler programs and to proper interaction with window managers.

XMapWindow can generate a **BadWindow** error.

To map and raise a window, use **XMapRaised**.

```
o XMapRaised (display, w)
```

The **XMapRaised** function essentially is similar to **XMapWindow** in that it maps the window and all of its subwindows that have had map requests. However, it also raises the specified window to the top of the stack.

XMapRaised can generate multiple **BadWindow** errors.

To map all subwindows for a specified window, use **XMapSubwindows**.

```
o XMapSubwindows (display, w)
```

The **XMapSubwindows** function maps all subwindows for a specified window in top-to-bottom stacking order. The X server generates Expose events on each newly displayed window. This may be much more efficient than mapping many windows one at a time because the server needs to perform much of the work only once, for all of the windows, rather than for each window.

XMapSubwindows can generate a **BadWindow** error.

- **Unmapping Windows:** Xlib provides functions that you can use to unmap a window or all subwindows.

To unmap a window, use **XUnmapWindow**.

```
o XUnmapWindow(display, w)
```

The **XUnmapWindow** function unmaps the specified window and causes the X server to generate an **UnmapNotify** event. If the specified window is already unmapped, **XUnmapWindow** has no effect. Normal exposure processing on formerly obscured windows is performed. Any child window will no longer be visible until another map call is made on the parent. In other words, the subwindows are still mapped but are not visible until the parent is mapped. Unmapping a window will generate Expose events on windows that were formerly obscured by it.

XUnmapWindow can generate a **BadWindow** error.

To unmap all subwindows for a specified window, use **XUnmapSubwindows**

```
o XUnmapSubwindows (display, w)
```

The **XUnmapSubwindows** function unmaps all subwindows for the specified window in bottom-to-top stacking order. It causes the X server to generate an **UnmapNotify** event on each subwindow and Expose events on formerly obscured windows. Using this function is much more efficient than unmapping multiple windows one at a time because the server needs to perform much of the work only once, for all of the windows, rather than for each window.

XUnmapSubwindows can generate a **BadWindow** error.

- **Configuring Windows:** Xlib provides functions that you can use to move a window, resize a window, move and resize a window, or change a window's border width. To change one of these parameters, set the appropriate member of the **XWindowChanges** structure and OR in the corresponding value mask in subsequent calls to **XConfigureWindow**. The symbols for the value mask bits and the **XWindowChanges** structure are

```
0  /* Configure window value mask bits */
1  #define CWX                (1<<0)
2  #define CWY                (1<<1)
3  #define CWWidth            (1<<2)
4  #define CWHeight           (1<<3)
5  #define CWBorderWidth      (1<<4)
6  #define CWSibling          (1<<5)
7  #define CWStackMode        (1<<6)
8
9  /* Values */
10
11  typedef struct {
12      int x, y;
13      int width, height;
14      int border_width;
15      Window sibling;
16      int stack_mode;
17  } XWindowChanges;
```

The x and y members are used to set the window's x and y coordinates, which are relative to the parent's origin and indicate the position of the upper-left outer corner of the window. The width and height members are used to set the inside size of the window, not including the border, and must be nonzero, or a **BadValue** error results. Attempts to configure a root window have no effect.

The `border_width` member is used to set the width of the border in pixels. Note that setting just the border width leaves the outer-left corner of the window in a fixed position but moves the absolute position of the window's origin. If you attempt to set the border-width attribute of an **InputOnly** window nonzero, a **BadMatch** error results.

Note: Inside the window, (0,0) excludes the border. But when positioning the window relative to its parent, the position refers to the outer window, including the border.

The `sibling` member is used to set the sibling window for stacking operations. The `stack_mode` member is used to set how the window is to be restacked and can be set to

- **Above:** Places the window above another window. Without **sibling** specified, it raises the window to the top. With **sibling** specified, it places that window above its specified sibling.
- **Below:** Places the window below another window. Without **sibling** specified, it raises the window to the bottom. With **sibling** specified, it places that window below its specified sibling.
- **TopIf:** Raises the window only if doing so is necessary. Informally: raise this window if it is currently being obscured.

Without **sibling**, X checks whether any sibling window is covering part of this window. If so, it raises the window to the top.

With **sibling**, X checks the relationship between this window and that sibling. If the sibling obscures this window, then this window is raised.

- **BottomIf:** Lowers the window only if doing so is necessary.

Without **sibling**, X checks whether this window is covering any sibling. If so, it lowers the window to the bottom.

With **sibling**, X checks whether this window obscures the given sibling. If so, this window is lowered.

- **Opposite:** This is conditional behavior based on whether the window is above or below another window.

Informally,

- * if this window is being obscured, raise it;
- * if this window is obscuring another window, lower it

Without **sibling**, X compares the window against its siblings generally.

With **sibling**, X compares the window specifically against that sibling.

So **Opposite** can act like either **TopIf** or **BottomIf**, depending on the current overlap and stacking relationship.

If you do not specify a sibling, then stacking is relative to the whole sibling stack. For example, specifying **Above** will mean that a window gets raised to the top of its sibling stack.

If you specify sibling, then the operation is relative to that sibling window.

The sibling must actually be a sibling of the window being configured. That means both windows must have the same parent.

If the override-redirect flag of the window is **False** and if some other client has selected **SubstructureRedirectMask** on the parent, the X server generates a **ConfigureRequest** event, and no further processing is performed. Otherwise, if some other client has selected **ResizeRedirectMask** on the window and the inside width or height of the window is being changed, a **ResizeRequest** event is generated, and the current inside width and height are used instead. Note that the override-redirect flag of the window has no effect on **ResizeRedirectMask** and that **SubstructureRedirectMask** on the parent has precedence over **ResizeRedirectMask** on the window.

When the geometry of the window is changed as specified, the window is restacked among siblings, and a **ConfigureNotify** event is generated if the state of the window actually changes. **GravityNotify** events are generated after **ConfigureNotify** events. If the inside width or height of the window has actually changed, children of the window are affected as specified.

If a window's size actually changes, the window's subwindows move according to their window gravity. Depending on the window's bit gravity, the contents of the window also may be moved.

If regions of the window were obscured but now are not, exposure processing is performed on these formerly obscured windows, including the window itself and its inferiors. As a result of increasing the width or height, exposure processing is also performed on any new regions of the window and any regions where window contents are lost

The restack check (specifically, the computation for **BottomIf**, **TopIf**, and **Opposite**) is performed with respect to the window's final size and position (as controlled by the other arguments of the request), not its initial position. If a sibling is specified without a `stack_mode`, a **BadMatch** error results.

Attempts to configure a root window have no effect.

To configure a window's size, location, stacking, or border, use **XConfigureWindow**.

```
o XConfigureWindow(Display* display, Window w, unsigned int
  ↳ value_mask, XWindowChanges* values)
```

- `value_mask` Specifies which values are to be set using information in the `values` structure. This mask is the bitwise inclusive OR of the valid configure window values bits.
- `values` Specifies the **XWindowChanges** structure.

The **XConfigureWindow** function uses the values specified in the **XWindowChanges** structure to reconfigure a window's size, position, border, and stacking order. Values not specified are taken from the existing geometry of the window.

If a sibling is specified without a `stack_mode` or if the window is not actually a sibling, a **BadMatch** error results. Note that the computations for **BottomIf**, **TopIf**, and **Opposite** are performed with respect to the window's final geometry (as controlled by the other arguments passed to **XConfigureWindow**), not its initial geometry. Any backing store contents of the window, its inferiors, and other newly visible windows are either discarded or changed to reflect the current screen contents (depending on the implementation).

XConfigureWindow can generate **BadMatch**, **BadValue**, and **BadWindow** errors.

Note: A call to **XConfigureWindow** does cause the window to move in the stack (if specified in the mask), with respect to the specified configuration.

To move a window without changing its size, use **XMoveWindow**.

```
o XMoveWindow(display, w, x, y)
```

- `x`, `y` Specify the x and y coordinates, which define the new location of the top-left pixel of the window's border or the window itself if it has no border.

The **XMoveWindow** function moves the specified window to the specified x and y coordinates, but it does not change the window's size, raise the window, or change the mapping state of the window. Moving a mapped window may or may not lose the window's contents depending on if the window is obscured by non-children and if no backing store exists. If the contents of the window are lost, the X server generates Expose events. Moving a mapped window generates Expose events on any formerly obscured windows.

If the `override-redirect` flag of the window is `False` and some other client has selected **SubstructureRedirectMask** on the parent, the X server generates a **ConfigureRequest** event, and no further processing is performed. Otherwise, the window is moved.

XMoveWindow can generate a **BadWindow** error.

To change a window's size without changing the upper-left coordinate, use **XResizeWindow**.

```
o XResizeWindow(Display* display, Window w, unsigned int
  ↪ width, unsigned int height)
```

- width, height Specify the width and height, which are the interior dimensions of the window after the call completes.

The **XResizeWindow** function changes the inside dimensions of the specified window, not including its borders. This function does not change the window's upper-left coordinate or the origin and does not restack the window. Changing the size of a mapped window may lose its contents and generate **Expose** events. If a mapped window is made smaller, changing its size generates **Expose** events on windows that the mapped window formerly obscured.

If the override-redirect flag of the window is **False** and some other client has selected **SubstructureRedirectMask** on the parent, the X server generates a **ConfigureRequest** event, and no further processing is performed. If either width or height is zero, a **BadValue** error results. **XResizeWindow** can generate **BadValue** and **BadWindow** errors.

To change the size and location of a window, use **XMoveResizeWindow**.

```
o XMoveResizeWindow(Display* display, Window w, int x$, int
  ↪ y, unsigned int width, unsigned int height)
```

- x, y Specify the x and y coordinates, which define the new position of the window relative to its parent.
- width, height Specify the width and height, which define the interior size of the window.

The **XMoveResizeWindow** function changes the size and location of the specified window without raising it. Moving and resizing a mapped window may generate an **Expose** event on the window. Depending on the new size and location parameters, moving and resizing a window may generate **Expose** events on windows that the window formerly obscured.

If the override-redirect flag of the window is **False** and some other client has selected **SubstructureRedirectMask** on the parent, the X server generates a **ConfigureRequest** event, and no further processing is performed. Otherwise, the window size and location are changed.

XMoveResizeWindow can generate **BadValue** and **BadWindow** errors.

To change the border width of a given window, use **XSetWindowBorderWidth**.

```
o XSetWindowBorderWidth (Display* display, Window w, unsigned
  ↪ int width)
```

The **XSetWindowBorderWidth** function sets the specified window's border width to the specified width.

XSetWindowBorderWidth can generate a **BadWindow** error.

- **Changing Window Stacking Order:** Xlib provides functions that you can use to raise, lower, circulate, or restack windows.

To raise a window so that no sibling window obscures it, use **XRaiseWindow**.

```
o XRaiseWindow(display, w)
```

The **XRaiseWindow** function raises the specified window to the top of the stack so that no sibling window obscures it. If the windows are regarded as overlapping sheets of paper stacked on a desk, then raising a window is analogous to moving the sheet to the top of the stack but leaving its *x* and *y* location on the desk constant. Raising a mapped window may generate **Expose** events for the window and any mapped subwindows that were formerly obscured.

If the override-redirect attribute of the window is **False** and some other client has selected **SubstructureRedirectMask** on the parent, the X server generates a **ConfigureRequest** event, and no processing is performed. Otherwise, the window is raised.

XRaiseWindow can generate a **BadWindow** error.

To lower a window so that it does not obscure any sibling windows, use **XLowerWindow**.

```
o XLowerWindow(display, w)
```

The **XLowerWindow** function lowers the specified window to the bottom of the stack so that it does not obscure any sibling windows. If the windows are regarded as overlapping sheets of paper stacked on a desk, then lowering a window is analogous to moving the sheet to the bottom of the stack but leaving its *x* and *y* location on the desk constant. Lowering a mapped window will generate **Expose** events on any windows it formerly obscured.

If the override-redirect attribute of the window is **False** and some other client has selected **SubstructureRedirectMask** on the parent, the X server generates a **ConfigureRequest** event, and no processing is performed. Otherwise, the window is lowered to the bottom of the stack.

XLowerWindow can generate a **BadWindow** error.

To circulate a subwindow up or down, use **XCirculateSubwindows**


```
o XCirculateSubwindows(Display* display, Window w, int
  ↪ direction)
```

- direction Specifies the direction (up or down) that you want to circulate the window. You can pass **RaiseLowest** or **LowerHighest**.

The **XCirculateSubwindows** function circulates children of the specified window in the specified direction. If you specify **RaiseLowest**, **XCirculateSubwindows** raises the lowest mapped child (if any) that is occluded by another child to the top of the stack. If you specify **LowerHighest**, **XCirculateSubwindows** lowers the highest mapped child (if any) that occludes another child to the bottom of the stack. Exposure processing is then performed on formerly obscured windows. If some other client has selected **SubstructureRedirectMask** on the window, the X server generates a **CirculateRequest** event, and no further processing is performed. If a child is actually restacked, the X server generates a **CirculateNotify** event.

XCirculateSubwindows can generate **BadValue** and **BadWindow** errors.

To raise the lowest mapped child of a window that is partially or completely occluded by another child, use **XCirculateSubwindowsUp**.

```
o XCirculateSubwindowsUp (display, w)
```

The **XCirculateSubwindowsUp** function raises the lowest mapped child of the specified window that is partially or completely occluded by another child. Completely unobscured children are not affected. This is a convenience function equivalent to **XCirculateSubwindows** with **RaiseLowest** specified.

XCirculateSubwindowsUp can generate a **BadWindow** error.

To lower the highest mapped child of a window that partially or completely occludes another child, use **XCirculateSubwindowsDown**

```
o XCirculateSubwindowsDown (display, w)
```

The **XCirculateSubwindowsDown** function lowers the highest mapped child of the specified window that partially or completely occludes another child. Completely unobscured children are not affected. This is a convenience function equivalent to **XCirculateSubwindows** with **LowerHighest** specified.

XCirculateSubwindowsDown can generate a **BadWindow** error.

To restack a set of windows from top to bottom, use **XRestackWindows**.

```
o XRestackWindows (Display* display, Window windows[], int  
  ↪ nwindows);
```

- windows Specifies an array containing the windows to be restacked.
- nwindows Specifies the number of windows to be restacked.

The **XRestackWindows** function restacks the windows in the order specified, from top to bottom. The stacking order of the first window in the windows array is unaffected, but the other windows in the array are stacked underneath the first window, in the order of the array. The stacking order of the other windows is not affected. For each window in the window array that is not a child of the specified window, a **BadMatch** error results.

If the override-redirect attribute of a window is False and some other client has selected **SubstructureRedirectMask** on the parent, the X server generates **ConfigureRequest** events for each window whose override-redirect flag is not set, and no further processing is performed. Otherwise, the windows will be restacked in top-to-bottom order.

XRestackWindows can generate a **BadWindow** error.

- **Changing window attributes:** Xlib provides functions that you can use to set window attributes. **XChangeWindowAttributes** is the more general function that allows you to set one or more window attributes provided by the **XSetWindowAttributes** structure. The other functions described in this section allow you to set one specific window attribute, such as a window's background.

Recall the **XSetWindowAttributes** structure

```

0  /* Window attribute value mask bits */
1  #define CWBackPixmap      (1L<<0)
2  #define CWBackPixel      (1L<<1)
3  #define CWBorderPixmap   (1L<<2)
4  #define CWBorderPixel    (1L<<3)
5  #define CWBitGravity      (1L<<4)
6  #define CWWinGravity      (1L<<5)
7  #define CWBackingStore    (1L<<6)
8  #define CWBackingPlanes  (1L<<7)
9  #define CWBackingPixel    (1L<<8)
10 #define CWOVERRIDERedirect (1L<<9)
11 #define CWSaveUnder       (1L<<10)
12 #define CWEventMask        (1L<<11)
13 #define CWDontPropagate    (1L<<12)
14 #define CWColormap         (1L<<13)
15 #define CWCursor           (1L<<14)
16
17 typedef struct {
18     Pixmap background_pixmap;      /* background, None, or
19     ↪ ParentRelative */
19     unsigned long background_pixel; /* background pixel */
20     Pixmap border_pixmap;          /* border of the window
21     ↪ or CopyFromParent */
21     unsigned long border_pixel;    /* border pixel value */
22     int bit_gravity;               /* one of bit gravity
23     ↪ values */
23     int win_gravity;               /* one of the window
24     ↪ gravity values */
24     int backing_store;             /* NotUseful, WhenMapped,
25     ↪ Always */
25     unsigned long backing_planes;  /* planes to be preserved
26     ↪ if possible */
26     unsigned long backing_pixel;   /* value to use in
27     ↪ restoring planes */
27     Bool save_under;               /* should bits under be
28     ↪ saved? (popups) */
28     long event_mask;               /* set of events that
29     ↪ should be saved */
29     long do_not_propagate_mask;    /* set of events that
30     ↪ should not propagate */
30     Bool override_redirect;        /* boolean value for
31     ↪ override_redirect */
31     Colormap colormap;             /* color map to be
32     ↪ associated with window */
32     Cursor cursor;                 /* cursor to be displayed
33     ↪ (or None) */
33 } XSetWindowAttributes;

```

To change one or more attributes for a given window, use **XChangeWindowAttributes**

```
o XChangeWindowAttributes(Display* display, Window w, unsigned
  ↪ long valuemask, XSetWindowAttributes* attributes)
```

- **valuemask** Specifies which window attributes are defined in the attributes argument. This mask is the bitwise inclusive OR of the valid attribute mask bits. If **valuemask** is zero, the attributes are ignored and are not referenced. The values and restrictions are the same as for **XCreateWindow**.
- **attributes** Specifies the structure from which the values (as specified by the value mask) are to be taken. The value mask should have the appropriate bits set to indicate which attributes have been set in the structure

Depending on the **valuemask**, the **XChangeWindowAttributes** function uses the window attributes in the **XSetWindowAttributes** structure to change the specified window attributes. Changing the background does not cause the window contents to be changed. To repaint the window and its background, use **XCclearWindow**. Setting the border or changing the background such that the border tile origin changes causes the border to be repainted. Changing the background of a root window to **None** or **ParentRelative** restores the default background pixmap. Changing the border of a root window to **CopyFromParent** restores the default border pixmap. Changing the win-gravity does not affect the current position of the window. Changing the backing-store of an obscured window to **WhenMapped** or **Always**, or changing the backing-planes, backing-pixel, or save-under of a mapped window may have no immediate effect. Changing the colormap of a window (that is, defining a new map, not changing the contents of the existing map) generates a **ColormapNotify** event. Changing the colormap of a visible window may have no immediate effect on the screen because the map may not be installed (see **XInstallColormap**). Changing the cursor of a root window to **None** restores the default cursor. Whenever possible, you are encouraged to share colormaps.

Multiple clients can select input on the same window. Their event masks are maintained separately. When an event is generated, it is reported to all interested clients. However, only one client at a time can select for **SubstructureRedirectMask**, **ResizeRedirectMask**, and **ButtonPressMask**. If a client attempts to select any of these event masks and some other client has already selected one, a **BadAccess** error results. There is only one do-not-propagate-mask for a window, not one per client.

XChangeWindowAttributes can generate **BadAccess**, **BadColor**, **BadCursor**, **BadMatch**, **BadPixmap**, **BadValue**, and **BadWindow** errors.

To set the background of a window to a given pixel, use **XSetWindowBackground**

```
o XSetWindowBackground (Display* display, Window w, unsigned
  ↪ long background_pixel)
```

- **background_pixel** Specifies the pixel that is to be used for the background.

The **XSetWindowBackground** function sets the background of the window to the specified pixel value. Changing the background does not cause the window contents to be changed. **XSetWindowBackground** uses a pixmap of undefined size filled with the pixel value you passed. If you try to change the background of an **InputOnly** window, a **BadMatch** error results.

XSetWindowBackground can generate **BadMatch** and **BadWindow** errors.

To set the background of a window to a given pixmap, use **XSetWindowBackgroundPixmap**.

```
o XSetWindowBackgroundPixmap (Display* display, Window w,  
    ↪ Pixmap background_pixmap)
```

The **XSetWindowBackgroundPixmap** function sets the background pixmap of the window to the specified pixmap. The background pixmap can immediately be freed if no further explicit references to it are to be made. If **ParentRelative** is specified, the background pixmap of the window's parent is used, or on the root window, the default background is restored. If you try to change the background of an **InputOnly** window, a **BadMatch** error results. If the background is set to None, the window has no defined background.

XSetWindowBackgroundPixmap can generate **BadMatch**, **BadPixmap**, and **BadWindow** errors.

Note: **XSetWindowBackground** and **XSetWindowBackgroundPixmap** do not change the current contents of the window.

To change and repaint a window's border to a given pixel, use **XSetWindowBorder**.

```
o XSetWindowBorder (display, w, unsigned long border_pixel)
```

– border_pixel Specifies the entry in the colormap.

The **XSetWindowBorder** function sets the border of the window to the pixel value you specify. If you attempt to perform this on an **InputOnly** window, a **BadMatch** error results.

XSetWindowBorder can generate **BadMatch** and **BadWindow** errors.

To change and repaint the border tile of a given window, use **XSetWindowBorderPixmap**.

```
o XSetWindowBorderPixmap (display, w, Pixmap border_pixmap)
```

– border_pixmap Specifies the border pixmap or CopyFromParent.

The **XSetWindowBorderPixmap** function sets the border pixmap of the window to the pixmap you specify. The border pixmap can be freed immediately if no further explicit references to it are to be made. If you specify **CopyFromParent**, a copy of the parent window's border pixmap is used. If you attempt to perform this on an **InputOnly** window, a **BadMatch** error results.

XSetWindowBorderPixmap can generate **BadMatch**, **BadPixmap**, and **BadWindow** errors.

To set the colormap of a given window, use **XSetWindowColormap**.

```
o XSetWindowColormap (display, w, Colormap colormap)
```

The **XSetWindowColormap** function sets the specified colormap of the specified window. The colormap must have the same visual type as the window, or a **BadMatch** error results.

XSetWindowColormap can generate **BadColor**, **BadMatch**, and **BadWindow** errors.

To define which cursor will be used in a window, use **XDefineCursor**

```
o XDefineCursor (display, w, Cursor cursor)
```

– cursor Specifies the cursor that is to be displayed or None.

If a cursor is set, it will be used when the pointer is in the window. If the cursor is None, it is equivalent to **XUndefineCursor**. **XDefineCursor** can generate **BadCursor** and **BadWindow** errors.

To undefine the cursor in a given window, use **XUndefineCursor**.

```
o XUndefineCursor (display, w)
```

The **XUndefineCursor** function undoes the effect of a previous **XDefineCursor** for this window. When the pointer is in the window, the parent's cursor will now be used. On the root window, the default cursor is restored.

XUndefineCursor can generate a **BadWindow** error.

4. Window information functions

- **Intro:** After you connect the display to the X server and create a window, you can use the Xlib window information functions to:
 - Obtain information about a window
 - Translate screen coordinates
 - Manipulate property lists
 - Obtain and change window properties
 - Manipulate selections
- **Obtaining Window Information:** Xlib provides functions that you can use to obtain information about the window tree, the window's current attributes, the window's current geometry, or the current pointer coordinates. Because they are most frequently used by window managers, these functions all return a status to indicate whether the window still exists.

To obtain the parent, a list of children, and number of children for a given window, use **XQueryTree**.

```
o Status XQueryTree (Display* display, Window w, Window*  
  ↪ root_return, Window* parent_return, Window**  
  ↪ children_return, unsigned int* nchildren_return)
```

- root_return Returns the root window.
- parent_return Returns the parent window.
- children_return Returns the list of children.
- nchildren_return Returns the number of children.

The **XQueryTree** function returns the root ID, the parent window ID, a pointer to the list of children windows (NULL when there are no children), and the number of children in the list for the specified window. The children are listed in current stacking order, from bottom-most (first) to top-most (last). **XQueryTree** returns zero if it fails and nonzero if it succeeds. To free a non-NULL children list when it is no longer needed, use **XFree**.

XQueryTree can generate a **BadWindow** error.

To obtain the current attributes of a given window, use **XGetWindowAttributes**.

```
o Status XGetWindowAttributes (display, w, XWindowAttributes*  
  ↪ window_attributes_return)
```

- **window_attributes_return:** Returns the specified window's attributes in the **XWindowAttributes** structure.

The **XGetWindowAttributes** function returns the current attributes for the specified window to an **XWindowAttributes** structure.

```

0  typedef struct {
1      int x, y;                                /* location of window
      ↪ */
2      int width, height;                       /* width and height
      ↪ of window */
3      int border_width;                       /* border width of
      ↪ window */
4      int depth;                              /* depth of window */
5      Visual *visual;                         /* the associated
      ↪ visual structure */
6      Window root;                            /* root of screen
      ↪ containing window */
7      int class;                              /* InputOutput,
      ↪ InputOnly */
8      int bit_gravity;                        /* one of the bit
      ↪ gravity values */
9      int win_gravity;                        /* one of the window
      ↪ gravity values */
10     int backing_store;                      /* NotUseful,
      ↪ WhenMapped, Always */
11     unsigned long backing_planes;           /* planes to be
      ↪ preserved if possible */
12     unsigned long backing_pixel;           /* value to be used
      ↪ when restoring planes */
13     Bool save_under;                        /* boolean, should
      ↪ bits under be saved? */
14     Colormap colormap;                     /* color map to be
      ↪ associated with window */
15     Bool map_installed;                     /* boolean, is color
      ↪ map currently installed */
16     int map_state;                          /* IsUnmapped,
      ↪ IsUnviewable, IsViewable */
17     long all_event_masks;                  /* set of events all
      ↪ people have interest in */
18     long your_event_mask;                  /* my event mask */
19     long do_not_propagate_mask;            /* set of events that
      ↪ should not propagate */
20     Bool override_redirect;                 /* boolean value for
      ↪ override-redirect */
21     Screen *screen;                        /* back pointer to
      ↪ correct screen */
22 } XWindowAttributes;

```

The *x* and *y* members are set to the upper-left outer corner relative to the parent window's origin. The width and height members are set to the inside size of the window, not including the border. The *border_width* member is set to the window's border width in pixels. The *depth* member is set to the depth of the window (that is, bits per pixel for the object). The *visual* member is a pointer to the screen's associated **Visual** structure. The *root* member is set to the root window of the screen containing the window. The *class* member is set to the window's class and can be either **InputOutput** or **InputOnly**.

The *bit_gravity* member is set to the window's bit gravity and can be one of the

following:

- ForgetGravity
- EastGravity
- NorthWestGravity
- SouthWestGravity
- NorthGravity
- SouthGravity
- NorthEastGravity
- SouthEastGravity
- WestGravity
- StaticGravity
- CenterGravity

The `win_gravity` member is set to the window's window gravity and can be one of the following:

- UnmapGravity
- EastGravity
- NorthWestGravity
- SouthWestGravity
- NorthGravity
- SouthGravity
- NorthEastGravity
- SouthEastGravity
- WestGravity
- StaticGravity
- CenterGravity

The `backing_store` member is set to indicate how the X server should maintain the contents of a window and can be **WhenMapped**, **Always**, or **NotUseful**. The `backing_planes` member is set to indicate (with bits set to 1) which bit planes of the window hold dynamic data that must be pre-served in `backing_stores` and during `save_unders`. The `backing_pixel` member is set to indicate what values to use for planes not set in `backing_planes`.

The `save_under` member is set to **True** or **False**. The `colormap` member is set to the colormap for the specified window and can be a colormap ID or **None**. The `map_installed` member is set to indicate whether the colormap is currently installed and can be **True** or **False**. The `map_state` member is set to indicate the state of the window and can be **IsUnmapped**, **IsUnviewable**, or **IsViewable**. **IsUnviewable** is used if the window is mapped but some ancestor is unmapped.

The `all_event_masks` member is set to the bitwise inclusive OR of all event masks selected on the window by all clients. The `your_event_mask` member is set to the bitwise inclusive OR of all event masks selected by the querying client. The `do_not_propagate_mask` member is set to the bitwise inclusive OR of the set of events that should not propagate.

The `override_redirect` member is set to indicate whether this window overrides structure control facilities and can be `True` or `False`. Window manager clients should ignore the window if this member is `True`.

The `screen` member is set to a screen pointer that gives you a back pointer to the correct screen. This makes it easier to obtain the screen information without having to loop over the root window fields to see which field matches. **XGetWindowAttributes** can generate **BadDrawable** and **BadWindow** errors.

To obtain the current geometry of a given drawable, use **XGetGeometry**.

```
0  Status XGetGeometry(  
1      Display* display,  
2      Drawable d,  
3      Window* root_return,  
4      int* x_return, int* y_return,  
5      unsigned int* width_return, unsigned int* height_return,  
6      unsigned int* border_width_return,  
7      unsigned int* depth_return  
8  )
```

- `d` Specifies the drawable, which can be a window or a pixmap.
- `root_return` Returns the root window.
- `x_return`, `y_return` Return the *x* and *y* coordinates that define the location of the drawable. For a window, these coordinates specify the upper-left outer corner relative to its parent's origin. For pixmaps, these coordinates are always zero.
- `width_return`, `height_return` Return the drawable's dimensions (width and height). For a window, these dimensions specify the inside size, not including the border.
- `border_width_return` Returns the border width in pixels. If the drawable is a pixmap, it returns zero.
- `depth_return` Returns the depth of the drawable (bits per pixel for the object).

The **XGetGeometry** function returns the root window and the current geometry of the drawable. The geometry of the drawable includes the *x* and *y* coordinates, width and height, border width, and depth. These are described in the argument list. It is legal to pass to this function a window whose class is **InputOnly**.

XGetGeometry can generate a **BadDrawable** error.

- **Translating Screen Coordinates:** Applications sometimes need to perform a coordinate transformation from the coordinate space of one window to another window or need to determine which window the pointing device is in. **XTranslateCoordinates** and **XQueryPointer** fulfill these needs (and avoid any race conditions) by asking the X server to perform these operations.

To translate a coordinate in one window to the coordinate space of another window, use **XTranslateCoordinates**.

```

0      Bool XTranslateCoordinates (
1          Display* display,
2          Window src_w, Window dest_w,
3          int src_x, int src_y,
4          int* dest_x_return, int* dest_y_return,
5          Window* child_return
6      )

```

- display Specifies the connection to the X server.
- src_w Specifies the source window.
- dest_w Specifies the destination window.
- src_x, src_y Specify the *x* and *y* coordinates within the source window.
- dest_x_return, dest_y_return Return the *x* and *y* coordinates within the destination window.
- child_return Returns the child if the coordinates are contained in a mapped child of the destination window.

If **XTranslateCoordinates** returns **True**, it takes the `src_x` and `src_y` coordinates relative to the source window's origin and returns these coordinates to `dest_x_return` and `dest_y_return` relative to the destination window's origin. If **XTranslateCoordinates** returns **False**, `src_w` and `dest_w` are on different screens, and `dest_x_return` and `dest_y_return` are zero. If the coordinates are contained in a mapped child of `dest_w`, that child is returned to `child_return`. Otherwise, `child_return` is set to **None**.

XTranslateCoordinates can generate a **BadWindow** error.

To obtain the screen coordinates of the pointer or to determine the pointer coordinates relative to a specified window, use **XQueryPointer**.

```

0  Bool XQueryPointer(
1      Display* display,
2      Window w,
3      Window* root_return, Window* child_return,
4      int* root_x_return, int* root_y_return,
5      int* win_x_return, int* win_y_return,
6      unsigned int* mask_return
7  )

```

- display Specifies the connection to the X server.
- w Specifies the window.
- root_return Returns the root window that the pointer is in.
- child_return Returns the child window that the pointer is located in, if any.
- root_x_return, root_y_return Return the pointer coordinates relative to the root window's origin.
- win_x_return, win_y_return Return the pointer coordinates relative to the specified window.
- mask_return Returns the current state of the modifier keys and pointer buttons.

The **XQueryPointer** function returns the root window the pointer is logically on and the pointer coordinates relative to the root window's origin. If **XQueryPointer** returns False, the pointer is not on the same screen as the specified window, and **XQueryPointer** returns None to `child_return` and zero to `win_x_return` and `win_y_return`. If **XQueryPointer** returns True, the pointer coordinates returned to `win_x_return` and `win_y_return` are relative to the origin of the specified window. In this case, **XQueryPointer** returns the child that contains the pointer, if any, or else None to `child_return`.

XQueryPointer returns the current logical state of the keyboard buttons and the modifier keys in `mask_return`. It sets `mask_return` to the bitwise inclusive OR of one or more of the button or modifier key bitmasks to match the current state of the mouse buttons and the modifier keys. Note that the logical state of a device (as seen through Xlib) may lag the physical state if device event processing is frozen

XQueryPointer can generate a **BadWindow** error.

- **Properties:** In Xlib, a property is a piece of data attached to a window.

Think of a window as having a small key-value database attached to it:

```
Window
|--- property: WM_NAME      -> "My Terminal"
|--- property: WM_CLASS    -> "kitty"
|--- property: WM_HINTS    -> window-manager hints
|--- property: _NET_WM_STATE -> fullscreen/maximized/etc.
```

Each property has three main parts:

- **name:** what the property is called
- **type:** what kind of data it stores
- **data:** the actual bytes stored

For example,

```
0  name: WM_NAME
1  type: STRING
2  data: "My Window"
```

An **atom** is just a unique numeric ID for a string name.

```
0  "WM_NAME"  -> atom 39
1  "STRING"   -> atom 31
2  "CARDINAL" -> atom 6
```

So instead of repeatedly passing the string "WM_NAME", Xlib passes the atom representing "WM_NAME".

- **Properties and atoms:** A property is a collection of named, typed data. The window system has a set of predefined properties (for example, the name of a window, size hints, and so on), and users can define any other arbitrary information and associate it with windows. Each property has a name, which is an ISO Latin-1 string. For each named property, a unique identifier (**atom**) is associated with it. A property also has a type, for example, string or integer. These types are also indicated using atoms, so arbitrary new types can be defined. Data of only one type may be associated with a single property name. Clients can store and retrieve properties associated with windows. For efficiency reasons, an atom is used rather than a character string. **XInternAtom** can be used to obtain the atom for property names.

A property is also stored in one of several possible formats. The X server can store the information as 8-bit quantities, 16-bit quantities, or 32-bit quantities. This permits the X server to present the data in the byte order that the client expects

Note: If you define further properties of complex type, you must encode and decode them yourself. These functions must be carefully written if they are to be portable

The type of a property is defined by an atom, which allows for arbitrary extension in this type scheme.

Certain property names are predefined in the server for commonly used functions. The atoms for these properties are defined in `<X11/Xatom.h>`. To avoid name clashes with user symbols, the **#define** name for each atom has the **XA__ prefix**. For an explanation of the functions that let you get and set much of the information stored in these predefined properties, see chapter 14.

The core protocol imposes no semantics on these property names, but semantics are specified in other X Consortium standards, such as the Inter-Client Communication Conventions Manual and the X Logical Font Description Conventions.

You can use properties to communicate other information between applications. The functions described in this section let you define new properties and get the unique atom IDs in your applications.

Although any particular atom can have some client interpretation within each of the name spaces, atoms occur in five distinct name spaces within the protocol:

- Selections
- Property names
- Property types
- Font properties
- Type of a **ClientMessage** event (none are built into the X server)

The built-in selection property names are:

PRIMARY	SECONDARY
CLIPBOARD	

The built-in property names are:

CUT_BUFFER0	RESOURCE_MANAGER
CUT_BUFFER1	WM_CLASS
CUT_BUFFER2	WM_CLIENT_MACHINE
CUT_BUFFER3	WM_COLORMAP_WINDOWS
CUT_BUFFER4	WM_COMMAND
CUT_BUFFER5	WM_HINTS
CUT_BUFFER6	WM_ICON_NAME
CUT_BUFFER7	WM_ICON_SIZE
RGB_BEST_MAP	WM_NAME
RGB_BLUE_MAP	WM_NORMAL_HINTS
RGB_DEFAULT_MAP	WM_PROTOCOLS
RGB_GRAY_MAP	WM_STATE
RGB_GREEN_MAP	WM_TRANSIENT_FOR
RGB_RED_MAP	WM_ZOOM_HINTS

The built-in property types are:

ARC	POINT
ATOM	RGB_COLOR_MAP
BITMAP	RECTANGLE
CARDINAL	STRING
COLORMAP	VISUALID
CURSOR	WINDOW
DRAWABLE	WM_HINTS
FONT	WM_SIZE_HINTS
INTEGER	
PIXMAP	

The built-in font property names are:

MIN_SPACE	STRIKEOUT_DESCENT
NORM_SPACE	STRIKEOUT_ASCENT
MAX_SPACE	ITALIC_ANGLE
END_SPACE	X_HEIGHT
SUPERSCRIP_T_X	QUAD_WIDTH
SUPERSCRIP_T_Y	WEIGHT
SUBSCRIPT_X	POINT_SIZE
SUBSCRIPT_Y	RESOLUTION
UNDERLINE_POSITION	COPYRIGHT
UNDERLINE_THICKNESS	NOTICE
FONT_NAME	FAMILY_NAME
FULL_NAME	CAP_HEIGHT

```
o Atom XInternAtom(Display* display, char* atom_name, Bool
  ↪ only_if_exists)
```

- display Specifies the connection to the X server.
- atom_name Specifies the name associated with the atom you want returned.

- `only_if_exists` Specifies a Boolean value that indicates whether the atom must be created.

The **XInternAtom** function returns the atom identifier associated with the specified `atom_name` string. If `only_if_exists` is False, the atom is created if it does not exist. Therefore, **XInternAtom** can return None. If the atom name is not in the Host Portable Character Encoding, the result is implementation-dependent. Uppercase and lowercase matter; the strings “thing”, “Thing”, and “thinG” all designate different atoms. The atom will remain defined even after the client’s connection closes. It will become undefined only when the last connection to the X server closes.

XInternAtom can generate BadAlloc and **BadValue** errors.

To return atoms for an array of names, use **XInternAtoms**.

```
o Status XInternAtoms(Display* display, char** names, int
  ↪ count, Bool only_if_exists, Atom* atoms_return)
```

- `display` Specifies the connection to the X server.
- `names` Specifies the array of atom names.
- `count` Specifies the number of atom names in the array.
- `only_if_exists` Specifies a Boolean value that indicates whether the atom must be created.
- `atoms_return` Returns the atoms.

The **XInternAtoms** function returns the atom identifiers associated with the specified names. The atoms are stored in the `atoms_return` array supplied by the caller. Calling this function is equivalent to calling **XInternAtom** for each of the names in turn with the specified value of `only_if_exists`, but this function minimizes the number of round-trip protocol exchanges between the client and the X server. This function returns a nonzero status if atoms are returned for all of the names; otherwise, it returns zero.

XInternAtoms can generate BadAlloc and **BadValue** errors.

To return a name for a given atom identifier, use **XGetAtomName**.

```
o char *XGetAtomName(Display display, Atom atom)
```

- `display` Specifies the connection to the X server.
- `atom` Specifies the atom for the property name you want returned.

The **XGetAtomName** function returns the name associated with the specified atom. If the data returned by the server is in the Latin Portable Character Encoding, then the returned string is in the Host Portable Character Encoding. Otherwise, the result is implementation-dependent. To free the resulting string, call **XFree**.

XGetAtomName can generate a **BadAtom** error.

To return the names for an array of atom identifiers, use **XGetAtomNames**.

```
0 Status XGetAtomNames(Display* display, Atom* atoms, int
  ↪ count, char** names_return)
```

- display Specifies the connection to the X server.
- atoms Specifies the array of atoms.
- count Specifies the number of atoms in the array.
- names_return Returns the atom names.

The **XGetAtomNames** function returns the names associated with the specified atoms. The names are stored in the names_return array supplied by the caller. Calling this function is equivalent to calling **XGetAtomName** for each of the atoms in turn, but this function minimizes the number of round-trip protocol exchanges between the client and the X server. This function returns a nonzero status if names are returned for all of the atoms; otherwise, it returns zero.

XGetAtomNames can generate a BadAtom error.

Note: Note that

```
0 typedef unsigned long Atom;
```

- **Obtaining and Changing Window Properties:** You can attach a property list to every window. Each property has a name, a type, and a value. The value is an array of 8-bit, 16-bit, or 32-bit quantities, whose interpretation is left to the clients. The type char is used to represent 8-bit quantities, the type short is used to represent 16-bit quantities, and the type long is used to represent 32-bit quantities.

Xlib provides functions that you can use to obtain, change, update, or interchange window properties. In addition, Xlib provides other utility functions for inter-client communication (chapter 14)

To obtain the type, format, and value of a property of a given window, use **XGetWindowProperty**

```
0 int XGetWindowProperty (
1     Display* display,
2     Window w,
3     Atom property,
4     long long_offset, long_length,
5     Bool delete,
6     Atom req_type,
7     Atom* actual_type_return,
8     int* actual_format_return,
9     unsigned long* nitems_return,
10    unsigned long* bytes_after_return,
11    unsigned char** prop_return
12 )
```


- display Specifies the connection to the X server.
- *w* Specifies the window whose property you want to obtain.
- property Specifies the property name.
- long_offset Specifies the offset in the specified property (in 32-bit quantities) where the data is to be retrieved.
- long_length Specifies the length in 32-bit multiples of the data to be retrieved.
- delete Specifies a Boolean value that determines whether the property is deleted.
- req_type Specifies the atom identifier associated with the property type or **AnyPropertyType**.
- actual_type_return Returns the atom identifier that defines the actual type of the property.
- actual_format_return Returns the actual format of the property.
- nitems_return Returns the actual number of 8-bit, 16-bit, or 32-bit items stored in the prop_return data.
- bytes_after_return Returns the number of bytes remaining to be read in the property if a partial read was performed.
- prop_return Returns the data in the specified format.

The **XGetWindowProperty** function returns the actual type of the property; the actual format of the property; the number of 8-bit, 16-bit, or 32-bit items transferred; the number of bytes remaining to be read in the property; and a pointer to the data actually returned. **XGetWindowProperty** sets the return arguments as follows:

- If the specified property does not exist for the specified window, **XGetWindowProperty** returns **None** to actual_type_return and the value zero to actual_format_return and bytes_after_return. The nitems_return argument is empty. In this case, the delete argument is ignored.
- If the specified property exists but its type does not match the specified type, **XGetWindowProperty** returns the actual property type to actual_type_return, the actual property format (never zero) to actual_format_return, and the property length in bytes (even if the actual_format_return is 16 or 32) to bytes_after_return. It also ignores the delete argument. The nitems_return argument is empty.
- If the specified property exists and either you assign **AnyPropertyType** to the req_type argument or the specified type matches the actual property type, **XGetWindowProperty** returns the actual property type to actual_type_return and the actual property format (never zero) to actual_format_return. It also returns a value to bytes_after_return and nitems_return, by defining the following values:

N = actual length of the stored property in bytes

$I = 4 \cdot \text{long_offset}$

$T = N - I$

$L = \min(T, 4 \cdot \text{long_length})$

$A = N - (I + L).$

The returned value starts at byte index I in the property (indexing from zero), and its length in bytes is L . If the value for long_offset causes L to be negative, a **BadValue** error results. The value of bytes_after_return is A , giving the number of trailing unread bytes in the stored property.

Note: Bool `delete` specifies whether *X* should delete the property after reading it. It only actually deletes the property if the read succeeds and there are no unread bytes left, meaning `bytes_after_return = 0`.

If you pass a specific type and the property has a different actual type, Xlib tells you the actual type but does not return the property data in the normal way.

For

```
o  int* actual_format_return
```

Xlib writes the property's data form here. The format is usually one of

- 8 $\implies$ data is 8-bit quantities
- 16 $\implies$ data is 16-bit quantities
- 32 $\implies$ data is 32-bit quantities

This tells us how to interpret `prop_return`.

If the returned format is 8, the returned data is represented as a **char** array. If the returned format is 16, the returned data is represented as a **short** array and should be cast to that type to obtain the elements. If the returned format is 32, the returned data is represented as a **long** array and should be cast to that type to obtain the elements.

XGetWindowProperty always allocates one extra byte in `prop_return` (even if the property is zero length) and sets it to zero so that simple properties consisting of characters do not have to be copied into yet another string before use.

If `delete` is True and `bytes_after_return` is zero, **XGetWindowProperty** deletes the property from the window and generates a **PropertyNotify** event on the window.

The function returns **Success** if it executes successfully. To free the resulting data, use **XFree**.

XGetWindowProperty can generate **BadAtom**, **BadValue**, and **BadWindow** errors.

To obtain a given window's property list, use **XListProperties**.

```
o  Atom* XListProperties(Display* display, Window w, int*  
    ↪ num_prop_return)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window whose property list you want to obtain.
- `num_prop_return` Returns the length of the properties array.

The **XListProperties** function returns a pointer to an array of atom properties that are defined for the specified window or returns NULL if no properties were found. To free the memory allocated by this function, use **XFree**.

XListProperties can generate a **BadWindow** error.

To change a property of a given window, use **XChangeProperty**

```
0  XChangeProperty (  
1      Display* display,  
2      Window w,  
3      Atom property, type,  
4      int format,  
5      int mode,  
6      unsigned char* data,  
7      int nelements  
8  )
```

- display Specifies the connection to the X server.
- w Specifies the window whose property you want to change.
- property Specifies the property name.
- type Specifies the type of the property. The X server does not interpret the type but simply passes it back to an application that later calls **XGetWindowProperty**.
- format Specifies whether the data should be viewed as a list of 8-bit, 16-bit, or 32-bit quantities. Possible values are 8, 16, and 32. This information allows the X server to correctly perform byte-swap operations as necessary. If the format is 16-bit or 32-bit, you must explicitly cast your data pointer to an (unsigned char *) in the call to **XChangeProperty**.
- mode Specifies the mode of the operation. You can pass **PropModeReplace**, **PropModePrepend**, or **PropModeAppend**.
- data Specifies the property data.
- nelements Specifies the number of elements of the specified data format.

The **XChangeProperty** function alters the property for the specified window and causes the X server to generate a **PropertyNotify** event on that window. **XChangeProperty** performs the following:

- If mode is **PropModeReplace**, **XChangeProperty** discards the previous property value and stores the new data.
- If mode is **PropModePrepend** or **PropModeAppend**, **XChangeProperty** inserts the specified data before the beginning of the existing data or onto the end of the existing data, respectively. The type and format must match the existing property value, or a **BadMatch** error results. If the property is undefined, it is treated as defined with the correct type and format with zero-length data.

If the specified format is 8, the property data must be a **char** array. If the specified format is 16, the property data must be a **short** array. If the specified format is 32, the property data must be a **long** array.

The lifetime of a property is not tied to the storing client. Properties remain until explicitly deleted, until the window is destroyed, or until the server resets. The maximum size of a property is server dependent and can vary dynamically depending on the amount of memory the server has available. (If there is insufficient space, a **BadAlloc** error results.)

XChangeProperty can generate **BadAlloc**, **BadAtom**, **BadMatch**, **BadValue**, and **BadWindow** errors.

To rotate a window's property list, use **XRotateWindowProperties**.

```
o  XRotateWindowProperties (display, w, properties, num_prop,  
    ↪  npositions)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- properties Specifies the array of properties that are to be rotated.
- num_prop Specifies the length of the properties array.
- npositions Specifies the rotation amount.

The **XRotateWindowProperties** function allows you to rotate properties on a window and causes the X server to generate **PropertyNotify** events. If the property names in the properties array are viewed as being numbered starting from zero and if there are num_prop property names in the list, then the value associated with property name I becomes the value associated with property name $(I + \text{npositions}) \bmod N$ for all I from zero to $N - 1$. The effect is to rotate the states by npositions places around the virtual ring of property names (right for positive npositions, left for negative npositions). If npositions mod N is nonzero, the X server generates a **PropertyNotify** event for each property in the order that they are listed in the array. If an atom occurs more than once in the list or no property with that name is defined for the window, a **BadMatch** error results. If a **BadAtom** or **BadMatch** error results, no properties are changed.

XRotateWindowProperties can generate **BadAtom**, **BadMatch**, and **BadWindow** errors.

XRotateWindowProperties is a niche convenience function for swapping property values among several property names on the same window.

It does not rotate the bytes inside one property. It rotates which property name owns which value.

Suppose a window has three properties:

```
o  P0 = "red"  
1  P1 = "green"  
2  P2 = "blue"
```

and you call

```
o  Atom props[] = { P0, P1, P2 };  
1  XRotateWindowProperties(display, w, props, 3, 1);
```

With $n_{\text{positions}} = 1$, the value associated with property I moves to property $(I + 1) \bmod 3$.

- P0's old value moves to P1
- P1's old value moves to P2
- P2's old value moves to P0

```
0  P0 = "blue"
1  P1 = "red"
2  P2 = "green"
```

To delete a property on a given window, use **XDeleteProperty**.

```
o  XDeleteProperty (display, w, property)
```

- display Specifies the connection to the X server.
- w Specifies the window whose property you want to delete.
- property Specifies the property name.

The **XDeleteProperty** function deletes the specified property only if the property was defined on the specified window and causes the X server to generate a **PropertyNotify** event on the window unless the property does not exist.

XDeleteProperty can generate **BadAtom** and **BadWindow** errors.

- **Selections:** Selections are one method used by applications to exchange data. By using the property mechanism, applications can exchange data of arbitrary types and can negotiate the type of the data. A selection can be thought of as an indirect property with a dynamic type. That is, rather than having the property stored in the X server, the property is maintained by some client (the owner). A selection is global in nature (considered to belong to the user but be maintained by clients) rather than being private to a particular window subhierarchy or a particular set of clients. Xlib provides functions that you can use to set, get, or request conversion of selections. This allows applications to implement the notion of current selection, which requires that notification be sent to applications when they no longer own the selection. Applications that support selection often highlight the current selection and so must be informed when another application has acquired the selection so that they can unhighlight the selection.

When a client asks for the contents of a selection, it specifies a selection target type. This target type can be used to control the transmitted representation of the contents. For example, if the selection is “the last thing the user clicked on” and that is currently an image, then the target type might specify whether the contents of the image should be sent in XY format or Z format.

The target type can also be used to control the class of contents transmitted, for example, asking for the “looks” (fonts, line spacing, indentation, and so forth) of a paragraph selection, not the text of the paragraph. The target type can also be used for other purposes. The protocol does not constrain the semantics.

A normal X property is stored on a window:

```
0  window W
1    property WM_NAME = "Terminal"
2    type STRING
3    format 8
```

The X server stores that property value. Another client can ask the server for WM_NAME, and the server can directly return the data.

A selection is different. For example, with the clipboard:

```
0  selection CLIPBOARD
1    owner = some client window
```

The X server usually does not store the clipboard contents itself. It only knows which client currently owns the selection. The actual data is maintained by the owner client. That is why it is called an **indirect property**: you do not directly read the value from the server; you ask the server who owns it, and the owner client provides the value. Xlib describes this as a selection being maintained by a client rather than stored in the X server.

The **dynamic type** part means the requester can ask for the same selection in different forms.

For example, suppose an application owns the **CLIPBOARD** selection and the selected content is rich text. Another client might request it as:

```
0  UTF8_STRING      // plain UTF-8 text
1  STRING           // older Latin-1-ish text
2  text/html        // HTML representation
3  image/png        // PNG representation, if applicable
4  TARGETS          // list of supported conversion targets
```

So the “type” is not fixed ahead of time like an ordinary property. The requester specifies a **target type**, and the owner decides whether it can convert the selection into that representation. Xlib says that when a client asks for a selection, it specifies a target type, which controls the transmitted representation.

To set the selection owner, use XSetSelectionOwner.

```
0  XSetSelectionOwner(Display* display, Atom selection, Window
   ↪ owner, Time time)
```

– display Specifies the connection to the X server.

- selection Specifies the selection atom.
- owner Specifies the owner of the specified selection atom. You can pass a window or **None**.
- time Specifies the time. You can pass either a timestamp or **CurrentTime**.

The **XSetSelectionOwner** function changes the owner and last-change time for the specified selection and has no effect if the specified time is earlier than the current last-change time of the specified selection or is later than the current X server time. Otherwise, the last-change time is set to the specified time, with **CurrentTime** replaced by the current server time. If the owner window is specified as **None**, then the owner of the selection becomes **None** (that is, no owner). Otherwise, the owner of the selection becomes the client executing the request.

If the new owner (whether a client or None) is not the same as the current owner of the selection and the current owner is not None, the current owner is sent a **SelectionClear** event. If the client that is the owner of a selection is later terminated (that is, its connection is closed) or if the owner window it has specified in the request is later destroyed, the owner of the selection automatically reverts to **None**, but the last-change time is not affected. The selection atom is uninterpreted by the X server. **XGetSelectionOwner** returns the owner window, which is reported in **SelectionRequest** and **SelectionClear** events. Selections are global to the X server.

XSetSelectionOwner can generate **BadAtom** and **BadWindow** errors.

The current owner does not get to veto another client taking ownership. the X server changes the owner of that selection, assuming the timestamp is valid. If the new owner is different from the old owner, the old owner is simply sent a **SelectionClear** event telling it that it lost ownership. The old owner is not asked for permission.

To return the selection owner, use **XGetSelectionOwner**.

◦ Window **XGetSelectionOwner** (Display* display, Atom selection)

- display Specifies the connection to the X server.
- selection Specifies the selection atom whose owner you want returned.

The **XGetSelectionOwner** function returns the window ID associated with the window that currently owns the specified selection. If no selection was specified, the function returns the constant None. If None is returned, there is no owner for the selection.

XGetSelectionOwner can generate a **BadAtom** error.

To request conversion of a selection, use **XConvertSelection**.

```

0  XConvertSelection (
1      Display* display,
2      Atom selection,
3      Atom target,
4      Atom property,
5      Window requestor,
6      Time time
7  )

```

- display Specifies the connection to the X server.
- selection Specifies the selection atom.
- target Specifies the target atom.
- property Specifies the property name. You also can pass **None**.
- requestor Specifies the requestor.
- time Specifies the time. You can pass either a timestamp or **CurrentTime**.

XConvertSelection requests that the specified selection be converted to the specified target type:

- If the specified selection has an owner, the X server sends a **SelectionRequest** event to that owner.
- If no owner for the specified selection exists, the X server generates a **SelectionNotify** event to the requestor with property **None**.

The arguments are passed on unchanged in either of the events. There are two predefined selection atoms: **PRIMARY** and **SECONDARY**.

XConvertSelection can generate **BadAtom** and **BadWindow** errors.

The owner of the selection is responsible for deciding what data to put into the requestor's property. The flow is

1. requestor calls **XConvertSelection**
2. X server sends **SelectionRequest** to the owner
3. owner examines the request
4. owner writes data into a property on the **requestor's** window
5. owner sends **SelectionNotify** back to the requestor
6. requestor reads the property with **XGetWindowProperty**

5. Pixmap and cursor functions

- Once you have connected to an X server, you can use the Xlib functions to:
 - Create and free pixmaps
 - Create, recolor, and free cursors
- **Drawables:** In Xlib, a Drawable is a generic X resource that you can draw into or copy from.

The two main drawable resource types are

```
0 Window
1 Pixmap
```

In Xlib headers, they are all just X resource IDs:

```
0 typedef XID Drawable;
1 typedef XID Window;
2 typedef XID Pixmap;
```

Many drawing functions take a Drawable

```
0 XDrawLine(Display *display,
1           Drawable d,
2           GC gc,
3           int x1, int y1,
4           int x2, int y2
5 );
```

The `d` argument may be a window or a pixmap. A Window drawable represents an on-screen drawing destination. If you draw into a window, the result may appear on the display, subject to clipping, exposure, obscuring windows, child windows, and so on.

A Pixmap drawable represents off-screen storage on the X server. You can draw into it, then later copy it into a window:

- **Creating and Freeing Pixmaps:** Pixmaps can only be used on the screen on which they were created. Pixmaps are off-screen resources that are used for various operations, such as defining cursors as tiling patterns or as the source for certain raster operations. Most graphics requests can operate either on a window or on a pixmap. A bitmap is a single bit-plane pixmap.

To create a pixmap of a given size, use **XCreatePixmap**.

```
o Pixmap XCreatePixmap(Display* display, Drawable d, unsigned
  ↪ int width, unsigned int height, unsigned int depth)
```

- display Specifies the connection to the X server.
- d Specifies which screen the pixmap is created on.
- width, height Specify the width and height, which define the dimensions of the pixmap.
- depth Specifies the depth of the pixmap.

The **XCreatePixmap** function creates a pixmap of the width, height, and depth you specified and returns a pixmap ID that identifies it. It is valid to pass an **InputOnly** window to the drawable argument. The width and height arguments must be nonzero, or a **BadValue** error results. The depth argument must be one of the depths supported by the screen of the specified drawable, or a **BadValue** error results.

The server uses the specified drawable to determine on which screen to create the pixmap. The pixmap can be used only on this screen and only with other drawables of the same depth (see **XCopyPlane** for an exception to this rule). The initial contents of the pixmap are undefined. **XCreatePixmap** can generate **BadAlloc**, **BadDrawable**, and **BadValue** errors.

The **d** argument is important. You are not drawing into **d**; you are using it to tell Xlib/X server which screen the pixmap should be created on. Pixmap can only be used on the screen where they were created.

A Drawable specifies the screen because every drawable resource is already associated with a particular X screen inside the X server.

To free all storage associated with a specified pixmap, use **XFreePixmap**.

```
o XFreePixmap(Display* display, Pixmap pixmap)
```

- display Specifies the connection to the X server.
- pixmap Specifies the pixmap.

The **XFreePixmap** function first deletes the association between the pixmap ID and the pixmap. Then, the X server frees the pixmap storage when there are no references to it. The pixmap should never be referenced again.

XFreePixmap can generate a **BadPixmap** error.

- **Xlib cursors:** In Xlib, a cursor is not modeled as a modern full-color image. It is modeled as a small two-color bitmap cursor with optional transparency and a logical “active point.”

A cursor has four main parts:

1. source pixmap
2. mask pixmap
3. foreground/background colors
4. hotspot

The **source pixmap** is the actual 1-bit cursor image. Since it has depth 1, each pixel is either 0 or 1, not a full RGB color.

The **colors** tell X how to interpret those bits. Typically:

- source bit 1 -> foreground color
- source bit 0 -> background color

The **mask pixmap** controls which cursor pixels are visible. It must also have depth 1.

- mask bit 0 -> transparent / not part of cursor
- mask bit 1 -> visible cursor pixel

So the mask gives the cursor its outline or shape. Without a mask, the cursor would effectively be a full rectangle of source pixels. With a mask, only selected pixels are drawn as the cursor.

The **hotspot** is the coordinate inside the cursor image that counts as the actual pointer location.

For example, with an arrow cursor, the visible image may be 16 by 16 pixels, but the actual click point is usually the arrow tip:

- **Fonts:** In old X11 terminology, a **font** is a server-side collection of **glyph bitmaps**. A glyph is just a small bitmap shape. Xlib can use those bitmap glyphs not only for drawing characters, but also for constructing cursors.

X provides a special built-in font named something like the cursor font. It contains predefined cursor glyphs: arrows, crosses, watches, hands, etc. The constants in:

```
o #include <X11/cursorfont.h>
```

Which contains

- **XC_X_cursor:** An “X” shaped cursor. Often used as a generic default or placeholder cursor.
- **XC_arrow:** A generic arrow cursor.
- **XC_based_arrow_down:** A downward-pointing arrow with a base/bar.
- **XC_based_arrow_up:** An upward-pointing arrow with a base/bar.
- **XC_boat:** A small boat-shaped cursor. Mostly decorative/legacy.
- **XC_bogosity:** A strange “bad/invalid/weird” symbol. Mostly humorous/legacy.

- **XC_bottom_left_corner**: Resize cursor for the bottom-left corner of a window.
- **XC_bottom_right_corner**: Resize cursor for the bottom-right corner of a window.
- **XC_bottom_side**: Resize cursor for the bottom edge of a window.
- **XC_bottom_tee**: A T-shaped cursor associated with the bottom side.
- **XC_box_spiral**: A box/square spiral shape. Mostly decorative.
- **XC_center_ptr**: A pointer arrow whose hotspot is more centered than **XC_left_ptr**.
- **XC_circle**: A circular cursor.
- **XC_clock**: A clock-shaped cursor, usually indicating waiting/busy state.
- **XC_coffee_mug**: A coffee mug cursor. Mostly decorative/legacy.
- **XC_cross**: A simple cross-shaped cursor.
- **XC_cross_reverse**: A reverse/inverted version of the cross cursor.
- **XC_crosshair**: A precision crosshair cursor, often used for targeting or coordinate selection.
- **XC_diamond_cross**: A cross combined with a diamond-like shape.
- **XC_dot**: A small dot cursor.
- **XC_dotbox**: A dot inside a box. Useful for precise pointing.
- **XC_double_arrow**: A double-ended arrow, generally suggesting resizing or directional adjustment.
- **XC_draft_large**: A large drafting/drawing-style cursor.
- **XC_draft_small**: A smaller drafting/drawing-style cursor.
- **XC_draped_box**: A box-like cursor with a draped/covered appearance. Mostly decorative.
- **XC_exchange**: An exchange/swap cursor, suggesting replacement or swapping.
- **XC_fleur**: A four-direction move cursor, like arrows pointing up/down/left/right.
- **XC_gobbler**: A “gobbler”/Pac-Man-like decorative cursor.
- **XC_gumby**: A Gumby-like figure cursor. Decorative/legacy.
- **XC_hand1**: A hand cursor, usually pointing or selecting.
- **XC_hand2**: Another hand cursor variant. Commonly used for links or clickable things.
- **XC_heart**: A heart-shaped cursor.
- **XC_icon**: An icon-like cursor, historically associated with window/icon manipulation.
- **XC_iron_cross**: A heavy cross shape resembling an iron cross.
- **XC_left_ptr**: The usual left-leaning arrow pointer. This is the common default pointer.
- **XC_left_side**: Resize cursor for the left edge of a window.
- **XC_left_tee**: A T-shaped cursor associated with the left side.
- **XC_leftbutton**: A mouse/button symbol emphasizing the left button.
- **XC_ll_angle**: Lower-left angle/corner shape.
- **XC_lr_angle**: Lower-right angle/corner shape.
- **XC_man**: A small human figure cursor.

- **XC_middlebutton**: A mouse/button symbol emphasizing the middle button.
- **XC_mouse**: A mouse-shaped cursor.
- **XC_pencil**: A pencil cursor, commonly used for drawing/editing.
- **XC_pirate**: A pirate/skull-style cursor, often used for destructive or dangerous actions.
- **XC_plus**: A plus-sign cursor. Often suggests adding, inserting, or selecting.
- **XC_question_arrow**: An arrow with a question mark, commonly used for help/context help.
- **XC_right_ptr**: A right-leaning or right-pointing pointer arrow.
- **XC_right_side**: Resize cursor for the right edge of a window.
- **XC_right_tee**: A T-shaped cursor associated with the right side.
- **XC_rightbutton**: A mouse/button symbol emphasizing the right button.
- **XC_rtl_logo**: A stylized logo cursor. Rarely used in modern programs.
- **XC_sailboat**: A sailboat-shaped cursor. Decorative/legacy.
- **XC_sb_down_arrow**: Scrollbar-style down arrow.
- **XC_sb_h_double_arrow**: Horizontal double arrow, commonly suggesting horizontal resizing or scrolling.
- **XC_sb_left_arrow**: Scrollbar-style left arrow.
- **XC_sb_right_arrow**: Scrollbar-style right arrow.
- **XC_sb_up_arrow**: Scrollbar-style up arrow.
- **XC_sb_v_double_arrow**: Vertical double arrow, commonly suggesting vertical resizing or scrolling.
- **XC_shuttle**: A space-shuttle-shaped cursor. Decorative/legacy.
- **XC_sizing**: Generic sizing/resizing cursor.
- **XC_spider**: Spider-shaped cursor. Decorative/legacy.
- **XC_spraycan**: Spray-can cursor, commonly associated with painting/drawing programs.
- **XC_star**: Star-shaped cursor.
- **XC_target**: Target/bullseye cursor.
- **XC_tcross**: A T-like cross cursor.
- **XC_top_left_arrow**: Arrow pointing toward the upper-left.
- **XC_top_left_corner**: Resize cursor for the top-left corner of a window.
- **XC_top_right_corner**: Resize cursor for the top-right corner of a window.
- **XC_top_side**: Resize cursor for the top edge of a window.
- **XC_top_tee**: A T-shaped cursor associated with the top side.
- **XC_trek**: A Star-Trek-like insignia cursor. Decorative/legacy.
- **XC_ul_angle**: Upper-left angle/corner shape.
- **XC_umbrella**: Umbrella-shaped cursor. Decorative/legacy.
- **XC_ur_angle**: Upper-right angle/corner shape.
- **XC_watch**: Watch cursor, commonly used to indicate busy/waiting.
- **XC_xterm**: Text insertion/I-beam cursor, commonly used over text areas.

The practical / common ones is the subset

Cursor	Description	Common use
XC_left_ptr	Standard arrow pointer, usually angled up-left.	Default cursor for normal pointing and selection.
XC_xterm	Text insertion cursor, usually an I-beam.	Used over editable or selectable text regions.
XC_watch	Watch/busy cursor.	Indicates that the application is busy or waiting.
XC_hand1	Hand-shaped cursor, first variant.	Used for clickable or draggable objects.
XC_hand2	Hand-shaped cursor, second variant.	Commonly used for links or clickable UI elements.
XC_crosshair	Crosshair cursor with horizontal and vertical lines.	Precision pointing, drawing, targeting, coordinate selection.
XC_fleur	Four-direction movement cursor.	Moving windows, panels, objects, or selections.
XC_sb_h_double_arrow	Horizontal double-ended arrow.	Horizontal resizing or horizontal scrollbar interaction.
XC_sb_v_double_arrow	Vertical double-ended arrow.	Vertical resizing or vertical scrollbar interaction.
XC_top_side	Resize cursor for the top edge.	Resizing a window or object from its top border.
XC_bottom_side	Resize cursor for the bottom edge.	Resizing from the bottom border.
XC_left_side	Resize cursor for the left edge.	Resizing from the left border.
XC_right_side	Resize cursor for the right edge.	Resizing from the right border.
XC_top_left_corner	Diagonal resize cursor for the top-left corner.	Resizing from the upper-left corner.
XC_top_right_corner	Diagonal resize cursor for the top-right corner.	Resizing from the upper-right corner.
XC_bottom_left_corner	Diagonal resize cursor for the bottom-left corner.	Resizing from the lower-left corner.
XC_bottom_right_corner	Diagonal resize cursor for the bottom-right corner.	Resizing from the lower-right corner.

- **Font:** In Xlib, Font is an X resource ID referring to a font loaded on the X server.

It is usually defined conceptually like this:

```
o typedef XID font;
```

So Font is not a C struct containing glyph data directly. It is an integer-like handle that identifies a server-side font resource.

For normal text drawing, a font contains glyphs for characters. For cursor creation, Xlib can also use those glyph bitmaps as cursor images.

```
o Font font = XLoadFont(display, "cursor");
```

This loads the standard X cursor font and returns a Font ID. Then `XCreateGlyphCursor` can use glyphs from that font as the cursor's source and mask.

- **XColor**: `XColor` is a structure that represents a color in Xlib. It is commonly defined like this

```
0  typedef struct {
1      unsigned long pixel;
2      unsigned short red, green, blue;
3      char flags;
4      char pad;
5  } XColor;
```

These are 16-bit color components, not 8-bit components. So their values range from:

```
0  0          // minimum intensity
1  65535      // maximum intensity
```

pixel is the actual pixel value used by the X server for a color.

It is not necessarily an RGB value in the ordinary sense. It is the value that can be placed into a drawable or into a GC foreground/background field.

The meaning of pixel depends on the visual and colormap.

- **Creating, Recoloring, and Freeing Cursors**: Each window can have a different cursor defined for it. Whenever the pointer is in a visible window, it is set to the cursor defined for that window. If no cursor was defined for that window, the cursor is the one defined for the parent window.

From X's perspective, a cursor consists of a cursor source, mask, colors, and a hotspot. The mask pixmap determines the shape of the cursor and must be a depth of one. The source pixmap must have a depth of one, and the colors determine the colors of the source. The hotspot defines the point on the cursor that is reported when a pointer event occurs. There may be limitations imposed by the hardware on cursors as to size and whether a mask is implemented. **XQueryBestCursor** can be used to find out what sizes are possible. There is a standard font for creating cursors, but Xlib provides functions that you can use to create cursors from arbitrary fonts or from bitmaps.

To create a cursor from the standard cursor font, use **XCreateFontCursor**.

```
0  #include <X11/cursorfont.h>
1
2  Cursor XCreateFontCursor(Display *display, unsigned int
   ↪  shape);
```

- *display* specifies the connection to the X server.
- *shape* specifies the shape of the cursor.

X provides a set of standard cursor shapes in a special font named *cursor*. Applications are encouraged to use this interface for their cursors because they cannot customize for the individual display type. The *shape* argument specifies which glyph of the standard fonts to use.

The hotspot comes from the information stored in the cursor font. The initial colors of a cursor are a black foreground and a white background. See **XRecolorCursor**. For further information about cursor shapes, see appendix B.

XCreateFontCursor can generate **BadAlloc** and **BadValue** errors.

To create a cursor from font glyphs, use **XCreateGlyphCursor**.

To create a cursor from font glyphs, use **XCreateGlyphCursor**.

```
0  Cursor XCreateGlyphCursor(  
1      Display *display,  
2      Font source_font,  
3      Font mask_font,  
4      unsigned int source_char,  
5      unsigned int mask_char,  
6      XColor *foreground_color,  
7      XColor *background_color  
8  );
```

- *display* specifies the connection to the X server.
- *source_font* specifies the font for the source glyph.
- *mask_font* specifies the font for the mask glyph, or **None**.
- *source_char* specifies the character glyph for the source.
- *mask_char* specifies the glyph character for the mask.
- *foreground_color* specifies the RGB values for the foreground of the source.
- *background_color* specifies the RGB values for the background of the source.

The **XCreateGlyphCursor** function is similar to **XCreatePixmapCursor** except that the source and mask bitmaps are obtained from the specified font glyphs. The *source_char* must be a defined glyph in *source_font*, or a **BadValue** error results. If *mask_font* is given, *mask_char* must be a defined glyph in *mask_font*, or a **BadValue** error results. The *mask_font* and character are optional. The origins of the *source_char* and *mask_char*, if defined, glyphs are positioned coincidently and define the hotspot. The *source_char* and *mask_char* need not have the same bounding box metrics, and there is no restriction on the placement of the hotspot relative to the bounding boxes. If no *mask_char* is given, all pixels of the source are displayed. You can free the fonts immediately by calling **XFreeFont** if no further explicit references to them are to be made.

For 2-byte matrix fonts, the 16-bit value should be formed with the *byte1* member in the most significant byte and the *byte2* member in the least significant byte.

XCreateGlyphCursor can generate **BadAlloc**, **BadFont**, and **BadValue** errors.

Note: To understand, think of a font as a table of small bitmap drawings. Each drawing in the font is selected by a number. That number is what Xlib calls a “character,” even if it is not a normal letter.

```
0 source_font + source_char
```

means: Use glyph number `source_char` from `source_font` as the cursor’s source image.

```
0 mask_font + mask_char
```

means: Use glyph number `mask_char` from `mask_font` as the cursor’s transparency mask

```
0 source_font + source_char -> choose the source glyph
1 mask_font + mask_char -> choose the mask glyph
```

The **source glyph** controls the cursor’s black/white pattern. Since it is a 1-bit glyph, each pixel is either 0 or 1

```
0 source bit 1 -> foreground color
1 source bit 0 -> background color
```

The mask glyph controls which pixels are visible at all.

```
0 mask bit 1 -> show this cursor pixel
1 mask bit 0 -> transparent pixel
```

Essentially,

```
0 if mask bit is 0:
1     draw nothing
2
3 if mask bit is 1:
4     if source bit is 1:
5         draw foreground color
6     else:
7         draw background color
```

To create a cursor from two bitmaps, use **XCreatePixmapCursor**.

```
0  Cursor XCreatePixmapCursor(  
1      Display* display,  
2      Pixmap source,  
3      Pixmap mask,  
4      XColor* foreground_color,  
5      XColor* background_color,  
6      unsigned int x, unsigned int y  
7  )
```

display Specifies the connection to the X server.

source Specifies the shape of the source cursor.

mask Specifies the cursor source bits to be displayed or **None**.

foreground_color Specifies the RGB values for the foreground of the source.

background_color Specifies the RGB values for the background of the source.

x, *y* Specify the *x* and *y* coordinates, which indicate the hotspot relative to the source's origin.

The **XCreatePixmapCursor** function creates a cursor and returns the cursor ID associated with it. The foreground and background RGB values must be specified using *foreground_color* and *background_color*, even if the X server only has **StaticGray** or **GrayScale** color. The foreground color is used for the pixels set to 1 in the source, and the background color is used for the pixels set to 0. Both source and mask, if specified, must have depth one, or a **BadMatch** error results, but can have any root. The mask argument defines the shape of the cursor. The pixels set to 1 in the mask define which source pixels are displayed, and the pixels set to 0 define which pixels are ignored. If no mask is given, all pixels of the source are displayed. The mask, if present, must be the same size as the pixmap defined by the source argument, or a **BadMatch** error results. The hotspot must be a point within the source, or a **BadMatch** error results.

The components of the cursor can be transformed arbitrarily to meet display limitations. The pixmaps can be freed immediately if no further explicit references to them are to be made. Subsequent drawing in the source or mask pixmap has an undefined effect on the cursor. The X server might or might not make a copy of the pixmap.

XCreatePixmapCursor can generate **BadAlloc** and **BadPixmap** errors.

To determine useful cursor sizes, use **XQueryBestCursor**.

```
0  Status XQueryBestCursor(  
1      Display* display,  
2      Drawable d,  
3      unsigned int width, height,  
4      unsigned int* width_return, height_return  
5  )
```

– *display* Specifies the connection to the X server.

– *d* Specifies the drawable, which indicates the screen.

- *width, height* Specify the width and height of the cursor that you want the size information for.
- *width_return, height_return* Return the best width and height that is closest to the specified width and height.

Some displays allow larger cursors than other displays. The **XQueryBestCursor** function provides a way to find out what size cursors are actually possible on the display. It returns the largest size that can be displayed. Applications should be prepared to use smaller cursors on displays that cannot support large ones.

XQueryBestCursor can generate a **BadDrawable** error.

To change the color of a given cursor, use **XRecolorCursor**.

```
o XRecolorCursor (display, cursor, foreground_color,
    ↪ background_color)
```

- *display* Specifies the connection to the X server.
- *cursor* Specifies the cursor.
- *foreground_color* Specifies the RGB values for the foreground of the source.
- *background_color* Specifies the RGB values for the background of the source.

The **XRecolorCursor** function changes the color of the specified cursor, and if the cursor is being displayed on a screen, the change is visible immediately. The pixel members of the **XColor** structures are ignored; only the RGB values are used.

XRecolorCursor can generate a **BadCursor** error.

To free (destroy) a given cursor, use **XFreeCursor**.

```
o XFreeCursor(display, cursor)
```

- *display* Specifies the connection to the X server.
- *cursor* Specifies the cursor.

The **XFreeCursor** function deletes the association between the cursor resource ID and the specified cursor. The cursor storage is freed when no other resource references it. The specified cursor ID should not be referred to again.

XFreeCursor can generate a **BadCursor** error.

6. Color management functions

- **Intro:** Each X window always has an associated colormap that provides a level of indirection between pixel values and colors displayed on the screen. Xlib provides functions that you can use to manipulate a colormap. The X protocol defines colors using values in the RGB color space. The RGB color space is device dependent; rendering an RGB value on differing output devices typically results in different colors. Xlib also provides a means for clients to specify color using device-independent color spaces for consistent results across devices. Xlib supports device-independent color spaces derivable from the CIE XYZ color space. This includes the CIE XYZ, xyY, $L^*u^*v^*$, and $L^*a^*b^*$ color spaces as well as the TekHVC color space.

All functions, types, and symbols in this chapter with the prefix “Xcms” are defined in `<X11/Xcms.h>`. The remaining functions and types are defined in `<X11/Xlib.h>`.

Functions in this chapter manipulate the representation of color on the screen. For each possible value that a pixel can take in a window, there is a color cell in the colormap. For example, if a window is 4 bits deep, pixel values 0 through 15 are defined. A colormap is a collection of color cells. A color cell consists of a triple of red, green, and blue (RGB) values. The hardware imposes limits on the number of significant bits in these values. As each pixel is read out of display memory, the pixel is looked up in a colormap. The RGB value of the cell determines what color is displayed on the screen. On a grayscale display with a black-and-white monitor, the values are combined to determine the brightness on the screen.

Typically, an application allocates color cells or sets of color cells to obtain the desired colors. The client can allocate read-only cells. In which case, the pixel values for these colors can be shared among multiple applications, and the RGB value of the cell cannot be changed. If the client allocates read/write cells, they are exclusively owned by the client, and the color associated with the pixel value can be changed at will. Cells must be allocated (and, if read/write, initialized with an RGB value) by a client to obtain desired colors. The use of pixel value for an unallocated cell results in an undefined color.

Because colormaps are associated with windows, X supports displays with multiple colormaps and, indeed, different types of colormaps. If there are insufficient colormap resources in the display, some windows will display in their true colors, and others will display with incorrect colors. A window manager usually controls which windows are displayed in their true colors if more than one colormap is required for the color resources the applications are using. At any time, there is a set of installed colormaps for a screen. Windows using one of the installed colormaps display with true colors, and windows using other colormaps generally display with incorrect colors. You can control the set of installed colormaps by using **XInstallColormap** and **XUninstallColormap**.

Colormaps are local to a particular screen. Screens always have a default colormap, and programs typically allocate cells out of this colormap. Generally, you should not write applications that monopolize color resources. Although some hardware supports multiple colormaps installed at one time, many of the hardware displays built today support only a single installed colormap, so the primitives are written to encourage sharing of colormap entries between applications.

The **DefaultColormap** macro returns the default colormap. The **DefaultVisual** macro returns the default visual type for the specified screen. Possible visual types are **StaticGray**, **GrayScale**, **StaticColor**, **PseudoColor**, **TrueColor**, or **DirectColor**.

- **Color structures:** Functions that operate only on RGB color space values use an **XColor** structure, which contains:

```

0  typedef struct {
1      unsigned long pixel; /* pixel value */
2      unsigned short red, green, blue; /* rgb values */
3      char flags; /* DoRed, DoGreen, DoBlue */
4      char pad;
5  } XColor;

```

The red, green, and blue values are always in the range 0 to 65535 inclusive, independent of the number of bits actually used in the display hardware. The server scales these values down to the range used by the hardware. Black is represented by (0,0,0), and white is represented by (65535,65535,65535). In some functions, the flags member controls which of the red, green, and blue members is used and can be the inclusive OR of zero or more of **DoRed**, **DoGreen**, and **DoBlue**.

Functions that operate on all color space values use an **XcmsColor** structure. This structure contains a union of substructures, each supporting color specification encoding for a particular color space. Like the **XColor** structure, the **XcmsColor** structure contains pixel and color specification information (the spec member in the XcmsColor structure).

```

0  typedef unsigned long XcmsColorFormat; /* Color Specification
    ↪ Format */

```

```

0  typedef struct {
1      union {
2          XcmsRGB RGB;
3          XcmsRGBi RGBi;
4          XcmsCIEXYZ CIEXYZ;
5          XcmsCIEuvY CIEuvY;
6          XcmsCIExyY CIExyY;
7          XcmsCIELab CIELab;
8          XcmsCIELuv CIELuv;
9          XcmsTekHVC TekHVC;
10         XcmsPad Pad;
11     } spec;
12     unsigned long pixel;
13     XcmsColorFormat format;
14 } XcmsColor; /* Xcms Color Structure */

```

Because the color specification can be encoded for the various color spaces, encoding for the spec member is identified by the format member, which is of type **XcmsColorFormat**. The following macros define standard formats.

```

0  #define XcmsUndefinedFormat 0x00000000
1  #define XcmsCIEXYZFormat 0x00000001 /* CIE XYZ */
2  #define XcmsCIEuvYFormat 0x00000002 /* CIE u'v'Y */
3  #define XcmsCIExyYFormat 0x00000003 /* CIE xyY */
4  #define XcmsCIELabFormat 0x00000004 /* CIE L*a*b* */
5  #define XcmsCIELuvFormat 0x00000005 /* CIE L*u*v* */
6  #define XcmsTekHVCFormat 0x00000006 /* TekHVC */
7  #define XcmsRGBFormat 0x80000000 /* RGB Device */
8  #define XcmsRGBiFormat 0x80000001 /* RGB Intensity */

```

Formats for device-independent color spaces are distinguishable from those for device-dependent spaces by the 32nd bit. If this bit is set, it indicates that the color specification is in a device-dependent form; otherwise, it is in a device-independent form. If the 31st bit is set, this indicates that the color space has been added to Xlib at run time. The format value for a color space added at run time may be different each time the program is executed. If references to such a color space must be made outside the client (for example, storing a color specification in a file), then reference should be made by color space string prefix (see **XcmsFormatOfPrefix** and **XcmsPrefixOfFormat**).

Data types that describe the color specification encoding for the various color spaces are defined as follows:

```

0  typedef double XcmsFloat;
1  typedef struct {
2      unsigned short red; /* 0x0000 to 0xffff */
3      unsigned short green; /* 0x0000 to 0xffff */
4      unsigned short blue; /* 0x0000 to 0xffff */
5  } XcmsRGB; /* RGB Device */
6
7  typedef struct {
8      XcmsFloat red; /* 0.0 to 1.0 */
9      XcmsFloat green; /* 0.0 to 1.0 */
10     XcmsFloat blue; /* 0.0 to 1.0 */
11 } XcmsRGBi; /* RGB Intensity */
12
13 typedef struct {
14     XcmsFloat X;
15     XcmsFloat Y; /* 0.0 to 1.0 */
16     XcmsFloat Z;
17 } XcmsCIEXYZ; /* CIE XYZ */
18
19 typedef struct {
20     XcmsFloat u_prime; /* 0.0 to ~0.6 */
21     XcmsFloat v_prime; /* 0.0 to ~0.6 */
22     XcmsFloat Y; /* 0.0 to 1.0 */
23 } XcmsCIEuvY; /* CIE u'v'Y */

```

```

0  typedef struct {
1      XcmsFloat x; /* 0.0 to ~.75 */
2      XcmsFloat y; /* 0.0 to ~.85 */
3      XcmsFloat Y; /* 0.0 to 1.0 */
4  } XcmsCIExyY; /* CIE xyY */
5
6  typedef struct {
7      XcmsFloat L_star; /* 0.0 to 100.0 */
8      XcmsFloat a_star;
9      XcmsFloat b_star;
10 } XcmsCIELab; /* CIE L*a*b* */
11
12 typedef struct {
13     XcmsFloat L_star; /* 0.0 to 100.0 */
14     XcmsFloat u_star;
15     XcmsFloat v_star;
16 } XcmsCIELuv; /* CIE L*u*v* */
17
18 typedef struct {
19     XcmsFloat H; /* 0.0 to 360.0 */
20     XcmsFloat V; /* 0.0 to 100.0 */
21     XcmsFloat C; /* 0.0 to 100.0 */
22 } XcmsTekHVC; /* TekHVC */
23
24 typedef struct {
25     XcmsFloat pad0;
26     XcmsFloat pad1;
27     XcmsFloat pad2;
28     XcmsFloat pad3;
29 } XcmsPad; /* four doubles */

```

The device-dependent formats provided allow color specification in:

- **RGB Intensity (XcmsRGBi)**: Red, green, and blue linear intensity values, floating-point values from 0.0 to 1.0, where 1.0 indicates full intensity, 0.5 half intensity, and so on.
- **RGB Device (XcmsRGB)**: Red, green, and blue values appropriate for the specified output device. **XcmsRGB** values are of type unsigned short, scaled from 0 to 65535 inclusive, and are interchangeable with the red, green, and blue values in an **XColor** structure.

It is important to note that RGB Intensity values are not gamma corrected values. In contrast, RGB Device values generated as a result of converting color specifications are always gamma corrected, and RGB Device values acquired as a result of querying a colormap or passed in by the client are assumed by Xlib to be gamma corrected. The term RGB value in this manual always refers to an RGB Device value.

- **Display color gamut**: Specific range of colors a screen can reproduce.
- **Gamma correction**: Gamma correction is the process of adjusting color or brightness values to account for the fact that displays do not produce light linearly.

Ideally, you might think that if you send a display a value of 50%, it produces 50% brightness. In reality, many displays have a nonlinear response. A value halfway between black and white does not necessarily produce half the physical light output.

So gamma correction compensates for this nonlinear relationship.

Mathematically, it is often modeled like this:

$$\text{output brightness} = \text{input value}^\gamma,$$

where γ is the **gamma value**. A common display gamma is around

$$\gamma \approx 2.2.$$

That means displays often make raw input values appear darker than a linear brightness model would suggest.

For example, suppose a pixel channel is normalized between 0 and 1:

$$0.5^{2.2} \approx 0.218.$$

So a numeric value of 0.5 may produce only about 21.8% of maximum physical light output, not 50%.

Gamma correction adjusts the stored or transmitted values so the displayed result looks perceptually correct.

In color systems, this matters because RGB values are usually not pure physical light intensities. They are often encoded values meant to look correct on a display. For example, an RGB value like:

o R = 128, G = 128, B = 128

is not necessarily “half the light” of white. It is a gamma-encoded middle gray intended to look visually halfway between black and white.

Gamma correcting an RGB value means changing the numeric channel values so that the final displayed brightness matches the intended perceived or physical brightness.

- **Color strings:** Xlib provides a mechanism for using string names for colors. A color string may either contain an abstract color name or a numerical color specification. Color strings are case-insensitive.

Color strings are used in the following functions:

- XAllocNamedColor
- XcmsAllocNamedColor
- XLookupColor
- XcmsLookupColor
- XParseColor
- XStoreNamedColor

Xlib supports the use of abstract color names, for example, red or blue. A value for this abstract name is obtained by searching one or more color name databases. Xlib first searches zero or more client-side databases; the number, location, and content of these databases is implementation-dependent and might depend on the current locale. If the name is not found, Xlib then looks for the color in the X server’s database. If the color name is not in the Host Portable Character Encoding, the result is implementation-dependent.

A numerical color specification consists of a color space name and a set of values in the following syntax:

```
0  <color_space_name>:<value>/.../<value>
```

The following are examples of valid color strings.

- "CIEXYZ:0.3227/0.28133/0.2493"
- "RGBi:1.0/0.0/0.0"
- "rgb:00/ff/00"
- "CIELuv:50.0/0.0/0.0"

The syntax and semantics of numerical specifications are given for each standard color space in the following sections.

- **RGB Device String Specification:** An RGB Device specification is identified by the prefix "rgb:" and conforms to the following syntax:

```
0  rgb:<red>/<green>/<blue>
1
2  <red>, <green>, <blue> := h  hh  hhh | hhhh
3  h := single hexadecimal digits (case insignificant)
```

Note that *h* indicates the value scaled in 4 bits, *hh* the value scaled in 8 bits, *hhh* the value scaled in 12 bits, and *hhhh* the value scaled in 16 bits, respectively.

For backward compatibility, an older syntax for RGB Device is supported, but its continued use is not encouraged. The syntax is an initial sharp sign character followed by a numeric specification, in one of the following formats:

```
0  #RGB (4 bits each)
1  #RRGGBB (8 bits each)
2  #RRRGGBBB (12 bits each)
3  #RRRRGGGBBBB (16 bits each)
```

The R, G, and B represent single hexadecimal digits. When fewer than 16 bits each are specified, they represent the most significant bits of the value (unlike the "rgb:" syntax, in which values are scaled). For example, the string "#3a7" is the same as "#3000a0007000".

- **RGB Intensity String Specification:** An RGB intensity specification is identified by the prefix "rgbi:" and conforms to the following syntax:

```
0  rgbi:<red>/<green>/<blue>
```

Note that red, green, and blue are floating-point values between 0.0 and 1.0, inclusive. The input format for these values is an optional sign, a string of numbers possibly containing a decimal point, and an optional exponent field containing an E or e followed by a possibly signed integer string.

- **Device-Independent String Specifications:** The standard device-independent string specifications have the following syntax:

```
0  CIEXYZ:<X>/<Y>/<Z>
1  CIEuvY:<u>/<v>/<Y>
2  CIExyY:<x>/<y>/<Y>
3  CIELab:<L>/<a>/<b>
4  CIELuv:<L>/<u>/<v>
5  TekHVC:<H>/<V>/<C>
```

All of the values (C, H, V, X, Y, Z, a, b, u, v, y, x) are floating-point values. The syntax for these values is an optional plus or minus sign, a string of digits possibly containing a decimal point, and an optional exponent field consisting of an “E” or “e” followed by an optional plus or minus followed by a string of digits.

- **Color Conversion Contexts and Gamut Mapping:** When Xlib converts device-independent color specifications into device-dependent specifications and vice versa, it uses knowledge about the color limitations of the screen hardware. This information, typically called the device profile, is available in a Color Conversion Context (CCC).

Because a specified color may be outside the color gamut of the target screen and the white point associated with the color specification may differ from the white point inherent to the screen, Xlib applies gamut mapping when it encounters certain conditions:

- Gamut compression occurs when conversion of device-independent color specifications to device-dependent color specifications results in a color out of the target screen’s gamut.
- White adjustment occurs when the inherent white point of the screen differs from the white point assumed by the client.

Gamut handling methods are stored as callbacks in the CCC, which in turn are used by the color space conversion routines. Client data is also stored in the CCC for each callback. The CCC also contains the white point the client assumes to be associated with color specifications (that is, the Client White Point). The client can specify the gamut handling callbacks and client data as well as the Client White Point. Xlib does not preclude the X client from performing other forms of gamut handling (for example, gamut expansion); however, Xlib does not provide direct support for gamut handling other than white adjustment and gamut compression.

Associated with each colormap is an initial CCC transparently generated by Xlib. Therefore, when you specify a colormap as an argument to an Xlib function, you are indirectly specifying a CCC. There is a default CCC associated with each screen. Newly created CCCs inherit attributes from the default CCC, so the default CCC attributes can be modified to affect new CCCs.

Xcms functions in which gamut mapping can occur return **Status** and have specific status values defined for them, as follows:

- **XcmsFailure** indicates that the function failed.
- **XcmsSuccess** indicates that the function succeeded. In addition, if the function performed any color conversion, the colors did not need to be compressed.
- **XcmsSuccessWithCompression** indicates the function performed color conversion and at least one of the colors needed to be compressed. The gamut compression method is determined by the gamut compression procedure in the CCC that is specified directly as a function argument or in the CCC indirectly specified by means of the colormap argument.

- **Creating, Copying, and Destroying Colormaps:**

To create a colormap for a screen, use **XCreateColormap**.

```
0  Colormap XCreateColormap(  
1      Display *display,  
2      Window w,  
3      Visual *visual,  
4      int alloc  
5  )
```

- **display**: Specifies the connection to the X server.
- **w**: Specifies the window on whose screen you want to create a colormap.
- **visual**: Specifies a visual type supported on the screen. If the visual type is not one supported by the screen, a **BadMatch** error results.
- **alloc**: Specifies the colormap entries to be allocated. You can pass **AllocNone** or **AllocAll**.

The **XCreateColormap** function creates a colormap of the specified visual type for the screen on which the specified window resides and returns the colormap ID associated with it. Note that the specified window is only used to determine the screen.

The initial values of the colormap entries are undefined for the visual classes **GrayScale**, **PseudoColor**, and **DirectColor**. For **StaticGray**, **StaticColor**, and **TrueColor**, the entries have defined values, but those values are specific to the visual and are not defined by X. For **StaticGray**, **StaticColor**, and **TrueColor**, **alloc** must be **AllocNone**, or a **BadMatch** error results. For the other visual classes, if **alloc** is **AllocNone**, the colormap initially has no allocated entries, and clients can allocate them.

If **alloc** is **AllocAll**, the entire colormap is allocated writable. The initial values of all allocated entries are undefined. For **GrayScale** and **PseudoColor**, the effect is as if an **XAllocColorCells** call returned all pixel values from zero to $N - 1$, where N is the colormap entries value in the specified visual. For **DirectColor**, the effect is as if an **XAllocColorPlanes** call returned a pixel value of zero and **red_mask**, **green_mask**, and **blue_mask** containing the same bits as the corresponding masks in the specified visual. However, in all cases, none of these entries can be freed by using **XFreeColors**.

XCreateColormap can generate **BadAlloc**, **BadMatch**, **BadValue**, and **BadWindow** errors.

To create a new colormap when the allocation out of a previously shared colormap has failed because of resource exhaustion, use **XCopyColormapAndFree**.

```
0  Colormap XCopyColormapAndFree(  
1      Display* display,  
2      Colormap colormap  
3  )
```

- **display**: Specifies the connection to the X server.
- **colormap**: Specifies the colormap.

The **XCopyColormapAndFree** function creates a colormap of the same visual type and for the same screen as the specified colormap and returns the new colormap ID. It also moves all of the client's existing allocation from the specified colormap to the new colormap with their color values intact and their read-only or writable characteristics intact and frees those entries in the specified colormap. Color values in other entries in the new colormap are undefined.

If the specified colormap was created by the client with **alloc** not set to **AllocAll**, the new colormap is also created with **AllocAll**, all color values for all entries are copied from the specified colormap, and then all entries in the specified colormap are freed.

If the specified colormap was not created by the client with **AllocAll**, the allocations to be moved are all those pixels and planes that have been allocated by the client using **XAllocColor**, **XAllocNamedColor**, **XAllocColorCells**, or **XAllocColorPlanes** and that have not been freed since they were allocated.

XCopyColormapAndFree can generate **BadAlloc** and **BadColor** errors.

Note: A colormap can be “exhausted” because it has a finite number of color cells.

If the visual has 8 colormap bits, there may be only 256 entries. Multiple clients may be sharing the same default colormap. If enough clients allocate entries, there may be no suitable entries left.

The “AndFree” part means it frees your color allocations in the old colormap. It does not necessarily destroy the old colormap object itself. To destroy a colormap resource, you use:

If the old colormap was created by your client with:

```
0  AllocAll
```

then the client owns the entire colormap. In that case, the new colormap is also treated like an **AllocAll** colormap. All entries are copied, and the old entries are freed.

If the old colormap was not created with **AllocAll**, then only the colors/cells that your client explicitly allocated are moved. That includes allocations made by functions such as:

XCopyColormapAndFree creates a new colormap with the same screen, same visual, and same number of entries as the old one. It does not increase the size of the colormap.

For example, if the old colormap had 256 entries, the new colormap also has 256 entries.

The benefit is that the new colormap does not carry over everyone else's allocations. It mainly preserves your client's allocated colors and leaves the rest available/undefined in the new colormap.

To destroy a colormap, use **XFreeColormap**.

```
0 XFreeColormap(Display *display, Colormap colormap)
```

- **display**: Specifies the connection to the X server.
- **colormap**: Specifies the colormap that you want to destroy.

The **XFreeColormap** function deletes the association between the colormap resource ID and the colormap and frees the colormap storage. However, this function has no effect on the default colormap for a screen. If the specified colormap is an installed map for a screen, it is uninstalled. See **XUninstallColormap**.

If the specified colormap is defined as the colormap for a window by **XCreateWindow**, **XSetWindowColormap**, or **XChangeWindowAttributes**, **XFreeColormap** changes the colormap associated with the window to **None** and generates a **ColormapNotify** event. X does not define the colors displayed for a window with a colormap of **None**.

XFreeColormap can generate a **BadColor** error.

- **Mapping Color Names to Values**: To map a color name to an RGB value, use **XLookupColor**

```
0 Status XLookupColor(  
1     Display *display,  
2     Colormap colormap,  
3     char *color_name,  
4     XColor *exact_def_return,  
5     XColor *screen_def_return  
6 )
```

- **display**: Specifies the connection to the X server.
- **colormap**: Specifies the colormap.

- **color_name**: Specifies the color name string, for example, **red**, whose color definition structure you want returned.
- **exact_def_return**: Returns the exact RGB values.
- **screen_def_return**: Returns the closest RGB values provided by the hardware.

The **XLookupColor** function looks up the string name of a color with respect to the screen associated with the specified colormap. It returns both the exact color values and the closest values provided by the screen with respect to the visual type of the specified colormap. If the color name is not in the Host Portable Character Encoding, the result is implementation-dependent. Use of uppercase or lowercase does not matter. **XLookupColor** returns nonzero if the name is resolved; otherwise, it returns zero.

XLookupColor can generate a **BadColor** error.

To map a color name to the exact RGB value, use **XParseColor**.

```

0  Status XParseColor(
1      Display *display,
2      Colormap colormap,
3      char *spec,
4      XColor *exact_def_return
5  )

```

- **display**: Specifies the connection to the X server.
- **colormap**: Specifies the colormap.
- **spec**: Specifies the color name string; case is ignored.
- **exact_def_return**: Returns the exact color value for later use and sets the **DoRed**, **DoGreen**, and **DoBlue** flags.

The **XParseColor** function looks up the string name of a color with respect to the screen associated with the specified colormap. It returns the exact color value. If the color name is not in the Host Portable Character Encoding, the result is implementation-dependent. Use of uppercase or lowercase does not matter. **XParseColor** returns nonzero if the name is resolved; otherwise, it returns zero.

XParseColor can generate a **BadColor** error.

To map a color name to a value in an arbitrary color space, use **XcmsLookupColor**.

```

0  Status XcmsLookupColor(
1      Display *display,
2      Colormap colormap,
3      char *color_string,
4      XcmsColor *color_exact_return,
5      XcmsColor *color_screen_return,
6      XcmsColorFormat result_format
7  )

```

- **display**: Specifies the connection to the X server.
- **colormap**: Specifies the colormap.
- **color_string**: Specifies the color string.
- **color_exact_return**: Returns the color specification parsed from the color string or parsed from the corresponding string found in a color-name database.
- **color_screen_return**: Returns the color that can be reproduced on the screen.
- **result_format**: Specifies the color format for the returned color specifications, that is, the **color_screen_return** and **color_exact_return** arguments. If the format is **XcmsUndefinedFormat** and the color string contains a numerical color specification, the specification is returned in the format used in that numerical color specification. If the format is **XcmsUndefinedFormat** and the color string contains a color name, the specification is returned in the format used to store the color in the database.

The **XcmsLookupColor** function looks up the string name of a color with respect to the screen associated with the specified colormap. It returns both the exact color values and the closest values provided by the screen with respect to the visual type of the specified colormap. The values are returned in the format specified by **result_format**. If the color name is not in the Host Portable Character Encoding, the result is implementation-dependent. Use of uppercase or lowercase does not matter. **XcmsLookupColor** returns **XcmsSuccess** or **XcmsSuccessWithCompression** if the name is resolved; otherwise, it returns **XcmsFailure**. If **XcmsSuccessWithCompression** is returned, the color specification returned in **color_screen_return** is the result of gamut compression.

- **Clearing up confusion**: The colormap is stored and managed by the X server, not by the client.

The client only holds an **XID**, a numeric handle, that refers to the server-side colormap object.

This is why multiple clients can share the same colormap. They are all referring to the same server-side resource by **XID**.

For a client to allocate a read-only color cell means: The client asks the X server for a colormap entry representing some RGB color, and the server gives the client a pixel value it may use, but not modify.

The important part is that the client has allocated permission to use that pixel value, not permission to change the RGB contents of the colormap cell.

The word allocate here means the server records that this client is using that shared color cell. It increments an internal count so the entry is not freed while clients are still using it.

When clients call **XFreeColors**, the server decrements that count. The cell is actually available for reuse only after all allocations have been freed.

- **Allocating and Freeing Color Cells:** There are two ways of allocating color cells: explicitly as read-only entries, one pixel value at a time, or read/write, where you can allocate a number of color cells and planes simultaneously. A read-only cell has its RGB value set by the server. Read/write cells do not have defined colors initially; functions described in the next section must be used to store values into them. Although it is possible for any client to store values into a read/write cell allocated by another client, read/write cells normally should be considered private to the client that allocated them.

Read-only colormap cells are shared among clients. The server counts each allocation and freeing of the cell by clients. When the last client frees a shared cell, the cell is finally deallocated. If a single client allocates the same read-only cell multiple times, the server counts each such allocation, not just the first one.

To allocate a read-only color cell with an RGB value, use **XAllocColor**

```

0  Status XAllocColor(
1      Display *display,
2      Colormap colormap,
3      XColor *screen_in_out
4  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *screen_in_out*: Specifies and returns the values actually used in the colormap.

The **XAllocColor** function allocates a read-only colormap entry corresponding to the closest RGB value supported by the hardware. **XAllocColor** returns the pixel value of the closest to the specified RGB elements supported by the hardware and returns the RGB value actually used. The corresponding colormap cell is read-only. In addition, **XAllocColor** returns nonzero if it succeeded or zero if it failed. Multiple clients that request the same effective RGB value can be assigned the same read-only entry, thus allowing entries to be shared. When the last client deallocates a shared cell, it is deallocated. **XAllocColor** does not use or affect the flags in the **XColor** structure.

XAllocColor can generate a **BadColor** error.

To allocate a read-only color cell with a color in arbitrary format, use **XcmsAllocColor**.

```

0  Status XcmsAllocColor(
1      Display *display,
2      Colormap colormap,
3      XcmsColor *color_in_out,
4      XcmsColorFormat result_format
5  )

```

- *display*: Specifies the connection to the X server.

- *colormap*: Specifies the colormap.
- *color_in_out*: Specifies the color to allocate and returns the pixel and color that is actually used in the colormap.
- *result_format*: Specifies the color format for the returned color specification.

The **XcmsAllocColor** function is similar to **XAllocColor** except the color can be specified in any format. The **XcmsAllocColor** function ultimately calls **XAllocColor** to allocate a read-only color cell, or colormap entry, with the specified color. **XcmsAllocColor** first converts the color specified in *color_in_out* to an RGB value and then passes it to **XAllocColor**. **XcmsAllocColor** returns the pixel value of the color cell and the color specification actually allocated. This returned color specification is the result of converting the RGB value returned by **XAllocColor** into the format specified with the *result_format* argument. If there is no interest in a returned color specification, unnecessary computation can be bypassed if *result_format* is set to **XcmsRGBFormat**. The corresponding colormap cell is read-only. If this routine returns **XcmsFailure**, the *color_in_out* color specification is left unchanged.

XcmsAllocColor can generate a **BadColor** error.

To allocate a read-only color cell using a color name and return the closest color supported by the hardware in RGB format, use **XAllocNamedColor**.

```

0  Status XAllocNamedColor(
1      Display *display,
2      Colormap colormap,
3      char *color_name,
4      XColor *screen_def_return,
5      XColor *exact_def_return
6  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *color_name*: Specifies the color name string, for example, **red**, whose color definition structure you want returned.
- *screen_def_return*: Returns the closest RGB values provided by the hardware.
- *exact_def_return*: Returns the exact RGB values.

The **XAllocNamedColor** function looks up the named color with respect to the screen that is associated with the specified colormap. It returns both the exact database definition and the closest color supported by the screen. The allocated color cell is read-only. The pixel value is returned in *screen_def_return*. If the color name is not in the Host Portable Character Encoding, the result is implementation-dependent. Use of uppercase or lowercase does not matter. If *screen_def_return* and *exact_def_return* point to the same structure, the pixel field will be set correctly, but the color values are undefined. **XAllocNamedColor** returns nonzero if a cell is allocated; otherwise, it returns zero.

XAllocNamedColor can generate a **BadColor** error.

To allocate a read-only color cell using a color name and return the closest color supported by the hardware in an arbitrary format, use **XcmsAllocNamedColor**.

```

0  Status XcmsAllocNamedColor(
1      Display *display,
2      Colormap colormap,
3      char *color_string,
4      XcmsColor *color_screen_return,
5      XcmsColor *color_exact_return,
6      XcmsColorFormat result_format
7  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *color_string*: Specifies the color string whose color definition structure is to be returned.
- *color_screen_return*: Returns the pixel value of the color cell and color specification that actually is stored for that cell.
- *color_exact_return*: Returns the color specification parsed from the color string or parsed from the corresponding string found in a color-name database.
- *result_format*: Specifies the color format for the returned color specifications, namely the *color_screen_return* and *color_exact_return* arguments. If the format is **XcmsUndefinedFormat** and the color string contains a numerical color specification, the specification is returned in the format used in that numerical color specification. If the format is **XcmsUndefinedFormat** and the color string contains a color name, the specification is returned in the format used to store the color in the database.

The **XcmsAllocNamedColor** function is similar to **XAllocNamedColor** except that the color returned can be in any format specified. This function ultimately calls **XAllocColor** to allocate a read-only color cell with the color specified by a color string. The color string is parsed into an **XcmsColor** structure, converted to an RGB value, and finally passed to **XAllocColor**. If the color name is not in the Host Portable Character Encoding, the result is implementation-dependent. Use of uppercase or lowercase does not matter.

This function returns both the color specification as a result of parsing, called the exact specification, and the actual color specification stored, called the screen specification. This screen specification is the result of converting the RGB value returned by **XAllocColor** into the format specified in *result_format*. If there is no interest in a returned color specification, unnecessary computation can be bypassed if *result_format* is set to **XcmsRGBFormat**. If *color_screen_return* and *color_exact_return* point to the same structure, the pixel field will be set correctly, but the color values are undefined.

XcmsAllocNamedColor can generate a **BadColor** error.

To allocate read/write color cell and color plane combinations for a **PseudoColor** model, use **XAllocColorCells**.

```

0  Status XAllocColorCells(
1      Display *display,
2      Colormap colormap,
3      Bool contig,
4      unsigned long plane_masks_return[],
5      unsigned int nplanes,
6      unsigned long pixels_return[],
7      unsigned int npixels
8  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *contig*: Specifies a Boolean value that indicates whether the planes must be contiguous.
- *plane_masks_return*: Returns an array of plane masks.
- *nplanes*: Specifies the number of plane masks that are to be returned in the plane masks array.
- *pixels_return*: Returns an array of pixel values.
- *npixels*: Specifies the number of pixel values that are to be returned in the *pixels_return* array.

The **XAllocColorCells** function allocates read/write color cells. The number of colors must be positive and the number of planes nonnegative, or a **BadValue** error results. If *npixels* and *nplanes* are requested, then *npixels* pixels and *nplanes* plane masks are returned. No mask will have any bits set to 1 in common with any other mask or with any of the pixels. By ORing together each pixel with zero or more masks, $npixels \times 2^{nplanes}$ distinct pixels can be produced. All of these are allocated writable by the request.

For **GrayScale** or **PseudoColor**, each mask has exactly one bit set to 1. For **DirectColor**, each has exactly three bits set to 1. If *contig* is **True** and if all masks are ORed together, a single contiguous set of bits set to 1 will be formed for **GrayScale** or **PseudoColor**, and three contiguous sets of bits set to 1, one within each pixel subfield, for **DirectColor**. The RGB values of the allocated entries are undefined. **XAllocColorCells** returns nonzero if it succeeded or zero if it failed.

XAllocColorCells can generate **BadColor** and **BadValue** errors.

To allocate read/write color resources for a **DirectColor** model, use **XAllocColorPlanes**.

The server guarantees that the returned masks do not overlap with each other or with the base pixels. That guarantee matters because otherwise ORing the masks together could accidentally collide with other allocated pixel values.

```

0  Status XAllocColorPlanes(
1      Display *display,
2      Colormap colormap,
3      Bool contig,
4      unsigned long pixels_return[],
5      int ncolors,
6      int nreds,
7      int ngreens,
8      int nblues,
9      unsigned long *rmask_return,
10     unsigned long *gmask_return,
11     unsigned long *bmask_return
12 )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *contig*: Specifies a Boolean value that indicates whether the planes must be contiguous.
- *pixels_return*: Returns an array of pixel values. **XAllocColorPlanes** returns the pixel values in this array.
- *ncolors*: Specifies the number of pixel values that are to be returned in the *pixels_return* array.
- *nreds*: Specifies the number of red planes. The value you pass must be nonnegative.
- *ngreens*: Specifies the number of green planes. The value you pass must be nonnegative.
- *nblues*: Specifies the number of blue planes. The value you pass must be nonnegative.
- *rmask_return*: Returns the bit mask for the red planes.
- *gmask_return*: Returns the bit mask for the green planes.
- *bmask_return*: Returns the bit mask for the blue planes.

The specified *ncolors* must be positive, and *nreds*, *ngreens*, and *nblues* must be nonnegative, or a **BadValue** error results. If *ncolors* colors, *nreds* reds, *ngreens* greens, and *nblues* blues are requested, *ncolors* pixels are returned, and the masks have *nreds*, *ngreens*, and *nblues* bits set to 1, respectively. If *contig* is **True**, each mask will have a contiguous set of bits set to 1. No mask will have any bits set to 1 in common with any other mask or with any of the pixels.

For **DirectColor**, each mask will lie within the corresponding pixel subfield. By ORing together subsets of masks with each pixel value, $ncolors \times 2^{(nreds+ngreens+nblues)}$ distinct pixel values can be produced. All of these are allocated by the request.

However, in the colormap, there are only $ncolors \times 2^{nreds}$ independent red entries, $ncolors \times 2^{ngreens}$ independent green entries, and $ncolors \times 2^{nblues}$ independent blue entries. This is true even for **PseudoColor**. When the colormap entry of a pixel value is changed using **XStoreColors**, **XStoreColor**, or **XStoreNamedColor**, the pixel is decomposed according to the masks, and the corresponding independent entries are updated. **XAllocColorPlanes** returns nonzero if it succeeded or zero if it failed.

XAllocColorPlanes can generate **BadColor** and **BadValue** errors.

Note: The *contig* argument controls the shape of those masks. If *contig* is *False*, the server may return masks using any non-overlapping bit positions.

```
0  mask0 = 0b00000001
1  mask1 = 0b00001000
2  mask2 = 0b00100000
```

These masks are valid because they do not overlap, but the set of mask bits is not contiguous.

If *contig* is *True*, the server must return masks whose set bits form a contiguous range.

```
0  mask0 = 0b00000100
1  mask1 = 0b00001000
2  mask2 = 0b00010000
```

Together, these occupy adjacent bit positions:

```
0  0b00011100
```

For *DirectColor*, each mask affects the red, green, and blue subfields separately. So *contig* = *True* means there is a contiguous set of bits within each color subfield.

To free colormap cells, use **XFreeColors**.

```
0  int XFreeColors(
1      Display *display,
2      Colormap colormap,
3      unsigned long pixels[],
4      int npixels,
5      unsigned long planes
6  )
```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *pixels*: Specifies an array of pixel values that map to the cells in the specified colormap.
- *npixels*: Specifies the number of pixels.
- *planes*: Specifies the planes you want to free.

The **XFreeColors** function frees the cells represented by pixels whose values are in the *pixels* array. The *planes* argument should not have any bits set to 1 in common with any of the pixels. The set of all pixels is produced by ORing together subsets of the *planes* argument with the pixels.

The request frees all of these pixels that were allocated by the client using **XAllocColor**, **XAllocNamedColor**, **XAllocColorCells**, and **XAllocColorPlanes**. Note that freeing an individual pixel obtained from **XAllocColorPlanes** may not actually allow it to be reused until all of its related pixels are also freed. Similarly, a read-only entry is not actually freed until it has been freed by all clients, and if a client allocates the same read-only entry multiple times, it must free the entry that many times before the entry is actually freed.

All specified pixels that are allocated by the client in the colormap are freed, even if one or more pixels produce an error. If a specified pixel is not a valid index into the colormap, a **BadValue** error results. If a specified pixel is not allocated by the client, that is, if it is unallocated or is only allocated by another client, or if the colormap was created with all entries writable by passing **AllocAll** to **XCreateColormap**, a **BadAccess** error results. If more than one pixel is in error, the one that gets reported is arbitrary.

XFreeColors can generate **BadAccess**, **BadColor**, and **BadValue** errors.

- **Modifying and Querying Colormap Cells:** To store an RGB value in a single colormap cell, use **XStoreColor**.

```
0  int XStoreColor(  
1      Display *display,  
2      Colormap colormap,  
3      XColor *color  
4  )
```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *color*: Specifies the pixel and RGB values.

The **XStoreColor** function changes the colormap entry of the pixel value specified in the *pixel* member of the **XColor** structure. This pixel value must be a read/write cell and a valid index into the colormap. If a specified pixel is not a valid index into the colormap, a **BadValue** error results.

XStoreColor also changes the red, green, and/or blue color components. You specify which color components are to be changed by setting **DoRed**, **DoGreen**, and/or **DoBlue** in the *flags* member of the **XColor** structure. If the colormap is an installed map for its screen, the changes are visible immediately.

XStoreColor can generate **BadAccess**, **BadColor**, and **BadValue** errors.

To store multiple RGB values in multiple colormap cells, use **XStoreColors**.

```
0  int XStoreColors(  
1      Display *display,  
2      Colormap colormap,  
3      XColor color[],  
4      int ncolors  
5  )
```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *color*: Specifies an array of color definition structures to be stored.
- *ncolors*: Specifies the number of **XColor** structures in the color definition array.

The **XStoreColors** function changes the colormap entries of the pixel values specified in the *pixel* members of the **XColor** structures. You specify which color components are to be changed by setting **DoRed**, **DoGreen**, and/or **DoBlue** in the *flags* member of the **XColor** structures. If the colormap is an installed map for its screen, the changes are visible immediately.

XStoreColors changes the specified pixels if they are allocated writable in the colormap by any client, even if one or more pixels generates an error. If a specified pixel is not a valid index into the colormap, a **BadValue** error results. If a specified pixel either is unallocated or is allocated read-only, a **BadAccess** error results. If more than one pixel is in error, the one that gets reported is arbitrary.

XStoreColors can generate **BadAccess**, **BadColor**, and **BadValue** errors.

To store a color of arbitrary format in a single colormap cell, use **XcmsStoreColor**.

```

0  Status XcmsStoreColor(
1      Display *display,
2      Colormap colormap,
3      XcmsColor *color
4  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *color*: Specifies the color cell and the color to store. Values specified in this **XcmsColor** structure remain unchanged on return.

The **XcmsStoreColor** function converts the color specified in the **XcmsColor** structure into RGB values. It then uses this RGB specification in an **XColor** structure, whose three flags, **DoRed**, **DoGreen**, and **DoBlue**, are set, in a call to **XStoreColor** to change the color cell specified by the *pixel* member of the **XcmsColor** structure.

This pixel value must be a valid index for the specified colormap, and the color cell specified by the pixel value must be a read/write cell. If the pixel value is not a valid index, a **BadValue** error results. If the color cell is unallocated or is allocated read-only, a **BadAccess** error results. If the colormap is an installed map for its screen, the changes are visible immediately.

Note that **XStoreColor** has no return value; therefore, an **XcmsSuccess** return value from this function indicates that the conversion to RGB succeeded and the call to **XStoreColor** was made. To obtain the actual color stored, use **XcmsQueryColor**. Because of the screen's hardware limitations or gamut compression, the color stored in the colormap may not be identical to the color specified.

XcmsStoreColor can generate **BadAccess**, **BadColor**, and **BadValue** errors.

To store multiple colors of arbitrary format in multiple colormap cells, use **XcmsStoreColors**.

```
0  Status XcmsStoreColors(  
1      Display *display,  
2      Colormap colormap,  
3      XcmsColor colors[],  
4      int ncolors,  
5      Bool compression_flags_return[]  
6  )
```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *colors*: Specifies the color specification array of **XcmsColor** structures, each specifying a color cell and the color to store in that cell. Values specified in the array remain unchanged upon return.
- *ncolors*: Specifies the number of **XcmsColor** structures in the color-specification array.
- *compression_flags_return*: Returns an array of Boolean values indicating compression status. If a non-**NULL** pointer is supplied, each element of the array is set to **True** if the corresponding color was compressed and **False** otherwise. Pass **NULL** if the compression status is not useful.

The **XcmsStoreColors** function converts the colors specified in the array of **XcmsColor** structures into RGB values and then uses these RGB specifications in **XColor** structures, whose three flags, **DoRed**, **DoGreen**, and **DoBlue**, are set, in a call to **XStoreColors** to change the color cells specified by the *pixel* member of the corresponding **XcmsColor** structure.

Each pixel value must be a valid index for the specified colormap, and the color cell specified by each pixel value must be a read/write cell. If a pixel value is not a valid index, a **BadValue** error results. If a color cell is unallocated or is allocated read-only, a **BadAccess** error results. If more than one pixel is in error, the one that gets reported is arbitrary. If the colormap is an installed map for its screen, the changes are visible immediately.

Note that **XStoreColors** has no return value; therefore, an **XcmsSuccess** return value from this function indicates that conversions to RGB succeeded and the call to **XStoreColors** was made. To obtain the actual colors stored, use **XcmsQueryColors**. Because of the screen's hardware limitations or gamut compression, the colors stored in the colormap may not be identical to the colors specified.

XcmsStoreColors can generate **BadAccess**, **BadColor**, and **BadValue** errors.

To store a color specified by name in a single colormap cell, use **XStoreNamedColor**.


```

0  int XStoreNamedColor(
1      Display *display,
2      Colormap colormap,
3      char *color,
4      unsigned long pixel,
5      int flags
6  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *color*: Specifies the color name string, for example, **red**.
- *pixel*: Specifies the entry in the colormap.
- *flags*: Specifies which red, green, and blue components are set.

The **XStoreNamedColor** function looks up the named color with respect to the screen associated with the colormap and stores the result in the specified colormap. The *pixel* argument determines the entry in the colormap. The *flags* argument determines which of the red, green, and blue components are set. You can set this member to the bitwise inclusive OR of the bits **DoRed**, **DoGreen**, and **DoBlue**.

If the color name is not in the Host Portable Character Encoding, the result is implementation-dependent. Use of uppercase or lowercase does not matter. If the specified pixel is not a valid index into the colormap, a **BadValue** error results. If the specified pixel either is unallocated or is allocated read-only, a **BadAccess** error results.

XStoreNamedColor can generate **BadAccess**, **BadColor**, **BadName**, and **BadValue** errors.

The **XQueryColor** and **XQueryColors** functions take pixel values in the *pixel* member of **XColor** structures and store in the structures the RGB values for those pixels from the specified colormap. The values returned for an unallocated entry are undefined. These functions also set the *flags* member in the **XColor** structure to all three colors. If a pixel is not a valid index into the specified colormap, a **BadValue** error results. If more than one pixel is in error, the one that gets reported is arbitrary.

To query the RGB value of a single colormap cell, use **XQueryColor**.

```

0  int XQueryColor(
1      Display *display,
2      Colormap colormap,
3      XColor *def_in_out
4  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *def_in_out*: Specifies and returns the RGB values for the pixel specified in the structure.

The **XQueryColor** function returns the current RGB value for the pixel in the **XColor** structure and sets the **DoRed**, **DoGreen**, and **DoBlue** flags.

XQueryColor can generate **BadColor** and **BadValue** errors.

To query the RGB values of multiple colormap cells, use **XQueryColors**.

```
0  int XQueryColors(  
1      Display *display,  
2      Colormap colormap,  
3      XColor defs_in_out[],  
4      int ncolors  
5  )
```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *defs_in_out*: Specifies and returns an array of color definition structures for the pixels specified in the structures.
- *ncolors*: Specifies the number of **XColor** structures in the color definition array.

The **XQueryColors** function returns the RGB value for each pixel in each **XColor** structure and sets the **DoRed**, **DoGreen**, and **DoBlue** flags in each structure.

XQueryColors can generate **BadColor** and **BadValue** errors.

To query the color of a single colormap cell in an arbitrary format, use **XcmsQueryColor**.

```
0  Status XcmsQueryColor(  
1      Display *display,  
2      Colormap colormap,  
3      XcmsColor *color_in_out,  
4      XcmsColorFormat result_format  
5  )
```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *color_in_out*: Specifies the *pixel* member that indicates the color cell to query. The color specification stored for the color cell is returned in this **XcmsColor** structure.
- *result_format*: Specifies the color format for the returned color specification.

The **XcmsQueryColor** function obtains the RGB value for the pixel value in the *pixel* member of the specified **XcmsColor** structure and then converts the value to the target format as specified by the *result_format* argument. If the pixel is not a valid index in the specified colormap, a **BadValue** error results.

XcmsQueryColor can generate **BadColor** and **BadValue** errors.

To query the color of multiple colormap cells in an arbitrary format, use **XcmsQueryColors**.

```

0  Status XcmsQueryColors(
1      Display *display,
2      Colormap colormap,
3      XcmsColor colors_in_out[],
4      unsigned int ncolors,
5      XcmsColorFormat result_format
6  )

```

- *display*: Specifies the connection to the X server.
- *colormap*: Specifies the colormap.
- *colors_in_out*: Specifies an array of **XcmsColor** structures, each *pixel* member indicating the color cell to query. The color specifications for the color cells are returned in these structures.
- *ncolors*: Specifies the number of **XcmsColor** structures in the color-specification array.
- *result_format*: Specifies the color format for the returned color specification.

The **XcmsQueryColors** function obtains the RGB values for pixel values in the *pixel* members of **XcmsColor** structures and then converts the values to the target format as specified by the *result_format* argument.

If a pixel is not a valid index into the specified colormap, a **BadValue** error results. If more than one pixel is in error, the one that gets reported is arbitrary.

XcmsQueryColors can generate **BadColor** and **BadValue** errors.

7. Graphics context functions

- **Intro:** A number of resources are used when performing graphics operations in X. Most information about performing graphics (for example, foreground color, background color, line style, and so on) is stored in resources called graphics contexts (GCs). Most graphics operations (see chapter 8) take a GC as an argument. Although in theory the X protocol permits sharing of GCs between applications, it is expected that applications will use their own GCs when performing operations. Sharing of GCs is highly discouraged because the library may cache GC state

Graphics operations can be performed to either windows or pixmaps, which collectively are called drawables. Each drawable exists on a single screen. A GC is created for a specific screen and drawable depth and can only be used with drawables of matching screen and depth.

- **Write-back cache:** A write-back cache is a caching technique where the system writes incoming data directly to the fast cache and instantly confirms the write is complete, deferring the update to the slower primary storage (like a hard drive or database) until a later time
- **Manipulating Graphics Context/State:** Most attributes of graphics operations are stored in GCs. These include line width, line style, plane mask, foreground, background, tile, stipple, clipping region, end style, join style, and so on. Graphics operations (for example, drawing lines) use these values to determine the actual drawing operation.

Xlib implements a write-back cache for all elements of a GC that are not resource IDs to allow Xlib to implement the transparent coalescing of changes to GCs. For example, a call to **XSetForeground** of a GC followed by a call to **XSetLineAttributes** results in only a single-change GC protocol request to the server. GCs are neither expected nor encouraged to be shared between client applications, so this write-back caching should present no problems. Applications cannot share GCs without external synchronization. Therefore, sharing GCs between applications is highly discouraged.

To set an attribute of a GC, set the appropriate member of the **XGCValues** structure and OR in the corresponding value bitmask in your subsequent calls to **XCreateGC**. The symbols for the value mask bits and the **XGCValues** structure are:

```

0  /* GC attribute value mask bits */
1  #define GCFunction (1L<<0)
2  #define GCPlaneMask (1L<<1)
3  #define GCForeground (1L<<2)
4  #define GCBackground (1L<<3)
5  #define GCLineWidth (1L<<4)
6  #define GCLineStyle (1L<<5)
7  #define GCCapStyle (1L<<6)
8  #define GCJoinStyle (1L<<7)
9  #define GCFillStyle (1L<<8)
10 #define GCFillRule (1L<<9)
11 #define GCTile (1L<<10)
12 #define GCStipple (1L<<11)
13 #define GCTileStipXOrigin (1L<<12)
14 #define GCTileStipYOrigin (1L<<13)
15 #define GCFont (1L<<14)
16 #define GCSubwindowMode (1L<<15)
17 #define GCGraphicsExposures (1L<<16)
18 #define GCClipXOrigin (1L<<17)
19 #define GCClipYOrigin (1L<<18)
20 #define GCClipMask (1L<<19)
21 #define GCDashOffset (1L<<20)
22 #define GCDashList (1L<<21)
23 #define GCArcMode (1L<<22)

```

```

0  /* Values */
1  typedef struct {
2      int function;                /* logical operation */
3      unsigned long plane_mask;    /* plane mask */
4      unsigned long foreground;    /* foreground pixel */
5      unsigned long background;    /* background pixel */
6      int line_width;              /* line width (in pixels)
   ↪ */
7      int line_style;              /* LineSolid,
   ↪ LineOnOffDash, LineDoubleDash */
8      int cap_style;               /* CapNotLast, CapButt,
   ↪ CapRound, CapProjecting */
9      int join_style;              /* JoinMiter, JoinRound,
   ↪ JoinBevel */
10     int fill_style;               /* FillSolid, FillTiled,
   ↪ FillStippled FillOpaqueStippled*/
11     int fill_rule;                /* EvenOddRule,
   ↪ WindingRule */
12     int arc_mode;                 /* ArcChord, ArcPieSlice
   ↪ */
13     Pixmap tile;                  /* tile pixmap for tiling
   ↪ operations */
14     Pixmap stipple;               /* stipple 1 plane pixmap
   ↪ for stippling */
15     int ts_x_origin;              /* offset for tile or
   ↪ stipple operations */
16     int ts_y_origin;
17     Font font;                    /* default text font for
   ↪ text operations */
18     int subwindow_mode;           /* ClipByChildren,
   ↪ IncludeInferiors */
19     Bool graphics_exposures;      /* boolean, should
   ↪ exposures be generated */
20     int clip_x_origin;            /* origin for clipping */
21     int clip_y_origin;
22     Pixmap clip_mask;             /* bitmap clipping; other
   ↪ calls for rects */
23     int dash_offset;              /* patterned/dashed line
   ↪ information */
24     char dashes;
25 } XGCValues;

```

8. Graphics functions

9. Window and session manager functions

- **Changing the parent of a window:** To change a window's parent to another window on the same screen, use `XReparentWindow`. There is no way to move a window between screens.

```
o XReparentWindow(Display* display, Window w, Window parent,  
  ↪ int x, int y)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window.
- `parent` Specifies the parent window.
- `x, y` Specify the *x* and *y* coordinates of the position in the new parent window.

If the specified window is mapped, `XReparentWindow` automatically performs an `UnmapWindow` request on it, removes it from its current position in the hierarchy, and inserts it as the child of the specified parent. The window is placed in the stacking order on top with respect to sibling windows.

After reparenting the specified window, `XReparentWindow` causes the X server to generate a `ReparentNotify` event. The `override_redirect` member returned in this event is set to the window's corresponding attribute. Window manager clients usually should ignore this window if this member is set to `True`. Finally, if the specified window was originally mapped, the X server automatically performs a `MapWindow` request on it.

The X server performs normal exposure processing on formerly obscured windows. The X server might not generate `Expose` events for regions from the initial `UnmapWindow` request that are immediately obscured by the final `MapWindow` request. A `BadMatch` error results if:

- The new parent window is not on the same screen as the old parent window.
- The new parent window is the specified window or an inferior of the specified window.
- The new parent is `InputOnly`, and the window is not.
- The specified window has a `ParentRelative` background, and the new parent window is not the same depth as the specified window.

`XReparentWindow` can generate `BadMatch` and `BadWindow` errors.

- **Save set:** The save-set of a client is a list of other clients' windows that, if they are inferiors of one of the client's windows at connection close, should not be destroyed and should be remapped if they are unmapped.

To allow an application's window to survive when a window manager that has reparented a window fails, `Xlib` provides the save-set functions that you can use to control the longevity of subwindows that are normally destroyed when the parent is destroyed. For example, a window manager that wants to add decoration to a window by adding a frame might reparent an application's window. When the frame is destroyed, the application's window should not be destroyed but be returned to its previous place in the window hierarchy

The X server automatically removes windows from the save-set when they are destroyed.

- **Controlling the Lifetime of a Window:** To add or remove a window from the client's save-set, use `XChangeSaveSet`

```
o XChangeSaveSet(Display* display, Window w, int change_mode)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window that you want to add to or delete from the client's save-set.
- `change_mode` Specifies the mode. You can pass `SetModeInsert` or `SetModeDelete`.

Depending on the specified mode, `XChangeSaveSet` either inserts or deletes the specified window from the client's save-set. The specified window must have been created by some other client, or a `BadMatch` error results.

`XChangeSaveSet` can generate `BadMatch`, `BadValue`, and `BadWindow` errors

To add a window to the client's save-set, use `XAddToSaveSet`

```
o XAddToSaveSet(Display* display, Window w)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window that you want to add to the client's save-set.

The `XAddToSaveSet` function adds the specified window to the client's save-set. The specified window must have been created by some other client, or a `BadMatch` error results.

`XAddToSaveSet` can generate `BadMatch` and `BadWindow` errors.

To remove a window from the client's save-set, use `XRemoveFromSaveSet`

```
o XRemoveFromSaveSet(Display* display, Window w)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window that you want to delete from the client's save-set.

The `XRemoveFromSaveSet` function removes the specified window from the client's save-set. The specified window must have been created by some other client, or a `BadMatch` error results.

`XRemoveFromSaveSet` can generate `BadMatch` and `BadWindow` errors.

- **Managing Installed Colormaps:** The X server maintains a list of installed colormaps. Windows using these colormaps are guaranteed to display with correct colors; windows using other colormaps may or may not display with correct colors. Xlib provides functions that you can use to install a colormap, uninstall a colormap, and obtain a list of installed colormaps.

At any time, there is a subset of the installed maps that is viewed as an ordered list and is called the required list. The length of the required list is at most M, where M is the minimum number of installed colormaps specified for the screen in the connection setup. The required list is maintained as follows. When a colormap is specified to `XInstallColormap`, it is added to the head of the list; the list is truncated at the tail, if necessary, to keep its length to at most M. When a colormap is specified to `XUninstallColormap` and it is in the required list, it is removed from the list. A colormap is not added to the required list when it is implicitly installed by the X server, and the X server cannot implicitly uninstall a colormap that is in the required list.

To install a colormap, use `XInstallColormap`

```
◦ XInstallColormap(Display* display, Colormap colormap)
```

- `display` Specifies the connection to the X server.
- `colormap` Specifies the colormap.

The `XInstallColormap` function installs the specified colormap for its associated screen. All windows associated with this colormap immediately display with true colors. You associated the windows with this colormap when you created them by calling `XCreateWindow`, `XCreateSimpleWindow`, `XChangeWindowAttributes`, or `XSetWindowColormap`.

If the specified colormap is not already an installed colormap, the X server generates a `ColormapNotify` event on each window that has that colormap. In addition, for every other colormap that is installed as a result of a call to `XInstallColormap`, the X server generates a `ColormapNotify` event on each window that has that colormap.

`XInstallColormap` can generate a `BadColor` error.

To uninstall a colormap, use `XUninstallColormap`.

```
◦ XUninstallColormap(Display* display, Colormap colormap)
```

- `display` Specifies the connection to the X server.
- `colormap` Specifies the colormap.

The `XUninstallColormap` function removes the specified colormap from the required list for its screen. As a result, the specified colormap might be uninstalled, and the X server might implicitly install or uninstall additional colormaps. Which colormaps get installed or uninstalled is server dependent except that the required list must remain installed.

If the specified colormap becomes uninstalled, the X server generates a `ColormapNotify` event on each window that has that colormap. In addition, for every other colormap that is installed or uninstalled as a result of a call to `XUninstallColormap`, the X server generates a `ColormapNotify` event on each window that has that colormap.

XUninstallColormap can generate a BadColor error

To obtain a list of the currently installed colormaps for a given screen, use XListInstalledColormaps

```
o Colormap *XListInstalledColormaps(Display* display, Window  
  ↪ w, int* num_return)
```

- display Specifies the connection to the X server.
- w Specifies the window that determines the screen.
- num_return Returns the number of currently installed colormaps.

The XListInstalledColormaps function returns a list of the currently installed colormaps for the screen of the specified window. The order of the colormaps in the list is not significant and is no explicit indication of the required list. When the allocated list is no longer needed, free it by using XFree.

XListInstalledColormaps can generate a BadWindow error.

- **Setting and Retrieving the Font Search Path:** The set of fonts available from a server depends on a font search path. Xlib provides functions to set and retrieve the search path for a server.

To set the font search path, use XSetFontPath

```
o XSetFontPath(Display* display, char** directories, int ndirs)
```

- display Specifies the connection to the X server.
- directories Specifies the directory path used to look for a font. Setting the path to the empty list restores the default path defined for the X server.
- ndirs Specifies the number of directories in the path.

The XSetFontPath function defines the directory search path for font lookup. There is only one search path per X server, not one per client. The encoding and interpretation of the strings are implementation-dependent, but typically they specify directories or font servers to be searched in the order listed. An X server is permitted to cache font information internally; for example, it might cache an entire font from a file and not check on subsequent opens of that font to see if the underlying font file has changed. However, when the font path is changed, the X server is guaranteed to flush all cached information about fonts for which there currently are no explicit resource IDs allocated. The meaning of an error from this request is implementation-dependent.

XSetFontPath can generate a BadValue error.

To get the current font search path, use XGetFontPath

```
o char** XGetFontPath(Display* display, int* npaths_return)
```

- display Specifies the connection to the X server.
- npaths_return Returns the number of strings in the font path array.

To free data returned by XGetFontPath, use XFreeFontPath

```
o XFreeFontPath(char** list)
```

- list Specifies the array of strings you want to free.

The XFreeFontPath function frees the data allocated by XGetFontPath

- **Grabbing the Server:** Xlib provides functions that you can use to grab and ungrab the server. These functions can be used to control processing of output on other connections by the window system server. While the server is grabbed, no processing of requests or close downs on any other connection will occur. A client closing its connection automatically ungrabs the server. Although grabbing the server is highly discouraged, it is sometimes necessary.

To grab the server, use **XGrabServer**.

```
o XGrabServer(Display* display)
```

- display Specifies the connection to the X server.

The XGrabServer function disables processing of requests and close downs on all other connections than the one this request arrived on. You should not grab the X server any more than is absolutely necessary.

To ungrab the server, use XUngrabServer

```
o XUngrabServer(Display* display)
```

- display Specifies the connection to the X server.

The XUngrabServer function restarts processing of requests and close downs on other connections. You should avoid grabbing the X server as much as possible.

- **Killing Clients:** Xlib provides a function to cause the connection to a client to be closed and its resources to be destroyed. To destroy a client, use XKillClient.

```
o XKillClient(Display* display, XID resource)
```

- display Specifies the connection to the X server.
- resource Specifies any resource associated with the client that you want to destroy or AllTemporary

The XKillClient function forces a close down of the client that created the resource if a valid resource is specified. If the client has already terminated in either RetainPermanent or RetainTemporary mode, all of the client's resources are destroyed. If AllTemporary is specified, the resources of all clients that have terminated in RetainTemporary are destroyed. This permits implementation of window manager facilities that aid debugging. A client can set its close-down mode to RetainTemporary. If the client then crashes, its windows would not be destroyed. The programmer can then inspect the application's window tree and use the window manager to destroy the zombie windows

XKillClient can generate a BadValue error.

- **Controlling the Screen Saver:** Xlib provides functions that you can use to set or reset the mode of the screen saver, to force or activate the screen saver, or to obtain the current screen saver values.

To set the screen saver mode, use **XSetScreenSaver**.

```
o XSetScreenSaver(Display* display, int timeout, int interval,  
  → int prefer_blanking, int allow_exposures)
```

- display Specifies the connection to the X server.
- timeout Specifies the timeout, in seconds, until the screen saver turns on.
- interval Specifies the interval, in seconds, between screen saver alterations.
- prefer_blanking Specifies how to enable screen blanking. You can pass DontPreferBlanking, PreferBlanking, or DefaultBlanking.
- allow_exposures Specifies the screen save control values. You can pass DontAllowExposures, AllowExposures, or DefaultExposures

Timeout and interval are specified in seconds. A timeout of 0 disables the screen saver (but an activated screen saver is not deactivated), and a timeout of -1 restores the default. Other negative values generate a BadValue error. If the timeout value is nonzero, XSetScreenSaver enables the screen saver. An interval of 0 disables the random-pattern motion. If no input from devices (keyboard, mouse, and so on) is generated for the specified number of timeout seconds once the screen saver is enabled, the screen saver is activated.

For each screen, if blanking is preferred and the hardware supports video blanking, the screen simply goes blank. Otherwise, if either exposures are allowed or the screen can be regenerated without sending Expose events to clients, the screen is tiled with the root window background tile randomly re-originated each interval seconds. Otherwise, the screens' state do not change, and the screen saver is not activated. The screen saver is deactivated, and all screen states are restored at the next keyboard or pointer input or at the next call to XForceScreenSaver with mode ScreenSaverReset

If the server-dependent screen saver method supports periodic change, the interval argument serves as a hint about how long the change period should be, and zero hints that no periodic change should be made. Examples of ways to change the screen include scrambling the colormap periodically, moving an icon image around the screen periodically, or tiling the screen with the root window background tile, randomly re-originated periodically.

XSetScreenSaver can generate a BadValue error.

To force the screen saver on or off, use **XForceScreenSaver**.

```
0 XForceScreenSaver(Display* display, int mode)
```

- display Specifies the connection to the X server.
- mode Specifies the mode that is to be applied. You can pass ScreenSaverActive or ScreenSaverReset

If the specified mode is ScreenSaverActive and the screen saver currently is deactivated, XForceScreenSaver activates the screen saver even if the screen saver had been disabled with a timeout of zero. If the specified mode is ScreenSaverReset and the screen saver currently is enabled, XForceScreenSaver deactivates the screen saver if it was activated, and the activation timer is reset to its initial state (as if device input had been received).

XForceScreenSaver can generate a BadValue error.

To activate the screen saver, use XActivateScreenSaver.

```
0 XActivateScreenSaver(Display* display)
```

To reset the screen saver, use XResetScreenSaver.

```
0 XResetScreenSaver(Display* display)
```

To get the current screen saver values, use XGetScreenSaver

```
0 XGetScreenSaver(  
1     Display* display,  
2     int* timeout_return,  
3     int* interval_return,  
4     int* prefer_blanking_return,  
5     int* allow_exposures_return  
6 )
```

- display Specifies the connection to the X server.
- timeout_return Returns the timeout, in seconds, until the screen saver turns on.

- `interval_return` Returns the interval between screen saver invocations.
- `prefer_blanking_return` Returns the current screen blanking preference (`DontPreferBlanking`, `PreferBlanking`, or `DefaultBlanking`).
- `allow_exposures_return` Returns the current screen save control value (`DontAllowExposures`, `AllowExposures`, or `DefaultExposures`).

10. Events

- **Events:** In X11, events are messages from the X server to clients.

Your program is an X client. The X server owns the display, windows, keyboard, mouse, screen resources, and window tree. When something happens, the server may place an event into your client's event queue.

- A key was pressed.
 - The pointer moved.
 - A window was created, mapped, unmapped, destroyed, resized, or moved.
 - A window needs repainting.
 - A client changed a property.
 - A client asked the window manager for something.
 - The input focus changed.
 - The pointer entered or left a window
- **Events are not automatically delivered to everyone:** The X server does not send every event to every client. That would be wasteful and ambiguous. Instead, each client declares interest in certain event categories on certain windows. This is done through event masks. An event mask says “For this window, send me these kinds of events.”
 - **Event types:** An event is data generated asynchronously by the X server as a result of some device activity or as side effects of a request sent by an Xlib function. Device-related events propagate from the source window to ancestor windows until some client application has selected that event type or until the event is explicitly discarded. The X server generally sends an event to a client application only if the client has specifically asked to be informed of that event type, typically by setting the event-mask attribute of the window. The mask can also be set when you create a window or by changing the window's event-mask. You can also mask out events that would propagate to ancestor windows by manipulating the do-not-propagate mask of the window's attributes. However, **MappingNotify** events are always sent to all clients.

n event type describes a specific event generated by the X server. For each event type, a corresponding constant name is defined in `<X11/X.h>`, which is used when referring to an event type. The following table lists the event category and its associated event type or types.

Event Category	Event Type
Keyboard events	KeyPress, KeyRelease
Pointer events	ButtonPress, ButtonRelease, MotionNotify
Window crossing events	EnterNotify, LeaveNotify
Input focus events	FocusIn, FocusOut
Keymap state notification event	KeymapNotify
Exposure events	Expose, GraphicsExpose, NoExpose
Structure control events	CirculateRequest, ConfigureRequest, MapRequest, ResizeRequest
Window state notification events	CirculateNotify, ConfigureNotify, CreateNotify, DestroyNotify, GravityNotify, MapNotify, MappingNotify, ReparentNotify, UnmapNotify, VisibilityNotify
Colormap state notification event	ColormapNotify
Client communication events	ClientMessage, PropertyNotify, SelectionClear, SelectionNotify, SelectionRequest

- **Event structures:** For each event type, a corresponding structure is declared in `<X11/Xlib.h>`. All the event structures have the following common members:

```

0  typedef struct {
1      int type;
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;
6  } XAnyEvent;

```

The type member is set to the event type constant name that uniquely identifies it. For example, when the X server reports a `GraphicsExpose` event to a client application, it sends an `XGraphicsExposeEvent` structure with the type member set to `GraphicsExpose`. The display member is set to a pointer to the display the event was read on. The `send_event` member is set to `True` if the event came from a `SendEvent` protocol request. The serial member is set from the serial number reported in the protocol but expanded from the 16-bit least-significant bits to a full 32-bit value. The window member is set to the window that is most useful to toolkit dispatchers.

The X server can send events at any time in the input stream. Xlib stores any events received while waiting for a reply in an event queue for later use. Xlib also provides functions that allow you to check events in the event queue

In addition to the individual structures declared for each event type, the `XEvent` structure is a union of the individual structures declared for each event type. Depending on the type, you should access members of each event by using the `XEvent` union.

```

0  typedef union _XEvent {
1      int type;          /* must not be changed */
2      XAnyEvent xany;
3      XKeyEvent xkey;
4      XButtonEvent xbutton;
5      XMotionEvent xmotion;
6      XCrossingEvent xcrossing;
7      XFocusChangeEvent xfocus;
8      XExposeEvent xexpose;
9      XGraphicsExposeEvent xgraphicsexpose;
10     XNoExposeEvent xnoexpose;
11     XVisibilityEvent xvisibility;
12     XCreateWindowEvent xcreatewindow;
13     XDestroyWindowEvent xdestroywindow;
14     XUnmapEvent xunmap;
15     XMapEvent xmap;
16     XMapRequestEvent xmaprequest;
17     XReparentEvent xreparent;
18     XConfigureEvent xconfigure;
19     XGravityEvent xgravity;
20     XResizeRequestEvent xresizerequest;
21     XConfigureRequestEvent xconfigurerequest;
22     XCirculateEvent xcirculate;
23     XCirculateRequestEvent xcirculaterequest;
24     XPropertyEvent xproperty;
25     XSelectionClearEvent xselectionclear;
26     XSelectionRequestEvent xselectionrequest;
27     XSelectionEvent xselection;
28     XColormapEvent xcolormap;
29     XClientMessageEvent xclient;
30     XMappingEvent xmapping;
31     XErrorEvent xerror;
32     XKeymapEvent xkeymap;
33     long pad[24];
34 } XEvent;

```

An XEvent structure's first entry always is the type member, which is set to the event type. The second member always is the serial number of the protocol request that generated the event. The third member always is `send_event`, which is a Bool that indicates if the event was sent by a different client. The fourth member always is a display, which is the display that the event was read from. Except for keymap events, the fifth member always is a window, which has been carefully selected to be useful to toolkit dispatchers. To avoid breaking toolkits, the order of these first five entries is not to change. Most events also contain a time member, which is the time at which an event occurred. In addition, a pointer to the generic event must be cast before it is used to access any other information in the structure.

- **Event Masks:** Clients select event reporting of most events relative to a window. To do this, pass an event mask to an Xlib event-handling function that takes an `event_mask` argument. The bits of the event mask are defined in `<X11/X.h>`. Each bit in the event mask maps to an event mask name, which describes the event or events you want the X server to return to a client application.

Unless the client has specifically asked for them, most events are not reported to

clients when they are generated. Unless the client suppresses them by setting graphics-exposures in the GC to False, GraphicsExpose and NoExpose are reported by default as a result of XCopyPlane and XCopyArea. SelectionClear, SelectionRequest, SelectionNotify, or ClientMessage cannot be masked. Selection-related events are only sent to clients cooperating with selections. When the keyboard or pointer mapping is changed, MappingNotify is always sent to clients.

Event Mask	Circumstances
NoEventMask	No events wanted
KeyPressMask	Keyboard down events wanted
KeyReleaseMask	Keyboard up events wanted
ButtonPressMask	Pointer button down events wanted
ButtonReleaseMask	Pointer button up events wanted
EnterWindowMask	Pointer window entry events wanted
LeaveWindowMask	Pointer window leave events wanted
PointerMotionMask	Pointer motion events wanted
PointerMotionHintMask	Pointer motion hints wanted
Button1MotionMask	Pointer motion while button 1 down
Button2MotionMask	Pointer motion while button 2 down
Button3MotionMask	Pointer motion while button 3 down
Button4MotionMask	Pointer motion while button 4 down
Button5MotionMask	Pointer motion while button 5 down
ButtonMotionMask	Pointer motion while any button down
KeymapStateMask	Keyboard state wanted at window entry and focus in
ExposureMask	Any exposure wanted
VisibilityChangeMask	Any change in visibility wanted
StructureNotifyMask	Any change in window structure wanted
ResizeRedirectMask	Redirect resize of this window
SubstructureNotifyMask	Substructure notification wanted
SubstructureRedirectMask	Redirect structure requests on children
FocusChangeMask	Any change in input focus wanted
PropertyChangeMask	Any change in property wanted
ColormapChangeMask	Any change in colormap wanted
OwnerGrabButtonMask	Automatic grabs should activate with owner_events set to True

- **Event processing overview:** The event reported to a client application during event processing depends on which event masks you provide as the event-mask attribute for a window. For some event masks, there is a one-to-one correspondence between the event mask constant and the event type constant. For example, if you pass the event mask `ButtonPressMask`, the X server sends back only `ButtonPress` events. Most events contain a time member, which is the time at which an event occurred.

In other cases, one event mask constant can map to several event type constants. For example, if you pass the event mask `SubstructureNotifyMask`, the X server can send back `CirculateNotify`, `ConfigureNotify`, `CreateNotify`, `DestroyNotify`, `GravityNotify`, `MapNotify`, `ReparentNotify`, or `UnmapNotify` events.

In another case, two event masks can map to one event type. For example, if you pass either `PointerMotionMask` or `ButtonMotionMask`, the X server sends back a `MotionNotify` event.

The following table lists the event mask, its associated event type or types, and the structure name associated with the event type. Some of these structures actually are typedefs to a generic structure that is shared between two event types. Note that N.A. appears in columns for which the information is not applicable

Event Mask	Event Type	Structure	Generic Structure
<code>ButtonMotionMask</code>	<code>MotionNotify</code>	<code>XPointerMovedEvent</code>	<code>XMotionEvent</code>
<code>Button1MotionMask</code>			
<code>Button2MotionMask</code>			
<code>Button3MotionMask</code>			
<code>Button4MotionMask</code>			
<code>Button5MotionMask</code>			
<code>ButtonPressMask</code>	<code>ButtonPress</code>	<code>XButtonPressedEvent</code>	<code>XButtonEvent</code>
<code>ButtonReleaseMask</code>	<code>ButtonRelease</code>	<code>XButtonReleasedEvent</code>	<code>XButtonEvent</code>
<code>ColormapChangeMask</code>	<code>ColormapNotify</code>	<code>XColormapEvent</code>	
<code>EnterWindowMask</code>	<code>EnterNotify</code>	<code>XEnterWindowEvent</code>	<code>XCrossingEvent</code>
<code>LeaveWindowMask</code>	<code>LeaveNotify</code>	<code>XLeaveWindowEvent</code>	<code>XCrossingEvent</code>
<code>ExposureMask</code>	<code>Expose</code>	<code>XExposeEvent</code>	
<code>GCGraphicsExposures</code> in GC	<code>GraphicsExpose</code>	<code>XGraphicsExposeEvent</code>	
	<code>NoExpose</code>	<code>XNoExposeEvent</code>	

Event Mask	Event Type	Structure	Generic Structure
FocusChangeMask	FocusIn	XFocusInEvent	XFocusChangeEvent
	FocusOut	XFocusOutEvent	XFocusChangeEvent
KeymapStateMask	KeymapNotify	XKeymapEvent	
KeyPressMask	KeyPress	XKeyPressedEvent	XKeyEvent
KeyReleaseMask	KeyRelease	XKeyReleasedEvent	XKeyEvent
OwnerGrabButtonMask	N.A.	N.A.	
PointerMotionMask	MotionNotify	XPointerMovedEvent	XMotionEvent
PointerMotionHintMask	N.A.	N.A.	
PropertyChangeMask	PropertyNotify	XPropertyEvent	
ResizeRedirectMask	ResizeRequest	XResizeRequestEvent	
StructureNotifyMask	CirculateNotify	XCirculateEvent	
	ConfigureNotify	XConfigureEvent	
	DestroyNotify	XDestroyWindowEvent	
	GravityNotify	XGravityEvent	
	MapNotify	XMapEvent	
	ReparentNotify	XReparentEvent	
	UnmapNotify	XUnmapEvent	
SubstructureNotifyMask	CirculateNotify	XCirculateEvent	
	ConfigureNotify	XConfigureEvent	
	CreateNotify	XCreateWindowEvent	
	DestroyNotify	XDestroyWindowEvent	
	GravityNotify	XGravityEvent	
	MapNotify	XMapEvent	
	ReparentNotify	XReparentEvent	
	UnmapNotify	XUnmapEvent	

Event Mask	Event Type	Structure	Generic Structure
SubstructureRedirect-Mask	CirculateRequest	XCirculateRequestEvent	
	ConfigureRequest	XConfigureRequestEvent	
	MapRequest	XMapRequestEvent	
N.A.	ClientMessage	XClientMessageEvent	
N.A.	MappingNotify	XMappingEvent	
N.A.	SelectionClear	XSelectionClearEvent	
N.A.	SelectionNotify	XSelectionEvent	
N.A.	SelectionRequest	XSelectionRequestEvent	
VisibilityChangeMask	VisibilityNotify	XVisibilityEvent	

The sections that follow describe the processing that occurs when you select the different event masks. The sections are organized according to these processing categories:

- Keyboard and pointer events
- Window crossing events
- Input focus events
- Keymap state notification events
- Exposure events
- Window state notification events
- Structure control events
- Colormap state notification events
- Client communication events
- **Pointer button events:** The following describes the event processing that occurs when a pointer button press is processed with the pointer in some window w and when no active pointer grab is in progress.

The X server searches the ancestors of w from the root down, looking for a passive grab to activate. If no matching passive grab on the button exists, the X server automatically starts an active grab for the client receiving the event and sets the last-pointer-grab time to the current server time. The effect is essentially equivalent to an XGrabButton with these client passed arguments:

- w The event window
- event_mask The client's selected pointer events on the event window
- pointer_mode GrabModeAsync
- keyboard_mode GrabModeAsync
- owner_events True, if the client has selected OwnerGrabButtonMask on the event window, otherwise False
- confine_to None
- cursor None

The active grab is automatically terminated when the logical state of the pointer has all buttons released. Clients can modify the active grab by calling `XUngrabPointer` and `XChangeActivePointerGrab`.

- **Keyboard and pointer events:** The X server reports `KeyPress` or `KeyRelease` events to clients wanting information about keys that logically change state. Note that these events are generated for all keys, even those mapped to modifier bits. The X server reports `ButtonPress` or `ButtonRelease` events to clients wanting information about buttons that logically change state.

The X server reports `MotionNotify` events to clients wanting information about when the pointer logically moves. The X server generates this event whenever the pointer is moved and the pointer motion begins and ends in the window. The granularity of `MotionNotify` events is not guaranteed, but a client that selects this event type is guaranteed to receive at least one event when the pointer moves and then rests.

The generation of the logical changes lags the physical changes if device event processing is frozen.

To receive `KeyPress`, `KeyRelease`, `ButtonPress`, and `ButtonRelease` events, set `KeyPressMask`, `KeyReleaseMask`, `ButtonPressMask`, and `ButtonReleaseMask` bits in the event-mask attribute of the window.

To receive `MotionNotify` events, set one or more of the following event masks bits in the eventmask attribute of the window

- **Button1MotionMask — Button5MotionMask:** The client application receives `MotionNotify` events only when one or more of the specified buttons is pressed.
- **ButtonMotionMask:** The client application receives `MotionNotify` events only when at least one button is pressed.
- **PointerMotionMask:** The client application receives `MotionNotify` events independent of the state of the pointer buttons.
- **PointerMotionHintMask:** If `PointerMotionHintMask` is selected in combination with one or more of the above masks, the X server is free to send only one `MotionNotify` event (with the `is_hint` member of the `XPointerMovedEvent` structure set to `NotifyHint`) to the client for the event window, until either the key or button state changes, the pointer leaves the event window, or the client calls `XQueryPointer` or `XGetMotionEvents`. The server still may send `MotionNotify` events without `is_hint` set to `NotifyHint`

The source of the event is the viewable window that the pointer is in. The window used by the X server to report these events depends on the window's position in the window hierarchy and whether any intervening window prohibits the generation of these events. Starting with the source window, the X server searches up the window hierarchy until it locates the first window specified by a client as having an interest in these events. If one of the intervening windows has its `do-not-propagate-mask` set to prohibit generation of the event type, the events of those types will be suppressed. Clients can modify the actual window used for reporting by performing active grabs and, in the case of keyboard events, by using the focus window

The structures for these event types contain:

```

0  typedef struct {
1      int type;                /* ButtonPress or ButtonRelease
   ↪ */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;          /* "event" window it is
   ↪ reported relative to */
6      Window root;            /* root window that the event
   ↪ occurred on */
7      Window subwindow;       /* child window */
8      Time time;              /* milliseconds */
9      int x, y;               /* pointer x, y coordinates in
   ↪ event window */
10     int x_root, y_root;      /* coordinates relative to root
   ↪ */
11     unsigned int state;      /* key or button mask */
12     unsigned int button;     /* detail */
13     Bool same_screen;        /* same screen flag */
14 } XButtonEvent;
15 typedef XButtonEvent XButtonPressedEvent;
16 typedef XButtonEvent XButtonReleasedEvent;

```

```

0  typedef struct {
1      int type;                /* KeyPress or KeyRelease */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;          /* "event" window it is
   ↪ reported relative to */
6      Window root;            /* root window that the event
   ↪ occurred on */
7      Window subwindow;       /* child window */
8      Time time;              /* milliseconds */
9      int x, y;               /* pointer x, y coordinates in
   ↪ event window */
10     int x_root, y_root;      /* coordinates relative to root
   ↪ */
11     unsigned int state;      /* key or button mask */
12     unsigned int keycode;    /* detail */
13     Bool same_screen;        /* same screen flag */
14 } XKeyEvent;
15 typedef XKeyEvent XKeyPressedEvent;
16 typedef XKeyEvent XKeyReleasedEvent;

```



```

0  typedef struct {
1      int type;                /* MotionNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;          /* "event" window reported
   ↪ relative to */
6      Window root;            /* root window that the event
   ↪ occurred on */
7      Window subwindow;       /* child window */
8      Time time;              /* milliseconds */
9      int x, y;               /* pointer x, y coordinates in
   ↪ event window */
10     int x_root, y_root;      /* coordinates relative to root
   ↪ */
11     unsigned int state;      /* key or button mask */
12     char is_hint;            /* detail */
13     Bool same_screen;        /* same screen flag */
14 } XMotionEvent;
15 typedef XMotionEvent XPointerMovedEvent;

```

These structures have the following common members: window, root, subwindow, time, x, y, x_root, y_root, state, and same_screen. The window member is set to the window on which the event was generated and is referred to as the event window. As long as the conditions previously discussed are met, this is the window used by the X server to report the event. The root member is set to the source window's root window. The x_root and y_root members are set to the pointer's coordinates relative to the root window's origin at the time of the event

The same_screen member is set to indicate whether the event window is on the same screen as the root window and can be either True or False. If True, the event and root windows are on the same screen. If False, the event and root windows are not on the same screen.

If the source window is an inferior of the event window, the subwindow member of the structure is set to the child of the event window that is the source window or the child of the event window that is an ancestor of the source window. Otherwise, the X server sets the subwindow member to None. The time member is set to the time when the event was generated and is expressed in milliseconds.

Subwindow is not trying to store "the deepest real source window." It stores the immediate child of the event window on the path toward the source window. So if the source window is an inferior of the event window, the source is somewhere below it in the window tree.

- subwindow = the immediate child of the event window containing the event/source
- It identifies which branch below the event window the event came from.

If the event window is on the same screen as the root window, the x and y members are set to the coordinates relative to the event window's origin. Otherwise, these members are set to zero.

The state member is set to indicate the logical state of the pointer buttons and modifier keys just prior to the event, which is the bitwise inclusive OR of one or more of the button or modifier key masks: Button1Mask, Button2Mask, Button3Mask, Button4Mask, Button5Mask, ShiftMask, LockMask, ControlMask, Mod1Mask, Mod2Mask, Mod3Mask, Mod4Mask, and Mod5Mask

Each of these structures also has a member that indicates the detail. For the XKeyPressedEvent and XKeyReleasedEvent structures, this member is called a keycode. It is set to a number that represents a physical key on the keyboard. The keycode is an arbitrary representation for any key on the keyboard

For the XButtonPressedEvent and XButtonReleasedEvent structures, this member is called button. It represents the pointer button that changed state and can be the Button1, Button2, Button3, Button4, or Button5 value. For the XPointerMovedEvent structure, this member is called is_hint. It can be set to NotifyNormal or NotifyHint

Some of the symbols mentioned in this section have fixed values, as follows:

Symbol	Value
Button1MotionMask	(1L«8)
Button2MotionMask	(1L«9)
Button3MotionMask	(1L«10)
Button4MotionMask	(1L«11)
Button5MotionMask	(1L«12)
Button1Mask	(1«8)
Button2Mask	(1«9)
Button3Mask	(1«10)
Button4Mask	(1«11)
Button5Mask	(1«12)
ShiftMask	(1«0)
LockMask	(1«1)
ControlMaUsk	(1«2)
Mod1Mask U	(1«3)
Mod2Mask U	(1«4)
Mod3Mask U	(1«5)
Mod4Mask U	(1«6)
Mod5Mask U	(1«7)
Button1	1
Button2	2
Button3	3
Button4	4
Button5	5

- source window = where the event logically originated
- event window = the window to which this particular event was delivered

Reminder: The do-not-propagate mask is a per-window attribute that says: “If this kind of input event starts here, and nobody selected it here, do not let it bubble upward to ancestor windows.”

- **Window Entry/Exit Events:** This section describes the processing that occurs for the window crossing events EnterNotify and LeaveNotify. If a pointer motion or a window hierarchy change causes the pointer to be in a different window than before, the X server reports EnterNotify or LeaveNotify events to clients who have selected for these events. All EnterNotify and LeaveNotify events caused by a hierarchy change are generated after any hierarchy event (UnmapNotify, MapNotify, ConfigureNotify,

GravityNotify, CirculateNotify) caused by that change; however, the X protocol does not constrain the ordering of EnterNotify and LeaveNotify events with respect to FocusOut, VisibilityNotify, and Expose events.

This contrasts with MotionNotify events, which are also generated when the pointer moves but only when the pointer motion begins and ends in a single window. An EnterNotify or LeaveNotify event also can be generated when some client application calls XGrabPointer and XUngrabPointer.

To receive EnterNotify or LeaveNotify events, set the EnterWindowMask or LeaveWindowMask bits of the event-mask attribute of the window.

The structure for these event types contains:

```

0  typedef struct {
1      int type;                /* EnterNotify or LeaveNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;        /* Display the event was read
   ↪ from */
5      Window window;          /* 'event' window reported
   ↪ relative to */
6      Window root;            /* root window that the event
   ↪ occurred on */
7      Window subwindow;       /* child window */
8      Time time;              /* milliseconds */
9      int x, y;               /* pointer x, y coordinates in
   ↪ event window */
10     int x_root, y_root;      /* coordinates relative to root
   ↪ */
11     int mode;                /* NotifyNormal, NotifyGrab,
   ↪ NotifyUngrab */
12     int detail;
13
14                             /*
15                             * NotifyAncestor, NotifyVirtual,
16                             ↪ NotifyInferior,
17                             * NotifyNonlinear, NotifyNonlinear_
18                             ↪ rVirtual
19                             */
20     Bool same_screen;        /* same screen flag */
21     Bool focus;              /* boolean focus */
22     unsigned int state;      /* key or button mask */
23 } XCrossingEvent;
24
25 typedef XCrossingEvent XEnterWindowEvent;
26 typedef XCrossingEvent XLeaveWindowEvent;

```

The window member is set to the window on which the EnterNotify or LeaveNotify event was generated and is referred to as the event window. This is the window used by the X server to report the event, and is relative to the root window on which the event occurred. The root member is set to the root window of the screen on which the event occurred.

For a `LeaveNotify` event, if a child of the event window contains the initial position of the pointer, the subwindow component is set to that child. Otherwise, the X server sets the subwindow member to `None`. For an `EnterNotify` event, if a child of the event window contains the final pointer position, the subwindow component is set to that child or `None`.

The time member is set to the time when the event was generated and is expressed in milliseconds. The `x` and `y` members are set to the coordinates of the pointer position in the event window. This position is always the pointer's final position, not its initial position. If the event window is on the same screen as the root window, `x` and `y` are the pointer coordinates relative to the event window's origin. Otherwise, `x` and `y` are set to zero. The `x_root` and `y_root` members are set to the pointer's coordinates relative to the root window's origin at the time of the event.

The `same_screen` member is set to indicate whether the event window is on the same screen as the root window and can be either `True` or `False`. If `True`, the event and root windows are on the same screen. If `False`, the event and root windows are not on the same screen.

The focus member is set to indicate whether the event window is the focus window or an inferior of the focus window. The X server can set this member to either `True` or `False`. If `True`, the event window is the focus window or an inferior of the focus window. If `False`, the event window is not the focus window or an inferior of the focus window.

The state member is set to indicate the state of the pointer buttons and modifier keys just prior to the event. The X server can set this member to the bitwise inclusive OR of one or more of the button or modifier key masks: `Button1Mask`, `Button2Mask`, `Button3Mask`, `Button4Mask`, `Button5Mask`, `ShiftMask`, `LockMask`, `ControlMask`, `Mod1Mask`, `Mod2Mask`, `Mod3Mask`, `Mod4Mask`, `Mod5Mask`.

The mode member is set to indicate whether the events are normal events, pseudo-motion events when a grab activates, or pseudo-motion events when a grab deactivates. The X server can set this member to `NotifyNormal`, `NotifyGrab`, or `NotifyUngrab`.

The detail member is set to indicate the notify detail and can be `NotifyAncestor`, `NotifyVirtual`, `NotifyInferior`, `NotifyNonlinear`, or `NotifyNonlinearVirtual`.

- **NotifyAncestor:** This means the crossing is between a window and one of its ancestors.
- **NotifyInferior:** This means the crossing is between a window and one of its descendants.
- **NotifyVirtual:** `NotifyVirtual` is used for intermediate windows between the old pointer window and the new pointer window when the movement is along a straight ancestor/descendant chain.
- **NotifyNonlinear:** `NotifyNonlinear` means the old and new pointer windows are not ancestors of each other.
- **NotifyNonlinearVirtual:** `NotifyNonlinearVirtual` is like `NotifyVirtual`, but for a nonlinear crossing.
- **Normal Entry/Exit Events:** `EnterNotify` and `LeaveNotify` events are generated when the pointer moves from one window to another window. Normal events are identified by `XEnterWindowEvent` or `XLeaveWindowEvent` structures whose mode member is set to `NotifyNormal`.

- When the pointer moves from window A to window B and A is an inferior of B, the X server does the following:
 - * It generates a LeaveNotify event on window A, with the detail member of the XLeaveWindowEvent structure set to NotifyAncestor.
 - * It generates a LeaveNotify event on each window between window A and window B, exclusive, with the detail member of each XLeaveWindowEvent structure set to NotifyVirtual.
 - * It generates an EnterNotify event on window B, with the detail member of the XEnterWindowEvent structure set to NotifyInferior.
- When the pointer moves from window A to window B and B is an inferior of A, the X server does the following:
 - * It generates a LeaveNotify event on window A, with the detail member of the XLeaveWindowEvent structure set to NotifyInferior.
 - * It generates an EnterNotify event on each window between window A and window B, exclusive, with the detail member of each XEnterWindowEvent structure set to NotifyVirtual.
 - * It generates an EnterNotify event on window B, with the detail member of the XEnterWindowEvent structure set to NotifyAncestor.
- When the pointer moves from window A to window B and window C is their least common ancestor, the X server does the following:
 - * It generates a LeaveNotify event on window A, with the detail member of the XLeaveWindowEvent structure set to NotifyNonlinear.
 - * It generates a LeaveNotify event on each window between window A and window C, exclusive, with the detail member of each XLeaveWindowEvent structure set to NotifyNonlinearVirtual.
 - * It generates an EnterNotify event on each window between window C and window B, exclusive, with the detail member of each XEnterWindowEvent structure set to NotifyNonlinearVirtual.
 - * It generates an EnterNotify event on window B, with the detail member of the XEnterWindowEvent structure set to NotifyNonlinear.
- When the pointer moves from window A to window B on different screens, the X server does the following:
 - * It generates a LeaveNotify event on window A, with the detail member of the XLeaveWindowEvent structure set to NotifyNonlinear.
 - * If window A is not a root window, it generates a LeaveNotify event on each window above window A up to and including its root, with the detail member of each XLeaveWindowEvent structure set to NotifyNonlinearVirtual.
 - * If window B is not a root window, it generates an EnterNotify event on each window from window B's root down to but not including window B, with the detail member of each XEnterWindowEvent structure set to NotifyNonlinearVirtual.
 - * It generates an EnterNotify event on window B, with the detail member of the XEnterWindowEvent structure set to NotifyNonlinear.
- **Grab and Ungrab Entry/Exit Events:** Pseudo-motion mode EnterNotify and LeaveNotify events are generated when a pointer grab activates or deactivates. Events in which the pointer grab activates are identified by XEnterWindowEvent or XLeaveWindowEvent structures whose mode member is set to NotifyGrab. Events in which the pointer grab deactivates are identified by XEnterWindowEvent or XLeaveWindowEvent structures whose mode member is set to NotifyUngrab.

- **Input Focus Events:** This section describes the processing that occurs for the input focus events FocusIn and FocusOut. The X server can report FocusIn or FocusOut events to clients wanting information about when the input focus changes. The keyboard is always attached to some window (typically, the root window or a top-level window), which is called the focus window. The focus window and the position of the pointer determine the window that receives keyboard input. Clients may need to know when the input focus changes to control highlighting of areas on the screen.

To receive FocusIn or FocusOut events, set the FocusChangeMask bit in the event-mask attribute of the window.

The structure for these event types contains:

```

0  typedef struct {
1      int type;                /* FocusIn or FocusOut */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;          /* window of event */
6      int mode;               /* NotifyNormal, NotifyGrab,
   ↪ NotifyUngrab */
7      int detail;
8      /*
9      * NotifyAncestor, NotifyVirtual, NotifyInferior,
10     * NotifyNonlinear, NotifyNonlinearVirtual, NotifyPointer,
11     * NotifyPointerRoot, NotifyDetailNone
12     */
13 } XFocusChangeEvent;
14 typedef XFocusChangeEvent XFocusInEvent;
15 typedef XFocusChangeEvent XFocusOutEvent;

```

The window member is set to the window on which the FocusIn or FocusOut event was generated. This is the window used by the X server to report the event. The mode member is set to indicate whether the focus events are normal focus events, focus events while grabbed, focus events when a grab activates, or focus events when a grab deactivates. The X server can set the mode member to NotifyNormal, NotifyWhileGrabbed, NotifyGrab, or NotifyUngrab.

All FocusOut events caused by a window unmap are generated after any UnmapNotify event; however, the X protocol does not constrain the ordering of FocusOut events with respect to generated EnterNotify, LeaveNotify, VisibilityNotify, and Expose events.

Depending on the event mode, the detail member is set to indicate the notify detail and can be NotifyAncestor, NotifyVirtual, NotifyInferior, NotifyNonlinear, NotifyNonlinearVirtual, NotifyPointer, NotifyPointerRoot, or NotifyDetailNone.

- **PointerRoot:** PointerRoot is a special value that can be used as the input focus.

If focus is PointerRoot, then keyboard focus follows the pointer / root context. PointerRoot is a special value that can be used as the input focus.

- **NotifyPointer:** Means This focus event is being generated for a window because of the pointer's position.
- **NotifyPointerRoot:** This focus event is related to the special PointerRoot focus state.
- **Normal Focus Events and Focus Events While Grabbed:** Normal focus events are identified by XFocusInEvent or XFocusOutEvent structures whose mode member is set to NotifyNormal. Focus events while grabbed are identified by XFocusInEvent or XFocusOutEvent structures whose mode member is set to NotifyWhileGrabbed
- **Focus Events Generated by Grabs:** Focus events in which the keyboard grab activates are identified by XFocusInEvent or XFocusOutEvent structures whose mode member is set to NotifyGrab. Focus events in which the keyboard grab deactivates are identified by XFocusInEvent or XFocusOutEvent structures whose mode member is set to NotifyUngrab (see XGrabKeyboard)
- **Key Map State Notification Events:** The X server can report KeymapNotify events to clients that want information about changes in their keyboard state.

To receive KeymapNotify events, set the KeymapStateMask bit in the event-mask attribute of the window. The X server generates this event immediately after every EnterNotify and FocusIn event.

The structure for this event type contains:

```
0  /* generated on EnterWindow and FocusIn when KeymapState
   ↳ selected */
1  typedef struct {
2      int type;                               /* KeymapNotify */
3      unsigned long serial;                   /* # of last request
   ↳ processed by server */
4      Bool send_event;                       /* true if this came from a
   ↳ SendEvent request */
5      Display *display;                     /* Display the event was read
   ↳ from */
6      Window window;
7      char key_vector[32];
8  } XKeymapEvent;
```

The window member is not used but is present to aid some toolkits. The key_vector member is set to the bit vector of the keyboard. Each bit set to 1 indicates that the corresponding key is currently pressed. The vector is represented as 32 bytes. Byte N (from 0) contains the bits for keys $8N$ to $8N + 7$ with the least significant bit in the byte representing key $8N$.

Note: KeymapNotify is an X event that gives a snapshot of the current keyboard state.

It does not mean “a key was pressed.” It means: “here is the current keymap state right now.” In practice, it tells you which physical keycodes are currently down.

The X server generates `KeymapNotify` immediately after an `EnterNotify` or `FocusIn` event when `KeymapStateMask` is selected. So it commonly appears when the pointer enters a window or when the keyboard focus moves to that window.

- **Exposure Events:** The X protocol does not guarantee to preserve the contents of window regions when the windows are obscured or reconfigured. Some implementations may preserve the contents of windows. Other implementations are free to destroy the contents of windows when exposed. X expects client applications to assume the responsibility for restoring the contents of an exposed window region. (An exposed window region describes a formerly obscured window whose region becomes visible.) Therefore, the X server sends `Expose` events describing the window and the region of the window that has been exposed. A naive client application usually redraws the entire window. A more sophisticated client application redraws only the exposed region.
- **Expose events:** The X server can report `Expose` events to clients wanting information about when the contents of window regions have been lost. The circumstances in which the X server generates `Expose` events are not as definite as those for other events. However, the X server never generates `Expose` events on windows whose class you specified as `InputOnly`. The X server can generate `Expose` events when no valid contents are available for regions of a window and either the regions are visible, the regions are viewable and the server is (perhaps newly) maintaining backing store on the window, or the window is not viewable but the server is (perhaps newly) honoring

the window's backing-store attribute of `Always` or `WhenMapped`. The regions decompose into an (arbitrary) set of rectangles, and an `Expose` event is generated for each rectangle. For any given window, the X server guarantees to report contiguously all of the regions exposed by some action that causes `Expose` events, such as raising a window.

To receive `Expose` events, set the `ExposureMask` bit in the event-mask attribute of the window.

The structure for this event type contains:

```
0  typedef struct {
1      int type;                /* Expose */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;
6      int x, y;
7      int width, height;
8      int count;              /* if nonzero, at least this many
   ↪ more */
9  } XExposeEvent;
```

The window member is set to the exposed (damaged) window. The *x* and *y* members are set to the coordinates relative to the window's origin and indicate the upper-left corner of the rectangle. The width and height members are set to the size (extent) of the rectangle. The count member is set to the number of Expose events that are to follow. If count is zero, no more Expose events follow for this window. However, if count is nonzero, at least that number of Expose events (and possibly more) follow for this window. Simple applications that do not want to optimize redisplay by distinguishing between subareas of its window can just ignore all Expose events with nonzero counts and perform full redisplays on events with zero counts.

Note: Expose is mainly for windows or regions that come into visibility, not for regions that go out of visibility. Expose means: some part of this window is now visible, and its pixels may need to be redrawn.

- **GraphicsExpose and NoExpose Events:** The X server can report GraphicsExpose events to clients wanting information about when a destination region could not be computed during certain graphics requests: XCopyArea or XCopyPlane. The X server generates this event whenever a destination region could not be computed because of an obscured or out-of-bounds source region. In addition, the X server guarantees to report contiguously all of the regions exposed by some graphics request (for example, copying an area of a drawable to a destination drawable)

The X server generates a NoExpose event whenever a graphics request that might produce a GraphicsExpose event does not produce any. In other words, the client is really asking for a GraphicsExpose event but instead receives a NoExpose event.

To receive GraphicsExpose or NoExpose events, you must first set the graphics-exposure attribute of the graphics context to True. You also can set the graphics-expose attribute when creating a graphics context using XCreateGC or by calling XSetGraphicsExposures

The structures for these event types contain:

```

0  typedef struct {
1      int type;                /* GraphicsExpose */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Drawable drawable;
6      int x, y;
7      int width, height;
8      int count;              /* if nonzero, at least this many
   ↪ more */
9      int major_code;          /* core is CopyArea or CopyPlane
   ↪ */
10     int minor_code;          /* not defined in the core */
11 } XGraphicsExposeEvent;
12
13 typedef struct {
14     int type;                /* NoExpose */
15     unsigned long serial;    /* # of last request processed by
   ↪ server */
16     Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
17     Display *display;       /* Display the event was read
   ↪ from */
18     Drawable drawable;
19     int major_code;          /* core is CopyArea or CopyPlane
   ↪ */
20     int minor_code;          /* not defined in the core */
21 } XNoExposeEvent;

```

Both structures have these common members: `drawable`, `major_code`, and `minor_code`. The `drawable` member is set to the drawable of the destination region on which the graphics request was to be performed. The `major_code` member is set to the graphics request initiated by the client and can be either `X_CopyArea` or `X_CopyPlane`. If it is `X_CopyArea`, a call to `XCopyArea` initiated the request. If it is `X_CopyPlane`, a call to `XCopyPlane` initiated the request. These constants are defined in `<X11/Xproto.h>`. The `minor_code` member, like the `major_code` member, indicates which graphics request was initiated by the client. However, the `minor_code` member is not defined by the core X protocol and will be zero in these cases, although it may be used by an extension.

The `XGraphicsExposeEvent` structure has these additional members: `x`, `y`, `width`, `height`, and `count`. The `x` and `y` members are set to the coordinates relative to the drawable's origin and indicate the upper-left corner of the rectangle. The `width` and `height` members are set to the size (extent) of the rectangle. The `count` member is set to the number of `GraphicsExpose` events to follow. If `count` is zero, no more `GraphicsExpose` events follow for this window. However, if `count` is nonzero, at least that number of `GraphicsExpose` events (and possibly more) are to follow for this window.

- **Window State Change Events:** The following sections discuss:

- CirculateNotify events
 - ConfigureNotify events
 - CreateNotify events
 - DestroyNotify events
 - GravityNotify events
 - MapNotify events
 - MappingNotify events
 - ReparentNotify events
 - UnmapNotify events
 - VisibilityNotify events
- **CirculateNotify Events:** The X server can report CirculateNotify events to clients wanting information about when a window changes its position in the stack. The X server generates this event type whenever a window is actually restacked as a result of a client application calling XCirculateSubwindows, XCirculateSubwindowsUp, or XCirculateSubwindowsDown

To receive CirculateNotify events, set the StructureNotifyMask bit in the event-mask attribute of the window or the SubstructureNotifyMask bit in the event-mask attribute of the parent window (in which case, circulating any child generates an event).

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* CirculateNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window event;
6      Window window;
7      int place;              /* PlaceOnTop, PlaceOnBottom */
8  } XCirculateEvent;

```

The event member is set either to the restacked window or to its parent, depending on whether StructureNotify or SubstructureNotify was selected. The window member is set to the window that was restacked. The place member is set to the window's position after the restack occurs and is either PlaceOnTop or PlaceOnBottom. If it is PlaceOnTop, the window is now on top of all siblings. If it is PlaceOnBottom, the window is now below all siblings.

- **ConfigureNotify Events:** The X server can report ConfigureNotify events to clients wanting information about actual changes to a window's state, such as size, position, border, and stacking order. The X server generates this event type whenever one of the following configure window requests made by a client application actually completes:
 - A window's size, position, border, and/or stacking order is reconfigured by calling XConfigureWindow.

- The window’s position in the stacking order is changed by calling `XLowerWindow`, `XRaiseWindow`, or `XRestackWindows`.
- A window is moved by calling `XMoveWindow`.
- A window’s size is changed by calling `XResizeWindow`.
- A window’s size and location is changed by calling `XMoveResizeWindow`.
- A window is mapped and its position in the stacking order is changed by calling `XMapRaised`.
- A window’s border width is changed by calling `XSetWindowBorderWidth`.

To receive `ConfigureNotify` events, set the `StructureNotifyMask` bit in the event-mask attribute of the window or the `SubstructureNotifyMask` bit in the event-mask attribute of the parent window (in which case, configuring any child generates an event).

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* ConfigureNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window event;
6      Window window;
7      int x, y;
8      int width, height;
9      int border_width;
10     Window above;
11     Bool override_redirect;
12 } XConfigureEvent;

```

The event member is set either to the reconfigured window or to its parent, depending on whether `StructureNotify` or `SubstructureNotify` was selected. The window member is set to the window whose size, position, border, and/or stacking order was changed.

The *x* and *y* members are set to the coordinates relative to the parent window’s origin and indicate the position of the upper-left outside corner of the window. The width and height members are set to the inside size of the window, not including the border. The `border_width` member is set to the width of the window’s border, in pixels.

The `above` member is set to the sibling window and is used for stacking operations. If the X server sets this member to `None`, the window whose state was changed is on the bottom of the stack with respect to sibling windows. However, if this member is set to a sibling window, the window whose state was changed is placed on top of this sibling window.

The `override_redirect` member is set to the `override-redirect` attribute of the window. Window manager clients normally should ignore this window if the `override_redirect` member is `True`

- **CreateNotify Events:** The X server can report `CreateNotify` events to clients wanting information about creation of windows. The X server generates this event whenever a client application creates a window by calling `XCreateWindow` or `XCreateSimpleWindow`

To receive `CreateNotify` events, set the `SubstructureNotifyMask` bit in the event-mask attribute of the window. Creating any children then generates an event

The structure for the event type contains:

```
0  typedef struct {
1      int type;                /* CreateNotify */
2      unsigned long serial;    /* # of last request
   ↪ processed by server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window parent;          /* parent of the window */
6      Window window;          /* window id of window
   ↪ created */
7      int x, y;               /* window location */
8      int width, height;      /* size of window */
9      int border_width;       /* border width */
10     Bool override_redirect;  /* creation should be
   ↪ overridden */
11 } XCreateWindowEvent;
```

The `parent` member is set to the created window's parent. The `window` member specifies the created window. The `x` and `y` members are set to the created window's coordinates relative to the parent window's origin and indicate the position of the upper-left outside corner of the created window. The `width` and `height` members are set to the inside size of the created window (not including the border) and are always nonzero. The `border_width` member is set to the width of the created window's border, in pixels. The `override_redirect` member is set to the `override-redirect` attribute of the window. Window manager clients normally should ignore this window if the `override_redirect` member is `True`.

- **DestroyNotify Events:** The X server can report `DestroyNotify` events to clients wanting information about which windows are destroyed. The X server generates this event whenever a client application destroys a window by calling `XDestroyWindow` or `XDestroySubwindows`.

The ordering of the `DestroyNotify` events is such that for any given window, `DestroyNotify` is generated on all inferiors of the window before being generated on the window itself. The X protocol does not constrain the ordering among siblings and across subhierarchies.

To receive DestroyNotify events, set the StructureNotifyMask bit in the event-mask attribute of the window or the SubstructureNotifyMask bit in the event-mask attribute of the parent window (in which case, destroying any child generates an event).

The structure for this event type contains:

```
0  typedef struct {
1      int type; /* DestroyNotify */
2      unsigned long serial; /* # of last request processed by
   ↪ server */
3      Bool send_event; /* true if this came from a SendEvent
   ↪ request */
4      Display *display; /* Display the event was read from */
5      Window event;
6      Window window;
7  } XDestroyWindowEvent;
```

The event member is set either to the destroyed window or to its parent, depending on whether StructureNotify or SubstructureNotify was selected. The window member is set to the window that is destroyed.

- **GravityNotify Events:** The X server can report GravityNotify events to clients wanting information about when a window is moved because of a change in the size of its parent. The X server generates this event whenever a client application actually moves a child window as a result of resizing its parent by calling XConfigureWindow, XMoveResizeWindow, or XResizeWindow

To receive GravityNotify events, set the StructureNotifyMask bit in the event-mask attribute of the window or the SubstructureNotifyMask bit in the event-mask attribute of the parent window (in which case, any child that is moved because its parent has been resized generates an event).

The structure for this event type contains:

```
0  typedef struct {
1      int type; /* GravityNotify */
2      unsigned long serial; /* # of last request processed by
   ↪ server */
3      Bool send_event; /* true if this came from a
   ↪ SendEvent request */
4      Display *display; /* Display the event was read
   ↪ from */
5      Window event;
6      Window window;
7      int x, y;
8  } XGravityEvent;
```

The event member is set either to the window that was moved or to its parent, depending on whether `StructureNotify` or `SubstructureNotify` was selected. The window member is set to the child window that was moved. The `x` and `y` members are set to the coordinates relative to the new parent window's origin and indicate the position of the upper-left outside corner of the window.

- **MapNotify Events:** The X server can report `MapNotify` events to clients wanting information about which windows are mapped. The X server generates this event type whenever a client application changes the window's state from unmapped to mapped by calling `XMapWindow`, `XMapRaised`, `XMapSubwindows`, `XReparentWindow`, or as a result of save-set processing

To receive `MapNotify` events, set the `StructureNotifyMask` bit in the event-mask attribute of the window or the `SubstructureNotifyMask` bit in the event-mask attribute of the parent window (in which case, mapping any child generates an event).

The structure for this event type contains:

```
0  typedef struct {
1      int type;                /* MapNotify */
2      unsigned long serial;    /* # of last request
   ↪ processed by server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window event;
6      Window window;
7      Bool override_redirect; /* boolean, is override
   ↪ set... */
8  } XMapEvent;
```

The event member is set either to the window that was mapped or to its parent, depending on whether `StructureNotify` or `SubstructureNotify` was selected. The window member is set to the window that was mapped. The `override_redirect` member is set to the `override-redirect` attribute of the window. Window manager clients normally should ignore this window if the `override-redirect` attribute is `True`, because these events usually are generated from pop-ups, which override structure control

- **UnmapNotify Events:** The X server can report `UnmapNotify` events to clients wanting information about which windows are unmapped. The X server generates this event type whenever a client application changes the window's state from mapped to unmapped.

To receive `UnmapNotify` events, set the `StructureNotifyMask` bit in the event-mask attribute of the window or the `SubstructureNotifyMask` bit in the event-mask attribute of the parent window (in which case, unmapping any child window generates an event).

The structure for this event type contains:


```

0  typedef struct {
1      int type;                /* UnmapNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;         /* true if this came from a
   ↪ SendEvent request */
4      Display *display;        /* Display the event was read
   ↪ from */
5      Window event;
6      Window window;
7      Bool from_configure;
8  } XUnmapEvent;

```

The event member is set either to the unmapped window or to its parent, depending on whether StructureNotify or SubstructureNotify was selected. This is the window used by the X server to report the event. The window member is set to the window that was unmapped. The from_configure member is set to True if the event was generated as a result of a resizing of the window's parent when the window itself had a win_gravity of UnmapGravity

- **MappingNotify Events:** The X server reports MappingNotify events to all clients. There is no mechanism to express disinterest in this event. The X server generates this event type whenever a client application successfully calls:
 - XSetModifierMapping to indicate which KeyCodes are to be used as modifiers
 - XChangeKeyboardMapping to change the keyboard mapping
 - XSetPointerMapping to set the pointer mapping

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* MappingNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;         /* true if this came from a
   ↪ SendEvent request */
4      Display *display;        /* Display the event was read
   ↪ from */
5      Window window;           /* unused */
6      int request;             /* one of MappingModifier,
   ↪ MappingKeyboard,
7      MappingPointer */
8      int first_keycode;       /* first keycode */
9      int count;               /* defines range of change w.
   ↪ first_keycode*/
10 } XMappingEvent;

```

The request member is set to indicate the kind of mapping change that occurred and can be MappingModifier, MappingKeyboard, or MappingPointer. If it is MappingModifier, the modifier mapping was changed. If it is MappingKeyboard, the keyboard mapping was changed. If it is MappingPointer, the pointer button mapping was

changed. The first_keycode and count members are set only if the request member was set to MappingKeyboard. The number in first_keycode represents the first number in the range of the altered mapping, and count represents the number of keycodes altered.

To update the client application's knowledge of the keyboard, you should call XRefreshKeyboardMapping

- **ReparentNotify Events:** The X server can report ReparentNotify events to clients wanting information about changing a window's parent. The X server generates this event whenever a client application calls XReparentWindow and the window is actually reparented.

To receive ReparentNotify events, set the StructureNotifyMask bit in the event-mask attribute of the window or the SubstructureNotifyMask bit in the event-mask attribute of either the old or the new parent window (in which case, reparenting any child generates an event).

The structure for this event type contains

```
0  typedef struct {
1      int type;                /* ReparentNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window event;
6      Window window;
7      Window parent;
8      int x, y;
9      Bool override_redirect;
10 } XReparentEvent;
```

The event member is set either to the reparented window or to the old or the new parent, depending on whether StructureNotify or SubstructureNotify was selected. The window member is set to the window that was reparented. The parent member is set to the new parent window. The *x* and *y* members are set to the reparented window's coordinates relative to the new parent window's origin and define the upper-left outer corner of the reparented window. The override_redirect member is set to the override-redirect attribute of the window specified by the window member. Window manager clients normally should ignore this window if the override_redirect member is True

- **VisibilityNotify Events:** The X server can report VisibilityNotify events to clients wanting any change in the visibility of the specified window. A region of a window is visible if someone looking at the screen can actually see it. The X server generates this event whenever the visibility changes state. However, this event is never generated for windows whose class is InputOnly.

All VisibilityNotify events caused by a hierarchy change are generated after any hierarchy event (UnmapNotify, MapNotify, ConfigureNotify, GravityNotify, CirculateNotify) caused by that change. Any VisibilityNotify event on a given window is generated before any Expose events on that window, but it is not required that all VisibilityNotify events on all windows be generated before all Expose events on all windows. The X protocol does not constrain the ordering of VisibilityNotify events with respect to FocusOut, EnterNotify, and LeaveNotify events.

To receive VisibilityNotify events, set the VisibilityChangeMask bit in the event-mask attribute of the window.

The structure for this event type contains

```

0  typedef struct {
1      int type;                /* VisibilityNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;
6      int state;
7  } XVisibilityEvent;

```

The window member is set to the window whose visibility state changes. The state member is set to the state of the window's visibility and can be VisibilityUnobscured, VisibilityPartiallyObscured, or VisibilityFullyObscured. The X server ignores all of a window's subwindows when determining the visibility state of the window and processes VisibilityNotify events according to the following:

- When the window changes state from partially obscured, fully obscured, or not viewable to viewable and completely unobscured, the X server generates the event with the state member of the XVisibilityEvent structure set to VisibilityUnobscured.
 - When the window changes state from viewable and completely unobscured or not viewable to viewable and partially obscured, the X server generates the event with the state member of the XVisibilityEvent structure set to VisibilityPartiallyObscured.
 - When the window changes state from viewable and completely unobscured, viewable and partially obscured, or not viewable to viewable and fully obscured, the X server generates the event with the state member of the XVisibilityEvent structure set to VisibilityFullyObscured
- **CirculateRequest Events:** The X server can report CirculateRequest events to clients wanting information about when another client initiates a circulate window request on a specified window. The X server generates this event type whenever a client initiates a circulate window request on a window and a subwindow actually needs to be restacked. The client initiates a circulate window request on the window by calling XCirculateSubwindows, XCirculateSubwindowsUp, or XCirculateSubwindowsDown.

To receive `CirculateRequest` events, set the `SubstructureRedirectMask` in the event-mask attribute of the window. Then, in the future, the circulate window request for the specified window is not executed, and thus, any subwindow's position in the stack is not changed. For example, suppose a client application calls `XCirculateSubwindowUp` to raise a subwindow to the top of the stack. If you had selected `SubstructureRedirectMask` on the window, the X server reports to you a `CirculateRequest` event and does not raise the subwindow to the top of the stack.

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* CirculateRequest */
2      unsigned long serial;    /* # of last request
   ↪ processed by server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window parent;
6      Window window;
7      int place;              /* PlaceOnTop, PlaceOnBottom
   ↪ */
8  } XCirculateRequestEvent;

```

The parent member is set to the parent window. The window member is set to the subwindow to be restacked. The place member is set to what the new position in the stacking order should be and is either `PlaceOnTop` or `PlaceOnBottom`. If it is `PlaceOnTop`, the subwindow should be on top of all siblings. If it is `PlaceOnBottom`, the subwindow should be below all siblings.

- **ConfigureRequest Events:** The X server can report `ConfigureRequest` events to clients wanting information about when a different client initiates a configure window request on any child of a specified window. The configure window request attempts to reconfigure a window's size, position, border, and stacking order. The X server generates this event whenever a different client initiates a configure window request on a window by calling `XConfigureWindow`, `XLowerWindow`, `XRaiseWindow`, `XMapRaised`, `XMoveResizeWindow`, `XMoveWindow`, `XResizeWindow`, `XRestackWindows`, or `XSetWindowBorderWidth`.

To receive `ConfigureRequest` events, set the `SubstructureRedirectMask` bit in the event-mask attribute of the window. `ConfigureRequest` events are generated when a `ConfigureWindow` protocol request is issued on a child window by another client. For example, suppose a client application calls `XLowerWindow` to lower a window. If you had selected `SubstructureRedirectMask` on the parent window and if the override-redirect attribute of the window is set to `False`, the X server reports a `ConfigureRequest` event to you and does not lower the specified window.

The structure for this event type contains

```

0  typedef struct {
1      int type;                /* ConfigureRequest */
2      unsigned long serial;    /* # of last request
   ↪ processed by server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window parent;
6      Window window;
7      int x, y;
8      int width, height;
9      int border_width;
10     Window above;
11     int detail; /* Above, Below, TopIf, BottomIf, Opposite */
12     unsigned long value_mask;
13 } XConfigureRequestEvent;

```

The parent member is set to the parent window. The window member is set to the window whose size, position, border width, and/or stacking order is to be reconfigured. The value_mask member indicates which components were specified in the ConfigureWindow protocol request. The corresponding values are reported as given in the request. The remaining values are filled in from the current geometry of the window, except in the case of above (sibling) and detail (stack-mode), which are reported as None and Above, respectively, if they are not given in the request.

- **MapRequest Events:** The X server can report MapRequest events to clients wanting information about a different client's desire to map windows. A window is considered mapped when a map window request completes. The X server generates this event whenever a different client initiates a map window request on an unmapped window whose override_redirect member is set to False. Clients initiate map window requests by calling XMapWindow, XMapRaised, or XMapSubwindows

To receive MapRequest events, set the SubstructureRedirectMask bit in the event-mask attribute of the window. This means another client's attempts to map a child window by calling one of the map window request functions is intercepted, and you are sent a MapRequest instead. For example, suppose a client application calls XMapWindow to map a window. If you (usually a window manager) had selected SubstructureRedirectMask on the parent window and if the override-redirect attribute of the window is set to False, the X server reports a MapRequest event to you and does not map the specified window. Thus, this event gives your window manager client the ability to control the placement of subwindows.

The structure for this event type contains:

```

0  typedef struct {
1      int type; /* MapRequest */
2      unsigned long serial; /* # of last request processed by
   ↪ server */
3      Bool send_event; /* true if this came from a SendEvent
   ↪ request */
4      Display *display; /* Display the event was read from */
5      Window parent;
6      Window window;
7  } XMapRequestEvent;

```

The parent member is set to the parent window. The window member is set to the window to be mapped.

- **ResizeRequest Events:** The X server can report ResizeRequest events to clients wanting information about another client's attempts to change the size of a window. The X server generates this event whenever some other client attempts to change the size of the specified window by calling XConfigureWindow, XResizeWindow, or XMoveResizeWindow

To receive ResizeRequest events, set the ResizeRedirect bit in the event-mask attribute of the window. Any attempts to change the size by other clients are then redirected.

The structure for this event type contains:

```

0  typedef struct {
1      int type; /* ResizeRequest */
2      unsigned long serial; /* # of last request
   ↪ processed by server */
3      Bool send_event; /* true if this came from a
   ↪ SendEvent request */
4      Display *display; /* Display the event was read
   ↪ from */
5      Window window;
6      int width, height;
7  } XResizeRequestEvent;

```

The window member is set to the window whose size another client attempted to change. The width and height members are set to the inside size of the window, excluding the border.

- **Colormap State Change Events:** The X server can report ColormapNotify events to clients wanting information about when the colormap changes and when a colormap is installed or uninstalled. The X server generates this event type whenever a client application
 - Changes the colormap member of the XSetWindowAttributes structure by calling XChangeWindowAttributes, XFreeColormap, or XSetWindowColormap
 - Installs or uninstalls the colormap by calling XInstallColormap or XUninstallColormap

To receive ColormapNotify events, set the ColormapChangeMask bit in the event-mask attribute of the window.

The structure for this event type contains:

```
0  typedef struct {
1      int type;                /* ColormapNotify */
2      unsigned long serial;    /* # of last request
   ↪ processed by server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;
6      Colormap colormap;      /* colormap or None */
7      Bool new;
8      int state;              /* ColormapInstalled,
   ↪ ColormapUninstalled */
9  } XColormapEvent;
```

The window member is set to the window whose associated colormap is changed, installed, or uninstalled. For a colormap that is changed, installed, or uninstalled, the colormap member is set to the colormap associated with the window. For a colormap that is changed by a call to `XFreeColormap`, the colormap member is set to `None`. The new member is set to indicate whether the colormap for the specified window was changed or installed or uninstalled and can be `True` or `False`. If it is `True`, the colormap was changed. If it is `False`, the colormap was installed or uninstalled. The state member is always set to indicate whether the colormap is installed or uninstalled and can be `ColormapInstalled` or `ColormapUninstalled`.

- **Client Communication Events:** This section discusses:
 - `ClientMessage` events
 - `PropertyNotify` events
 - `SelectionClear` events
 - `SelectionNotify` events
 - `SelectionRequest` events
- **ClientMessage Events:** The X server generates `ClientMessage` events only when a client calls the function `XSendEvent`.

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* ClientMessage */
2      unsigned long serial;    /* # of last request
   ↪ processed by server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;
6      Atom message_type;
7      int format;
8      union {
9          char b[20];
10         short s[10];
11         long l[5];
12     } data;
13 } XClientMessageEvent;

```

The `message_type` member is set to an atom that indicates how the data should be interpreted by the receiving client. The `format` member is set to 8, 16, or 32 and specifies whether the data should be viewed as a list of bytes, shorts, or longs. The data member is a union that contains the members `b`, `s`, and `l`. The `b`, `s`, and `l` members represent data of twenty 8-bit values, ten 16-bit values, and five 32-bit values. Particular message types might not make use of all these values. The X server places no interpretation on the values in the `window`, `message_type`, or `data` members.

- **PropertyNotify Events:** The X server can report PropertyNotify events to clients wanting information about property changes for a specified window.

To receive PropertyNotify events, set the `PropertyChangeMask` bit in the event-mask attribute of the window.

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* PropertyNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window window;
6      Atom atom;
7      Time time;
8      int state;              /* PropertyNewValue or
   ↪ PropertyDelete */
9  } XPropertyEvent;

```


The window member is set to the window whose associated property was changed. The atom member is set to the property's atom and indicates which property was changed or desired. The time member is set to the server time when the property was changed. The state member is set to indicate whether the property was changed to a new value or deleted and can be PropertyNewValue or PropertyDelete. The state member is set to PropertyNewValue when a property of the window is changed using XChangeProperty or XRotateWindowProperties (even when adding zero-length data using XChangeProperty) and when replacing all or part of a property with identical data using XChangeProperty or XRotateWindowProperties. The state member is set to PropertyDelete when a property of the window is deleted using XDeleteProperty or, if the delete argument is True, XGetWindowProperty

- **SelectionClear Events:** The X server reports SelectionClear events to the client losing ownership of a selection. The X server generates this event type when another client asserts ownership of the selection by calling XSetSelectionOwner.

The structure for this event type contains:

```

0  typedef struct {
1      int type;                      /* SelectionClear */
2      unsigned long serial;          /* # of last request
   ↪ processed by server */
3      Bool send_event;               /* true if this came from a
   ↪ SendEvent request */
4      Display *display;              /* Display the event was read
   ↪ from */
5      Window window;
6      Atom selection;
7      Time time;
8  } XSelectionClearEvent;
```

The selection member is set to the selection atom. The time member is set to the last change time recorded for the selection. The window member is the window that was specified by the current owner (the owner losing the selection) in its XSetSelectionOwner call.

- **SelectionRequest Events:** The X server reports SelectionRequest events to the owner of a selection. The X server generates this event whenever a client requests a selection conversion by calling XConvertSelection for the owned selection.

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* SelectionRequest */
2      unsigned long serial;    /* # of last request
   ↪ processed by server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window owner;
6      Window requestor;
7      Atom selection;
8      Atom target;
9      Atom property;
10     Time time;
11 } XSelectionRequestEvent;

```

The owner member is set to the window that was specified by the current owner in its XSetSelectionOwner call. The requestor member is set to the window requesting the selection. The selection member is set to the atom that names the selection. For example, PRIMARY is used to indicate the primary selection. The target member is set to the atom that indicates the type the selection is desired in. The property member can be a property name or None. The time member is set to the timestamp or CurrentTime value from the ConvertSelection request.

The owner should convert the selection based on the specified target type and send a SelectionNotify event back to the requestor. A complete specification for using selections is given in the X Consortium standard Inter-Client Communication Conventions Manual.

- **SelectionNotify Events:** This event is generated by the X server in response to a ConvertSelection protocol request when there is no owner for the selection. When there is an owner, it should be generated by the owner of the selection by using XSendEvent. The owner of a selection should send this event to a requestor when a selection has been converted and stored as a property or when a selection conversion could not be performed (which is indicated by setting the property member to None).

If None is specified as the property in the ConvertSelection protocol request, the owner should choose a property name, store the result as that property on the requestor window, and then send a SelectionNotify giving that actual property name.

The structure for this event type contains:

```

0  typedef struct {
1      int type;                /* SelectionNotify */
2      unsigned long serial;    /* # of last request processed by
   ↪ server */
3      Bool send_event;        /* true if this came from a
   ↪ SendEvent request */
4      Display *display;       /* Display the event was read
   ↪ from */
5      Window requestor;
6      Atom selection;
7      Atom target;
8      Atom property;          /* atom or None */
9      Time time;
10 } XSelectionEvent;

```

The requestor member is set to the window associated with the requestor of the selection. The selection member is set to the atom that indicates the selection. For example, PRIMARY is used for the primary selection. The target member is set to the atom that indicates the converted type.

For example, PIXMAP is used for a pixmap. The property member is set to the atom that indicates which property the result was stored on. If the conversion failed, the property member is set to None. The time member is set to the time the conversion took place and can be a timestamp or CurrentTime

11. Event handling functions

- **Selecting Events:** There are two ways to select the events you want reported to your client application. One way is to set the event_mask member of the XSetWindowAttributes structure when you call XCreateWindow and XChangeWindowAttributes. Another way is to use XSelectInput.

```
◦ XSelectInput(Display* display, Window w, long event_mask)
```

The XSelectInput function requests that the X server report the events associated with the specified event mask. Initially, X will not report any of these events. Events are reported relative to a window. If a window is not interested in a device event, it usually propagates to the closest ancestor that is interested, unless the do_not_propagate mask prohibits it. Setting the event-mask attribute of a window overrides any previous call for the same window but not for other clients. Multiple clients can select for the same events on the same window with the following restrictions:

- Multiple clients can select events on the same window because their event masks are disjoint. When the X server generates an event, it reports it to all interested clients.
- Only one client at a time can select CirculateRequest, ConfigureRequest, or MapRequest events, which are associated with the event mask SubstructureRedirectMask.
- Only one client at a time can select a ResizeRequest event, which is associated with the event mask ResizeRedirectMask.
- Only one client at a time can select a ButtonPress event, which is associated with the event mask ButtonPressMask.

The server reports the event to all interested clients.

XSelectInput can generate a BadWindow error.

- **The output buffer:** In Xlib, the output buffer is the client-side buffer where Xlib temporarily stores X protocol requests before actually writing them to the X server over the X connection.

Xlib does not necessarily send every request immediately. Calls usually just append protocol requests into Xlib's output buffer. They may not reach the X server until Xlib decides to flush the buffer.

The output buffer exists because sending every request with a separate system call would be inefficient. Xlib batches requests together and writes them in larger chunks.

- **Flushing the buffer:** To flush the output buffer, use XFlush.

```
◦ XFlush(Display* display);
```

The XFlush function flushes the output buffer. Most client applications need not use this function because the output buffer is automatically flushed as needed by calls to XPending, XNextEvent, and XWindowEvent. Events generated by the server may be enqueued into the library's event queue.

To flush the output buffer and then wait until all requests have been processed, use **XSync**

```
o XSync(Display* display, Bool discard);
```

The XSync function flushes the output buffer and then waits until all requests have been received and processed by the X server. Any errors generated must be handled by the error handler. For each protocol error received by Xlib, XSync calls the client application's error handling routine

Any events generated by the server are enqueued into the library's event queue.

Finally, if you passed False, XSync does not discard the events in the queue. If you passed True, XSync discards all events in the queue, including those events that were on the queue before XSync was called. Client applications seldom need to call XSync.

- **Event queue:** Xlib keeps an event queue inside the client process. When Xlib has already read event data from the X server, it decodes that data into XEvent structures and places them in this queue.
- **Event Queue Management:** Xlib maintains an event queue. However, the operating system also may be buffering data in its network connection that is not yet read into the event queue.

To check the number of events in the event queue, use XEventsQueued

```
o int XEventsQueued(Display* display, int mode)
```

If mode is QueuedAlready, XEventsQueued returns the number of events already in the event queue (and never performs a system call). If mode is QueuedAfterFlush, XEventsQueued returns the number of events already in the queue if the number is nonzero. If there are no events

in the queue, XEventsQueued flushes the output buffer, attempts to read more events out of the application's connection, and returns the number read. If mode is QueuedAfterReading, XEventsQueued returns the number of events already in the queue if the number is nonzero. If there are no events in the queue, XEventsQueued attempts to read more events out of the application's connection without flushing the output buffer and returns the number read.

XEventsQueued always returns immediately without I/O if there are events already in the queue. XEventsQueued with mode QueuedAfterFlush is identical in behavior to XPending. XEventsQueued with mode QueuedAlready is identical to the XQLength function.

To return the number of events that are pending, use XPending.

```
o int XPending(Display* display);
```

The `XPending` function returns the number of events that have been received from the X server but have not been removed from the event queue. `XPending` is identical to `XEventsQueued` with the mode `QueuedAfterFlush` specified.

- **Manipulating the Event Queue:** Xlib provides functions that let you manipulate the event queue. This section discusses how to:
 - Obtain events, in order, and remove them from the queue
 - Peek at events in the queue without removing them
 - Obtain events that match the event mask or the arbitrary predicate procedures that you provide
- **XEvent:**

```
0  typedef union _XEvent {
1      int type;
2
3      XKeyEvent      xkey;
4      XButtonEvent   xbutton;
5      XMotionEvent   xmotion;
6      XExposeEvent    xexpose;
7      XConfigureEvent xconfigure;
8      XMapEvent       xmap;
9      XMapRequestEvent xmaprequest;
10     XDestroyWindowEvent xdestroywindow;
11
12     /* many more event-specific structures */
13 } XEvent;
```

- **Returning the Next Event:** To get the next event and remove it from the queue, use `XNextEvent`.

```
o  XNextEvent (Display* display, XEvent* event_return)
```

- `display` Specifies the connection to the X server.
- `event_return` Returns the next event in the queue

The `XNextEvent` function copies the first event from the event queue into the specified `XEvent` structure and then removes it from the queue. If the event queue is empty, `XNextEvent` flushes the output buffer and blocks until an event is received.

To peek at the event queue, use `XPeekEvent`

```
o  XPeekEvent(Display* display, XEvent* event_return)
```

The `XPeekEvent` function returns the first event from the event queue, but it does not remove the event from the queue. If the queue is empty, `XPeekEvent` flushes the output buffer and blocks until an event is received. It then copies the event into the client-supplied `XEvent` structure without removing it from the event queue.

- **Selecting Events Using a Predicate Procedure:** Each of the functions discussed in this section requires you to pass a predicate procedure that determines if an event matches what you want. Your predicate procedure must decide if the event is useful without calling any Xlib functions. If the predicate directly or indirectly causes the state of the event queue to change, the result is not defined. If Xlib has been initialized for threads, the predicate is called with the display locked and the result of a call by the predicate to any Xlib function that locks the display is not defined unless the caller has first called `XLockDisplay`

The predicate procedure and its associated arguments are:

```
0 Bool (*predicate)(Display* display, XEvent* event, XPointer
   ↪ arg)
```

- display Specifies the connection to the X server.
- event Specifies the XEvent structure.
- arg Specifies the argument passed in from the `XIfEvent`, `XCheckIfEvent`, or `XPeekIfEvent` function

The predicate procedure is called once for each event in the queue until it finds a match. After finding a match, the predicate procedure must return `True`. If it did not find a match, it must return `False`

To check the event queue for a matching event and, if found, remove the event from the queue, use `XIfEvent`

```
0 XIfEvent(
1     Display* display,
2     XEvent event_return,
3     predicate,
4     XPointer arg
5 )
```

- display Specifies the connection to the X server.
- *event_return* *Returnsthematchedeventsassociatedstructure.*
- predicate Specifies the procedure that is to be called to determine if the next event in the queue matches what you want.
- arg Specifies the user-supplied argument that will be passed to the predicate procedure

The `XIfEvent` function completes only when the specified predicate procedure returns `True` for an event, which indicates an event in the queue matches. `XIfEvent` flushes the output buffer if it blocks waiting for additional events. `XIfEvent` removes the matching event from the queue and copies the structure into the client-supplied XEvent structure.

To check the event queue for a matching event without blocking, use `XCheckIfEvent`

```
o Bool XCheckIfEvent (Display* display, XEvent event_return,  
    ↪ predicate, XPointer arg)
```

- display Specifies the connection to the X server.
- event_return Returns a copy of the matched event's associated structure.
- predicate Specifies the procedure that is to be called to determine if the next event in the queue matches what you want.
- arg Specifies the user-supplied argument that will be passed to the predicate procedure.

When the predicate procedure finds a match, XCheckIfEvent copies the matched event into the client-supplied XEvent structure and returns True. (This event is removed from the queue.) If the predicate procedure finds no match, XCheckIfEvent returns False, and the output buffer will have been flushed. All earlier events stored in the queue are not discarded.

To check the event queue for a matching event without removing the event from the queue, use XPeekIfEvent

```
o XPeekIfEvent (Display* display, XEvent* event_return,  
    ↪ predicate, XPointer arg)
```

- display Specifies the connection to the X server.
- event_return Returns a copy of the matched event's associated structure.
- predicate Specifies the procedure that is to be called to determine if the next event in the queue matches what you want.
- arg Specifies the user-supplied argument that will be passed to the predicate procedure.

The XPeekIfEvent function returns only when the specified predicate procedure returns True for an event. After the predicate procedure finds a match, XPeekIfEvent copies the matched event into the client-supplied XEvent structure without removing the event from the queue. XPeekIfEvent flushes the output buffer if it blocks waiting for additional events.

- **Selecting Events Using a Window or Event Mask:** The functions discussed in this section let you select events by window or event types, allowing you to process events out of order.

To remove the next event that matches both a window and an event mask, use XWindowEvent

```
o XWindowEvent(Display* display, Window w, long event_mask,  
    ↪ XEvent* event_return)
```

- display Specifies the connection to the X server.
- w Specifies the window whose events you are interested in.
- event_mask Specifies the event mask.
- event_return Returns the matched event's associated structure.

The `XWindowEvent` function searches the event queue for an event that matches both the specified window and event mask. When it finds a match, `XWindowEvent` removes that event from the queue and copies it into the specified `XEvent` structure. The other events stored in the queue are not discarded. If a matching event is not in the queue, `XWindowEvent` flushes the output buffer and blocks until one is received.

To remove the next event that matches both a window and an event mask (if any), use `XCheckWindowEvent`. This function is similar to `XWindowEvent` except that it never blocks and it returns a `Bool` indicating if the event was returned.

```
◦ Bool XCheckWindowEvent(Display* display, Window w, long
  ↪ event_mask, XEvent event_return)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window whose events you are interested in.
- `event_mask` Specifies the event mask.
- `event_return` Returns the matched event's associated structure.

The `XCheckWindowEvent` function searches the event queue and then the events available on the server connection for the first event that matches the specified window and event mask. If it finds a match, `XCheckWindowEvent` removes that event, copies it into the specified `XEvent` structure, and returns `True`. The other events stored in the queue are not discarded. If the event you requested is not available, `XCheckWindowEvent` returns `False`, and the output buffer will have been flushed.

To remove the next event that matches an event mask, use **`XMaskEvent`**

```
◦ XMaskEvent(Display* display, long event_mask, XEvent*
  ↪ event_return)
```

- `display` Specifies the connection to the X server.
- `event_mask` Specifies the event mask.
- `event_return` Returns the matched event's associated structure.

The `XMaskEvent` function searches the event queue for the events associated with the specified mask. When it finds a match, `XMaskEvent` removes that event and copies it into the specified `XEvent` structure. The other events stored in the queue are not discarded. If the event you requested is not in the queue, `XMaskEvent` flushes the output buffer and blocks until one is received.

To return and remove the next event that matches an event mask (if any), use `XCheckMaskEvent`. This function is similar to `XMaskEvent` except that it never blocks and it returns a `Bool` indicating if the event was returned.

```
◦ Bool XCheckMaskEvent(Display* display, long event_mask,
  ↪ XEvent* event_return)
```

- `display` Specifies the connection to the X server.

- event_mask Specifies the event mask.
- event_return Returns the matched event's associated structure.

The XCheckMaskEvent function searches the event queue and then any events available on the server connection for the first event that matches the specified mask. If it finds a match,

XCheckMaskEvent removes that event, copies it into the specified XEvent structure, and returns True. The other events stored in the queue are not discarded. If the event you requested is not available, XCheckMaskEvent returns False, and the output buffer will have been flushed.

To return and remove the next event in the queue that matches an event type, use XCheckTypedEvent

```
o Bool XCheckTypedEvent(Display* display, int event_type,
    ↪ XEvent* event_return)
```

- display Specifies the connection to the X server.
- event_type Specifies the event type to be compared.
- event_return Returns the matched event's associated structure.

The XCheckTypedEvent function searches the event queue and then any events available on the server connection for the first event that matches the specified type. If it finds a match, XCheckTypedEvent removes that event, copies it into the specified XEvent structure, and returns True. The other events in the queue are not discarded. If the event is not available, XCheckTypedEvent returns False, and the output buffer will have been flushed.

To return and remove the next event in the queue that matches an event type and a window, use XCheckTypedWindowEvent

```
o Bool XCheckTypedWindowEvent(Display* display, Window w, int
    ↪ event_type, XEvent* event_return)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- event_type Specifies the event type to be compared.
- event_return Returns the matched event's associated structure

The XCheckTypedWindowEvent function searches the event queue and then any events available on the server connection for the first event that matches the specified type and window. If it finds a match, XCheckTypedWindowEvent removes the event from the queue, copies it into the specified XEvent structure, and returns True. The other events in the queue are not discarded. If the event is not available, XCheckTypedWindowEvent returns False, and the output buffer will have been flushed.

- **Putting an Event Back into the Queue:** To push an event back into the event queue, use XPutBackEvent

```
o XPutBackEvent (Display* display, XEvent* event)
```

- display Specifies the connection to the X server.
- event Specifies the event

The XPutBackEvent function pushes an event back onto the head of the display's event queue by copying the event into the queue. This can be useful if you read an event and then decide that you would rather deal with it later. There is no limit to the number of times in succession that you can call XPutBackEvent.

- **Sending Events to Other Applications:** To send an event to a specified window, use XSendEvent. This function is often used in selection processing. For example, the owner of a selection should use XSendEvent to send a SelectionNotify event to a requestor when a selection has been converted and stored as a property.

```
o Status XSendEvent (Display* display, Window w, Bool  
  ↳ propagate, long event_mask, XEvent* event_send)
```

- display Specifies the connection to the X server.
- *w* Specifies the window the event is to be sent to, or PointerWindow, or InputFocus.
- propagate Specifies a Boolean value.
- event_mask Specifies the event mask.
- event_send Specifies the event that is to be sent.

The XSendEvent function identifies the destination window, determines which clients should receive the specified events, and ignores any active grabs. This function requires you to pass an event mask.

This function uses the *w* argument to identify the destination window as follows

- If *w* is PointerWindow, the destination window is the window that contains the pointer.
- If *w* is InputFocus and if the focus window contains the pointer, the destination window is the window that contains the pointer; otherwise, the destination window is the focus window

To determine which clients should receive the specified events, XSendEvent uses the propagate argument as follows:

- If event_mask is the empty set, the event is sent to the client that created the destination window. If that client no longer exists, no event is sent.
- If propagate is False, the event is sent to every client selecting on destination any of the event types in the event_mask argument.
- If propagate is True and no clients have selected on destination any of the event types in event_mask, the destination is replaced with the closest ancestor of destination for which some client has selected a type in event_mask and for which no intervening window has that type in its do-not-propagate-mask. If no such window exists or if the window is an ancestor of the focus window and InputFocus was originally specified as the destination, the event is not sent to any clients. Otherwise, the event is reported to every client selecting on the final destination any of the types specified in event_mask.

The event in the XEvent structure must be one of the core events or one of the events defined by an extension (or a BadValue error results) so that the X server can correctly byte-swap the contents as necessary. The contents of the event are otherwise unaltered and unchecked by the X server except to force `send_event` to True in the forwarded event and to set the serial number in the event correctly; therefore these fields and the display field are ignored by XSendEvent

XSendEvent returns zero if the conversion to wire protocol format failed and returns nonzero otherwise.

XSendEvent can generate BadValue and BadWindow errors.

- **XTimeCoord**

```
0  typedef struct {
1      Time time;
2      short x, y;
3  } XTimeCoord;
```

The time member is set to the time, in milliseconds. The *x* and *y* members are set to the coordinates of the pointer and are reported relative to the origin of the specified window. To free the data returned from this call, use XFree

- **Time:** is a data type defined as an unsigned long that represents a server-side timestamp in milliseconds.
- **Getting Pointer Motion History:** Some X server implementations will maintain a more complete history of pointer motion than is reported by event notification. The pointer position at each pointer hardware interrupt may be stored in a buffer for later retrieval. This buffer is called the motion history buffer. For example, a few applications, such as paint programs, want to have a precise history of where the pointer traveled. However, this historical information is highly excessive for most applications.

To determine the approximate maximum number of elements in the motion buffer, use XDisplayMotionBufferSize

```
0  unsigned long XDisplayMotionBufferSize(Display* display)
```

The server may retain the recent history of the pointer motion and do so to a finer granularity than is reported by MotionNotify events. The XGetMotionEvents function makes this history available.

To get the motion history for a specified window and time, use XGetMotionEvents

```
0  XTimeCoord* XGetMotionEvents(Display* display, Window w,
    ↪ Time start, Time stop, int* nevents_return)
```

- display Specifies the connection to the X server.

- *w* Specifies the window.
- *start, stop* Specify the time interval in which the events are returned from the motion history buffer. You can pass a timestamp or `CurrentTime`.
- *nevents_return* Returns the number of events from the motion history buffer.

The `XGetMotionEvents` function returns all events in the motion history buffer that fall between the specified start and stop times, inclusive, and that have coordinates that lie within the specified window (including its borders) at its present placement. If the server does not support motion history, if the start time is later than the stop time, or if the start time is in the future, no events are returned; `XGetMotionEvents` returns `NULL`. If the stop time is in the future, it is equivalent to specifying `CurrentTime`.

`XGetMotionEvents` can generate a `BadWindow` error.

- **Handling Protocol Errors:** Xlib provides functions that you can use to enable or disable synchronization and to use the default error handlers.
- **Enabling or Disabling Synchronization:** When debugging X applications, it often is very convenient to require Xlib to behave synchronously so that errors are reported as they occur. The following function lets you disable or enable synchronous behavior. Note that graphics may occur 30 or more times more slowly when synchronization is enabled. On POSIX-conformant systems, there is also a global variable `__Xdebug` that, if set to nonzero before starting a program under a debugger, will force synchronous library behavior.

After completing their work, all Xlib functions that generate protocol requests call what is known as an after function. `XSetAfterFunction` sets which function is to be called.

```
o  int (*XSetAfterFunction(Display* display, int
    ↪  (*procedure)()))()
```

- *display* Specifies the connection to the X server.
- *procedure* Specifies the procedure to be called.

The specified procedure is called with only a display pointer. `XSetAfterFunction` returns the previous after function.

To enable or disable synchronization, use `XSynchronize`

```
o  int (*XSynchronize(Display* display, Bool onoff))()
```

- *display* Specifies the connection to the X server.
- *onoff* Specifies a Boolean value that indicates whether to enable or disable synchronization.

The `XSynchronize` function returns the previous after function. If `onoff` is `True`, `XSynchronize` turns on synchronous behavior. If `onoff` is `False`, `XSynchronize` turns off synchronous behavior.

- **Using the Default Error Handlers:** There are two default error handlers in Xlib: one to handle typically fatal conditions (for example, the connection to a display server dying because a machine crashed) and one to handle protocol errors from the X server. These error handlers can be changed to user-supplied routines if you prefer your own error handling and can be changed as often as you like. If either function is passed a `NULL` pointer, it will reinvoke the default handler. The action of the default handlers is to print an explanatory message and exit.

To set the error handler, use `XSetErrorHandler`

```
0  int (*XSetErrorHandler(handler))(Display*, XErrorEvent*)
1      int (*handler)(Display *, XErrorEvent *)
```

– `handler` Specifies the program's supplied error handler.

Xlib generally calls the program's supplied error handler whenever an error is received. It is not called on `BadName` errors from `OpenFont`, `LookupColor`, or `AllocNamedColor` protocol requests or on `BadFont` errors from a `QueryFont` protocol request. These errors generally are reflected back to the program through the procedural interface. Because this condition is not assumed to be fatal, it is acceptable for your error handler to return; the returned value is ignored. However, the error handler should not call any functions (directly or indirectly) on the display that will generate protocol requests or that will look for input events. The previous error handler is returned.

The `XErrorEvent` structure contains:

```
0  typedef struct {
1      int type;
2      Display *display;           /* Display the event
   ↳ was read from */
3      unsigned long serial;      /* serial number of
   ↳ failed request */
4      unsigned char error_code;  /* error code of
   ↳ failed request */
5      unsigned char request_code; /* Major op-code of
   ↳ failed request */
6      unsigned char minor_code;  /* Minor op-code of
   ↳ failed request */
7      XID resourceid;           /* resource id */
8  } XErrorEvent;
```

The `serial` member is the number of requests, starting from one, sent over the network connection since it was opened. It is the number that was the value of `NextRequest` immediately before the failing call was made. The `request_code` member is a protocol request of the procedure that failed, as defined in `<X11/Xproto.h>`. The following error codes can be returned by the functions described in this chapter:

Error	Code Description
BadAccess	A client attempts to grab a key/button combination already grabbed by another client. A client attempts to free a colormap entry that it had not already allocated or to free an entry in a colormap that was created with all entries writable. A client attempts to store into a read-only or unallocated colormap entry. A client attempts to modify the access control list from other than the local (or otherwise authorized) host. A client attempts to select an event type that another client has already selected.
BadAlloc	The server fails to allocate the requested resource. Note that the explicit listing of BadAlloc errors in requests only covers allocation errors at a very coarse level and is not intended to (nor can it in practice hope to) cover all cases of a server running out of allocation space in the middle of service. The semantics when a server runs out of allocation space are left unspecified, but a server may generate a BadAlloc error on any request for this reason, and clients should be prepared to receive such errors and handle or discard them.
BadAtom	A value for an atom argument does not name a defined atom.
BadColor	A value for a colormap argument does not name a defined colormap.
BadCursor	A value for a cursor argument does not name a defined cursor.
BadDrawable	A value for a drawable argument does not name a defined window or pixmap.
BadFont	A value for a font argument does not name a defined font (or, in some cases, GContext).
BadGC	A value for a GContext argument does not name a defined GContext.
BadIDChoice	The value chosen for a resource identifier either is not included in the range assigned to the client or is already in use. Under normal circumstances, this cannot occur and should be considered a server or Xlib error.
BadImplementation	The server does not implement some aspect of the request. A server that generates this error for a core request is deficient. As such, this error is not listed for any of the requests, but clients should be prepared to receive such errors and handle or discard them.
BadLength	The length of a request is shorter or longer than that required to contain the arguments. This is an internal Xlib or server error. The length of a request exceeds the maximum length accepted by the server.

Error	Code Description
BadMatch	In a graphics request, the root and depth of the graphics context do not match those of the drawable. An InputOnly window is used as a drawable. Some argument or pair of arguments has the correct type and range, but it fails to match in some other way required by the request. An InputOnly window lacks this attribute.
BadName	A font or color of the specified name does not exist.
BadPixmap	A value for a pixmap argument does not name a defined pixmap.
BadRequest	The major or minor opcode does not specify a valid request. This usually is an Xlib or server error.
BadValue	Some numeric value falls outside of the range of values accepted by the request. Unless a specific range is specified for an argument, the full range defined by the argument's type is accepted. Any argument defined as a set of alternatives typically can generate this error (due to the encoding).
BadWindow	A value for a window argument does not name a defined window

To obtain textual descriptions of the specified error code, use `XGetErrorText`

```

0  XGetErrorText(Display* display, int code, char*
   ↪  buffer_return, int length)

```

- display Specifies the connection to the X server.
- code Specifies the error code for which you want to obtain a description.
- buffer_return Returns the error description.
- length Specifies the size of the buffer.

The `XGetErrorText` function copies a null-terminated string describing the specified error code into the specified buffer. The returned text is in the encoding of the current locale. It is recommended that you use this function to obtain an error description because extensions to Xlib may define their own error codes and error strings.

To obtain error messages from the error database, use `XGetErrorDatabaseText`

```

0  XGetErrorDatabaseText(
1      Display* display,
2      char* name,
3      char* fmessage,
4      char* default_string,
5      char* buffer_return,
6      int length
7  )

```

- display Specifies the connection to the X server.
- name Specifies the name of the application.
- message Specifies the type of the error message.

- default_string Specifies the default error message if none is found in the database.
- buffer_return Returns the error description.
- length Specifies the size of the buffer

The XGetErrorDatabaseText function returns a null-terminated message (or the default message) from the error message database. Xlib uses this function internally to look up its error messages. The text in the default_string argument is assumed to be in the encoding of the current locale, and the text stored in the buffer_return argument is in the encoding of the current locale.

The name argument should generally be the name of your application. The message argument should indicate which type of error message you want. If the name and message are not in the Host Portable Character Encoding, the result is implementation-dependent. Xlib uses three predefined “application names” to report errors. In these names, uppercase and lowercase matter.

- XProtoError The protocol error number is used as a string for the message argument.
- XlibMessage These are the message strings that are used internally by the library.
- XRequest For a core protocol request, the major request protocol number is used for the message argument. For an extension request, the extension name (as given by InitExtension) followed by a period (.) and the minor request protocol number is used for the message argument. If no string is found in the error database, the default_string is returned to the buffer argument.

To report an error to the user when the requested display does not exist, use XDisplayName

```
0 char* XDisplayName(char* string);
```

- string specifies the character string

The XDisplayName function returns the name of the display that XOpenDisplay would attempt to use. If a NULL string is specified, XDisplayName looks in the environment for the display and returns the display name that XOpenDisplay would attempt to use. This makes it easier to report to the user precisely which display the program attempted to open when the initial connection attempt failed.

To handle fatal I/O errors, use XSetIOErrorHandler

```
0 int (*XSetIOErrorHandler(handler))()
1 int (*handler)(Display *);
```

- handler Specifies the program’s supplied error handler.

The XSetIOErrorHandler sets the fatal I/O error handler. Xlib calls the program’s supplied error handler if any sort of system call error occurs (for example, the connection to the server was lost). This is assumed to be a fatal condition, and the called routine should not return. If the I/O error handler does return, the client process exits. Note that the previous error handler is returned.

12. Input device functions

- **Intro:** You can use the Xlib input device functions to:
 - Grab the pointer and individual buttons on the pointer
 - Grab the keyboard and individual keys on the keyboard
 - Resume event processing
 - Move the pointer
 - Set the input focus
 - Manipulate the keyboard and pointer settings
 - Manipulate the keyboard encoding
- **Pointer Grabbing:** Xlib provides functions that you can use to control input from the pointer, which usually is a mouse. Usually, as soon as keyboard and mouse events occur, the X server delivers them to the appropriate client, which is determined by the window and input focus. The X server provides sufficient control over event delivery to allow window managers to support mouse ahead and various other styles of user interface. Many of these user interfaces depend on synchronous delivery of events. The delivery of pointer and keyboard events can be controlled independently.

When mouse buttons or keyboard keys are grabbed, events will be sent to the grabbing client rather than the normal client who would have received the event. If the keyboard or pointer is in asynchronous mode, further mouse and keyboard events will continue to be processed. If the keyboard or pointer is in synchronous mode, no further events are processed until the grabbing client allows them (see `XAllowEvents`). The keyboard or pointer is considered frozen during this interval. The event that triggered the grab can also be replayed.

Note that the logical state of a device (as seen by client applications) may lag the physical state if device event processing is frozen.

There are two kinds of grabs: active and passive. An active grab occurs when a single client grabs the keyboard and/or pointer explicitly (see `XGrabPointer` and `XGrabKeyboard`). A passive grab occurs when clients grab a particular keyboard key or pointer button in a window, and the grab will activate when the key or button is actually pressed. Passive grabs are convenient for implementing reliable pop-up menus. For example, you can guarantee that the pop-up is mapped before the up pointer button event occurs by grabbing a button requesting synchronous behavior. The down event will trigger the grab and freeze further processing of pointer events until you have the chance to map the pop-up window. You can then allow further event processing. The up event will then be correctly processed relative to the pop-up window.

For many operations, there are functions that take a time argument. The X server includes a timestamp in various events. One special time, called `CurrentTime`, represents the current server time. The X server maintains the time when the input focus was last changed, when the keyboard was last grabbed, when the pointer was last grabbed, or when a selection was last changed. Your application may be slow reacting to an event. You often need some way to specify that your request should not occur if another application has in the meanwhile taken control of the keyboard, pointer, or selection. By providing the timestamp from the event in the request, you can arrange that the operation not take effect if someone else has performed an operation in the meanwhile.

A timestamp is a time value, expressed in milliseconds. It typically is the time since the last server reset. Timestamp values wrap around (after about 49.7 days). The server, given its current time is represented by timestamp T, always interprets timestamps from clients by treating half of the timestamp space as being later in time than T. One timestamp value, named `CurrentTime`, is never generated by the server. This value is reserved for use in requests to represent the current server time.

For many functions in this section, you pass pointer event mask bits. The valid pointer event mask bits are: `ButtonPressMask`, `ButtonReleaseMask`, `EnterWindowMask`, `LeaveWindowMask`, `PointerMotionMask`, `PointerMotionHintMask`, `Button1MotionMask`, `Button2MotionMask`, `Button3MotionMask`, `Button4MotionMask`, `Button5MotionMask`, `ButtonMotionMask`, and `KeyMapStateMask`. For other functions in this section, you pass keymask bits. The valid keymask bits are: `ShiftMask`, `LockMask`, `ControlMask`, `Mod1Mask`, `Mod2Mask`, `Mod3Mask`, `Mod4Mask`, and `Mod5Mask`.

To grab the pointer, use `XGrabPointer`

```
0  int XGrabPointer(  
1      Display* display,  
2      Window grab_window,  
3      Bool owner_events,  
4      unsigned int event_mask,  
5      int pointer_mode, keyboard_mode,  
6      Window confine_to,  
7      Cursor cursor,  
8      Time time  
9  )
```

- `display` Specifies the connection to the X server.
- `grab_window` Specifies the grab window.
- `owner_events` Specifies a Boolean value that indicates whether the pointer events are to be re-
- ported as usual or reported with respect to the grab window if selected by the
- event mask.
- `event_mask` Specifies which pointer events are reported to the client. The mask is the bitwise
- inclusive OR of the valid pointer event mask bits.
- `pointer_mode` Specifies further processing of pointer events. You can pass `GrabModeSync` or
- `GrabModeAsync`.
- `keyboard_mode` Specifies further processing of keyboard events. You can pass `GrabModeSync`
- or `GrabModeAsync`.
- `confine_to` Specifies the window to confine the pointer in or `None`.
- `cursor` Specifies the cursor that is to be displayed during the grab or `None`.
- `time` Specifies the time. You can pass either a timestamp or `CurrentTime`.

The `XGrabPointer` function actively grabs control of the pointer and returns `GrabSuccess` if the grab was successful. Further pointer events are reported only to the grabbing client. `XGrabPointer` overrides any active pointer grab by this client. If `owner_events` is `False`, all generated pointer events are reported with respect to `grab_window` and are reported only if selected by `event_mask`. If `owner_events` is `True` and if a generated pointer event would normally be reported to this client, it is reported as usual. Otherwise, the event is reported with respect to the `grab_window` and is reported only if selected by `event_mask`. For either value of `owner_events`, unreported events are discarded.

If the `pointer_mode` is `GrabModeAsync`, pointer event processing continues as usual. If the pointer is currently frozen by this client, the processing of events for the pointer is resumed. If the `pointer_mode` is `GrabModeSync`, the state of the pointer, as seen by client applications, appears to freeze, and the X server generates no further pointer events until the grabbing client calls `XAllowEvents` or until the pointer grab is released. Actual pointer changes are not lost while the pointer is frozen; they are simply queued in the server for later processing.

If the `keyboard_mode` is `GrabModeAsync`, keyboard event processing is unaffected by activation of the grab. If the `keyboard_mode` is `GrabModeSync`, the state of the keyboard, as seen by client applications, appears to freeze, and the X server generates no further keyboard events until the grabbing client calls `XAllowEvents` or until the pointer grab is released. Actual keyboard changes are not lost while the pointer is frozen; they are simply queued in the server for later processing.

If a cursor is specified, it is displayed regardless of what window the pointer is in. If `None` is specified, the normal cursor for that window is displayed when the pointer is in `grab_window` or one of its subwindows; otherwise, the cursor for `grab_window` is displayed.

If a `confine_to` window is specified, the pointer is restricted to stay contained in that window. The `confine_to` window need have no relationship to the `grab_window`. If the pointer is not initially in the `confine_to` window, it is warped automatically to the closest edge just before the grab activates and `enter/leave` events are generated as usual. If the `confine_to` window is subsequently reconfigured, the pointer is warped automatically, as necessary, to keep it contained in the window.

The `time` argument allows you to avoid certain circumstances that come up if applications take a long time to respond or if there are long network delays. Consider a situation where you have two applications, both of which normally grab the pointer when clicked on. If both applications specify the timestamp from the event, the second application may wake up faster and successfully grab the pointer before the first application. The first application then will get an indication that the other application grabbed the pointer before its request was processed.

`XGrabPointer` generates `EnterNotify` and `LeaveNotify` events.

Either if `grab_window` or `confine_to` window is not viewable or if the `confine_to` window lies completely outside the boundaries of the root window, `XGrabPointer` fails and returns `GrabNotViewable`. If the pointer is actively grabbed by some other client, it fails and returns `AlreadyGrabbed`. If the pointer is frozen by an active grab of another client, it fails and returns `GrabFrozen`. If the specified time is earlier than

the last-pointer-grab time or later than the current X server time, it fails and returns `GrabInvalidTime`. Otherwise, the last-pointer-grab time is set to the specified time (`CurrentTime` is replaced by the current X server time).

`XGrabPointer` can generate `BadCursor`, `BadValue`, and `BadWindow` errors.

To ungrab the pointer, use **XUngrabPointer**

```
o XUngrabPointer(Display* display, Time time)
```

- `display` Specifies the connection to the X server.
- `time` Specifies the time. You can pass either a timestamp or `CurrentTi`

The `XUngrabPointer` function releases the pointer and any queued events if this client has actively grabbed the pointer from `XGrabPointer`, `XGrabButton`, or from a normal button press. `XUngrabPointer` does not release the pointer if the specified time is earlier than the last-pointer-grab time or is later than the current X server time. It also generates `EnterNotify` and `LeaveNotify` events. The X server performs an `UngrabPointer` request automatically if the event window or `confine_to` window for an active pointer grab becomes not viewable or if window reconfiguration causes the `confine_to` window to lie completely outside the boundaries of the root window.

To change an active pointer grab, use `XChangeActivePointerGrab`

```
o XChangeActivePointerGrab (Display* display, unsigned int
  ↪ event_mask, Cursor cursor, Time time)
```

- `display` Specifies the connection to the X server.
- `event_mask` Specifies which pointer events are reported to the client. The mask is the bitwise
- inclusive OR of the valid pointer event mask bits.
- `cursor` Specifies the cursor that is to be displayed or `None`.
- `time` Specifies the time. You can pass either a timestamp or `CurrentTime`.

The `XChangeActivePointerGrab` function changes the specified dynamic parameters if the pointer is actively grabbed by the client and if the specified time is no earlier than the last-pointer-grab time and no later than the current X server time. This function has no effect on the passive parameters of an `XGrabButton`. The interpretation of `event_mask` and `cursor` is the same as described in `XGrabPointer`

`XChangeActivePointerGrab` can generate `BadCursor` and `BadValue` errors. To grab a pointer button, use `XGrabButton`

```

0  XGrabButton (
1      Display* display,
2      unsigned int button,
3      unsigned int modifiers,
4      Window grab_window,
5      Bool owner_events,
6      unsigned int event_mask,
7      int pointer_mode, keyboard_mode,
8      Window confine_to,
9      Cursor cursor
10 )

```

- display Specifies the connection to the X server.
- button Specifies the pointer button that is to be grabbed or AnyButton.
- modifiers Specifies the set of keymasks or AnyModifier. The mask is the bitwise inclusive OR of the valid keymask bits.
- grab_window Specifies the grab window.
- owner_events Specifies a Boolean value that indicates whether the pointer events are to be re-ported as usual or reported with respect to the grab window if selected by the event mask.
- event_mask Specifies which pointer events are reported to the client. The mask is the bitwise inclusive OR of the valid pointer event mask bits.
- pointer_mode Specifies further processing of pointer events. You can pass GrabModeSync or GrabModeAsync.
- keyboard_mode Specifies further processing of keyboard events. You can pass GrabModeSync or GrabModeAsync.
- confine_to Specifies the window to confine the pointer in or None.
- cursor Specifies the cursor that is to be displayed or None

The XGrabButton function establishes a passive grab. In the future, the pointer is actively grabbed (as for XGrabPointer), the last-pointer-grab time is set to the time at which the button was pressed (as transmitted in the ButtonPress event), and the ButtonPress event is reported if all of the following conditions are true:

- The pointer is not grabbed, and the specified button is logically pressed when the specified modifier keys are logically down, and no other buttons or modifier keys are logically down.
- The grab_window contains the pointer.
- The confine_to window (if any) is viewable.
- A passive grab on the same button/key combination does not exist on any ancestor of grab_window.

The interpretation of the remaining arguments is as for XGrabPointer. The active grab is terminated automatically when the logical state of the pointer has all buttons released (independent of the state of the logical modifier keys).

Note that the logical state of a device (as seen by client applications) may lag the physical state if device event processing is frozen.

This request overrides all previous grabs by the same client on the same button/key combinations on the same window. A modifiers of AnyModifier is equivalent to issuing the grab request for all possible modifier combinations (including the combination of no modifiers). It is not required that all modifiers specified have currently assigned KeyCodes. A button of AnyButton is equivalent to issuing the request for all possible buttons. Otherwise, it is not required that the specified button currently be assigned to a physical button.

If some other client has already issued an XGrabButton with the same button/key combination on the same window, a BadAccess error results. When using AnyModifier or AnyButton, the request fails completely, and a BadAccess error results (no grabs are established) if there is a conflicting grab for any combination. XGrabButton has no effect on an active grab.

XGrabButton can generate BadCursor, BadValue, and BadWindow errors

If you call a passive grab function while an active grab already exists, the passive grab is usually just registered for the future. It does not take over the current active grab.

To ungrab a pointer button, use XUngrabButton

```
o XUngrabButton (Display* display, unsigned int button,
    ↪ unsigned int modifiers, Window grab_window)
```

The XUngrabButton function releases the passive button/key combination on the specified window if it was grabbed by this client. A modifiers of AnyModifier is equivalent to issuing the ungrab request for all possible modifier combinations, including the combination of no modifiers. A button of AnyButton is equivalent to issuing the request for all possible buttons. XUngrabButton has no effect on an active grab.

XUngrabButton can generate BadValue and BadWindow errors.

- display Specifies the connection to the X server.
- button Specifies the pointer button that is to be released or AnyButton.
- modifiers Specifies the set of keymasks or AnyModifier. The mask is the bitwise inclusive OR of the valid keymask bits.
- grab_window Specifies the grab window

• **Keymask bits:**

- ShiftMask (1) Shift
- LockMask (2) Caps Lock
- ControlMask (4) Ctrl
- Mod1Mask (8) Alt / Meta
- Mod2Mask (16) Num Lock

- Mod3Mask (32) Scroll Lock / AltGr
 - Mod4Mask (64) Windows Key / Super
 - Mod5Mask (128) AltGr / Scroll Lock
 - AnyModifier (32768) Matches any modifier combination
- **Keyboard Grabbing:** Xlib provides functions that you can use to grab or ungrab the keyboard as well as allow events. For many functions in this section, you pass keymask bits. The valid keymask bits are: ShiftMask, LockMask, ControlMask, Mod1Mask, Mod2Mask, Mod3Mask, Mod4Mask, and Mod5Mask

To grab the keyboard, use XGrabKeyboard.

```

0  int XGrabKeyboard(
1      Display* display,
2      Window grab_window,
3      Bool owner_events,
4      int pointer_mode, keyboard_mode,
5      Time time
6  )

```

- display Specifies the connection to the X server.
- grab_window Specifies the grab window.
- owner_events Specifies a Boolean value that indicates whether the keyboard events are to be reported as usual.
- pointer_mode Specifies further processing of pointer events. You can pass GrabModeSync or GrabModeAsync.
- keyboard_mode Specifies further processing of keyboard events. You can pass GrabModeSync or GrabModeAsync.
- time Specifies the time. You can pass either a timestamp or CurrentTime

The XGrabKeyboard function actively grabs control of the keyboard and generates FocusIn and FocusOut events. Further key events are reported only to the grabbing client. XGrabKeyboard overrides any active keyboard grab by this client. If owner_events is False, all generated key events are reported with respect to grab_window. If owner_events is True and if a generated key event would normally be reported to this client, it is reported normally; otherwise, the event is reported with respect to the grab_window. Both KeyPress and KeyRelease events are always reported, independent of any event selection made by the client.

If the keyboard_mode argument is GrabModeAsync, keyboard event processing continues as usual. If the keyboard is currently frozen by this client, then processing of keyboard events is resumed. If the keyboard_mode argument is GrabModeSync, the state of the keyboard (as seen by client applications) appears to freeze, and the X server generates no further keyboard events until the grabbing client issues a releasing XAllowEvents call or until the keyboard grab is released. Actual keyboard changes are not lost while the keyboard is frozen; they are simply queued in the server for later processing.

If `pointer_mode` is `GrabModeAsync`, pointer event processing is unaffected by activation of the grab. If `pointer_mode` is `GrabModeSync`, the state of the pointer (as seen by client applications) appears to freeze, and the X server generates no further pointer events until the grabbing client issues a releasing `XAllowEvents` call or until the keyboard grab is released. Actual pointer changes are not lost while the pointer is frozen; they are simply queued in the server for later processing.

If the keyboard is actively grabbed by some other client, `XGrabKeyboard` fails and returns `AlreadyGrabbed`. If `grab_window` is not viewable, it fails and returns `GrabNotViewable`. If the keyboard is frozen by an active grab of another client, it fails and returns `GrabFrozen`. If the specified time is earlier than the last-keyboard-grab time or later than the current X server time, it fails and returns `GrabInvalidTime`. Otherwise, the last-keyboard-grab time is set to the specified time (`CurrentTime` is replaced by the current X server time).

`XGrabKeyboard` can generate `BadValue` and `BadWindow` errors.

To ungrab the keyboard, use `XUngrabKeyboard`.

```
o XUngrabKeyboard(display, time);
```

- `display` Specifies the connection to the X server.
- `time` Specifies the time. You can pass either a timestamp or `CurrentTime`.

The `XUngrabKeyboard` function releases the keyboard and any queued events if this client has it actively grabbed from either `XGrabKeyboard` or `XGrabKey`. `XUngrabKeyboard` does not release the keyboard and any queued events if the specified time is earlier than the last-keyboard-grab time or is later than the current X server time. It also generates `FocusIn` and `FocusOut` events. The X server automatically performs an `UngrabKeyboard` request if the event window for an active keyboard grab becomes not viewable.

To passively grab a single key of the keyboard, use `XGrabKey`.

```
o XGrabKey(  
1     Display* display,  
2     int keycode,  
3     unsigned int modifiers,  
4     Window grab_window,  
5     Bool owner_events,  
6     int pointer_mode, keyboard_mode  
7 )
```

- `display` Specifies the connection to the X server.
- `keycode` Specifies the `KeyCode` or `AnyKey`.
- `modifiers` Specifies the set of keymasks or `AnyModifier`. The mask is the bitwise inclusive OR of the valid keymask bits.
- `grab_window` Specifies the grab window.

- `owner_events` Specifies a Boolean value that indicates whether the keyboard events are to be reported as usual.
- `pointer_mode` Specifies further processing of pointer events. You can pass `GrabModeSync` or `GrabModeAsync`.
- `keyboard_mode` Specifies further processing of keyboard events. You can pass `GrabModeSync` or `GrabModeAsync`.

The `XGrabKey` function establishes a passive grab on the keyboard. In the future, the keyboard is actively grabbed (as for `XGrabKeyboard`), the last-keyboard-grab time is set to the time at which the key was pressed (as transmitted in the `KeyPress` event), and the `KeyPress` event is reported if all of the following conditions are true:

- The keyboard is not grabbed and the specified key (which can itself be a modifier key) is logically pressed when the specified modifier keys are logically down, and no other modifier keys are logically down.
- Either the `grab_window` is an ancestor of (or is) the focus window, or the `grab_window` is a descendant of the focus window and contains the pointer.
- A passive grab on the same key combination does not exist on any ancestor of `grab_window`.

The interpretation of the remaining arguments is as for `XGrabKeyboard`. The active grab is terminated automatically when the logical state of the keyboard has the specified key released (independent of the logical state of the modifier keys).

A modifiers argument of `AnyModifier` is equivalent to issuing the request for all possible modifier combinations (including the combination of no modifiers). It is not required that all modifiers specified have currently assigned `KeyCodes`. A `keycode` argument of `AnyKey` is equivalent to issuing the request for all possible `KeyCodes`. Otherwise, the specified `keycode` must be in the range specified by `min_keycode` and `max_keycode` in the connection setup, or a `BadValue` error results.

If some other client has issued a `XGrabKey` with the same key combination on the same window, a `BadAccess` error results. When using `AnyModifier` or `AnyKey`, the request fails completely, and a `BadAccess` error results (no grabs are established) if there is a conflicting grab for any combination.

`XGrabKey` can generate `BadAccess`, `BadValue`, and `BadWindow` errors.

To ungrab a key, use `XUngrabKey`.

```
◦ XUngrabKey (Display display, int keycode, unsigned int
  ↪ modifiers, Window grab_window)
```

- `display` Specifies the connection to the X server.
- `keycode` Specifies the `KeyCode` or `AnyKey`.
- `modifiers` Specifies the set of keymasks or `AnyModifier`. The mask is the bitwise inclusive OR of the valid keymask bits.
- `grab_window` Specifies the grab window.

The `XUngrabKey` function releases the key combination on the specified window if it was grabbed by this client. It has no effect on an active grab. A modifiers of `AnyModifier` is equivalent to issuing the request for all possible modifier combinations (including the combination of no modifiers). A `keycode` argument of `AnyKey` is equivalent to issuing the request for all possible key codes.

`XUngrabKey` can generate `BadValue` and `BadWindow` errors.

- **Resuming Event Processing:** The previous sections discussed grab mechanisms with which processing of events by the server can be temporarily suspended. This section describes the mechanism for resuming event processing.

To allow further events to be processed when the device has been frozen, use `XAllowEvents`

```
o XAllowEvents(Display* display, int event_mode, Time time)
```

- `display` Specifies the connection to the X server.
- `event_mode` Specifies the event mode. You can pass `AsyncPointer`, `SyncPointer`, `AsyncKeyboard`, `SyncKeyboard`, `ReplayPointer`, `ReplayKeyboard`, `AsyncBoth`, or `SyncBoth`.
- `time` Specifies the time. You can pass either a timestamp or `CurrentTime`

The `XAllowEvents` function releases some queued events if the client has caused a device to freeze. It has no effect if the specified time is earlier than the last-grab time of the most recent active grab for the client or if the specified time is later than the current X server time. Depending on the `event_mode` argument, the following occurs:

- **AsyncPointer** If the pointer is frozen by the client, pointer event processing continues as usual. If the pointer is frozen twice by the client on behalf of two separate grabs, `AsyncPointer` thaws for both. `AsyncPointer` has no effect if the pointer is not frozen by the client, but the pointer need not be grabbed by the client.
- **SyncPointer** If the pointer is frozen and actively grabbed by the client, pointer event processing continues as usual until the next `ButtonPress` or `ButtonRelease` event is reported to the client. At this time, the pointer again appears to freeze. However, if the reported event causes the pointer grab to be released, the pointer does not freeze. `SyncPointer` has no effect if the pointer is not frozen by the client or if the pointer is not grabbed by the client.
- **ReplayPointer** If the pointer is actively grabbed by the client and is frozen as the result of an event having been sent to the client (either from the activation of an `XGrabButton` or from a previous `XAllowEvents` with mode `SyncPointer` but not from an `XGrabPointer`), the pointer grab is released and that event is completely reprocessed. This time, however, the function ignores any passive grabs at or above (toward the root of) the `grab_window` of the grab just released. The request has no effect if the pointer is not grabbed by the client or if the pointer is not frozen as the result of an event.
- **AsyncKeyboard** If the keyboard is frozen by the client, keyboard event processing continues as usual. If the keyboard is frozen twice by the client on behalf of two separate grabs, `AsyncKeyboard` thaws for both. `AsyncKeyboard` has no effect if the keyboard is not frozen by the client, but the keyboard need not be grabbed by the client.

- **SyncKeyboard** If the keyboard is frozen and actively grabbed by the client, keyboard event processing continues as usual until the next KeyPress or KeyRelease event is reported to the client. At this time, the keyboard again appears to freeze. However, if the reported event causes the keyboard grab to be released, the keyboard does not freeze. SyncKeyboard has no effect if the keyboard is not frozen by the client or if the keyboard is not grabbed by the client.
- **ReplayKeyboard** If the keyboard is actively grabbed by the client and is frozen as the result of an event having been sent to the client (either from the activation of an XGrabKey or from a previous XAllowEvents with modeSyncKeyboard but not from an XGrabKeyboard), the keyboard grab is released and that event is completely reprocessed. This time, however, the function ignores any passive grabs at or above (toward the root of) the grab_window of the grab just released. The request has no effect if the keyboard is not grabbed by the client or if the keyboard is not frozen as the result of an event.
- **SyncBoth** If both pointer and keyboard are frozen by the client, event processing for both devices continues as usual until the next ButtonPress, ButtonRelease, KeyPress, or KeyRelease event is reported to the client for a grabbed device (button event for the pointer, key event for the keyboard), at which time the devices again appear to freeze. However, if the reported event causes the grab to be released, then the devices do not freeze (but if the other device is still grabbed, then a subsequent event for it will still cause both devices to freeze). SyncBoth has no effect unless both pointer and keyboard are frozen by the client. If the pointer or keyboard is frozen twice by the client on behalf of two separate grabs, SyncBoth thaws for both (but a subsequent freeze for SyncBoth will only freeze each device once).
- **AsyncBoth** If the pointer and the keyboard are frozen by the client, event processing for both devices continues as usual. If a device is frozen twice by the client on behalf of two separate grabs, AsyncBoth thaws for both. AsyncBoth has no effect unless both pointer and keyboard are frozen by the client

AsyncPointer, SyncPointer, and ReplayPointer have no effect on the processing of keyboard events. AsyncKeyboard, SyncKeyboard, and ReplayKeyboard have no effect on the processing of pointer events. It is possible for both a pointer grab and a keyboard grab (by the same or different clients) to be active simultaneously. If a device is frozen on behalf of either grab, no event processing is performed for the device. It is possible for a single device to be frozen because of both grabs. In this case, the freeze must be released on behalf of both grabs before events can again be processed. If a device is frozen twice by a single client, then a single AllowEvents releases both

XAllowEvents can generate a BadValue error.

ReplayKeyboard and ReplayPointer mean: “Cancel my active grab, then re-process the event that caused the freeze as if my grab had not intercepted it.”

They are used when you grabbed an input event, looked at it, and decided not to consume it.

- **Moving the Pointer:** Although movement of the pointer normally should be left to the control of the end user, sometimes it is necessary to move the pointer to a new position under program control.

To move the pointer to an arbitrary point in a window, use XWarpPointer

```

0  XWarpPointer(
1      display,
2      src_w, dest_w,
3      src_x, src_y,
4      src_width, src_height,
5      dest_x, dest_y
6  )

```

- display Specifies the connection to the X server.
- src_w Specifies the source window or None.
- dest_w Specifies the destination window or None.
- src_x, src_y
- src_width, src_height Specify a rectangle in the source window.
- dest_x, dest_y Specify the x and y coordinates within the destination window.

If dest_w is None, XWarpPointer moves the pointer by the offsets (dest_x, dest_y) relative to the current position of the pointer. If dest_w is a window, XWarpPointer moves the pointer to the offsets (dest_x, dest_y) relative to the origin of dest_w. However, if src_w is a window, the move only takes place if the window src_w contains the pointer and if the specified rectangle of src_w contains the pointer.

The src_x and src_y coordinates are relative to the origin of src_w. If src_height is zero, it is replaced with the current height of src_w minus src_y. If src_width is zero, it is replaced with the current width of src_w minus src_x.

There is seldom any reason for calling this function. The pointer should normally be left to the user. If you do use this function, however, it generates events just as if the user had instantaneously moved the pointer from one position to another. Note that you cannot use XWarpPointer to move the pointer outside the confine_to window of an active pointer grab. An attempt to do so will only move the pointer as far as the closest edge of the confine_to window.

XWarpPointer can generate a BadWindow error.

- **Controlling Input Focus:** Xlib provides functions that you can use to set and get the input focus. The input focus is a shared resource, and cooperation among clients is required for correct interaction. See the Inter-Client Communication Conventions Manual for input focus policy.

To set the input focus, use XSetInputFocus

```

0  XSetInputFocus(Display* display, Window focus, int
    ↪ revert_to, Time time)

```

- display Specifies the connection to the X server.
- focus Specifies the window, PointerRoot, or None.
- revert_to Specifies where the input focus reverts to if the window becomes not viewable.

- You can pass `RevertToParent`, `RevertToPointerRoot`, or `RevertToNone`.
- `time` Specifies the time. You can pass either a timestamp or `CurrentTime`

The `XSetInputFocus` function changes the input focus and the last-focus-change time. It has no effect if the specified time is earlier than the current last-focus-change time or is later than the current X server time. Otherwise, the last-focus-change time is set to the specified time (`CurrentTime` is replaced by the current X server time). `XSetInputFocus` causes the X server to generate `FocusIn` and `FocusOut` events.

Depending on the focus argument, the following occurs

- If focus is `None`, all keyboard events are discarded until a new focus window is set, and the `revert_to` argument is ignored.
- If focus is a window, it becomes the keyboard's focus window. If a generated keyboard event would normally be reported to this window or one of its inferiors, the event is reported as usual. Otherwise, the event is reported relative to the focus window.
- If focus is `PointerRoot`, the focus window is dynamically taken to be the root window of whatever screen the pointer is on at each keyboard event. In this case, the `revert_to` argument is ignored.

The specified focus window must be viewable at the time `XSetInputFocus` is called, or a `BadMatch` error results. If the focus window later becomes not viewable, the X server evaluates the `revert_to` argument to determine the new focus window as follows

- If `revert_to` is `RevertToParent`, the focus reverts to the parent (or the closest viewable ancestor), and the new `revert_to` value is taken to be `RevertToNone`.
- If `revert_to` is `RevertToPointerRoot` or `RevertToNone`, the focus reverts to `PointerRoot` or `None`, respectively. When the focus reverts, the X server generates `FocusIn` and `FocusOut` events, but the last-focus-change time is not affected

`XSetInputFocus` can generate `BadMatch`, `BadValue`, and `BadWindow` errors.

To obtain the current input focus, use **`XGetInputFocus`**.

```
o XGetInputFocus (Display* display, Window* focus_return, int*
  ↪ revert_to_return)
```

- `display` Specifies the connection to the X server.
- `focus_return` Returns the focus window, `PointerRoot`, or `None`.
- `revert_to_return` Returns the current focus state (`RevertToParent`, `RevertToPointerRoot`, or `RevertToNone`).

The **`XGetInputFocus`** function returns the focus window and the current focus state.

- **Manipulating the Keyboard and Pointer Settings:** Xlib provides functions that you can use to change the keyboard control, obtain a list of the auto-repeat keys, turn keyboard auto-repeat on or off, ring the bell, set or obtain the pointer button or keyboard mapping, and obtain a bit vector for the keyboard.

This section discusses the user-preference options of bell, key click, pointer behavior, and so on. The default values for many of these options are server dependent. Not all implementations will actually be able to control all of these parameters.

The `XChangeKeyboardControl` function changes control of a keyboard and operates on a `XKeyboardControl` structure:

- **Keyboard auto-repeat:** Keyboard auto-repeat is a feature that generates continuous keystrokes when you press and hold down a key
- **XKeyboardControl**

```
0  /* Mask bits for ChangeKeyboardControl */
1  #define KBKeyClickPercent (1L<<0)
2  #define KBBellPercent (1L<<1)
3  #define KBBellPitch (1L<<2)
4  #define KBBellDuration (1L<<3)
5  #define KBLed (1L<<4)
6  #define KBLedMode (1L<<5)
7  #define KBKey (1L<<6)
8  #define KBAutoRepeatMode (1L<<7)
9
10 typedef struct {
11     int key_click_percent;
12     int bell_percent;
13     int bell_pitch;
14     int bell_duration;
15     int led;
16     int led_mode;          /* LedModeOn, LedModeOff */
17     int key;
18     int auto_repeat_mode; /* AutoRepeatModeOff,
19     ↪ AutoRepeatModeOn, AutoRepeatModeDefault */
19 } XKeyboardControl;
```

The `key_click_percent` member sets the volume for key clicks between 0 (off) and 100 (loud) inclusive, if possible. A setting of `-1` restores the default. Other negative values generate a `BadValue` error

The `bell_percent` sets the base volume for the bell between 0 (off) and 100 (loud) inclusive, if possible. A setting of `-1` restores the default. Other negative values generate a `BadValue` error. The `bell_pitch` member sets the pitch (specified in Hz) of the bell, if possible. A setting of `-1` restores the default. Other negative values generate a `BadValue` error. The `bell_duration` member sets the duration of the bell specified in milliseconds, if possible. A setting of `-1` restores the default. Other negative values generate a `BadValue` error.

If both the `led_mode` and `led` members are specified, the state of that LED is changed, if possible. The `led_mode` member can be set to `LedModeOn` or `LedModeOff`. If only `led_mode` is specified, the state of all LEDs are changed, if possible. At most 32 LEDs numbered from one are supported. No standard interpretation of LEDs is defined. If `led` is specified without `led_mode`, a `BadMatch` error results.

If both the `auto_repeat_mode` and `key` members are specified, the `auto_repeat_mode` of that key is changed (according to `AutoRepeatModeOn`, `AutoRepeatModeOff`, or `AutoRepeatModeDefault`), if possible. If only `auto_repeat_mode` is specified, the global `auto_repeat_mode` for the entire keyboard is changed, if possible, and does not affect the per-key settings. If a key is specified without an `auto_repeat_mode`, a `BadMatch` error results. Each key has an individual mode of whether or not it should auto-repeat and a default setting for the mode. In addition, there is a global mode of whether auto-repeat should be enabled or not and a default setting for that mode. When global mode is `AutoRepeatModeOn`, keys should obey their individual auto-repeat modes. When global mode is `AutoRepeatModeOff`, no keys should auto-repeat. An autorepeating key generates alternating `KeyPress` and `KeyRelease` events. When a key is used as a modifier, it is desirable for the key not to auto-repeat, regardless of its auto-repeat setting.

A bell generator connected with the console but not directly on a keyboard is treated as if it were part of the keyboard. The order in which controls are verified and altered is server-dependent. If an error is generated, a subset of the controls may have been altered.

```
o XChangeKeyboardControl(Display* display, unsigned long
  ↪ value_mask, XKeyboardControl values)
```

- `display` Specifies the connection to the X server.
- `value_mask` Specifies which controls to change. This mask is the bitwise inclusive OR of the valid control mask bits.
- `values` Specifies one value for each bit set to 1 in the mask.

The `XChangeKeyboardControl` function controls the keyboard characteristics defined by the `XKeyboardControl` structure. The `value_mask` argument specifies which values are to be changed.

`XChangeKeyboardControl` can generate `BadMatch` and `BadValue` errors.

To obtain the current control values for the keyboard, use `XGetKeyboardControl`

```
o XGetKeyboardControl(Display* display, XKeyboardState*
  ↪ values_return)
```

- `display` Specifies the connection to the X server.
- `values_return` Returns the current keyboard controls in the specified `XKeyboardState` structure. The `XGetKeyboardControl` function returns the current control values for the keyboard to the `XKeyboardState` structure.

```
o typedef struct {
1     int key_click_percent;
2     int bell_percent;
3     unsigned int bell_pitch, bell_duration;
4     unsigned long led_mask;
5     int global_auto_repeat;
6     char auto_repeats[32];
7 } XKeyboardState;
```


For the LEDs, the least significant bit of `led_mask` corresponds to LED one, and each bit set to 1 in `led_mask` indicates an LED that is lit. The `global_auto_repeat` member can be set to `AutoRepeatModeOn` or `AutoRepeatModeOff`. The `auto_repeats` member is a bit vector. Each bit set to 1 indicates that auto-repeat is enabled for the corresponding key. The vector is represented as 32 bytes. Byte N (from 0) contains the bits for keys $8N$ to $8N + 7$ with the least significant bit in the byte representing key $8N$.

To turn on keyboard auto-repeat, use `XAutoRepeatOn`.

```
o XAutoRepeatOn(Display* display)
```

- `display` Specifies the connection to the X server.

The `XAutoRepeatOn` function turns on auto-repeat for the keyboard on the specified display.

To turn off keyboard auto-repeat, use `XAutoRepeatOff`

```
o XAutoRepeatOff(Display* display)
```

- `display` Specifies the connection to the X server.

The `XAutoRepeatOff` function turns off auto-repeat for the keyboard on the specified display.

To ring the bell, use `XBell`.

```
o XBell (Display* display, int percent)
```

- `display` Specifies the connection to the X server.
- `percent` Specifies the volume for the bell, which can range from -100 to 100 inclusive.

The `XBell` function rings the bell on the keyboard on the specified display, if possible. The specified volume is relative to the base volume for the keyboard. If the value for the `percent` argument is not in the range -100 to 100 inclusive, a `BadValue` error results.

To change the base volume of the bell, use `XChangeKeyboardControl`

`XBell` can generate a `BadValue` error.

To obtain a bit vector that describes the state of the keyboard, use `XQueryKeymap`

```
◦ XQueryKeymap(Display* display, char keys_return[32])
```

- display Specifies the connection to the X server.
- keys_return Returns an array of bytes that identifies which keys are pressed down. Each bit represents one key of the keyboard.

The XQueryKeymap function returns a bit vector for the logical state of the keyboard, where each bit set to 1 indicates that the corresponding key is currently pressed down. The vector is represented as 32 bytes. Byte N (from 0) contains the bits for keys $8N$ to $8N + 7$ with the least significant bit in the byte representing key $8N$.

Note that the logical state of a device (as seen by client applications) may lag the physical state if device event processing is frozen.

To set the mapping of the pointer buttons, use XSetPointerMapping.

```
◦ int XSetPointerMapping(display, map, nmap)
```

- display Specifies the connection to the X server.
- map Specifies the mapping list.
- nmap Specifies the number of items in the mapping list.

The XSetPointerMapping function sets the mapping of the pointer. If it succeeds, the X server generates a MappingNotify event, and XSetPointerMapping returns MappingSuccess. Element $\text{map}[i]$ defines the logical button number for the physical button $i + 1$. The length of the list must be the same as XGetPointerMapping would return, or a BadValue error results. A zero element disables a button, and elements are not restricted in value by the number of physical buttons. However, no two elements can have the same nonzero value, or a BadValue error results. If any of the buttons to be altered are logically in the down state, XSetPointerMapping returns MappingBusy, and the mapping is not changed.

XSetPointerMapping can generate a BadValue error.

To get the pointer mapping, use XGetPointerMapping

```
◦ int XGetPointerMapping(Display* display, unsigned char
  ↪ map_return[], int nmap)
```

- display Specifies the connection to the X server.
- map_return Returns the mapping list.
- nmap Specifies the number of items in the mapping list.

The XGetPointerMapping function returns the current mapping of the pointer. Pointer buttons are numbered starting from one. XGetPointerMapping returns the number of physical buttons actually on the pointer. The nominal mapping for a pointer is $\text{map}[i] = i + 1$. The nmap argument

specifies the length of the array where the pointer mapping is returned, and only the first nmap elements are returned in map_return

To control the pointer's interactive feel, use `XChangePointerControl`

```
0  XChangePointerControl(  
1      Display* display,  
2      Bool do_accel,  
3      bool do_threshold,  
4      int accel_numerator,  
5      int accel_denominator,  
6      int threshold  
7  )
```

- `display` Specifies the connection to the X server.
- `do_accel` Specifies a Boolean value that controls whether the values for the `accel_numerator` or `accel_denominator` are used.
- `do_threshold` Specifies a Boolean value that controls whether the value for the `threshold` is used.
- `accel_numerator` Specifies the numerator for the acceleration multiplier.
- `accel_denominator` Specifies the denominator for the acceleration multiplier.
- `threshold` Specifies the acceleration threshold.

The `XChangePointerControl` function defines how the pointing device moves. The acceleration, expressed as a fraction, is a multiplier for movement. For example, specifying $3/1$ means the pointer moves three times as fast as normal. The fraction may be rounded arbitrarily by the X server. Acceleration only takes effect if the pointer moves more than `threshold` pixels at once and only applies to the amount beyond the value in the `threshold` argument. Setting a value to -1 restores the default. The values of the `do_accel` and `do_threshold` arguments must be `True` for the pointer values to be set, or the parameters are unchanged. Negative values (other than -1) generate a `BadValue` error, as does a zero value for the `accel_denominator` argument.

`XChangePointerControl` can generate a `BadValue` error.

To get the current pointer parameters, use `XGetPointerControl`

```
0  XGetPointerControl(  
1      Display* display,  
2      int* accel_numerator_return,  
3      int* accel_denominator_return,  
4      int* threshold_return  
5  )
```

- `display` Specifies the connection to the X server.
- `accel_numerator_return`
– Returns the numerator for the acceleration multiplier.
- `accel_denominator_return`
– Returns the denominator for the acceleration multiplier.
- `threshold_return` Returns the acceleration threshold.

The `XGetPointerControl` function returns the pointer's current acceleration multiplier and acceleration threshold.

16. Application Utility Functions

- **Using Keyboard Utility Functions:** To obtain a KeySym for the KeyCode of an event, use XLookupKeysym

```
o KeySym XLookupKeysym(XKeyEvent* key_event, int index)
```

- key_event Specifies the KeyPress or KeyRelease event.
- index Specifies the index into the KeySyms list for the event's KeyCode.

The XLookupKeysym function uses a given keyboard event and the index you specified to return the KeySym from the list that corresponds to the KeyCode member in the XKeyPressedEvent or XKeyReleasedEvent structure. If no KeySym is defined for the KeyCode of the event, XLookupKeysym returns NoSymbol.

To obtain a KeySym for a specific KeyCode, use XKeycodeToKeysym.

```
o KeySym XKeycodeToKeysym (Display* display, KeyCode keycode,
↪ int index)
```

- display Specifies the connection to the X server.
- keycode Specifies the KeyCode.
- index Specifies the element of KeyCode vector

The XKeycodeToKeysym function uses internal Xlib tables and returns the KeySym defined for the specified KeyCode and the element of the KeyCode vector. If no symbol is defined, XKeycodeToKeysym returns NoSymbol

To obtain a KeyCode for a key having a specific KeySym, use XKeysymToKeyCode.

```
o KeyCode XKeysymToKeyCode(Display* display, KeySym keysym)
```

- display Specifies the connection to the X server.
- keysym Specifies the KeySym that is to be searched for.

If the specified KeySym is not defined for any KeyCode, XKeysymToKeyCode returns zero.

The mapping between KeyCodes and KeySyms is cached internal to Xlib. When this information is changed at the server, an Xlib function must be called to refresh the cache. To refresh the stored modifier and keymap information, use XRefreshKeyboardMapping

```
o XRefreshKeyboardMapping(XMappingEvent* event_map)
```

- event_map Specifies the mapping event that is to be used.

The XRefreshKeyboardMapping function refreshes the stored modifier and keymap information. You usually call this function when a MappingNotify event with a request member of MappingKeyboard or MappingModifier occurs. The result is to update Xlib's knowledge of the keyboard.

To obtain the uppercase and lowercase forms of a KeySym, use XConvertCase

```
o void XConvertCase(Keysym keysym, Keysym* lower_return,  
  ↪ Keysym* upper_return)
```

- keysym Specifies the KeySym that is to be converted.
- upper_return Returns the uppercase form of keysym, or keysym.
- lower_return Returns the lowercase form of keysym, or keysym.

The XConvertCase function returns the uppercase and lowercase forms of the specified Keysym, if the KeySym is subject to case conversion; otherwise, the specified KeySym is returned to both lower_return and upper_return.

KeySyms have string names as well as numeric codes. To convert the name of the KeySym to the KeySym code, use XStringToKeysym.

```
o Keysym XStringToKeysym(char* string)
```

- string Specifies the name of the KeySym that is to be converted.

Standard KeySym names are obtained from <X11/keysymdef.h> by removing the *XK_pprefix* from each name. *KeySyms that are not part of the Xlib standard also may be obtained with this function. This is implementation-dependent.*

If the KeySym name is not in the Host Portable Character Encoding, the result is implementation-dependent. If the specified string does not match a valid KeySym, XStringToKeysym returns NoSymbol.

To convert a KeySym code to the name of the KeySym, use XKeysymToString.

```
o char *XKeysymToString(Keysym keysym)
```

- keysym Specifies the KeySym that is to be converted.

The returned string is in a static area and must not be modified. The returned string is in the Host Portable Character Encoding. If the specified KeySym is not defined, XKeysymToString returns a NULL.

- **KeySym Classification Macros:** You may want to test if a KeySym is, for example, on the keypad or on one of the function keys. You can use KeySym macros to perform the following tests.

```
o IsCursorKey(Keysym keysym)
```

- keysym Specifies the KeySym that is to be tested.

Returns True if the specified KeySym is a cursor key.

```
o IsFunctionKey(Keysym keysym)
```

- keysym Specifies the KeySym that is to be tested.

Returns True if the specified KeySym is a function key.

◦ `IsKeypadKey(KeySym keysym)`

– `keysym` Specifies the `KeySym` that is to be tested.

Returns True if the specified `KeySym` is a standard keypad key.

◦ `IsPrivateKeypadKey(KeySym keysym)`

– `keysym` Specifies the `KeySym` that is to be tested.

Returns True if the specified `KeySym` is a vendor-private keypad key.

◦ `IsMiscFunctionKey(KeySym keysym)`

– `keysym` Specifies the `KeySym` that is to be tested.

Returns True if the specified `KeySym` is a miscellaneous function key.

◦ `IsModifierKey(KeySym keysym)`

– `keysym` Specifies the `KeySym` that is to be tested.

Returns True if the specified `KeySym` is a modifier key.

◦ `IsPFKey(KeySym keysym)`

– `keysym` Specifies the `KeySym` that is to be tested.

Returns True if the specified `KeySym` is a PF key.

ICCCM Functions

- **Intro:** The Inter-Client Communication Conventions Manual, hereafter referred to as the ICCCM, details the X Consortium approved conventions that govern inter-client communications. These conventions ensure peer-to-peer client cooperation in the use of selections, cut buffers, and shared resources as well as client cooperation with window and session managers. For further information, see the Inter-Client Communication Conventions Manual.

Xlib provides a number of standard properties and programming interfaces that are ICCCM compliant. The predefined atoms for some of these properties are defined in the `<X11/Xatom.h>` header file, where to avoid name conflicts with user symbols their define name has an `XA_` prefix.

Xlib's selection and cut buffer mechanisms provide the primary programming interfaces by which peer client applications communicate with each other. The functions discussed in this chapter provide the primary programming interfaces by which client applications communicate with their window and session managers as well as share standard colormaps.

The standard properties that are of special interest for communicating with window and session managers are:

Name	Type	Format	Description
WM_CLASS	STRING	8	Set by application programs to allow window and session managers to obtain the application's resources from the resource database.
WM_CLIENT_MACHINE	TEXT		The string name of the machine on which the client application is running.
WM_COLORMAP_WINDOWS	WINDOW	32	The list of window IDs that may need a different colormap from that of their top-level window.
WM_COMMAND	TEXT		The command and arguments, null-separated, used to invoke the application.
WM_HINTS	WM_HINTS	32	Additional hints set by the client for use by the window manager. The C type of this property is XWMHints.
WM_ICON_NAME	TEXT		The name to be used in an icon.
WM_ICON_SIZE	WM_ICON_SIZE	32	The window manager may set this property on the root window to specify the icon sizes it supports. The C type of this property is XIconSize.
WM_NAME	TEXT		The name of the application.

Name	Type	Format	Description
WM_NORMAL_HINTS	WM_SIZE_HINTS	32	Size hints for a window in its normal state. The C type of this property is XSizeHints.
WM_PROTOCOLS	ATOM	32	List of atoms that identify the communications protocols between the client and window manager in which the client is willing to participate.
WM_STATE	WM_STATE	32	Intended for communication between window and session managers only.
WM_TRANSIENT_FOR	WINDOW	32	Set by application programs to indicate to the window manager that a transient top-level window, such as a dialog box.

- **Client to Window Manager Communication:** This section discusses how to:
 - Manipulate top-level windows
 - Convert string lists
 - Set and read text properties
 - Set and read the WM_NAME property
 - Set and read the WM_ICON_NAME property
 - Set and read the WM_HINTS property
 - Set and read the WM_NORMAL_HINTS property
 - Set and read the WM_CLASS property
 - Set and read the WM_TRANSIENT_FOR property
 - Set and read the WM_PROTOCOLS property
 - Set and read the WM_COLORMAP_WINDOWS property
 - Set and read the WM_ICON_SIZE property
 - Use window manager convenience functions
- **Manipulating Top-Level Windows:** Xlib provides functions that you can use to change the visibility or size of top-level windows (that is, those that were created as children of the root window). Note that the subwindows that you create are ignored by window managers. Therefore, you should use the basic window functions described in chapter 3 to manipulate your application's subwindows.

To request that a top-level window be iconified, use XIconifyWindow.

```
o Status XIconifyWindow(Display* display, Window w, int
  ↪ screen_number)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- screen_number Specifies the appropriate screen number on the host server.

The `XIconifyWindow` function sends a `WM_CHANGE_STATE` ClientMessage event with a format of 32 and a first data element of `IconicState` and a window of `w` to the root window of the specified screen with an event mask set to `SubstructureNotifyMask|SubstructureRedirectMask`. Window managers may elect to receive this message and if the window is in its normal state, may treat it as a request to change the window's state from normal to iconic. If the `WM_CHANGE_STATE` property cannot be interned, `XIconifyWindow` does not send a message and returns a zero status. It returns a nonzero status if the client message is sent successfully; otherwise, it returns a zero status.

To request that a top-level window be withdrawn, use `XWithdrawWindow`

```
o Status XWithdrawWindow(Display* display, Window w, int
    ↪ screen_number)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window.
- `screen_number` Specifies the appropriate screen number on the host server.

The `XWithdrawWindow` function unmaps the specified window and sends a synthetic `UnmapNotify` event to the root window of the specified screen. Window managers may elect to receive this message and may treat it as a request to change the window's state to withdrawn. When a window is in the withdrawn state, neither its normal nor its iconic representations is visible. It returns a nonzero status if the `UnmapNotify` event is successfully sent; otherwise, it returns a zero status.

`XWithdrawWindow` can generate a `BadWindow` error.

To request that a top-level window be reconfigured, use `XReconfigureWMWindow`.

```
o Status XReconfigureWMWindow(Display* display, Window w, int
    ↪ screen_number, unsigned int value_mask, XWindowChanges*
    ↪ values)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window.
- `screen_number` Specifies the appropriate screen number on the host server.
- `value_mask` Specifies which values are to be set using information in the `values` structure.
- This mask is the bitwise inclusive OR of the valid configure window values bits.
- `values` Specifies the `XWindowChanges` structure.

The `XReconfigureWMWindow` function issues a `ConfigureWindow` request on the specified top-level window. If the stacking mode is changed and the request fails with a `BadMatch` error, the error is trapped by Xlib and a synthetic `ConfigureRequestEvent` containing the same configuration parameters is sent to the root of the specified window. Window managers may elect to receive this event and treat it as a request to reconfigure the indicated window. It returns a nonzero status if the request or event is successfully sent; otherwise, it returns a zero status.

XReconfigureWMWindow can generate BadValue and BadWindow errors.

- **Converting String Lists:** Many of the text properties allow a variety of types and formats. Because the data stored in these properties are not simple null-terminated strings, an XTextProperty structure is used to describe the encoding, type, and length of the text as well as its value. The XTextProperty structure contains:

```
0  typedef struct {
1      unsigned char *value;          /* property data */
2      Atom encoding;                /* type of property */
3      int format;                   /* 8, 16, or 32 */
4      unsigned long nitems;         /* number of items in value
   ↪                               */
5  } XTextProperty;
```

Xlib provides functions to convert localized text to or from encodings that support the inter-client communication conventions for text. In addition, functions are provided for converting between lists of pointers to character strings and text properties in the STRING encoding.

The functions for localized text return a signed integer error status that encodes Success as zero, specific error conditions as negative numbers, and partial conversion as a count of unconvertible characters.

- **Setting and Reading Text Properties:** lib provides two functions that you can use to set and read the text properties for a given window. You can use these functions to set and read those properties of type TEXT (WM_NAME, WM_ICON_NAME, WM_COMMAND, and WM_CLIENT_MACHINE). In addition, Xlib provides separate convenience functions that you can use to set each of these properties.

To set one of a window's text properties, use XSetTextProperty.

```
0  void XSetTextProperty(Display* display, Window w,
   ↪  XTextProperty* text_prop, Atom property)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- text_prop Specifies the XTextProperty structure to be used.
- property Specifies the property name.

The XSetTextProperty function replaces the existing specified property for the named window with the data, type, format, and number of items determined by the value field, the encoding field, the format field, and the nitems field, respectively, of the specified XTextProperty structure. If the property does not already exist, XSetTextProperty sets it for the specified window.

XSetTextProperty can generate BadAlloc, BadAtom, BadValue, and BadWindow errors.

To read one of a window's text properties, use XGetTextProperty

```

o Status XGetTextProperty(Display* display, Window w,
  ↪ XTextProperty* text_prop_return, Atom property)

```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- text_prop_return Returns the XTextProperty structure.
- property Specifies the property name.

The XGetTextProperty function reads the specified property from the window and stores the data in the returned XTextProperty structure. It stores the data in the value field, the type of the data in the encoding field, the format of the data in the format field, and the number of items of data in the nitems field. An extra byte containing null (which is not included in the nitems member) is stored at the end of the value field of text_prop_return. *The particular interpretation of the property's encoding and data as text is left to the calling application.*

If it was able to read and store the data in the XTextProperty structure, XGetTextProperty returns a nonzero status; otherwise, it returns a zero status.

XGetTextProperty can generate BadAtom and BadWindow errors.

- **Setting and Reading the WM_NAME Property:** Xlib provides convenience functions that you can use to set and read the WM_NAME property for a given window.

To set a window's WM_NAME property with the supplied convenience function, use XSetWMName.

```

o void XSetWMName(Display* display, Window w, XTextProperty*
  ↪ text_prop)

```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- text_prop Specifies the XTextProperty structure to be used.

The XSetWMName convenience function calls XSetTextProperty to set the WM_NAME property.

To read a window's WM_NAME property with the supplied convenience function, use XGetWMName

```

o Status XGetWMName(Display* display, Window w, XTextProperty*
  ↪ text_prop_return)

```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- text_prop_return Returns the XTextProperty structure

The XGetWMName convenience function calls XGetTextProperty to obtain the WM_NAME property. It a nonzero status on success; otherwise, it returns a zero status.

The following two functions have been superseded by XSetWMName and XGetWMName, respectively. You can use these additional convenience functions for window names that are encoded as STRING properties.

To assign a name to a window, use XStoreName

```
o XStoreName(Display* display, Window w, char* window_name)
```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- window_name Specifies the window name, which should be a null-terminated string.

The XStoreName function assigns the name passed to window_name to the specified window. A window manager can display the window name in some prominent place, such as the title bar, to allow users to identify windows easily. Some window managers may display a window's name in the window's icon, although they are encouraged to use the window's icon name if one is provided by the application. If the string is not in the Host Portable Character Encoding, the result is implementation-dependent.

XStoreName can generate BadAlloc and BadWindow errors.

Note: Both XStoreName and XSetWMName set WM_NAME. The important difference is that XSetWMName() sets WM_NAME using an XTextProperty, while XStoreName() is a simpler convenience wrapper for ordinary string names. XSetWMName sets the name as XA_STRING.

To get the name of a window, use XFetchName

```
o Status XFetchName(Display* display, Window w, char**  
  ↪ window_name_return)
```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- window_name_return

Returns the window name, which is a null-terminated string.

WM_NAME property has not been set for this window, XFetchName sets window_name_return to NULL. If the data returned by the server is in the Latin Portable Character Encoding, then the returned string is in the Host Portable Character Encoding. Otherwise, the result is implementation-dependent. When finished with it, a client must free the window name string using XFree.

XFetchName can generate a BadWindow error.

- **Setting and Reading the WM_ICON_NAME Property:** Xlib provides convenience functions that you can use to set and read the WM_ICON_NAME property for a given window.

To set a window's WM_ICON_NAME property, use XSetWMIconName.

```
o void XSetWMIconName(Display* display, Window w,  
  ↪ XTextProperty* text_prop)
```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- text_prop Specifies the XTextProperty structure to be used.

The XSetWMIconName convenience function calls XSetTextProperty to set the WM_ICON_NAME property.

To read a window's WM_ICON_NAME property, use XGetWMIconName

```
o Status XGetWMIconName(Display* display, Window w,  
  ↪ XTextProperty* text_prop_return)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- text_prop_return Returns the XTextProperty structure

The XGetWMIconName convenience function calls XGetTextProperty to obtain the WM_ICON_NAME property. It returns a nonzero status on success; otherwise, it returns a zero status.

The next two functions have been superseded by XSetWMIconName and XGetWMIconName, respectively. You can use these additional convenience functions for window names that are encoded as STRING properties.

To set the name to be displayed in a window's icon, use XSetIconName.

```
o XSetIconName (Display* display, Window w, char* icon_name)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- icon_name Specifies the icon name, which should be a null-terminated string.

If the string is not in the Host Portable Character Encoding, the result is implementation-dependent. XSetIconName can generate BadAlloc and BadWindow errors.

To get the name a window wants displayed in its icon, use XGetIconName.

```
o Status XGetIconName(Display* display, Window w, char**  
  ↪ icon_name_return)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- icon_name_return Returns the window's icon name, which is a null-terminated string.

The XGetIconName function returns the name to be displayed in the specified window's icon. If it succeeds, it returns a nonzero status; otherwise, if no icon name has been set for the window, it returns zero. If you never assigned a name to the window, XGetIconName sets icon_name_return to NULL. If the data returned by the server is in the Latin Portable Character Encoding, then the returned string is in the Host Portable Character Encoding. Otherwise, the result is implementation-dependent. When finished with it, a client must free the icon name string using XFree.

XGetIconName can generate a BadWindow error

- **Setting and reading the WM_HINTS property:** Xlib provides functions that you can use to set and read the WM_HINTS property for a given window. These functions use the flags and the XWMHints structure in `X11/Xutil.h` header file.

To allocate an XWMHints structure, use XAllocWMHints

```
0 XWMHints *XAllocWMHints()
```

The XAllocWMHints function allocates and returns a pointer to an XWMHints structure. Note that all fields in the XWMHints structure are initially set to zero. If insufficient memory is available, XAllocWMHints returns NULL. To free the memory allocated to this structure, use XFree.

The XWMHints structure contains

```
0  * Window manager hints mask bits */
1  #define InputHint          (1L << 0)
2  #define StateHint          (1L << 1)
3  #define IconPixmapHint     (1L << 2)
4  #define IconWindowHint     (1L << 3)
5  #define IconPositionHint   (1L << 4)
6  #define IconMaskHint       (1L << 5)
7  #define WindowGroupHint    (1L << 6)
8  #define UrgencyHint        (1L << 8)
9  #define AllHints
10     ↪ (InputHint|StateHint|IconPixmapHint|
        IconWindowHint|
        ↪ IconPositionHint
11     ↪ IconMaskHint|WindowGroupHint)
```

```
0  typedef struct {
1      long flags;                /* marks which fields in this
   ↪ structure are defined */
2      Bool input;                /* does this application rely
   ↪ on the window manager to get keyboard input? */
3      int initial_state;         /* see below */
4      Pixmap icon_pixmap;        /* pixmap to be used as icon
   ↪ */
5      Window icon_window;        /* window to be used as icon
   ↪ */
6      int icon_x, icon_y;        /* initial position of icon
   ↪ */
7      Pixmap icon_mask;          /* pixmap to be used as mask
   ↪ for icon_pixmap */
8      XID window_group;          /* id of related window group
   ↪ */
9      /* this structure may be extended in the future */
10 } XWMHints;
```

The input member is used to communicate to the window manager the input focus model used by the application. Applications that expect input but never explicitly set focus to any of their subwindows (that is, use the push model of focus management), such as X Version 10 style applications that use real-estate driven focus, should set this member to True. Similarly, applications that set input focus to their subwindows only when it is given to their top-level window by a window manager should also set this member to True. Applications

that manage their own input focus by explicitly setting focus to one of their subwindows whenever they want keyboard input (that is, use the pull model of focus management) should set this member to False. Applications that never expect any keyboard input also should set this member to False.

Pull model window managers should make it possible for push model applications to get input by setting input focus to the top-level windows of applications whose input member is True. Push model window managers should make sure that pull model applications do not break them by resetting input focus to PointerRoot when it is appropriate (for example, whenever an application whose input member is False sets input focus to one of its subwindows).

The definitions for the `initial_state` flag are:

```
0  #define WithdrawnState 0
1  #define NormalState 1      /* most applications start
   ↪   this way */
2  #define IconicState 3      /* application wants to start
   ↪   as an icon */
```

The `icon_mask` specifies which pixels of the `icon_pixmap` should be used as the icon. This allows for nonrectangular icons. Both `icon_pixmap` and `icon_mask` must be bitmaps. The `icon_window` lets an application provide a window for use as an icon for window managers that support such use. The `window_group` lets you specify that this window belongs to a group of other windows. For example, if a single application manipulates multiple top-level windows, this allows you to provide enough information that a window manager can iconify all of the windows rather than just the one window.

The `UrgencyHint` flag, if set in the `flags` field, indicates that the client deems the window contents to be urgent, requiring the timely response of the user. The window manager will make some effort to draw the user's attention to this window while this flag is set. The client must provide some means by which the user can cause the urgency flag to be cleared (either mitigating the condition that made the window urgent or merely shutting off the alarm) or the window to be withdrawn.

To set a window's `WM_HINTS` property, use `XSetWMHints`

```
o  XSetWMHints (Display* display, Window w, XWMHints* wmhints)
```

- `display` Specifies the connection to the X server.
- `w` Specifies the window.
- `wmhints` Specifies the `XWMHints` structure to be used.

The `XSetWMHints` function sets the window manager hints that include icon information and location, the initial state of the window, and whether the application relies on the window manager to get keyboard input.

`XSetWMHints` can generate `BadAlloc` and `BadWindow` errors.

To read a window's `WM_HINTS` property, use `XGetWMHints`

```
o XWMHints *XGetWMHints(display, w)
```

- display Specifies the connection to the X server.
- w Specifies the window.

The XGetWMHints function reads the window manager hints and returns NULL if no WM_HINTS property was set on the window or returns a pointer to an XWMHints structure if it succeeds. When finished with the data, free the space used for it by calling XFree.

XGetWMHints can generate a BadWindow error.

- **Setting and Reading the WM_NORMAL_HINTS Property:** Xlib provides functions that you can use to set or read the WM_NORMAL_HINTS property for a given window. The functions use the flags and the XSizeHints structure, as defined in the <X11/Xutil.h> header file.

The size of the XSizeHints structure may grow in future releases, as new components are added to support new ICCCM features. Passing statically allocated instances of this structure into Xlib may result in memory corruption when running against a future release of the library. As such, it is recommended that only dynamically allocated instances of the structure be used.

To allocate an XSizeHints structure, use XAllocSizeHints

```
o XSizeHints *XAllocSizeHints()
```

The XAllocSizeHints function allocates and returns a pointer to an XSizeHints structure. Note that all fields in the XSizeHints structure are initially set to zero. If insufficient memory is available, XAllocSizeHints returns NULL. To free the memory allocated to this structure, use XFree.

The XSizeHints structure contains:

```
o  /* Size hints mask bits */
1  #define USPosition      (1L << 0)      /* user specified x,
   ↳ y */
2  #define USSize          (1L << 1)      /* user specified
   ↳ width, height */
3  #define PPosition      (1L << 2)      /* program specified
   ↳ position */
4  #define PSize           (1L << 3)      /* program specified
   ↳ size */
5  #define PMinSize        (1L << 4)      /* program specified
   ↳ minimum size */
6  #define PMaxSize        (1L << 5)      /* program specified
   ↳ maximum size */
7  #define PResizeInc      (1L << 6)      /* program specified
   ↳ resize increments */
8  #define PAspect         (1L << 7)      /* program specified
   ↳ min and max aspect ratios */
9  #define PBaseSize        (1L << 8)
10 #define PWinGravity      (1L << 9)
11 #define PAllHints        (PPosition|PSize| PMinSize|PMaxSize|
   ↳ PResizeInc|PAspect)
```



```

0  typedef struct {
1      long flags;                /* marks which fields in
   ↳ this structure are defined */
2      int x, y;                 /* Obsolete */
3      int width, height;        /* Obsolete */
4      int min_width, min_height;
5      int max_width, max_height;
6      int width_inc, height_inc;

7
8      struct {
9          int x;                /* numerator */
10         int y;                /* denominator */
11     } min_aspect, max_aspect;

12
13     int base_width, base_height;
14     int win_gravity;
15     /* this structure may be extended in the future */
16 } XSizeHints;

```

The *x*, *y*, *width*, and *height* members are now obsolete and are left solely for compatibility reasons. The *min_width* and *min_height* members specify the minimum window size that still allows the application to be useful. The *max_width* and *max_height* members specify the maximum window size. The *width_inc* and *height_inc* members define an arithmetic progression of sizes (minimum to maximum) into which the window prefers to be resized. The *min_aspect* and *max_aspect* members are expressed as ratios of *x* and *y*, and they allow an application to specify the range of aspect ratios it prefers. The *base_width* and *base_height* members define the desired size of the window. The window manager will interpret the position of the window and its border width to position the point of the outer rectangle of the overall window specified by the *win_gravity* member. The outer rectangle of the window includes any borders or decorations supplied by the window manager. In other words, if the window manager decides to place the window where the client asked, the position on the parent window's border named by the *win_gravity* will be placed where the client window would have been placed in the absence of a window manager.

The outer rectangle is the window-manager-managed frame, including decorations.

When the client gives an (*x*, *y*) position, the window manager should not blindly treat that as “put the top-left of the outer frame here.” Instead, it should interpret (*x*, *y*) according to *win_gravity*

In simpler terms: the app requested “my top-left should be at (100, 100).” But because the WM adds a title bar and border around it, the WM adjusts the outer frame so the client area still ends up where the app meant.

Without adjustment, decorations would push the client down and right.

Note that use of the `PAllHints` macro is highly discouraged.

To set a window's `WM_NORMAL_HINTS` property, use `XSetWMNormalHints`.

```
o void XSetWMNormalHints(Display* display, Window w,
    ↪ XSizeHints* hints)
```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- hints Specifies the size hints for the window in its normal state.

The XSetWMNormalHints function replaces the size hints for the WM_NORMAL_HINTS property on the specified window. If the property does not already exist, XSetWMNormalHints sets the size hints for the WM_NORMAL_HINTS property on the specified window. The property is stored with a type of WM_SIZE_HINTS and a format of 32.

XSetWMNormalHints can generate BadAlloc and BadWindow errors.

To read a window's WM_NORMAL_HINTS property, use XGetWMNormalHints.

```
o Status XGetWMNormalHints(Display* display, Window w,
    ↪ XSizeHints* hints_return, long* supplied_return)
```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- hints_return Returns the size hints for the window in its normal state.
- supplied_return Returns the hints that were supplied by the user.

The XGetWMNormalHints function returns the size hints stored in the WM_NORMAL_HINTS property on the specified window. If the property is of type WM_SIZE_HINTS, is of format 32, and is long enough to contain either an old (pre-ICCCM) or new size hints structure, XGetWMNormalHints sets the various fields of the XSizeHints structure, sets the supplied_return argument to the list of fields that were supplied by the user (whether or not they contained defined values), and returns a nonzero status. Otherwise, it returns a zero status.

If XGetWMNormalHints returns successfully and a pre-ICCCM size hints property is read, the supplied_return argument will contain the following bits:

```
o (USPositionUSSizePPositionPSizePMinSize
    ↪ PMaxSizePResizeInc|PAspect)
```

If the property is large enough to contain the base size and window gravity fields as well, the supplied_return argument will also contain the following bits:

```
o PBaseSize|PWinGravity
```

XGetWMNormalHints can generate a BadWindow error.

To set a window's WM_SIZE_HINTS property, use XSetWMSizeHints

```

0 void XSetWMSizeHints(Display* display, Window w, XSizeHints*
  ↪ hints, Atom property)

```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- hints Specifies the XSizeHints structure to be used.
- property Specifies the property name

The XSetWMSizeHints function replaces the size hints for the specified property on the named window. If the specified property does not already exist, XSetWMSizeHints sets the size hints for the specified property on the named window. The property is stored with a type of WM_SIZE_HINTS and a format of 32. To set a window's normal size hints, you can use the XSetWMNormalHints function.

XSetWMSizeHints can generate BadAlloc, BadAtom, and BadWindow errors.

To read a window's WM_SIZE_HINTS property, use XGetWMSizeHints

```

0 Status XGetWMSizeHints(
1     Display* display,
2     Window w,
3     XSizeHints* hints_return,
4     long* supplied_return,
5     Atom property
6 )

```

- display Specifies the connection to the X server.
- *w* Specifies the window.
- hints_return Returns the XSizeHints structure.
- supplied_return Returns the hints that were supplied by the user.
- property Specifies the property name.

The XGetWMSizeHints function returns the size hints stored in the specified property on the named window. If the property is of type WM_SIZE_HINTS, is of format 32, and is long enough to contain either an old (pre-ICCCM) or new size hints structure, XGetWMSizeHints sets the various fields of the XSizeHints structure, sets the supplied_return argument to the list of fields that were supplied by the user (whether or not they contained defined values), and returns a nonzero status. Otherwise, it returns a zero status. To get a window's normal size hints, you can use the XGetWMNormalHints function.

If XGetWMSizeHints returns successfully and a pre-ICCCM size hints property is read, the supplied_return argument will contain the following bits:

```

0 (USPositionUSSizePPositionPSizePMinSize
  ↪ PMaxSizePResizeInc|PAspect))

```

If the property is large enough to contain the base size and window gravity fields as well, the supplied_return argument will also contain the following bits:

```

0 PBaseSize|PWinGravity

```

XGetWMSizeHints can generate BadAtom and BadWindow errors.

- **Setting and Reading the WM_CLASS Property:** Xlib provides functions that you can use to set and get the WM_CLASS property for a given window. These functions use the XClassHint structure, which is defined in the <X11/Xutil.h> header file.

To allocate an XClassHint structure, use XAllocClassHint.

```
o XClassHint *XAllocClassHint()
```

The XAllocClassHint function allocates and returns a pointer to an XClassHint structure. Note that the pointer fields in the XClassHint structure are initially set to NULL. If insufficient memory is available, XAllocClassHint returns NULL. To free the memory allocated to this structure, use XFree.

The XClassHint contains:

```
0 typedef struct {  
1     char *res_name;  
2     char *res_class;  
3 } XClassHint;
```

The res_name member contains the application name, and the res_class member contains the application class. Note that the name set in this property may differ from the name set as WM_NAME. That is, WM_NAME specifies what should be displayed in the title bar and, therefore, can contain temporal information (for example, the name of a file currently in an editor's buffer). On the other hand, the name specified as part of WM_CLASS is the formal name of the application that should be used when retrieving the application's resources from the resource database.

To set a window's WM_CLASS property, use XSetClassHint

```
o XSetClassHint(Display* display, Window w, XClassHint*  
  ↪ class_hints)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- class_hints Specifies the XClassHint structure that is to be used.

To read a window's WM_CLASS property, use XGetClassHint

```
o Status XGetClassHint(Display* display, Window w, XClassHint*  
  ↪ class_hints_return)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- class_hints_return Returns the XClassHint structure.

The XGetClassHint function returns the class hint of the specified window to the members of the supplied structure. If the data returned by the server is in the Latin Portable Character Encoding, then the returned strings are in the Host Portable Character Encoding. Otherwise, the result is implementation-dependent. It returns a nonzero status on success; otherwise, it returns a zero status. To free res_name and res_class when finished with the strings, use XFree on each individually.

XGetClassHint can generate a BadWindow error.

- **Setting and Reading the WM_TRANSIENT_FOR Property:** Xlib provides functions that you can use to set and read the WM_TRANSIENT_FOR property for a given window.

To set a window's WM_TRANSIENT_FOR property, use XSetTransientForHint

```
◦ XSetTransientForHint (Display* display, Window w, Window  
  ↪ prop_window)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- prop_window Specifies the window that the WM_TRANSIENT_FOR property is to be set to.

The XSetTransientForHint function sets the WM_TRANSIENT_FOR property of the specified window to the specified prop_window.

XSetTransientForHint can generate BadAlloc and BadWindow errors.

To read a window's WM_TRANSIENT_FOR property, use XGetTransientForHint

```
◦ Status XGetTransientForHint(Display* display, Window w,  
  ↪ Window* prop_window_return)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- prop_window_return Returns the WM_TRANSIENT_FOR property of the specified window.

The XGetTransientForHint function returns the WM_TRANSIENT_FOR property for the specified window. It returns a nonzero status on success; otherwise, it returns a zero status.

XGetTransientForHint can generate a BadWindow error.

- **Setting and Reading the WM_PROTOCOLS Property:** Xlib provides functions that you can use to set and read the WM_PROTOCOLS property for a given window.

To set a window's WM_PROTOCOLS property, use XSetWMProtocols

```
◦ Status XSetWMProtocols(Display* display, Window w, Atom*  
  ↪ protocols, int count)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- protocols Specifies the list of protocols.
- count Specifies the number of protocols in the list.

The XSetWMProtocols function replaces the WM_PROTOCOLS property on the specified window with the list of atoms specified by the protocols argument. If the property does not already exist, XSetWMProtocols sets the WM_PROTOCOLS property on the specified window to the list of atoms specified by the protocols argument. The property is stored with a type of ATOM and a format of 32. If it cannot intern the WM_PROTOCOLS atom, XSetWMProtocols returns a zero status. Otherwise, it returns a nonzero status.

XSetWMProtocols can generate BadAlloc and BadWindow errors.

To read a window's WM_PROTOCOLS property, use XGetWMProtocols

```
o Status XGetWMProtocols(Display* display, Window w, Atom**  
  ↪ protocols_return, int* count_return)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- protocols_return Returns the list of protocols.
- count_return Returns the number of protocols in the list.

The XGetWMProtocols function returns the list of atoms stored in the WM_PROTOCOLS property on the specified window. These atoms describe window manager protocols in which the owner of this window is willing to participate. If the property exists, is of type ATOM, is of format 32, and the atom WM_PROTOCOLS can be interned, XGetWMProtocols sets the protocols_return argument to a list of atoms, sets the count_return argument to the number of elements in the list, and returns a nonzero status. Otherwise, it sets neither of the return arguments and returns a zero status. To release the list of atoms, use XFree

XGetWMProtocols can generate a BadWindow error.

- **Setting and Reading the WM_COLORMAP_WINDOWS Property:** Xlib provides functions that you can use to set and read the WM_COLORMAP_WINDOWS property for a given window.

To set a window's WM_COLORMAP_WINDOWS property, use XSetWMColormapWindows.

```
o Status XSetWMColormapWindows(Display* display, Window w,  
  ↪ Window* colormap_windows, int count)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- colormap_windows Specifies the list of windows.
- count Specifies the number of windows in the list.

The XSetWMColormapWindows function replaces the WM_COLORMAP_WINDOWS property on the specified window with the list of windows specified by the colormap_windows argument. If the property does not already exist, XSetWMColormapWindows sets the WM_COLORMAP_WINDOWS property on the specified window to the list of windows specified by the colormap_windows argument. The property is stored with a type of WINDOW and a format of 32. If it cannot intern the WM_COLORMAP_WINDOWS atom, XSetWMColormapWindows returns a zero status. Otherwise, it returns a nonzero status.

XSetWMColormapWindows can generate BadAlloc and BadWindow errors.

To read a window's WM_COLORMAP_WINDOWS property, use XGetWMColormapWindows

```

0  Status XGetWColormapWindows(Display* display, Window w,
   ↪ Window** colormap_windows_return, int count_return)

```

- display Specifies the connection to the X server.
- w Specifies the window.
- colormap_windows_return
- Returns the list of windows.
- count_return Returns the number of windows in the list.

The XGetWColormapWindows function returns the list of window identifiers stored in the WM_COLORMAP_WINDOWS property on the specified window. These identifiers indicate the colormaps that the window manager may need to install for this window. If the property exists, is of type WINDOW, is of format 32, and the atom WM_COLORMAP_WINDOWS can be interned, XGetWColormapWindows sets the windows_return argument to a list of window identifiers, sets the count_return argument to the number of elements in the list, and returns a nonzero status. Otherwise, it sets neither of the return arguments and returns a zero status. To release the list of window identifiers, use XFree.

XGetWColormapWindows can generate a BadWindow error.

- **Setting and Reading the WM_ICON_SIZE Property:** Xlib provides functions that you can use to set and read the WM_ICON_SIZE property for a given window. These functions use the XIconSize structure in *X11/Xutil.h* header file.

To allocate an XIconSize structure, use XAllocIconSize.

```

0  XIconSize *XAllocIconSize( )

```

The XAllocIconSize function allocates and returns a pointer to an XIconSize structure. Note that all fields in the XIconSize structure are initially set to zero. If insufficient memory is available, XAllocIconSize returns NULL. To free the memory allocated to this structure, use XFree.

The XIconSize structure contains:

```

0  typedef struct {
1      int min_width, min_height;
2      int max_width, max_height;
3      int width_inc, height_inc;
4  } XIconSize;

```

The width_inc and height_inc members define an arithmetic progression of sizes (minimum to maximum) that represent the supported icon sizes.

To set a window's WM_ICON_SIZE property, use XSetIconSizes

```

0  XSetIconSizes(Display* display, Window w, XIconSize*
   ↪ size_list, int count)

```

- display Specifies the connection to the X server.
- w Specifies the window.
- size_list Specifies the size list.
- count Specifies the number of items in the size list.

The XSetIconSizes function is used only by window managers to set the supported icon sizes. XSetIconSizes can generate BadAlloc and BadWindow errors.

To read a window's WM_ICON_SIZE property, use XGetIconSizes

```
0  Status XGetIconSizes(Display* display, Window w, XIconSize**
    ↪ size_list_return, int* count_return)
```

- display Specifies the connection to the X server.
- w Specifies the window.
- size_list_return Returns the size list.
- count_return Returns the number of items in the size list

The XGetIconSizes function returns zero if a window manager has not set icon sizes; otherwise, it returns nonzero. XGetIconSizes should be called by an application that wants to find out what icon sizes would be most appreciated by the window manager under which the application is running. The application should then use XSetWMHints to supply the window manager with an icon pixmap or window in one of the supported sizes. To free the data allocated in size_list_return, use XFree.

XGetIconSizes can generate a BadWindow error.

- **Using Window Manager Convenience Functions:** The XmbSetWMProperties function stores the standard set of window manager properties, with text properties in standard encodings for internationalized text communication. The standard window manager properties for a given window are WM_NAME, WM_ICON_NAME, WM_HINTS, WM_NORMAL_HINTS, WM_CLASS, WM_COMMAND, WM_CLIENT_MACHINE, and WM_LOCALE_NAME.

```
0  void XmbSetWMProperties(
1      Display* display,
2      Window w,
3      char* window_name, icon_name, argv[],
4      int argc,
5      XSizeHints* normal_hints,
6      XWMHints* wm_hints,
7      XClassHint* class_hints
8  )
```

- display Specifies the connection to the X server.
- w Specifies the window.
- window_name Specifies the window name, which should be a null-terminated string.
- icon_name Specifies the icon name, which should be a null-terminated string.
- argv Specifies the application's argument list.
- argc Specifies the number of arguments.
- hints Specifies the size hints for the window in its normal state.

- `wm_hints` Specifies the `XWMHints` structure to be used.
- `class_hints` Specifies the `XClassHint` structure to be used.

The `XmbSetWMProperties` convenience function provides a simple programming interface for setting those essential window properties that are used for communicating with other clients (particularly window and session managers).

If the `window_name` argument is non-NULL, `XmbSetWMProperties` sets the `WM_NAME` property. If the `icon_name` argument is non-NULL, `XmbSetWMProperties` sets the `WM_ICON_NAME` property. The `window_name` and `icon_name` arguments are null-terminated strings in the encoding of the current locale. If the arguments can be fully converted to the `STRING` encoding, the properties are created with type “`STRING`”; otherwise, the arguments are converted to Compound Text, and the properties are created with type “`COMPOUND_TEXT`”.

If the `normal_hints` argument is non-NULL, `XmbSetWMProperties` calls `XSetWMNormalHints`, which sets the `WM_NORMAL_HINTS` property. If the `wm_hints` argument is non-NULL, `XmbSetWMProperties` calls `XSetWMHints`, which sets the `WM_HINTS` property.

If the `argv` argument is non-NULL, `XmbSetWMProperties` sets the `WM_COMMAND` property from `argv` and `argc`. An `argc` of zero indicates a zero-length command.

The hostname of the machine is stored using `XSetWMClientMachine`

If the `class_hints` argument is non-NULL, `XmbSetWMProperties` sets the `WM_CLASS` property. If the `res_name` member in the `XClassHint` structure is set to the NULL pointer and the `RESOURCE_NAME` environment variable is set, the value of the environment variable is substituted for `res_name`. If the `res_name` member is NULL, the environment variable is not set, and `argv` and `argv[0]` are set, then the value of `argv[0]`, stripped of any directory prefixes, is substituted for `res_name`

For clients that need to process the property text in a locale, `XmbSetWMProperties` sets the `WM_LOCALE_NAME` property to be the name of the current locale. The name is assumed to be in the Host Portable Character Encoding and is converted to `STRING` for storage in the property.

`XmbSetWMProperties` can generate `BadAlloc` and `BadWindow` errors.

To set a window’s standard window manager properties with strings in client-specified encodings, use `XSetWMProperties`. The standard window manager properties for a given window are `WM_NAME`, `WM_ICON_NAME`, `WM_HINTS`, `WM_NORMAL_HINTS`, `WM_CLASS`, `WM_COMMAND`, and `WM_CLIENT_MACHINE`.

```

0  void XSetWMProperties(
1      Display* display,
2      Window w,
3      XTextProperty* window_name, icon_name,
4      char** argv,
5      int argc,
6      XSizeHints* normal_hints,
7      XWMHints* wm_hints,
8      XClassHint* class_hints
9  )

```

- `display` Specifies the connection to the X server.
- `w` Specifies the window.
- `window_name` Specifies the window name, which should be a null-terminated string.
- `icon_name` Specifies the icon name, which should be a null-terminated string.
- `argv` Specifies the application's argument list.
- `argc` Specifies the number of arguments.
- `normal_hints` Specifies the size hints for the window in its normal state.
- `wm_hints` Specifies the `XWMHints` structure to be used.
- `class_hints` Specifies the `XClassHint` structure to be used.

`XSetWMProperties` can generate `BadAlloc` and `BadWindow` errors.