

EBS in Windows instance.

First we have to create an EBS in the same region and AZ.

The screenshot shows the 'Create volume' page in the AWS Management Console. The page title is 'Create volume' with an 'Info' link. Below the title is a subtitle: 'Create an Amazon EBS volume to attach to any EC2 instance in the same Availability Zone.' The 'Volume settings' section contains the following fields:

- Volume type:** A dropdown menu set to 'General Purpose SSD (gp3)'.
- Size (GiB):** A text input field set to '50'. Below it, a note says 'Min: 1 GiB, Max: 65536 GiB.'
- IOPS:** A spinner input field set to '3000'. Below it, a note says 'Min: 3000 IOPS, Max: 80000 IOPS.'
- Throughput (MiB/s):** A text input field set to '125'. Below it, a note says 'Min: 125 MiB, Max: 2000 MiB. Baseline: 125 MiB/s.'
- Availability Zone:** A dropdown menu set to 'use1-az2 (us-east-1b)'.

Then we have to attach the volume to the created instance.

The screenshot shows the 'Volumes' page in the AWS Management Console. At the top, a green banner says 'Successfully created volume vol-0ce8111eca07d641c.' Below this is a table of volumes:



	Name	Volume ID	Type	Size	IOPS	Throughput
☒		vol-0ce8111eca07d641c	gp3	50 GiB	3000	125
☐		vol-0120e9efa80c04d6d	gp3	30 GiB	3000	125
☐		vol-0757ec798313501a9	gp3	30 GiB	3000	125


On the right side of the table, an 'Actions' dropdown menu is open, showing options: 'Modify volume', 'Create snapshot', 'Create snapshot lifecycle policy', 'Delete volume', 'Attach volume', 'Detach volume', and 'Force detach volume'. The 'Attach volume' option is highlighted. Below the table, the 'Attach volume' dialog is open, showing the following details:

- Volume ID:** vol-0ce8111eca07d641c
- Availability Zone:** use1-az2 (us-east-1b)
- Instance:** i-0f8b91c2631ab263d (running)
- Device name:** xvdb


At the bottom of the dialog, there are 'Cancel' and 'Attach volume' buttons.

After searching for disk management you can see this app and you have to allocate the unallocated attached volume.

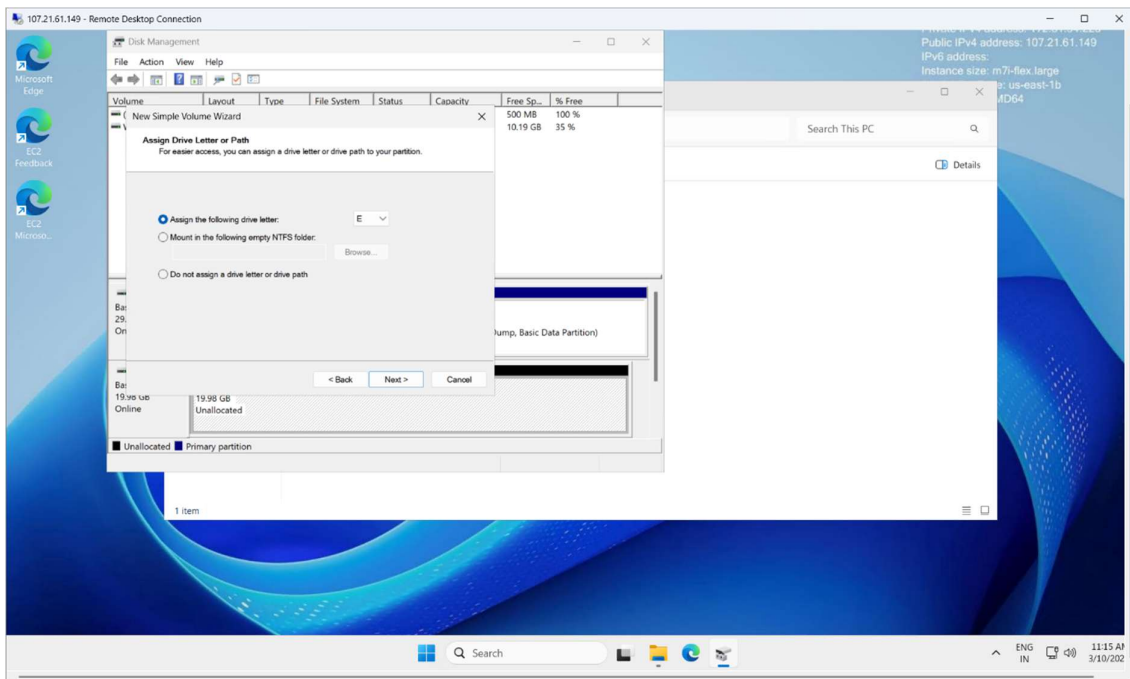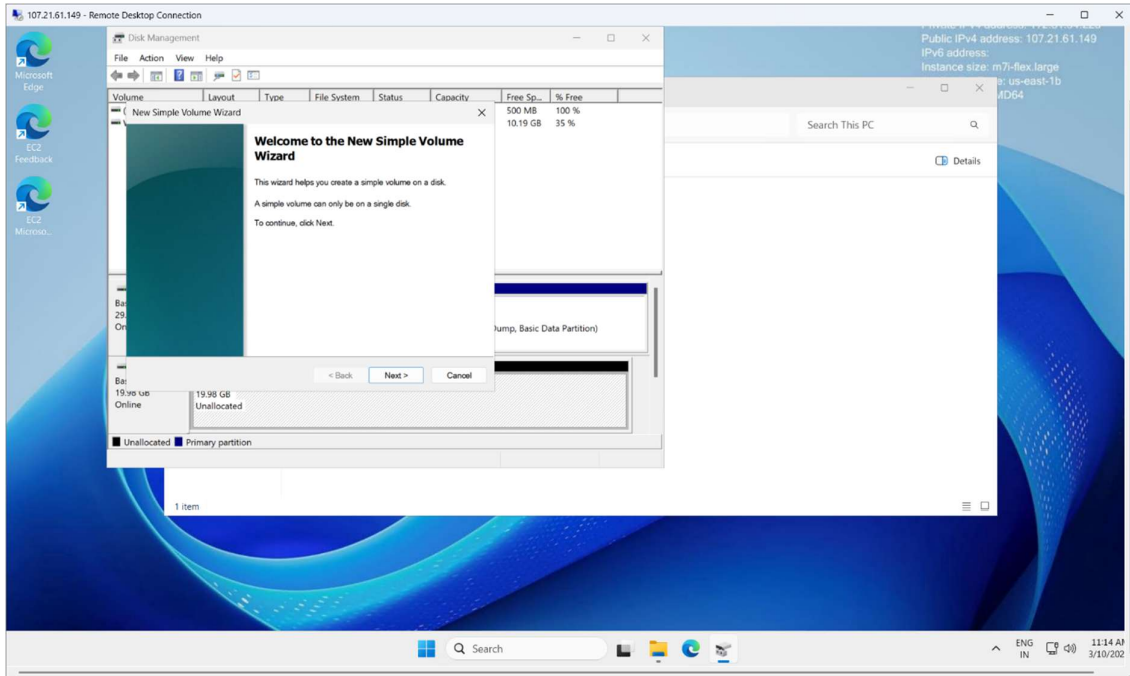


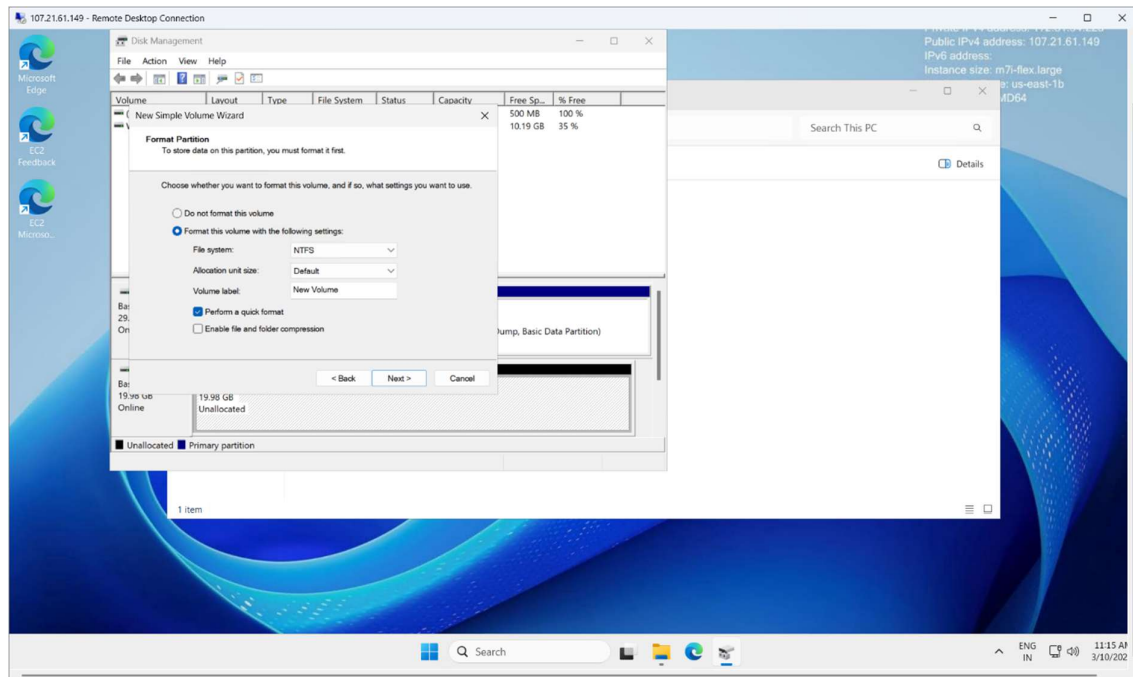

Then I have done all the procedure and the volume has been formatted and allocated.

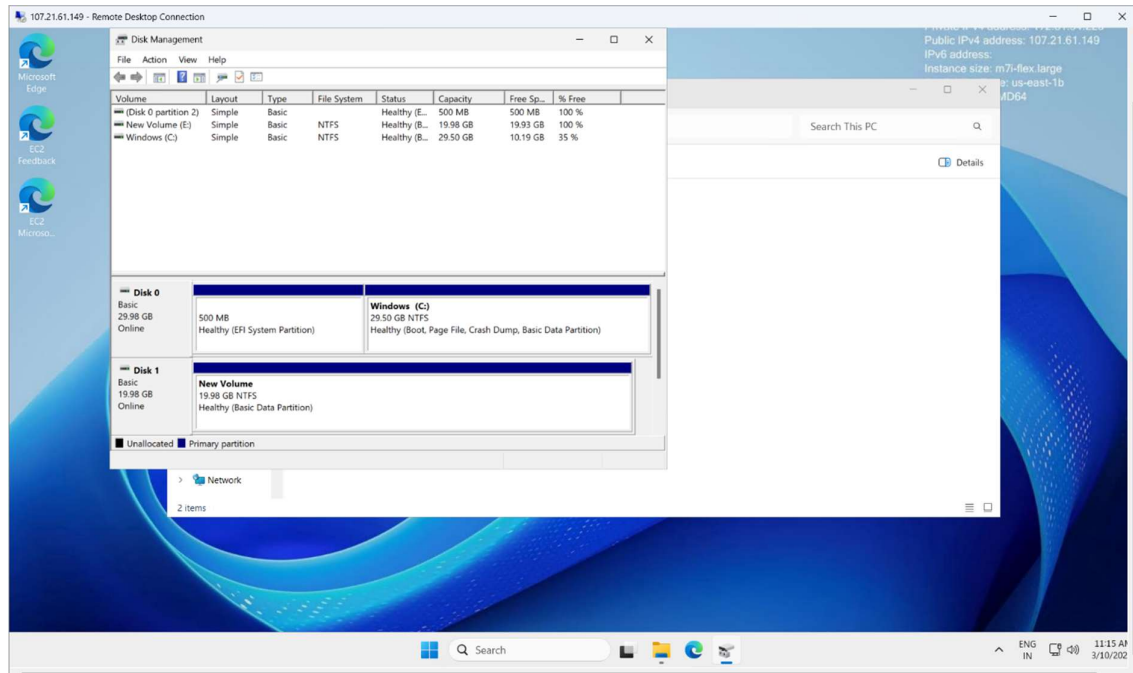

We can see the allocated disk.

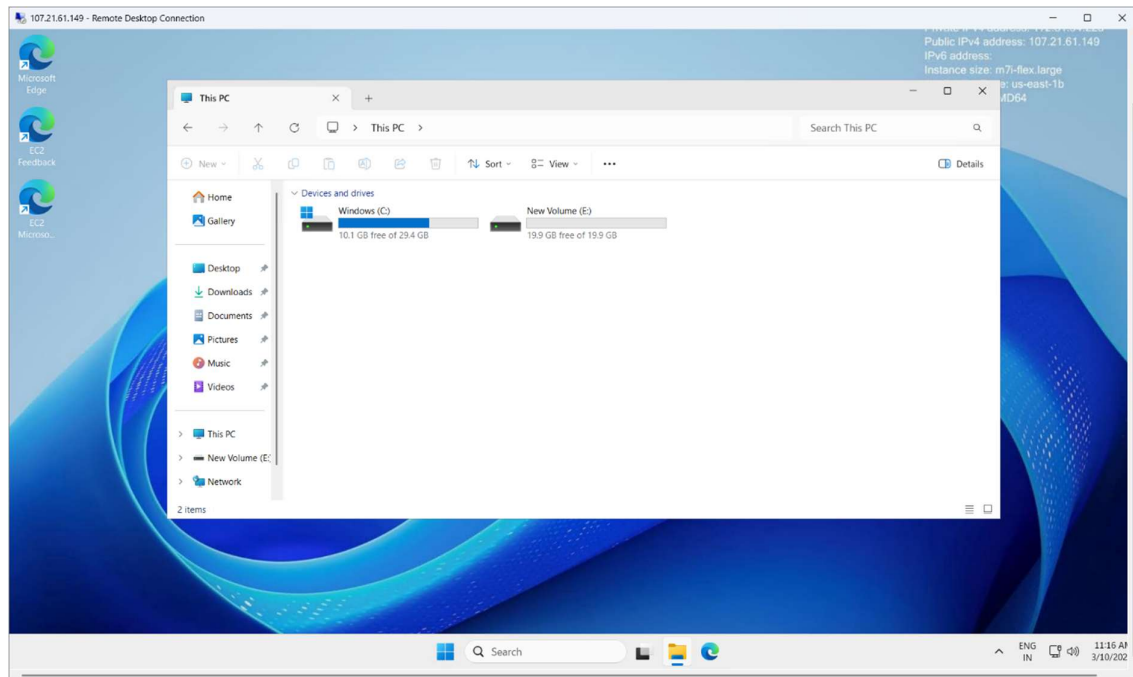

EBS Snapshot

An **EBS Snapshot** is a **backup of an EBS volume** stored in **Amazon S3**.

Key Points

- It is used to **backup data of an EBS volume**.
- Snapshots are **incremental** (only changes are saved after the first snapshot).
- Used for **data recovery**.
- You can **create a new EBS volume from a snapshot**.

Example Flow

1. EC2 instance has an **EBS volume**.
2. You create a **snapshot of that volume**.
3. Later you can restore it → **create a new EBS volume** → attach it to an instance.

I have selected the volume and creating one snapshot.

Volumes (1/2) Info

Last updated less than a minute ago

Recycle Bin Actions Create volume

Modify volume
Create snapshot
Create snapshot lifecycle policy
Delete volume
Attach volume
Detach volume
Force detach volume
Manage auto-enabled I/O
Copy volume - new
Manage tags
Resilience testing
Previously fault injection

Name	Volume ID	Type	Size	IOPS	Throughput
☒	vol-08d319529cfb23313	gp3	20 GiB	3000	125
☐	vol-06ba02cd29b4f912b	gp3	30 GiB	3000	125

Volume ID: vol-08d319529cfb23313

Details Status checks Monitoring Tags

Volume ID vol-08d319529cfb23313	Size 20 GiB	Type gp3	Status check Okay
AWS Compute Optimizer finding Opt-in to AWS Compute Optimizer for recommendations. Learn more	Volume state In-use	IOPS 3000	Throughput 125
Fast snapshot restored No	Availability Zone use1-az2 (us-east-1b)	Created Tue Mar 10 2026 16:41:15 GMT+0530 (India Standard Time)	Multi-Attach enabled No
Attached resources i-09856ea384bfbdbbf (windows-machine)	Outposts ARN -	Managed false	Operator -

Create snapshot Info

Create a point-in-time snapshot to back up the data on an Amazon EBS volume to Amazon S3.

Source volume

Volume ID: vol-08d319529cfb23313

Availability Zone: use1-az2 (us-east-1b)

Snapshot details

Description
Add a description for your snapshot.
mysnapshot
255 characters maximum.

Encryption
Not encrypted

Tags Info
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.
No tags associated with the resource.
Add new tag
You can add up to 50 tags.

Cancel Create snapshot

Then I have the volume back (i.e) snapshot's

Snapshots (1) Info

Last updated less than a minute ago

Recycle Bin Actions Create snapshot

Snapshot scope: Owned by me

Name	Snapshot ID	Full snapshot size	Volume size	Description	Storage tier	Snapshot status
☐	snap-01a376de1d3d1920a	54 MiB	20 GiB	mysnapshot	Standard	Completed

AMI (Amazon Machine Image)

An AMI is a complete template used to launch an EC2 instance.

It contains:

- OS (Linux / Windows)
- Application software
- Configuration
- Snapshots of attached volumes


Key Points

- Used to **launch new EC2 instances**.
- Contains **snapshots of EBS volumes**.
- Acts like a **golden template**.

Example Flow

1. Configure an EC2 instance.
2. Install software (Apache, Docker, etc.).
3. Create an **AMI from that instance**.
4. Launch **multiple instances using that AMI**.

For creation of the image we can use the pre-installed webserver and any other services are build to **AMI**. By clicking the create image button for the selected instance

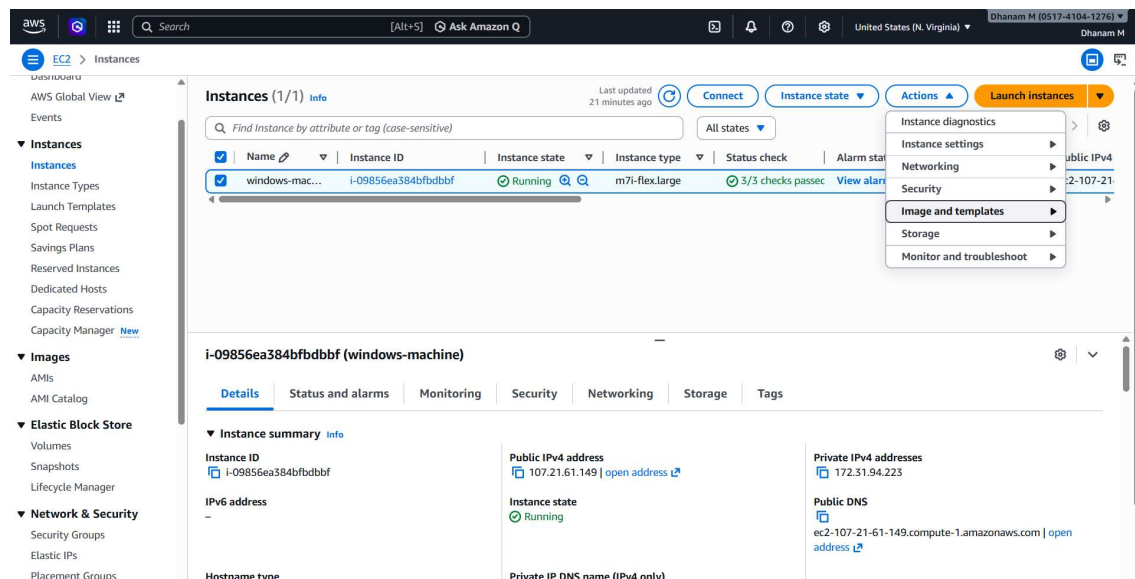

Then we have to name the MYAMI.

Image details

Instance ID
i-09856ea384bfdbbf (windows-machine)

Image name
myami
Maximum 127 characters. Can't be modified after creation.

Image description - optional
Image description
Maximum 255 characters

☒ Reboot instance
When selected, Amazon EC2 reboots the instance so that data is at rest when snapshots of the attached volumes are taken. This ensures data consistency.

Instance volumes

Storage type	Device	Snapshot	Size	Volume type	IOPS	Throughput	Delete on termination	Encrypted
EBS	/dev/...	Create new snapshot from...	30	EBS General Purpose SS...	3000		☒ Enable	☐ Enable
EBS	xvdb	Create new snapshot from...	20	EBS General Purpose SS...	3000	125	☐ Enable	☐ Enable

[Add volume](#)

During the image creation process, Amazon EC2 creates a snapshot of each of the above volumes.

When the created **MYAMI** is available we can use it for launching an instance.

aws

Search

[Alt+S]

Ask Amazon Q

United States (N. Virginia)

Dhanam M

0517-4104-1276

EC2 > AMIs

Launch Instance from AMI

Amazon Machine Images (AMIs) (1) Info

Recycle Bin

EC2 Image Builder

Actions

Owned by me

Find AMI by attribute or tag

☐	Name	AMI name	AMI ID	Source	Owner	Visibility
☐	myami	ami-027ab4c1055853198	051741041276/myami	051741041276	Private	

The created **MYAMI** is in the created by me section.

Launch an instance

Name
e.g. My Web Server

Application and OS Images (Amazon Machine Image)

Search our full catalog including 1000s of application and OS images

Owned by me | Shared with me

Amazon Machine Image (AMI)

myami
ami-027ab4c1055853198
2026-03-10T11:20:04.000Z
Virtualization: hvm
ENA enabled: true
Root device type: ebs
Boot mode: uefi

Description

Architecture: x86_64
AMI ID: ami-027ab4c1055853198

Summary

Number of instances: 1

Software Image (AMI): myami
ami-027ab4c1055853198

Virtual server type (instance type): t3.micro

Firewall (security group): New security group

Storage (volumes): 2 volume(s) - 50 GiB

[Launch instance](#)

