



Command Line

1. **clone** the repository onto your local machine using the command line

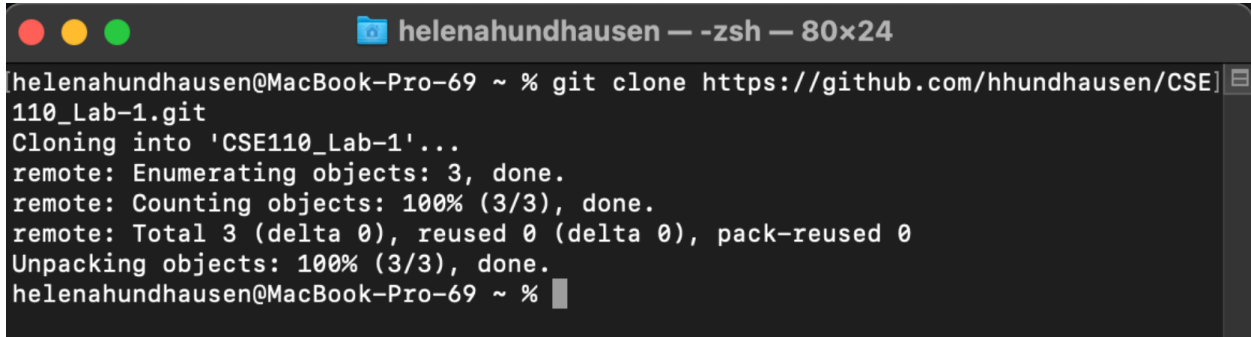


```
helenahundhausen@MacBook-Pro-69 ~ % git clone https://github.com/hhundhausen/CSE110_Lab-1.git
Cloning into 'CSE110_Lab-1'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Unpacking objects: 100% (3/3), done.
helenahundhausen@MacBook-Pro-69 ~ %
```


2. **cd** into the repo folder and create a new git **branch** called "add-read-me" (can be done either locally or through GitHub) and **checkout** that branch into your local repository.

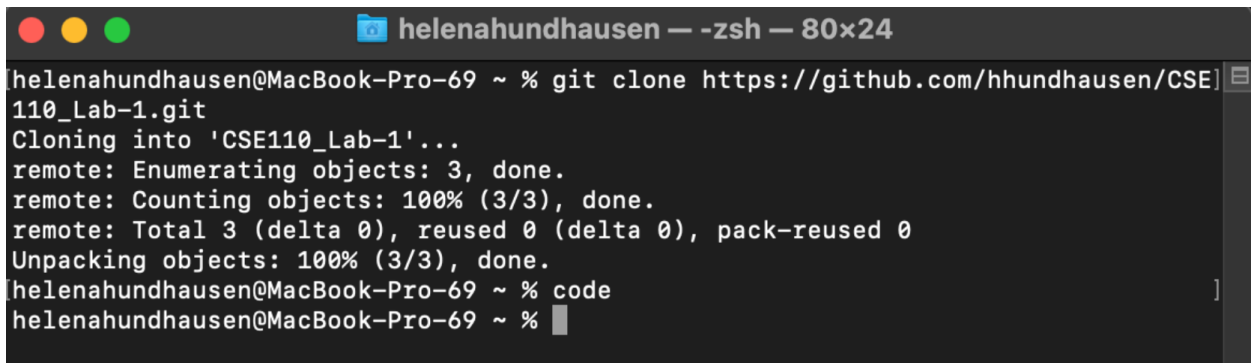

```
helenahundhausen@MacBook-Pro-69 ~ % git clone https://github.com/hhundhausen/CSE110_Lab-1.git
Cloning into 'CSE110_Lab-1'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Unpacking objects: 100% (3/3), done.
helenahundhausen@MacBook-Pro-69 ~ % code
helenahundhausen@MacBook-Pro-69 ~ %
```

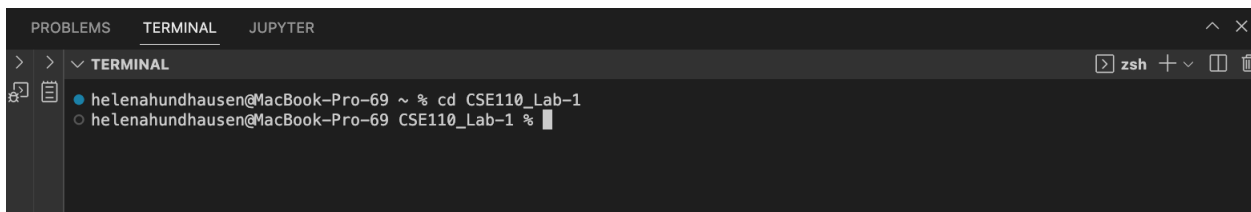


```
helenahundhausen@MacBook-Pro-69 ~ % cd CSE110_Lab-1
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 %
```

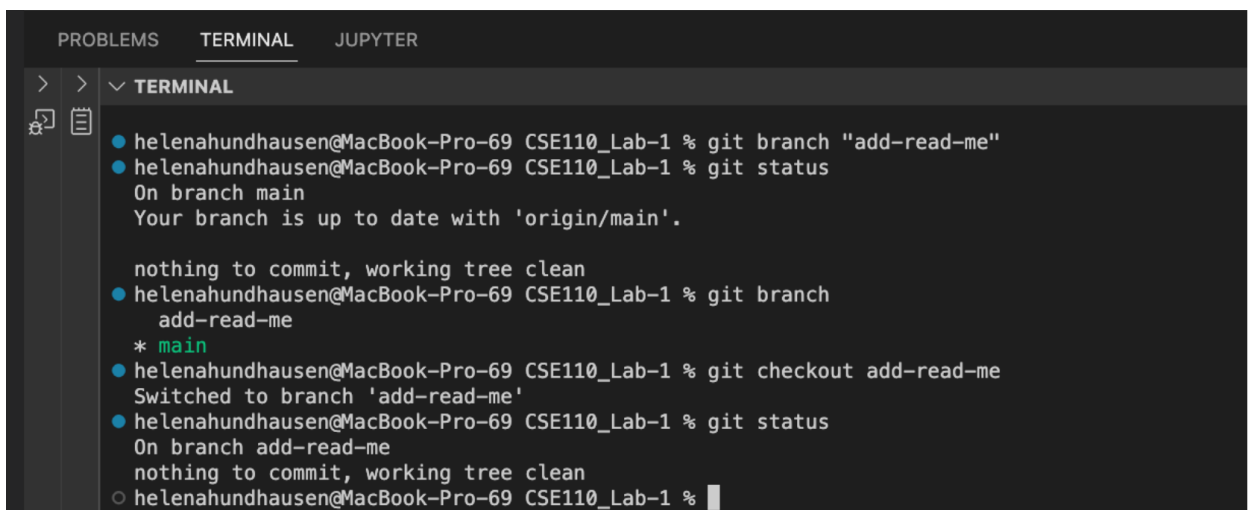


```
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 % git branch "add-read-me"
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 % git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 % git branch
add-read-me
* main
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 % git checkout add-read-me
Switched to branch 'add-read-me'
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 % git status
On branch add-read-me
nothing to commit, working tree clean
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 %
```


3. Add the text "<Your name>'s User Page" to the "README.md" file (e.g. "Powell's User Page"). This can be done using a separate text editor.

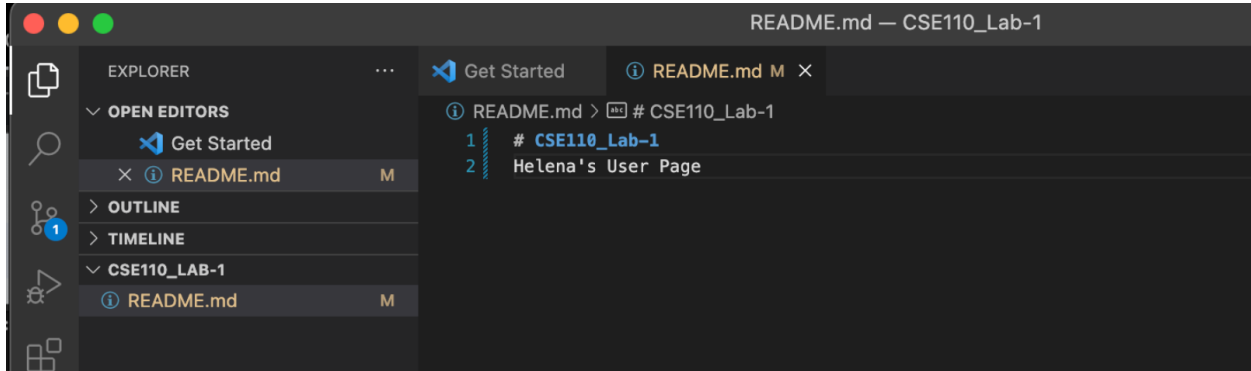

4. **add** the new file to git.

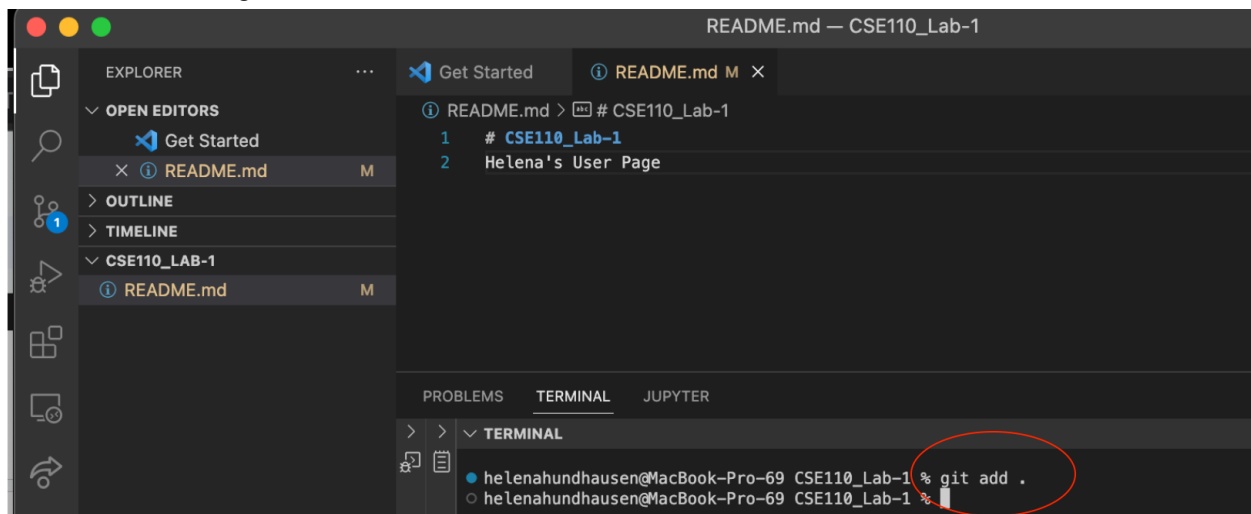

5. **commit** the files with the commit message "Update readme file".

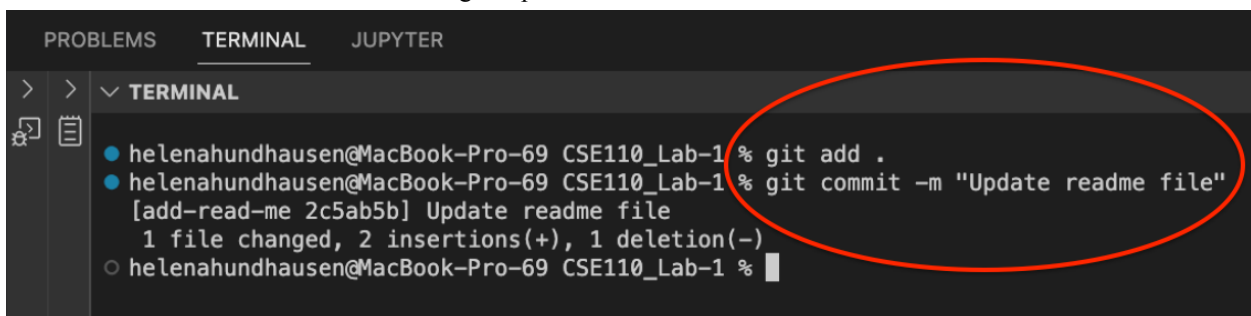

6. **push** the commit to the remote branch. (You may need to use the **set-upstream** flag if you created the branch locally).

```
helenahundhausen@MacBook-Pro-69 CSE110_Lab-1 % git push --set-upstream origin add-read-me
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Writing objects: 100% (3/3), 281 bytes | 281.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0)
remote:
remote: Create a pull request for 'add-read-me' on GitHub by visiting:
remote:   https://github.com/hhundhausen/CSE110_Lab-1/pull/new/add-read-me
remote:
To https://github.com/hhundhausen/CSE110_Lab-1.git
 * [new branch]      add-read-me -> add-read-me
Branch 'add-read-me' set up to track remote branch 'add-read-me' from 'origin'.
```