BACHELOR OF COMPUTER APPLICATIONS

SEMESTER 1

INTRODUCTION TO WEB PROGRAMMING

Unit 2

Advanced HTML Features

Table of Contents

SL No	Topic	Fig No / Table / Graph	SAQ / Activity	Page No
1	Introduction	-	-	3-4
	1.1 Learning Objectives	-	-	
2	Inserting texts	1, 2, 3, 4, 5, 6, 7, 8	-	5-10
3	Text alignment	9	-	11-12
4	Using images in pages	10	-	13-15
5	Hyperlinks – text and images	-	-	16-17
6	Bookmarks	11, 12	-	18-21
7	Background and colour controls	13, 14, 15, 16, 17	-	21-27
8	Summary	-	-	27
9	Questions	-	1	28-29
10	Answers	-	-	29

1. INTRODUCTION

HTML5 is the latest and most advanced iteration of the HTML markup language. It brings a host of innovative features that enhance both the development experience for web developers and the interactivity for users. Unlike a programming language, HTML5 is a markup language used to structure and present content on the World Wide Web. It represents a collaboration between the World Wide Web Consortium (W3C) and the Web Hypertext Application Technology Working Group (WHATWG).

HTML5 introduces numerous new elements and attributes, revolutionizing website development. Some notable features of HTML5 include:

1. Multimedia Integration: HTML5 enables the seamless embedding of video and audio files directly into web pages, eliminating the need for third-party plugins. This simplifies multimedia content delivery.
2. Canvas for Graphics: It introduces the `<canvas>` element, providing a versatile two-dimensional drawing surface that can be manipulated using JavaScript. This feature is particularly useful for creating interactive graphics and visualizations.
3. Enhanced Forms: HTML5 offers advanced form elements, such as date pickers, email input validation, and range sliders, which improve the user experience. It also supports client-side form validation.
4. Offline Capabilities: Websites built with HTML5 can offer offline browsing capabilities. This means users can access certain parts of a website even without an active internet connection, enhancing accessibility.
5. Improved Interactivity:HTML5 includes features that reduce the need for extensive JavaScript coding, making it easier to create interactive elements directly within the markup.
6. Semantic Elements: It introduces semantic elements like `<header>`, `<footer>`, and `<section>`, which enhance the structure and semantics of web documents, benefiting both search engines and assistive technologies.
7. WebSockets: HTML5 facilitates bidirectional communication in web applications, enabling real-time updates and interactions, which is a significant advancement in web technology.

Why HTML5?

HTML5 offers several compelling advantages:

1. Enhanced Semantic Markup: HTML5 introduces tags that make web content more meaningful, improving accessibility and SEO.
2. Cross-Browser Compatibility: HTML5 is widely supported across modern browsers, including Internet Explorer, which recognizes the `<!doctype html>` declaration.
3. Improved Usability and User Experience: Its technical enhancements and features empower developers to create more dynamic websites and applications, resulting in a better user experience.
4. Offline Browsing: HTML5's offline caching capabilities allow core website elements to load even without an internet connection, increasing accessibility.
5. Video and Audio Support:HTML5 eliminates the need for third-party plugins like Flash, making it easier to incorporate video and audio content using the `<video>` and `<audio>` tags.

In summary, HTML5 represents a significant step forward in web development, offering a range of advanced features that simplify development, improve usability, and enrich the overall user experience. Its widespread adoption and cross-browser compatibility make it a key technology for modern web development.

1.1 Learning Objectives

At the end of this topic, the students will be able to:

- *Define the purpose and significance of text alignment in web design.*
- *Summarize the key considerations when using images in web pages, including file formats and image optimization techniques.*
- *Create functional hyperlinks, both text-based and image-based, to connect web pages and external resources.*
- *Analyze the impact of image selection and placement on overall web page design and loading times.*
- *Synthesize cohesive web designs by using background and color controls in a way that aligns with branding and user experience goals.*

2. INSERTING TEXTS

Inserting text in HTML is fundamental to web development, as text forms the content of web pages. You can insert text using various HTML elements and tags. Here's a detailed explanation, along with syntax and examples:

2.1. Using Paragraphs (`<p>`): The most basic way of adding text to a web page is the paragraph element.

- The `<p>` element is used to define paragraphs of text.
- Syntax: `<p>Your text goes here.</p>`
- Example:

```
<p>This is a paragraph of text.</p>
```

The output would be like this

This is a paragraph of text.

Fig 2. 1

By default, every browser puts a bit of space above and below paragraph elements when they display them, which keeps each paragraph independent from the ones around it, just like the paragraphs you'd see printed in a book or magazine.

2.2 Using Headings (`<h1>` to `<h6>`): Heading elements are available in six default levels, ranging from <h1> to <h6, and you can consider them as a hierarchy of importance. When you use an <h1> tag in your web content, it typically signifies the most significant section heading, often found at the top of your page. Conversely, an <h2> denotes a slightly lower level of importance, and this pattern continues down the hierarchy.

In addition to their structural significance, heading elements also come with default styling by web browsers that visually reinforce their order of importance. For instance, the <h1> element is styled as the largest heading, while the <h2> is rendered slightly smaller, and so forth.

- Headings are used to define headings and subheadings on a web page.
- Syntax: `<h1>Your heading</h1>`
- Example:

```
<h1>This is the biggest one</h1>
<h2>This one is a little smaller</h2>
<h3>This one is even smaller</h3>
<h4>They keep getting smaller</h4>
<h5>This one isn't even that big</h5>
<h6>Pretty small now, actually</h6>
```

The output would be like this

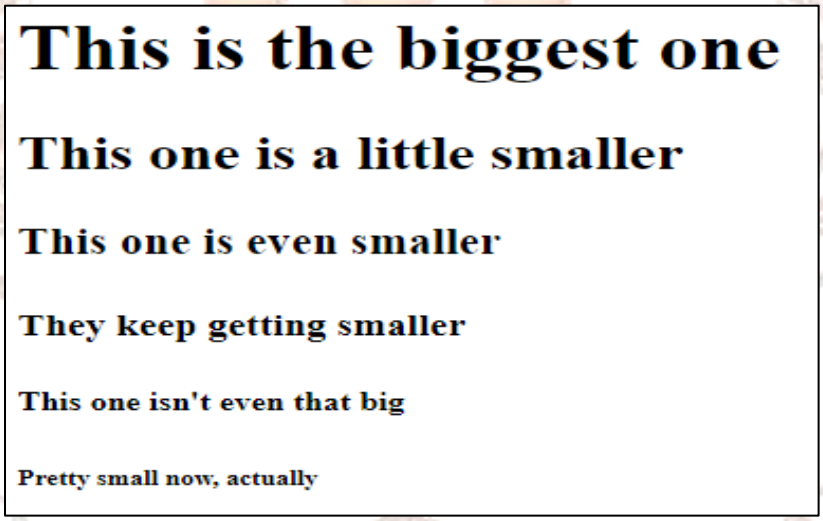

Fig 2. 2

2.3 Using Line Breaks (`<br>`)

- The `<br>` element is used to insert a line break within text.
- Syntax: `<br>`
- Example:

```
This is some text. <br>Here's a new line of text
```

The output would be like this

This is some text.
Here's a new line of text.

Fig 2. 3

2.4 Using Preformatted Text (`<pre>`):

- The `<pre>` element preserves whitespace and line breaks as they appear in the HTML code.
- Syntax: `<pre>Your preformatted text</pre>`
- Example:

```
<pre>  This is preformatted text.  </pre>
```

The output would be

```
This is preformatted text.
```

Fig 2. 4

2.5. Using Blockquotes (`<blockquote>`):

- `<blockquote>` is used to insert quotations or cited text.
- Syntax: `<blockquote>Your quoted text</blockquote>`
- Example:

```
<blockquote>
    To be or not to be, that is the question. - Shakespeare
  </blockquote>
```

The output would be

"To be or not to be, that is the question." - Shakespeare

Fig 2. 5

2.6. Using Lists (Ordered `<ol>` and Unordered `<ul>` Lists):

- Lists are used to create ordered or unordered lists.
- Syntax (Ordered List):

```
<ol>
  <li>Item 1</li>
  <li>Item 2</li>
</ol>
```

- Syntax (Unordered List):

```
  <ul>
  <li>Item 1</li>
  <li>Item 2</li>
</ul>
```

- Example:

```
<ol>

    <li>First item</li>

    <li>Second item</li>

  </ol>

     <ul>

    <li>Apples</li>
```

The output would be

1. First item
2. Second item

- Apples
- Bananas

Fig 2. 6

2.7. Using Anchors (`<a>` for Hyperlinks):

- The `<a>` element is used to create hyperlinks.
- Syntax: `<a href="URL">Link Text</a>`
- Example:

```
<a href="https://www.example.com">Visit Example.com</a>
```

The output would be

Visit Example.com

Fig 2. 7

2.8. Using Comments (`<!-- -->`):

- Comments are not visible on the web page but are useful for adding notes to the HTML code.
- Syntax: `<!-- Your comment here -->`
- Example:

```
<!-- This is a comment -->
```

2.9. Using Text Formatting (`<em>`, `<strong>`, `<u>`, `<s>`):

- These elements are used to format text for emphasis, strong importance, underlining, and strikethrough.
- Syntax: `<em>Italic</em>`, `<strong>Bold</strong>`, `<u>Underline</u>`, `<s>Strikethrough</s>`
- Example:

```
<p><em>This is italic text</em></p>
<p><strong>This is bold text</strong></p>
<p><u>This is underlined text</u></p>
<p><s>This is strikethrough text</s></p>
```

The output would be like this

This is italic text

This is bold text

This is underlined text

~~This is strikethrough text~~

Fig 2. 8

These examples cover the basic methods for inserting text in HTML. HTML provides many more text-related elements and attributes for advanced formatting and styling, but these fundamental elements should give you a solid starting point for creating textual content on a web page.

3. TEXT ALIGNMENT

Text alignment in HTML is achieved using the **align** attribute for certain HTML elements. However, it's important to note that HTML alignment attributes are considered deprecated in modern HTML standards (HTML5 and beyond). The **align** attribute was historically used in HTML to control the alignment of content within specific HTML elements such as paragraphs (<**p**>), headings (<**h1**>, <**h2**>, etc.), divs (<**div**>), and table cells (<**td**>) among others. It allowed developers to specify how text or other content should be aligned within those elements. The attribute could take values like "left," "center," "right," or "justify," depending on the desired alignment.

Using the align Attribute:

The **align** attribute can be applied to elements like <**p**>, <**h1**>, <**h2**>, <**h3**>, <**h4**>, <**h5**>, <**h6**>, <**div**>, and <**td**> (for table cells) to control text alignment. The **align** attribute accepts the following values:

- **left:** Aligns text to the left.
- **centre:** Centers text horizontally.
- **right:** Aligns text to the right.
- **justify:** Justifies text, causing it to align to both the left and right edges, adding space between words as needed.

Syntax for the align Attribute:

```
<element align="value">Your text here</element>
```

Examples:

Left Alignment:

```
<p align="left">This is left-aligned text.</p>
```

Center Alignment:

```
<h1 align="center">This is centered text.</h1>
```

Right Alignment:

```
<div align="right">This is right-aligned text.</div>
```

Justified Text:

```
<p align="justify">This is justified text. It will spread evenly between the left and right edges. </p>
```

The output will be given as:

This is left-aligned text.

This is centered text.

This is right-aligned text.

This is justified text. It will spread evenly between the left and right edges.

Fig 2. 9

Please note that while you can use the **align** attribute for text alignment, it is considered outdated, and it's strongly recommended to use CSS for this purpose in modern web development for better control and compatibility with modern HTML standard

4. USING IMAGES IN PAGES

Using images in HTML is essential for creating visually appealing and informative web pages. To incorporate images into your HTML pages, you can use the <**img**> (image) element. Here's a detailed explanation of how to use images in HTML, along with examples:

4.1. The <img> Element:

The <**img**> element is a self-closing tag used to display images on a web page. It doesn't have a closing tag because it's an empty element that doesn't contain any text or other HTML elements. It uses the src attribute to specify the image file's source (URL) and the alt attribute to provide alternative text for accessibility.

Syntax for <img> Element:

```
<img src="image-source-url" alt="alternative-text">
```

Attributes:

- **src** (required): Specifies the URL or file path of the image.
- **alt** (required): Provides alternative text for the image, which is displayed if the image cannot be loaded or for accessibility purposes.
- **width** (optional): Specifies the width of the image in pixels.
- **height** (optional): Specifies the height of the image in pixels.

Examples:

Basic Image Insertion:

To insert an image, you need to provide the src attribute with the image file's URL and the **alt** attribute with a brief description of the image. Here's an example:

```
<img src="example.jpg" alt="An example image">
```

Image with Specified Dimensions:

You can also set the width and height attributes to control the dimensions of the displayed image. It's recommended to maintain the image's aspect ratio to avoid distortion. For example:

```
<img src="example.jpg" alt="An example image" width="300" height="200">
```

Relative Image Paths:

If the image is located in the same directory as your HTML file or within a subdirectory, you can use a relative path to specify the image source:

<img src="images/example.jpg" alt="An example image">

Image Links:

You can also turn images into clickable links by wrapping the <**img**> element with an <**a**> (anchor) element:

<a href="https://example.com"> <img src="example.jpg" alt="Link to Example.com"> </a>

Responsive Images:

To make images responsive and adapt to different screen sizes, you can use the **max-width** property in CSS:

<style> img { max-width: 100%; height: auto; } </style>

This CSS code ensures that the image's width does not exceed the width of its container, preserving its aspect ratio.

Image Formats:

HTML supports various image formats such as JPEG, PNG, GIF, and SVG. Ensure that the image format you choose is appropriate for your content and use case.

Image Accessibility:

Remember to provide meaningful and descriptive **alt** text for your images to improve accessibility for users who rely on screen readers or encounter image loading issues.

By following these guidelines and examples, you can effectively use images in your HTML pages to enhance the visual appeal and content of your website.

Example :

```
<!DOCTYPE html>

<html>
<body>

<h2>Alternative text</h2>

<p>The alt attribute should reflect the image content, so users who cannot see the
image get an understanding of what the image contains:</p>
```

The output will be given as

Alternative text

The alt attribute should reflect the image content, so users who cannot see the image get an understanding of what the image contains:

Fig 2. 10

Note: When a web page loads, it is the browser, at that moment, that gets the image from a web server and inserts it into the page. Therefore, make sure that the image actually stays in the same spot in relation to the web page, otherwise your visitors will get a broken link icon. The broken link icon and the alt text are shown if the browser cannot find the image.

5. HYPERLINKS – TEXT AND IMAGES

Hyperlinks are essential elements in web development, allowing you to create connections between web pages, resources, or external content. Hyperlinks can be applied to both text and images to navigate users to other web pages or destinations. In this detailed explanation, I'll cover how to create hyperlinks using text and images in HTML. Hyperlinks are essential elements in web development, allowing you to create connections between web pages, resources, or external content. Hyperlinks can be applied to both text and images to navigate users to other web pages or destinations. In this detailed explanation, I'll cover how to create hyperlinks using text and images in HTML.

5.1. Creating Hyperlinks with Text:

To create hyperlinks using text, you can use the `<a>` (anchor) element. Here's a step-by-step explanation:

Step 1: Open the `<a>` element

<a href="destination-url">Link Text</a>

- `<a>`: This is the anchor element used to create a hyperlink.
- `href`: The `href` attribute specifies the destination URL, where the link will take the user when clicked.
- `"destination-url"`: Replace this with the actual URL of the destination web page or resource.
- `"Link Text"`: This is the text that users will see as the clickable link.

Step 2: Complete the anchor element: Your anchor element should look like this:

<a href="https://www.example.com">Visit Example.com</a>

This code will display the text "Visit Example.com," which users can click to navigate to the "https://www.example.com" web page.

5.2 Creating Hyperlinks with Images

We can add image as a link and other **HTML** elements as a link. A link is a connection from one Web page to another web page. To create hyperlinks using images, you combine the `<a>` element with the `<img>` element. Here's how it's done:

Step 1: Wrap the `<img>` element with the `<a>` element:

```
<a href="destination-url">
  <img src="image-url" alt="Image Description">
</a>
```

- `<a>`: As explained earlier, this is the anchor element for creating a hyperlink.
- `href`: The `href` attribute specifies the destination URL, just like with text links.
- `<img>`: This is the image element.
- `src`: The `src` attribute specifies the image URL.
- `alt`: The `alt` attribute provides alternative text for the image, which is important for accessibility and for users with images disabled.

Step 2: Close the anchor element: Your anchor element with the image should look like this:

```
<a href="https://www.example.com">
  <img src="image.jpg" alt="An example image">
</a>
```

This code will display the image and make it clickable, so when users click the image, they will be directed to the "https://www.example.com" web page.

- Use meaningful `alt` text for images to ensure accessibility and provide context if the image doesn't load.

Note: - You can use relative or absolute URLs for the `href` attribute, depending on whether you want to link to a page on your website or an external website.

- Adding the `target="_blank"` attribute to the `<a>` element opens the linked page in a new browser tab or window. For example:

```
<a href="https://www.example.com" target="_blank">Visit Example.com</a>
```

By following these steps, you can create both text and image hyperlinks in your HTML documents, enhancing navigation and user experience on the website.

6. BOOKMARKS

HTML bookmarks, also known as anchor bookmarks or named anchors, are used to create specific points within a web page that users can jump to quickly by clicking on a link. Bookmarks are especially useful for long web pages or when you want to provide easy navigation to specific sections of content. In HTML, you can create bookmarks using the `<a>` (anchor) element with the `name` attribute or the `id` attribute on target elements.

Here's a detailed explanation of HTML bookmarks with an example:

6.1. Creating Bookmarks with the `name` Attribute

You can create a bookmark within a web page by assigning a `name` attribute to an `<a>` element. This bookmark will have a unique name or identifier within the page. When users click on a link that points to this bookmark, the browser will scroll to the location of the bookmarked element.

Syntax:

<a name="bookmark-name"></a>

Example:

```
<body>
  <h1>Table of Contents</h1>
  <ul>
    <li><a href="#section1">Section 1</a></li>
    <li><a href="#section2">Section 2</a></li>
    <li><a href="#section3">Section 3</a></li>
  </ul>

  <h2><a name="section1"></a>Section 1</h2>
  <p>This is the content of Section 1.</p>
  <h2><a name="section2"></a>Section 2</h2>
  <p>This is the content of Section 2.</p>
  <h2><a name="section3"></a>Section 3</h2>
  <p>This is the content of Section 3.</p>
</body>
</html>
```

The output will be given as

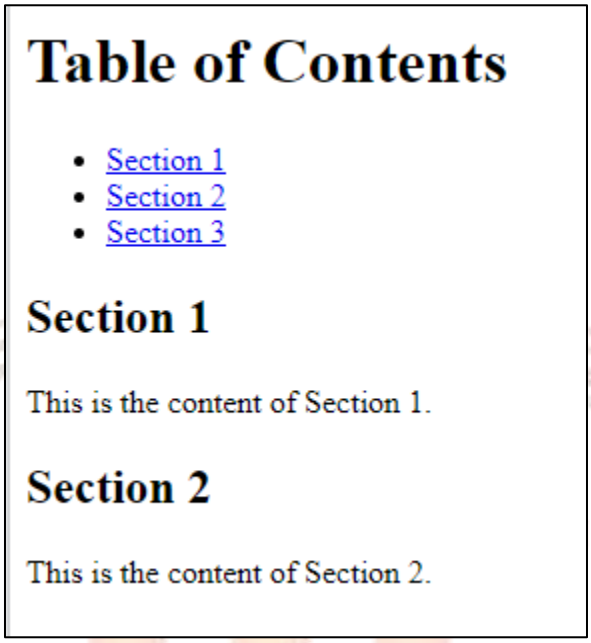

Fig 2. 11

In this example:

- We create a simple table of contents with links to three sections.
- Each section has an `<h2>` heading with an `<a name="sectionX"></a>` element to define the bookmark, where "X" is the section number.
- The links in the table of contents use `href` attributes with corresponding `#sectionX` values to link to the bookmarked sections.
- When users click on a table of contents link, the browser scrolls to the respective section.

6.2. Creating Bookmarks with the `id` Attribute

You can also create bookmarks using the `id` attribute on target elements, such as headings, divs, or any other HTML element.

Syntax:

```
<div id="bookmark-name"></div>
```

Example:

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Bookmarks Example</title>
</head>
<body>
  <h1>Table of Contents</h1>
  <ul>
    <li><a href="#section1">Section 1</a></li>
    <li><a href="#section2">Section 2</a></li>
    <li><a href="#section3">Section 3</a></li>
  </ul>

  <h2 id="section1">Section 1</h2>
  <p>This is the content of Section 1.</p>
  <h2 id="section2">Section 2</h2>
  <p>This is the content of Section 2.</p>
  <h2 id="section3">Section 3</h2>
  <p>This is the content of Section 3.</p>
</body>
</html>
```

The output will be given as

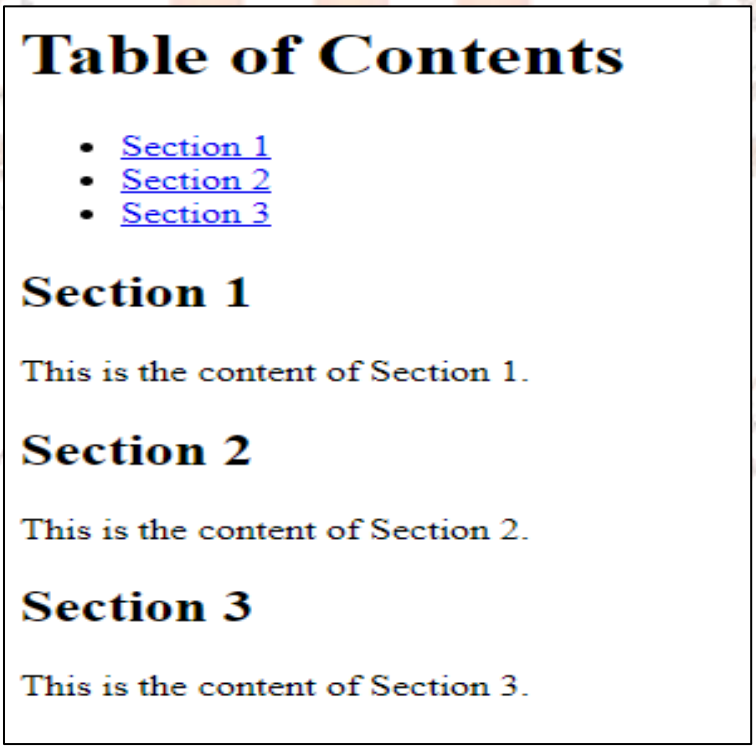

Fig 2. 12

In this example:

- We use the `id` attribute on the `<h2>` headings to define the bookmarks for each section.
- The links in the table of contents still use `href` attributes with corresponding `#sectionX` values to link to the bookmarked sections.
- Clicking on the table of contents links scrolls the browser to the respective sections, just like in the previous example.

These HTML bookmarks enhance the user experience by providing quick navigation to specific sections within a web page. You can use them to create more user-friendly and easily navigable long web pages or to create a table of contents for your content.

7. BACKGROUND AND COLOUR CONTROLS

Setting the background color of a web page or an element within it is a crucial aspect of web design, as it allows for the creation of distinctive visual layouts.

In HTML, to define the background color, you use the style attribute and the CSS property background-color within the <body> tag of the HTML document. HTML5 no longer supports the deprecated bgcolor attribute in the <body> tag, so the preferred method is to apply background color using CSS.

If you need to change the background color later on, you can simply override the existing background-color property with a different one in your CSS styles.

In summary, the use of the background-color property via the style attribute in HTML is essential for customizing the visual appearance of web pages or specific elements. HTML5 promotes this approach over deprecated attributes like bgcolor to ensure modern and standardized web design practices.

HTML provides you following two good ways to decorate your webpage background.

- HTML Background with Colours
- HTML Background with Images

7.1. Background with Colour

You can set the background color of an HTML element using the `background-color` property in CSS. This property specifies the background color of an element, such as a `<div>`, `<body>`, or any other HTML element.

Syntax

```
<body style="background-color:aquamarine;">
```

Example

Following is the example program to set background color in HTML.

```
<!DOCTYPE html>

<html>

<body style="background-color:
aquamarine;">

  <h1>HTML Articles</h1>

</body>
```

The output will be given as :

Fig 2. 13

We can change the background color by overriding the property with the other color.

Example

Following is the example program to set background color in HTML.

```
<!DOCTYPE html>
<html>
<body style="background-color: khaki;">
  <h1>HTML Articles</h1>
</body>
</html>
```

The output will be given as :

Fig 2. 14

We can specify the background color with RGB value. RGB value indicates its red, green, and blue color intensity. Each intensity value is on a scale of 0 to 255, or in hexadecimal from 00 to FF. Following is the example program to set background color with RGB value

```
<!DOCTYPE html>
<html>
<head>
  <style>
    body {
      background-color: rgb(20,30, 1);
    }
  </style>
  <h1>HTML Articles</h1>
</head>
<body>
</body>
</html>
```

The out put will be given as

Fig 2. 15

7.2. Background with Image

The background attribute is an option in HTML that can be used to control the background of an HTML element, such as the page body or table backgrounds. It allows you to specify an image to be used as the background for your HTML page or table.

However, it's crucial to note that the background attribute has been deprecated in HTML5, and it's strongly discouraged from use. Instead, modern web development practices recommend using Cascading Style Sheets (CSS) for setting background properties.

Here is the syntax for using the background attribute with any HTML tag:
<tagname background = "Image URL"...>

The most frequently used image formats are JPEG, GIF and PNG images.

Example

Here are the examples to set background images of a table.

```
<!DOCTYPE html>
<html>

  <head>
    <title>HTML Background Images</title>
  </head>

  <body>
    <!-- Set table background -->
    <table background = "/images/html.gif" width = "100%"
height = "100">
      <tr><td>
        This background is filled up with HTML image.
      </td></tr>
    </table>
  </body>
</html>
```

The output will be given as :

Fig 2. 16

7.3 Patterned and Transparent Background

Patterned and transparent backgrounds are commonly used in web design to enhance the visual appeal of websites. This can be accomplished by utilizing patterned images or transparent images as backgrounds. For optimal performance and faster loading times, it is recommended to create patterns or transparent GIF or PNG images with the smallest possible dimensions, even as small as 1x1 pixel. Example: Here are some illustrations of how to set a background pattern for a table element:

```
!DOCTYPE html>
<html>
  <head>
    <title>HTML Background Images</title>
  </head>
          <body>
    <!-- Set a table background using pattern -->
    <table background = "/images/pattern1.gif" width = "100%" height = "100">
      <tr>
        <td>
          This background is filled up with a pattern image.
        </td>
      </tr>
    </table>
    <!-- Another example on table background using pattern -->
    <table background = "/images/pattern2.gif" width = "100%" height = "100">
      <tr>
        <td>
          This background is filled up with a pattern image.
        </td>
      </tr>
    </table>
  </body>
  </html>
```

The output will be given as

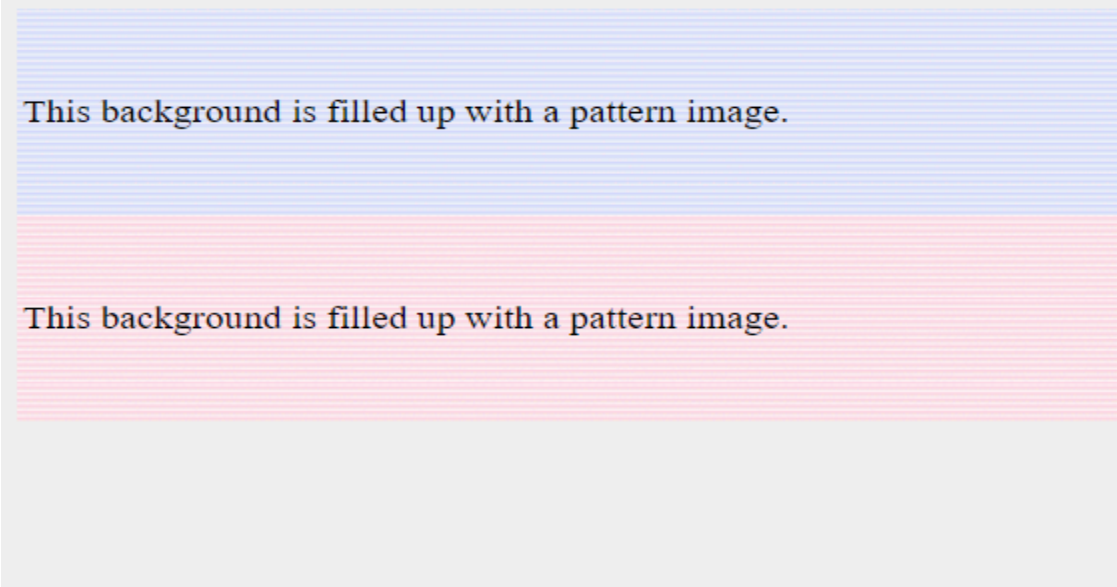

Fig 2. 17

In summary, patterned and transparent backgrounds are effective design elements in web development. To optimize website performance, it's advised to create these background images with minimal dimensions, and you can apply them to HTML elements like tables using CSS styles.

8. SUMMARY

In this comprehensive HTML chapter, we explore the fundamental building blocks of web content creation. Beginning with 'Inserting Texts' , we learn how to structure content using HTML tags, including headings, paragraphs, and inline text formatting elements. 'Text Alignment' introduces techniques for precisely positioning text within elements, enhancing visual appeal. 'Using Images in Pages' unveils the power of images in conveying information, covering image insertion, dimensions, and responsiveness. 'Hyperlinks - Text and Images' empowers us to create dynamic web navigation, integrating both text and image hyperlinks. 'Bookmarks' provide efficient in-page navigation through anchor bookmarks, and finally, 'Background and Colour Controls' showcase methods for controlling page and element backgrounds, emphasizing modern CSS practices for layout and design. This chapter equips us with essential HTML skills for creating structured, visually appealing, and interactive web content.

9. QUESTIONS

Self-Assessment Questions:

SELF-ASSESSMENT QUESTIONS – 1

1. What HTML element is used to define paragraphs of text?
2. Which HTML element is used to create hyperlinks?
3. Which HTML attribute was historically used for text alignment but is now considered deprecated in modern HTML standards?
4. In HTML, what value would you use with the align attribute to center text horizontally?
5. Which HTML element is used to display images on a web page?
6. What attribute in the <img> element specifies the image file's source (URL)?
7. What HTML element is used to create hyperlinks in both text and images?
8. Which HTML attribute specifies the destination URL for a hyperlink?
9. What CSS property is used to set the background color of an HTML element?
10. Which HTML attribute for setting background properties is deprecated in HTML5?
11. What HTML attribute is used to create bookmarks within a web page using the <a> element?
12. What is the purpose of using HTML bookmarks within a web page?

Terminal Questions

13. Explain the difference between the and elements in HTML and provide an example of each.
14. Why is it recommended to avoid using the align attribute for text alignment in modern web development, and what is the preferred alternative?
15. Why is it important to provide meaningful and descriptive alternative text (alt attribute) for images in HTML, and how does it contribute to web accessibility?
16. Explain the significance of providing meaningful alternative text (alt attribute) for images used as hyperlinks in HTML, and how does it contribute to web accessibility?

17. Explain the significance of using CSS for background control in modern web development compared to using deprecated HTML attributes like bgcolor and background. Provide reasons and benefits of using CSS for background customization.
18. Explain the difference between creating HTML bookmarks with the name attribute and the id attribute. Provide examples of when each approach might be preferred.

10. ANSWERS

Self-Assessment Questions

1. <p>
2. <a>
3. Align
4. Center
5. <img>
6. src
7. <a>(anchor)
8. Href
9. Background-color
10. Background
11. Name
12. Navigation

Terminal questions

13. Refer section 2.3
14. Refer section 2.4
15. Refer section 2.5
16. Refer section 2.6
17. Refer section 2.8
18. Refer section 2.7