

RESEARCH ARTICLE

A demonstration of the \LaTeX class file for Statistics in Medicine with Rmarkdown

H. van de Beek^{*1,1}

¹Methods and Statistics, Utrecht University,
Utrecht, the Netherlands

²Julius Center for Health Sciences and
Primary Care, UMC Utrecht, Utrecht, the
Netherlands

Correspondence

*Corresponding author, Email:
h.vandebeek@uu.nl

-

KEYWORDS:

Predictive modelling; Model selection;

1 | THE ARTICLE HEADER INFORMATION

YAML header:

output:

```
articles::sim_article:  
  keep_tex: TRUE
```

Configure the YAML header including the following elements:

- title: Title
- author: List of author(s) containing name and num
- address: List containing num and org for defining author affiliations
- presentaddress: Not sure what they mean with this
- corres: Author and address for correspondence
- authormark: Short author list for header
- received, revised, accepted: dates of submission, revision, and acceptance of the manuscript
- abstract: Limited to 250 words
- keywords: Up to 6 keywords
- bibliography: BibTeX .bib file
- classoption: options of the WileyNJD-v2 class
- longtable: set to true to include the longtable package, used by default from pandoc to convert markdown to \LaTeX code

1.1 | Remarks

1. In authormark use *et al.* if there are three or more authors.
2. Note the use of num to link names and addresses.
3. For submitting a double-spaced manuscript, add `doublespace` as an option to a `classoption` line in the YAML header:
`classoption: doublespace.`
4. Keywords are separated by semicolons.

2 | THE BODY OF THE ARTICLE

2.1 | Mathematics

Use mathematics in Rmarkdown as usual.

2.2 | Figures and Tables

Figures are supported from R code:

```
x = rnorm(10)
y = rnorm(10)
plot(x, y)
```

...and can be referenced (Figure 1) by including the `\\label{}` tag in the `fig.cap` attribute of the R chunk: `fig.cap = "Fancy Caption\\label{fig:plot}"`. It is a quirky hack at the moment, see [here](#).

Analogously, use Rmarkdown to produce tables as usual:

```
if (!require("xtable")) install.packages("xtable")

## Loading required package: xtable

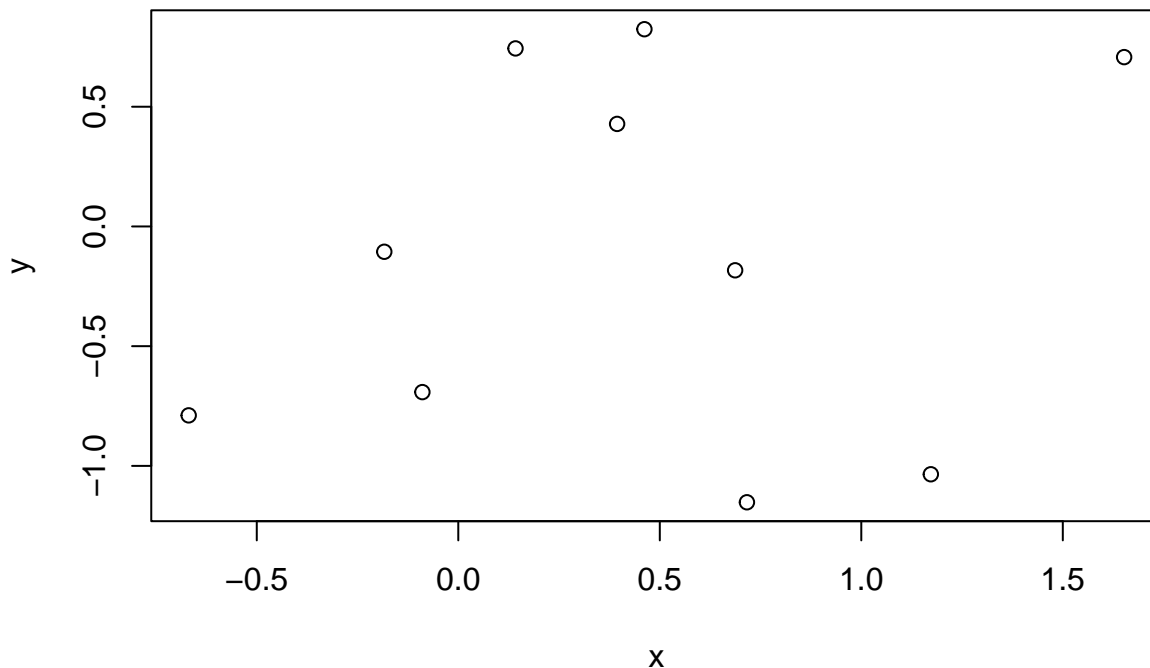
xt <- xtable(head(cars), caption = "A table", label = "tab:table")
print(xt, comment = FALSE)
```

	speed	dist
1	4.00	2.00
2	4.00	10.00
3	7.00	4.00
4	7.00	22.00
5	8.00	16.00
6	9.00	10.00

TABLE 1 A table

Referenced via 1. You can also use the YAML option `header-includes` to includes custom \LaTeX packages for tables (keep in mind that pandoc uses `longtables` by default, and it is hardcoded; some things may require including the package `longtable`). E.g., using `ctable`:

```
header-includes:
- \usepackage{ctable}
```

**FIGURE 1** Fancy Caption

Then, just write straight-up \LaTeX code and reference is as usual (`\ref{tab:ctable}`):

```
\ctable[cap = {Short caption},
  caption = {A long, long, long, long, long caption for this table.},
  label={tab:ctable},]
{cc}
{
  \tnote[ $\ast$ ]{Footnote 1}
  \tnote[ $\dagger$ ]{Other footnote}
  \tnote[b]{Mistakes are possible.}
}{
\FL
COL 1\tmark[a] & COL 2\tmark[ $\ast$ ]
\ML
6.92\tmark[ $\dagger$ ] & 0.09781 \\\
6.93\tmark[ $\dagger$ ] & 0.09901 \\\
97 & 2000
\LL
}
```

It is also possible to set the YAML option `longtable: true` and use markdown tables (or the `knitr::kable` function): `knitr::kable(head(cars))` produces the same table as the `xtable` example presented before.

2.3 | Cross-referencing

The use of the Rmarkdown equivalent of the \LaTeX cross-reference system for figures, tables, equations, etc., is encouraged (using `[@<name>]`, equivalent of `\ref{<name>}` and `\label{<name>}`). That works well for citations in Rmarkdown, not so well for figures and tables. In that case, it is possible to revert to standard \LaTeX syntax.

2.4 | Double Spacing

If you need to double space your document for submission please use the `doubleSPACE` option in the header.

3 | BIBLIOGRAPHY

Link a `.bib` document via the YAML header, and bibliography will be printed at the very end (as usual). The default bibliography style is provided by Wiley as in `WileyNJD-AMA.bst`, do not delete that file.

Use the Rmarkdown equivalent of the \LaTeX citation system using `[@<name>]`. Example:^{1,2,3}.

To include all citation from the `.bib` file, add `\nocite{*}` before the end of the document.

4 | FURTHER INFORMATION

All \LaTeX environments supported by the main template are supported here as well; see the `.tex` sample file here for more details and example.

References

1. Taylor G, Green A. Mechanism of the production of small eddies from large ones. *P Roy Soc Lond A Mat* 1937; 158(895): 499–521.
2. Knupp P. Winslow smoothing on two-dimensional unstructured meshes. *Eng Comput* 1999; 15: 263–268.
3. Kamm J. Evaluation of the Sedov-von Neumann-Taylor blast wave solution. Tech. Rep. Technical Report LA-UR-00-6055, Los Alamos National Laboratory; 2064 Derek Drive, Cuyahoga Falls, Ohio: 2000.

