SdLG computation and controlled interventions

(a) Forward block: sequential local → global computation

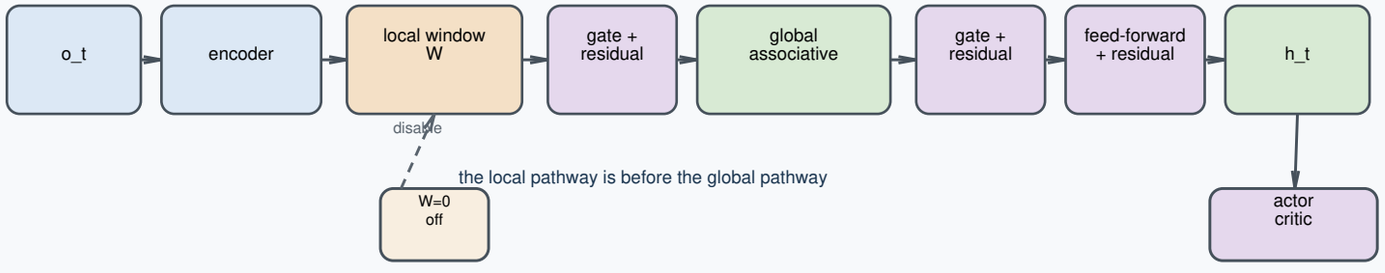

one block; repeated across layers. Arrows show forward data flow, not separate parallel streams.

(b) Global state execution alternatives

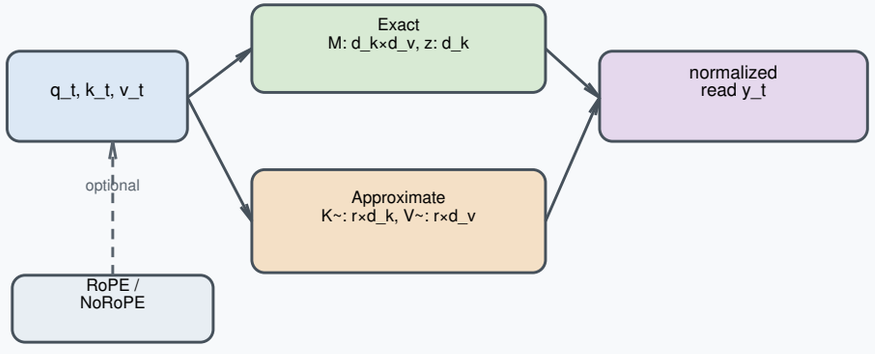

one state-execution mode per run; positional phase is an independent switch

Exact and Approximate differ in recurrence/read computation as well as represented rank.

(c) Temporal carry, reset, and optimization pathway

Recurrent state + running phase

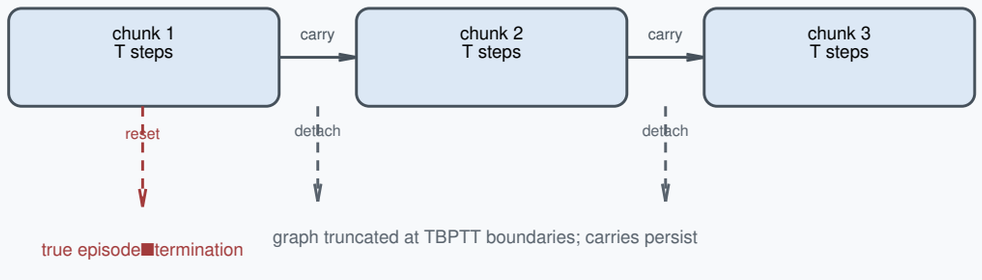

graph truncated at TBPTT boundaries; carries persist

GGS: backward actor-path intervention

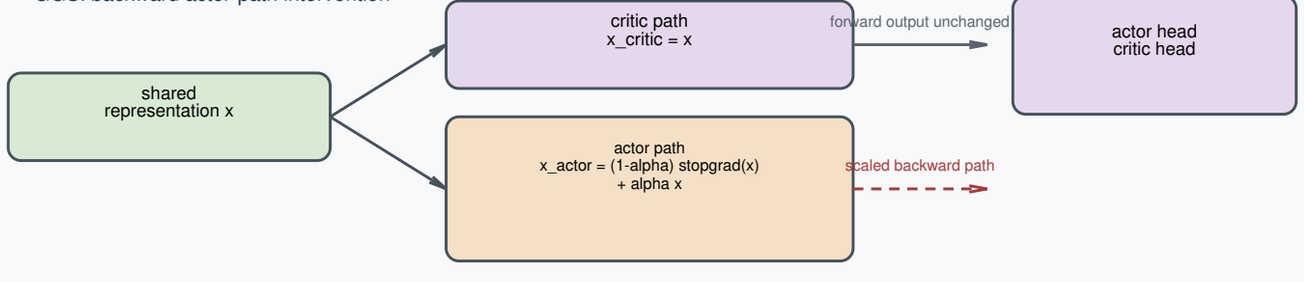

GGS scales only the actor gradient entering the shared representation; it is not a separate forward trunk.