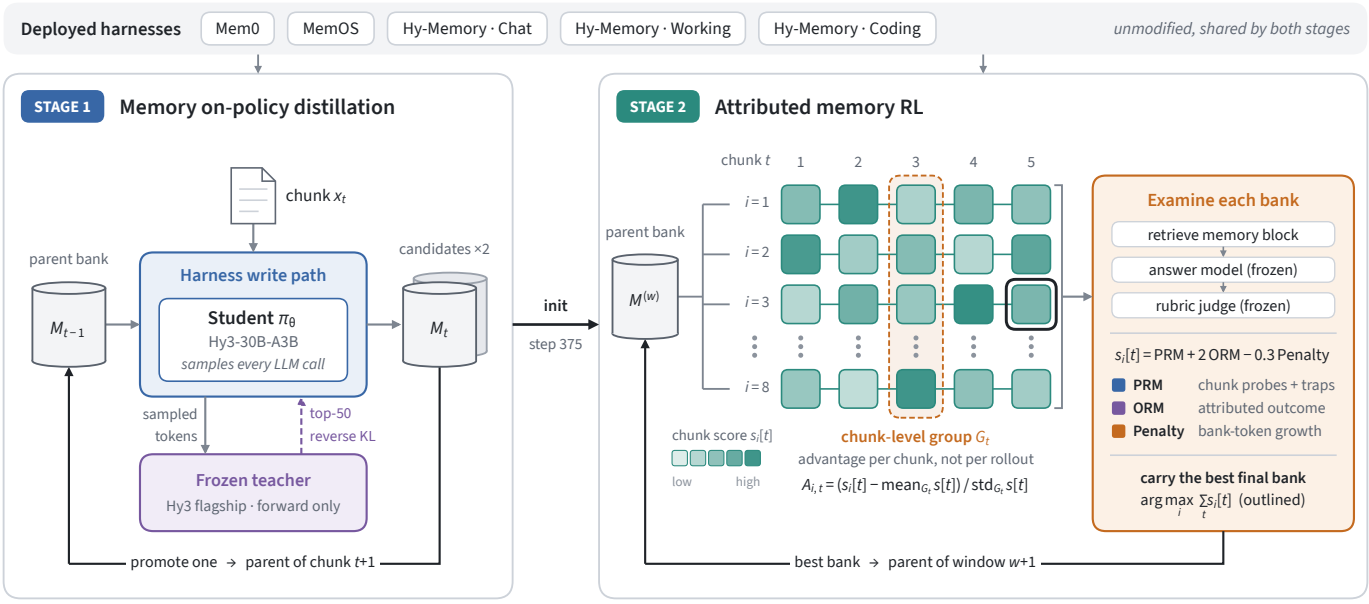

Deployed harnesses
Mem0
MemOS
Hy-Memory · Chat
Hy-Memory · Working
Hy-Memory · Coding
unmodified, shared by both stages
STAGE 1
Memory on-policy distillation
chunk x_t
parent bank
M_{t-1}
Harness write path
Student π_θ
Hy3-30B-A3B
samples every LLM call
candidates ×2
M_t
sampled tokens
top-50 reverse KL
Frozen teacher
Hy3 flagship · forward only
promote one → parent of chunk t+1
init
step 375
STAGE 2
Attributed memory RL
chunk t
1
2
3
4
5
parent bank
$M^{(w)}$
$i=1$
$i=2$
$i=3$
$i=8$
chunk score $s_i[t]$
low
high
chunk-level group G_t
advantage per chunk, not per rollout
$A_{i,t} = (s_i[t] - \text{mean}_{G_t} s[t]) / \text{std}_{G_t} s[t]$
Examine each bank
retrieve memory block
answer model (frozen)
rubric judge (frozen)
$s_i[t]$ = PRM + 2 ORM − 0.3 Penalty
PRM
chunk probes + traps
ORM
attributed outcome
Penalty
bank-token growth
carry the best final bank
$\arg\max_i \sum_t s_i[t]$ (outlined)
best bank → parent of window w+1