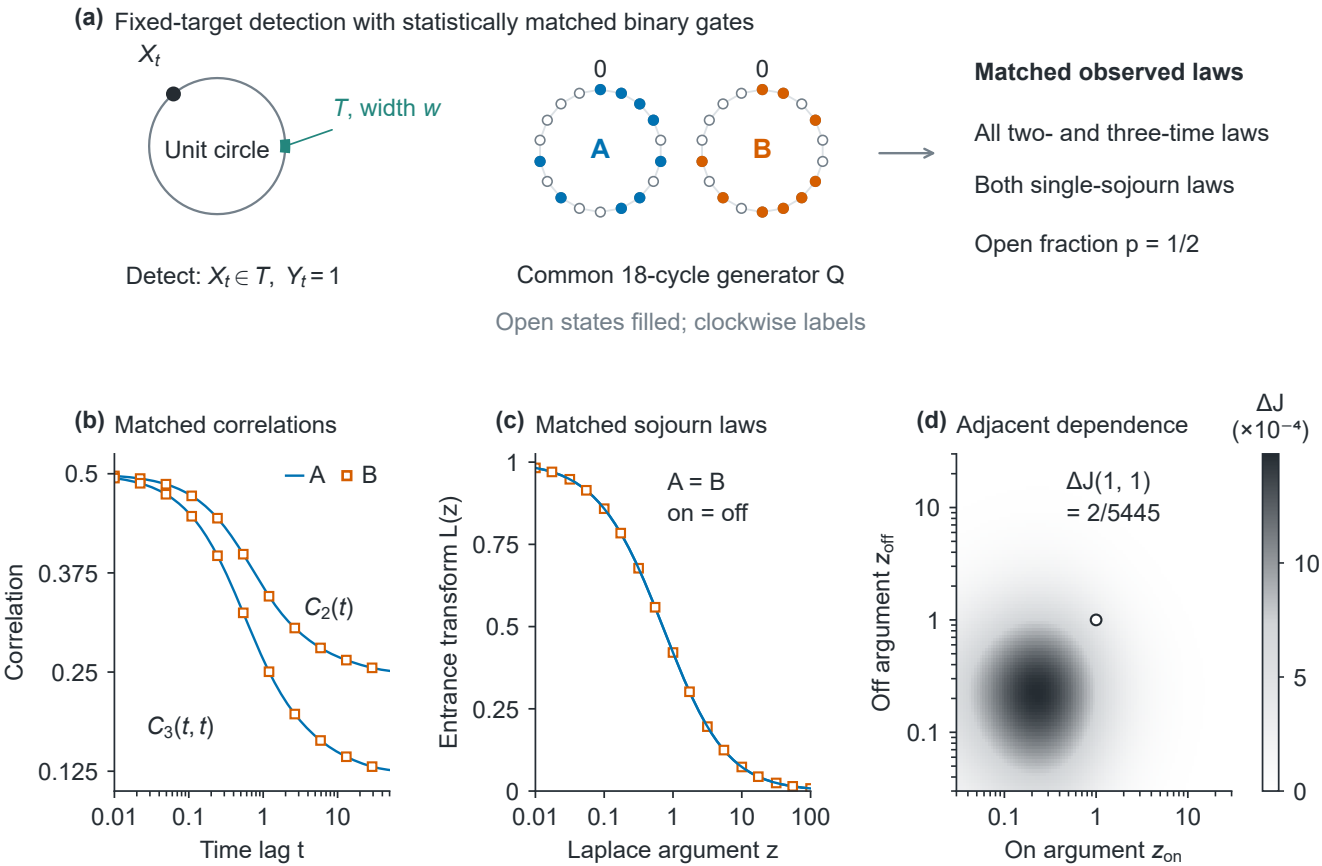

(a) Fixed-target detection with statistically matched binary gates
$X_t$
Unit circle
$T$, width $w$
Detect: $X_t \in T$, $Y_t = 1$
0
0
A
B
Common 18-cycle generator Q
Open states filled; clockwise labels
Matched observed laws
All two- and three-time laws
Both single-sojourn laws
Open fraction p = 1/2
(b) Matched correlations
A
B
0.5
0.375
0.25
0.125
Correlation
$C_2(t)$
$C_3(t, t)$
0.01
0.1
1
10
Time lag t
(c) Matched sojourn laws
A = B
on = off
1
0.75
0.5
0.25
0
Entrance transform L(z)
0.01
0.1
1
10
100
Laplace argument z
(d) Adjacent dependence
ΔJ
(×10⁻⁴)
ΔJ(1, 1)
= 2/5445
10
1
0.1
Off argument $z_{off}$
0.1
1
10
On argument $z_{on}$
10
5
0