(a) The shared neighborhoods of Pair II


Middle run m; neighboring lengths {a, b}

The same five types occur for either middle state.

m	{a, b}	Local runs	Count
1	{1, 2}	□ ■ □□	1
1	{1, 3}	□ ■ □□□	1
2	{1, 2}	□ ■■ □□	1
2	{2, 3}	□□ ■■ □□□	1
3	{1, 2}	□ ■■■ □□	1

Count = 1 in A and in B; entrance weight = 1/5.

(b) Four-duration memory

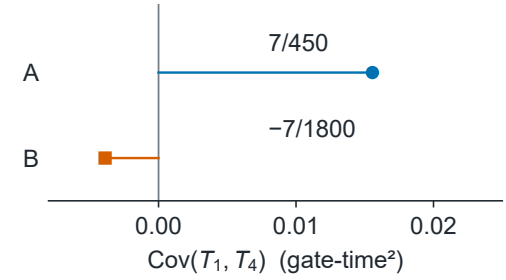

(c) Summing exit sides removes one rate

