

1

2

3

4

5

6

7

REV.	ZONE	DESCRIPTION	DATE	REVISER	APPD

A

A

B

B

C

C


D

D

E

E

A
HDMI
A TYPE
19M

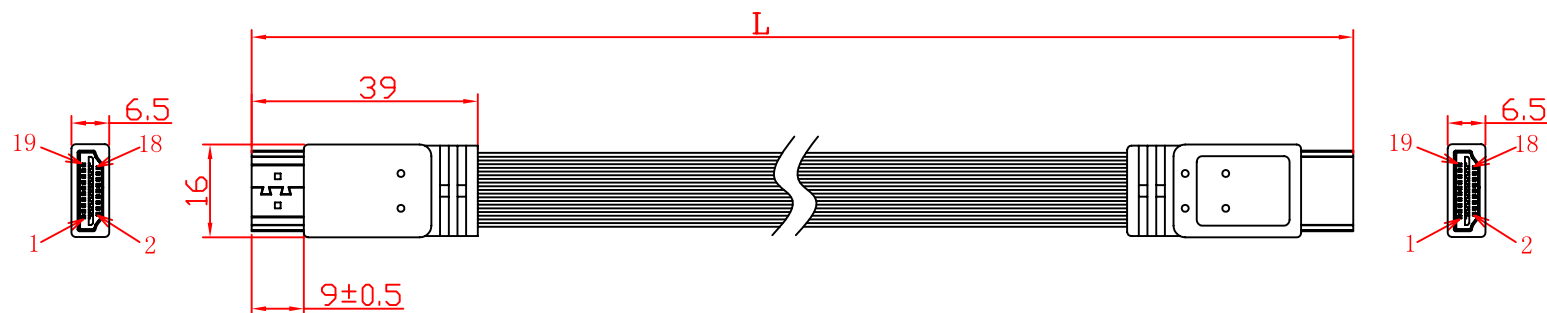

B
HDMI
A TYPE
19M

20C 30AWG Slim Cable Thickness=0.7mm; PE Insulation; Jacket Color: White/Black
Support HDMI 2.0 & 4K UHD

PIN ASSIGNMENT

A	D0+	1		1	D0+	B
	D0-	3		3	D0-	
	GND	2		2	GND	
	D1+	4		4	D1+	
	D1-	6		6	D1-	
	GND	5		5	GND	
	D2+	7		7	D2+	
	D2-	9		9	D2-	
	GND	8		8	GND	
	DCLK+	10		10	DCLK+	
	DCLK-	12		12	DCLK-	
	GND	11		11	GND	
	UTILITY	14		14	UTILITY	
	HOT PLUG DETECT	19		19	HOT PLUG DETECT	
	GND	17		17	GND	
	CEC	13		13	CEC	
	SCL	15		15	SCL	
	SDA	16		16	SDA	
	+5V PWR	18		18	+5V PWR	
	SHELL				SHELL	

L mm	Part No.
1000±30	5G19A05-B1000
2000+50/-0	5G19A05-B2000
3000+70/-0	5G19A05-B3000

備註:
建議線材彎曲直徑須大於>3CM

 高位企業有限公司 Yes Way Enterprise Corp.		TOLERANCE UNSPECIFIED	
 SCALE X		UNIT mm	
NAME HDMI A/A 30AWG CABLE ASS'Y		SHEET 1/1	DRAWN 9/12/2013 Johanna
DRAWING NO. 5G19A05-Bxxxx		REV A0	CHECKED Jenny
RoHS product		A3	APPROVED Tim