

FINAL REPORT CAPSTONE PROJECT

HIMANI KAMRA
PGP-DSBA ONLINE
DATE : 22.01.23

CONTENTS

Problem statement.....	3
1.1 data attributes.....	3
1.2 sample of dataset.....	3
1.3 data type.....	4
1.4 null values.....	4
1.5 shape of the dataset.....	4
1.6 descriptive details.....	5
1.7 anomalies.....	5
1.8 variable transformation.....	6
1.9 descriptive summary after treatment.....	7
1.10 outlier check.....	7
1.11 univariate analysis.....	8
1.12 bivariate analysis.....	10
1.13 business insights.....	14
1.14 model building.....	14
1.15 naïve bayes.....	14
1.16 bagging classifier.....	16
1.17 gradient boosting.....	17
1.18 random forest classifier.....	18
1.19 model tuning.....	20
1.20 naïve bayes with SMOTE.....	20
1.21 comparison of different models.....	21
1.22 business recommendations.....	22

LIST OF FIGURES

Fig 1. – boxplot outliers.....	7
Fig 2. – hist yearly avg outstation.....	8
Fig 3. – hist member of family.....	8
Fig 4. – hist total likes.....	8
Fig 5. – hist week since last out.....	8
Fig 6. –hist travelling network rating.....	8
Fig 7. –hist daily avg min spent.....	8
Fig 8. – countplot.....	9
Fig 9. – preferred location type.....	9
Fig 10. – pie chart-preferred device.....	10
Fig 11. – correlation heatmap.....	10
Fig 12. –Barplot-device-product.....	11
Fig 13. – Barplot location-product.....	11
Fig 14. – scatterplot	12
Fig 15. – barplot adult flag-member.....	12
Fig 16. – boxplot location-member.....	13
Fig 17. – working – last outstation.....	13
Fig 18. – confusion matrix training- naïve bayes.....	14
Fig 19. – confusion matrix testing – naïve bayes.....	15
Fig 20. – feature importance-gbcl.....	18
Fig 21. – feature importance-rfcl.....	19

LIST OF TABLES

Table 1. – data attributes.....	3
Table 2. – dataset sample.....	3
Table 3. – descriptive details.....	5
Table 4. – numerical columns.....	5
Table 5. – preferred device.....	6
Table 6. – taken product.....	6
Table 7. – descriptive summary num.....	7
Table 8. – datatype conversion.....	14
Table 9. – classification report training – naïve bayes.....	15
Table 10. - classification report testing – naïve bayes.....	15
Table 11. - classification report training -bagging.....	16
Table 12. - classification report testing - bagging.....	16
Table 13. - classification report training –gradient boosting.....	17
Table 14. - classification report testing –gradient boosting.....	17
Table 15. - classification report training -rfcl	18
Table 16. - classification report testing - rfcl	19
Table 17. - classification report training – naïve bayes with SMOTE.....	20
Table 18. - classification report testing - naïve bayes with SMOTE.....	21
Table 19. – comparison of models.....	21

PROBLEM STATEMENT

An aviation company that provides domestic as well as international trips to the customers now wants to apply a targeted approach instead of reaching out to each of the customers. This time they want to do it digitally instead of tele calling. Hence they have collaborated with a social networking platform, so they can learn the digital and social behaviour of the customers and provide the digital advertisement on the user page of the targeted customers who have a high propensity to take up the product.

Hence, we need to predict whether the customer is going to adopt the tourism package based on the social media campaign.

NEED OF THE STUDY

- Optimum product and price combination for the customers.
- Optimum platform for attracting more customers.

DATA ATTRIBUTES

Variable	Description
UserID	Unique ID of user
Buy_ticket	Buy ticket in next month
Yearly_avg_view_on_travel_page	Average yearly views on any travel related page by user
preferred_device	Through which device user preferred to do login
total_likes_on_outstation_checkin_given	Total number of likes given by a user on out of station checkings in last year
yearly_avg_Outstation_checkins	Average number of out of station check-in done by user
member_in_family	Total number of relationship mentioned by user in the account
preferred_location_type	Preferred type of the location for travelling of user
Yearly_avg_comment_on_travel_page	Average yearly comments on any travel related page by user
total_likes_on_outofstation_checkin_received	Total number of likes received by a user on out of station checkings in last year
week_since_last_outstation_checkin	Number of weeks since last out of station check-in update by user
following_company_page	Weather the customer is following company page (Yes or No)
monthly_avg_comment_on_company_page	Average monthly comments on company page by user
working_flag	Weather the customer is working or not
travelling_network_rating	Does user have close friends who also like travelling. 1 is highs and 4 is lowest
Adult_flag	Weather the customer is adult or not
Daily_Avg_mins_spend_on_traveling_page	Average time spend on the company page by user on daily basis

Table 1. data attributes

SAMPLE OF THE DATASET

	UserID	Taken_product	Yearly_avg_view_on_travel_page	preferred_device	total_likes_on_outstation_checkin_given	yearly_avg_Outstation_checkins	member
0	1000001	Yes	307.0	iOS and Android	38570.0	1	
1	1000002	No	367.0	iOS	9765.0	1	
2	1000003	Yes	277.0	iOS and Android	48055.0	1	
3	1000004	No	247.0	iOS	48720.0	1	
4	1000005	No	202.0	iOS and Android	20685.0	1	

Table 2. Dataset sample

DATA TYPE

UserID	int64
Taken_product	object
Yearly_avg_view_on_travel_page	float64
preferred_device	object
total_likes_on_outstation_checkin_given	float64
yearly_avg_Outstation_checkins	object
member_in_family	object
preferred_location_type	object
Yearly_avg_comment_on_travel_page	float64
total_likes_on_outofstation_checkin_received	int64
week_since_last_outstation_checkin	int64
following_company_page	object
montly_avg_comment_on_company_page	int64
working_flag	object
travelling_network_rating	int64
Adult_flag	int64
Daily_Avg_mins_spend_on_traveling_page	int64

- The above dataset have 3 float64 data type, 7 int64 data type and 7 object data type.

NULL VALUES

Yearly_avg_view_on_travel_page	581
total_likes_on_outstation_checkin_given	381
Yearly_avg_comment_on_travel_page	206
following_company_page	103
yearly_avg_Outstation_checkins	75
preferred_device	53
preferred_location_type	31

- The above dataset has many null values.
- There are total 1430 null values present in the given dataset.
- Yearly_avg_view_on_travel_package, total_likes_on_outstation_checkin_given, yearly_avg_comment_on_travel_page : these features have high percentage of missing values and hence we are dropping these from analysis. We are dropping them to make sure other valid observations do not get eliminated when we remove or impute null values.

SHAPE OF THE DATASET

- The number of rows are 11760.
- The number of columns are 17.

DESCRIPTIVE DETAILS

	count	unique	top	freq	mean	std	min	25%	50%	75%	max
UserID	11760.0	NaN	NaN	NaN	1005880.5	3394.963917	1000001.0	1002940.75	1005880.5	1008820.25	1011760.0
Taken_product	11760	2	No	9864	NaN	NaN	NaN	NaN	NaN	NaN	NaN
preferred_device	11707	10	Tab	4172	NaN	NaN	NaN	NaN	NaN	NaN	NaN
yearly_avg_Outstation_checkins	11685	30	1	4543	NaN	NaN	NaN	NaN	NaN	NaN	NaN
member_in_family	11760	7	3	4561	NaN	NaN	NaN	NaN	NaN	NaN	NaN
preferred_location_type	11729	15	Beach	2424	NaN	NaN	NaN	NaN	NaN	NaN	NaN
total_likes_on_outofstation_checkin_received	11760.0	NaN	NaN	NaN	6531.699065	4706.613785	1009.0	2940.75	4948.0	8393.25	20065.0
week_since_last_outstation_checkin	11760.0	NaN	NaN	NaN	3.203571	2.616365	0.0	1.0	3.0	5.0	11.0
following_company_page	11657	4	No	8355	NaN	NaN	NaN	NaN	NaN	NaN	NaN
monthly_avg_comment_on_company_page	11760.0	NaN	NaN	NaN	28.661565	48.660504	11.0	17.0	22.0	27.0	500.0
working_flag	11760	2	No	9952	NaN	NaN	NaN	NaN	NaN	NaN	NaN
travelling_network_rating	11760.0	NaN	NaN	NaN	2.712245	1.080887	1.0	2.0	3.0	4.0	4.0
Adult_flag	11760.0	NaN	NaN	NaN	0.793878	0.851823	0.0	0.0	1.0	1.0	3.0
Daily_Avg_mins_spend_on_traveling_page	11760.0	NaN	NaN	NaN	13.817432	9.070657	0.0	8.0	12.0	18.0	270.0

Table 3. descriptive details

- The above table shows the descriptive summary of all the columns except 3 that we dropped earlier.
- A lot of NaN can be seen as many null values are present in the dataset.
- As per the above summary we can infer that on an average 13.8 minutes is spent by the customer on travelling page.
- Around 29 monthly average comments are there on company page.

TREATING ANOMALIES

- member_in_family has integers as its datatype but it is currently shown as object due to presence of some anomaly i.e. the string character “three” but it is replaced by the integer and its datatype is also integer now.
- Similarly, yearly_avg_Outstation_checkins also has some missing value and string character and it is also replaced and its datatype is also changed to float now.
- All the missing values in the numerical columns **are imputed by the median** so as the outliers are not affected.

#	Column	Non-Null Count	Dtype
0	UserID	11760 non-null	float64
1	yearly_avg_Outstation_checkins	11760 non-null	float64
2	member_in_family	11760 non-null	float64
3	total_likes_on_outofstation_checkin_received	11760 non-null	float64
4	week_since_last_outstation_checkin	11760 non-null	float64
5	monthly_avg_comment_on_company_page	11760 non-null	float64
6	travelling_network_rating	11760 non-null	float64
7	Adult_flag	11760 non-null	float64
8	Daily_Avg_mins_spend_on_traveling_page	11760 non-null	float64

Table 4. numerical column

- The above table shows the numerical columns after treating all the missing values and other anomalies like data type.
- Some categorical columns are also treated.

- There are 10 Preferred devices used by different customers but they are divided into two categories now : Laptop and Not Laptops.

Taken_product		preferred_device
0	1	Not Laptop
1	0	Not Laptop
2	1	Not Laptop
3	0	Not Laptop
4	0	Not Laptop
5	0	Not Laptop
6	0	Not Laptop
7	0	Not Laptop
8	0	Not Laptop
9	0	Not Laptop

Table 5. preferred device

- Customers using androids, ios, tab, etc are categorised as Not Laptop and customers having laptops are categorised as Laptops.
- Categorical column like following_company_page had integer and string data type so it is also treated and the data type is now string only.

TARGET VARIABLE TRANSFORMATION

- Here our target variable is Taken_product.
- Customers who have taken the product i.e yes is marked as '1' and the ones who has not taken the product are marked as '0'

Taken_product	
0	1
1	0
2	1
3	0
4	0
5	0
6	0
7	0
8	0
9	0

Table 6. taken_product

DESCRIPTIVE SUMMARY

	count	mean	std	min	25%	50%	75%	max
UserID	11760.0	1.005880e+06	3394.963917	1000001.0	1002940.75	1005880.5	1008820.25	1011760.0
yearly_avg_Outstation_checkins	11760.0	8.223554e+00	8.644327	1.0	1.00	4.0	14.00	29.0
member_in_family	11760.0	2.921344e+00	1.044883	1.0	2.00	3.0	4.00	10.0
total_likes_on_outofstation_checkin_received	11760.0	6.531699e+03	4706.613785	1009.0	2940.75	4948.0	8393.25	20065.0
week_since_last_outstation_checkin	11760.0	3.203571e+00	2.616365	0.0	1.00	3.0	5.00	11.0
monthly_avg_comment_on_company_page	11760.0	2.866156e+01	48.660504	11.0	17.00	22.0	27.00	500.0
travelling_network_rating	11760.0	2.712245e+00	1.080887	1.0	2.00	3.0	4.00	4.0
Adult_flag	11760.0	7.938776e-01	0.851823	0.0	0.00	1.0	1.00	3.0
Daily_Avg_mins_spend_on_traveling_page	11760.0	1.381743e+01	9.070657	0.0	8.00	12.0	18.00	270.0

Table 7. descriptive summary num

- The above table shows the descriptive summary of all the numerical columns after treating all the anomalies like missing values, etc.
- We can infer that on an average there are 1009 likes received on outstation checkin.
- Maximum 10 members are there in the family.
- Maximum 3 adults are there in any family.
- There are maximum 29 yearly outstation checkins on an average.

OUTLIER CHECK

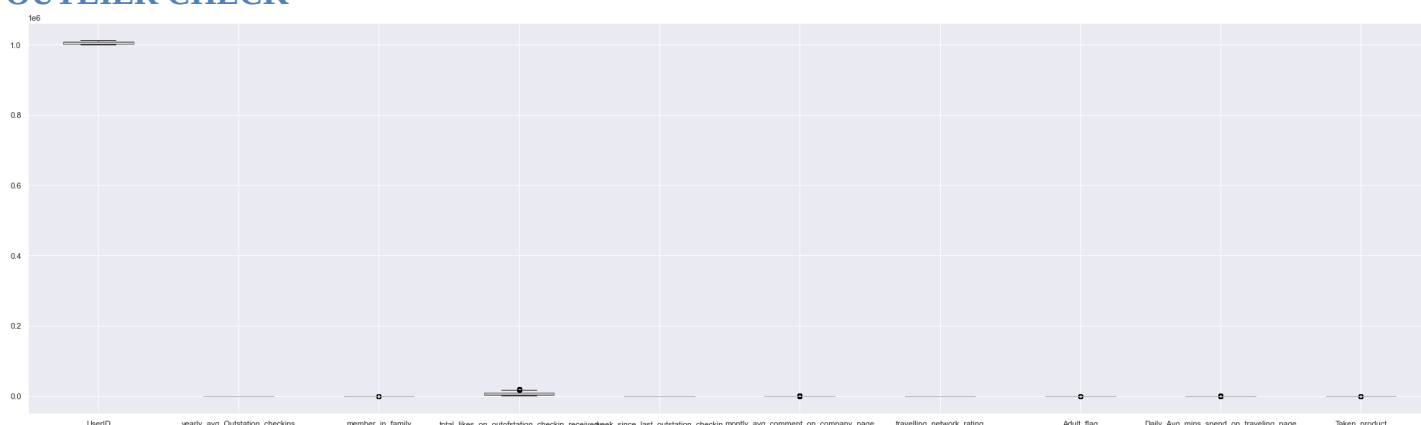


Fig 1. Boxplot

- The above boxplot shows the outliers in the dataset.
- As we can see that very few or no outliers are present in the given dataset.

UNIVARIATE ANALYSIS

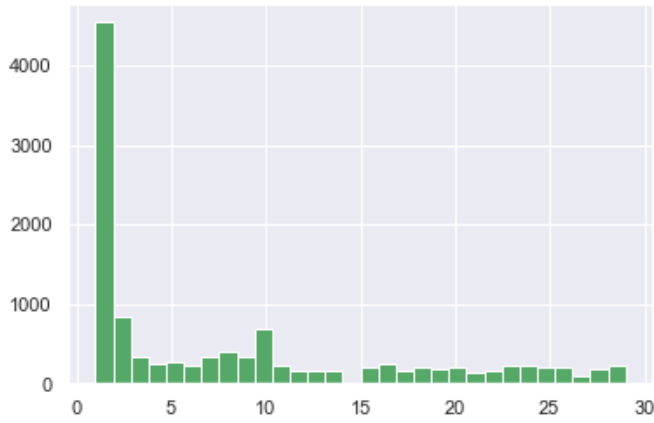


Fig 2. Hist-yearly avg outstation

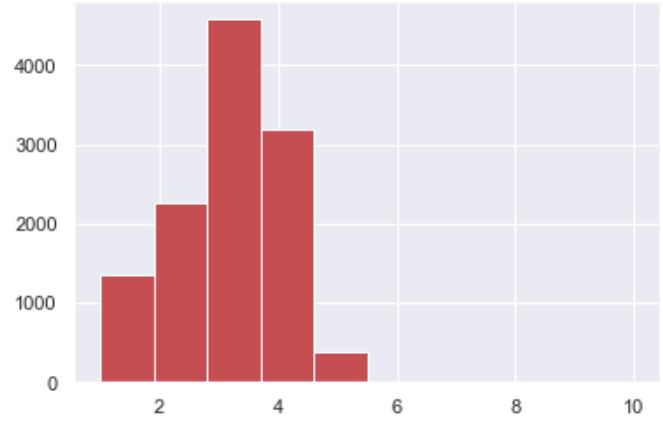


Fig 3. Hist-member of family

- The above figure shows the distribution of the yearly_avg_outstation_checkins (fig 2) and member_of_family (fig 3)
- Yearly_avg_outstation_checkin has right skewed distribution while we can infer that maximum members in a family is 3.

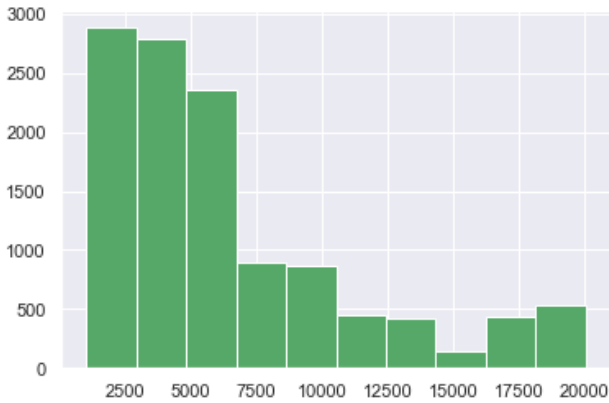


Fig 4. Hist-total likes

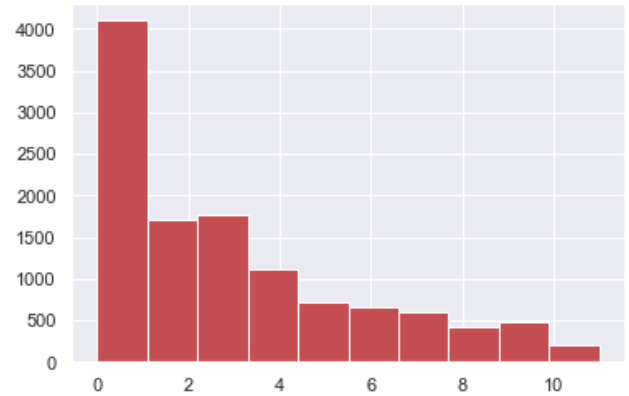


fig 5. Hist-week since last out

- The distribution of total likes on outstation checkin received (fig 4) is right skewed.
- The distribution of week since last out station checkin (fig 5) is also right skewed.

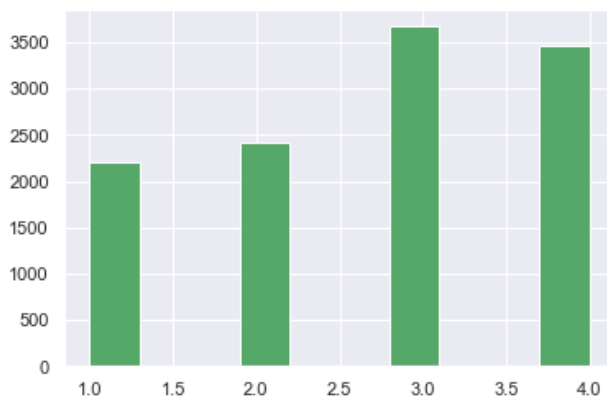


Fig 6. Hist-travelling network rating

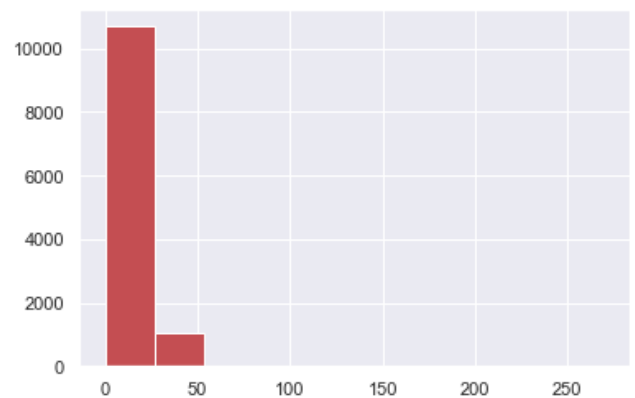


fig 7. Hist-daily avg min spent

- The distribution of travelling network rating shows discrete variable (fig 6). 4 is highest and 1 is lowest rating.
- While (fig 7) shows distribution of daily average min spent.

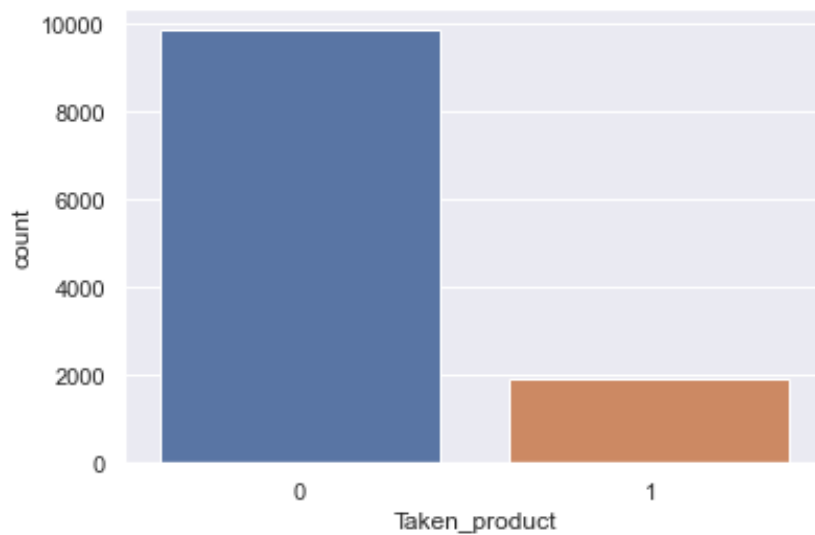


Fig 8. Countplot

- The above figure is the countplot of Taken_product.
- Around 1896 customers have taken the product (showing 1) while 9864 customers has not taken the product (showing 0)

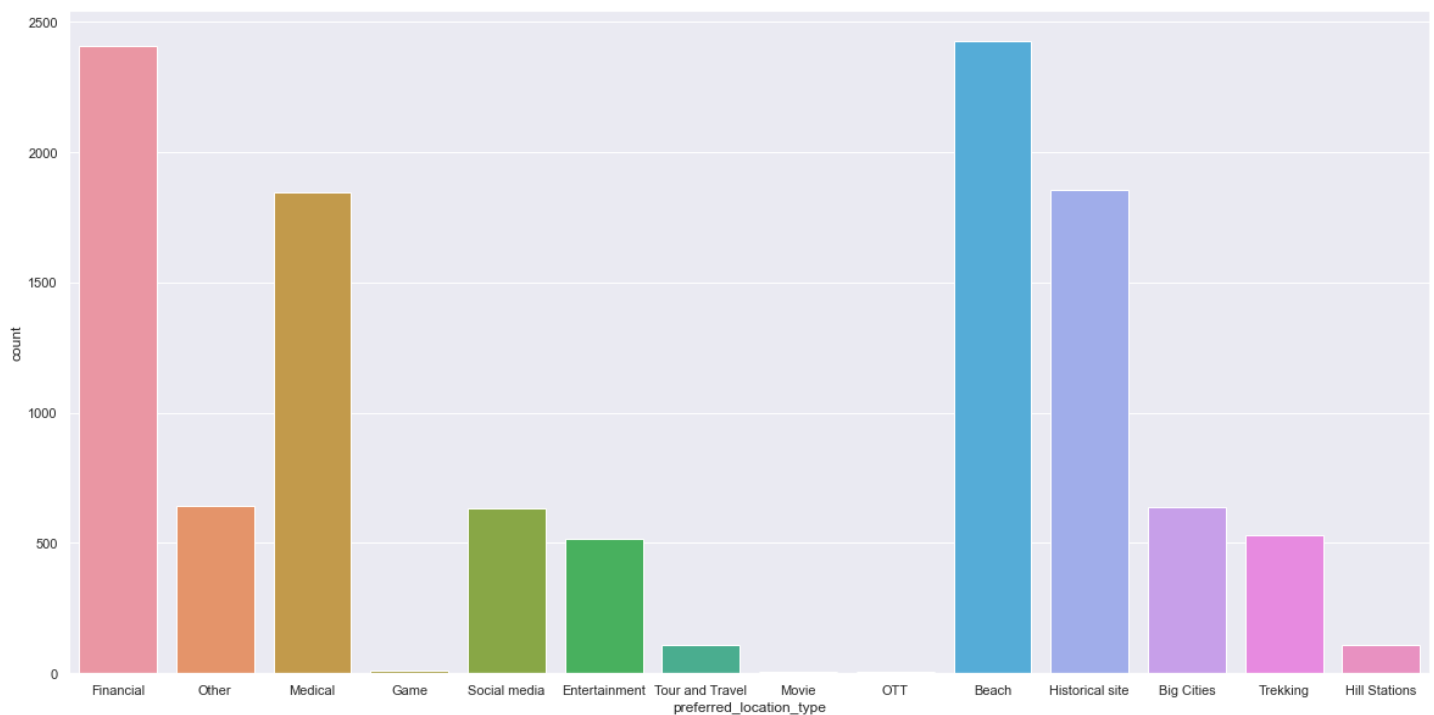


Fig 9. Preferred location type

- The above countplot shows the preferred locations where customers wants to go outstation.
- Maximum customers wants to go for “Beach” outstation location and then for “financial” work.
- Very few customers wants to go for movie, OTT and gaming purpose.

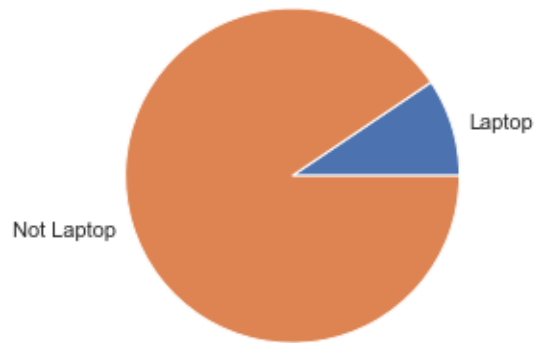


Fig 10. Pie-chart preferred device

- The above pie-chart depicts the distribution of devices preferred by the customers for login purposes.
- Very few customers login from their laptops while maximum people login from Mobiles (not laptop).
- Around 1000 customers use laptops and 10000 customers use mobiles for login purposes.

BIVARIATE ANALYSIS

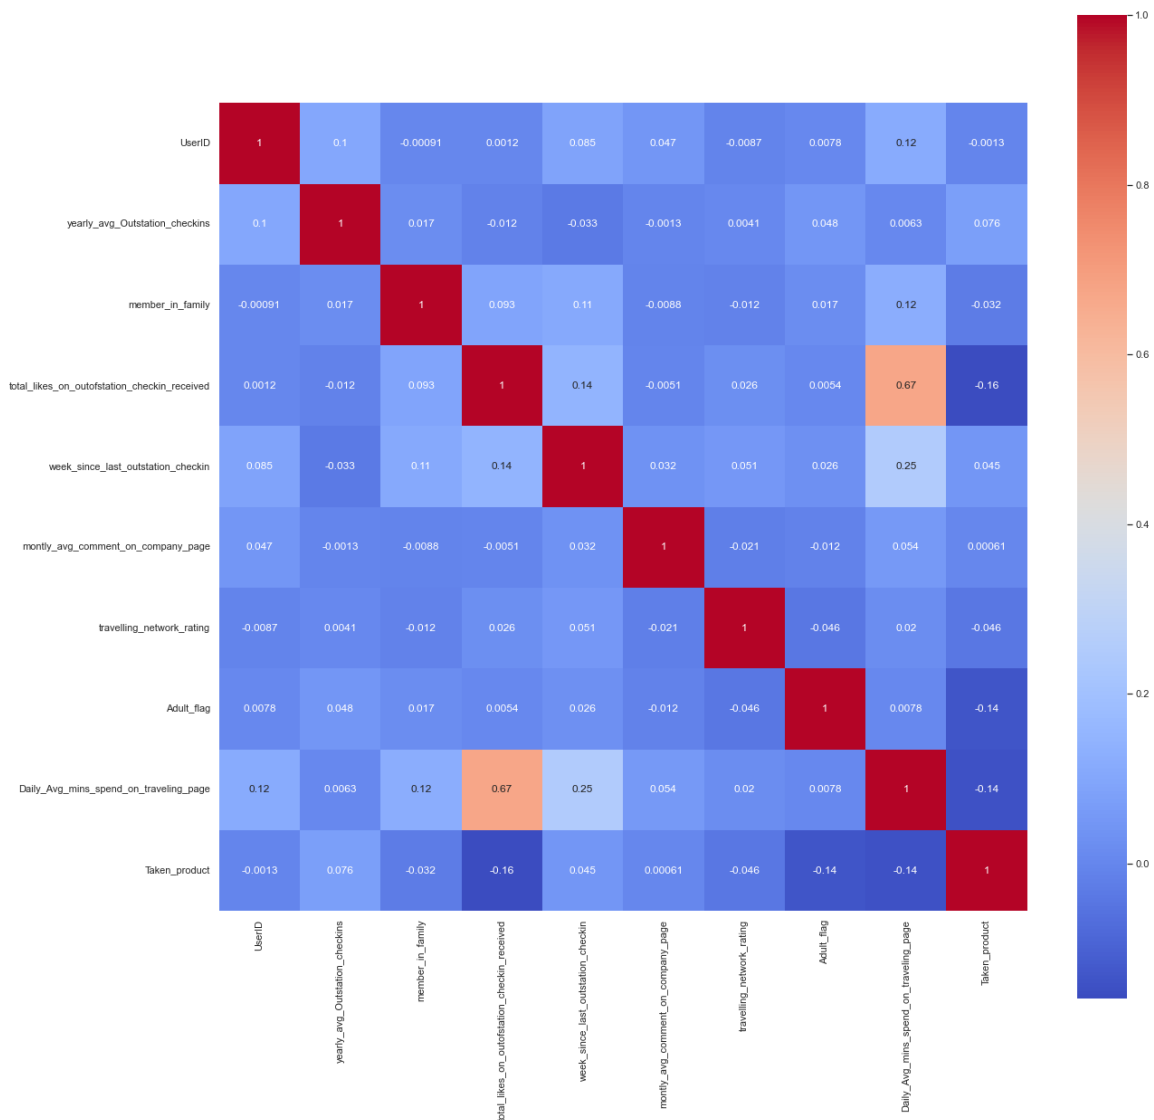


Fig 11. Correlation heatmap

- The above correlation heatmap shows the correlation between all the variables.
- Daily average minutes spent on travelling page and total checkins on outstation received are 67% correlated while there is no or very less correlation between other variables.

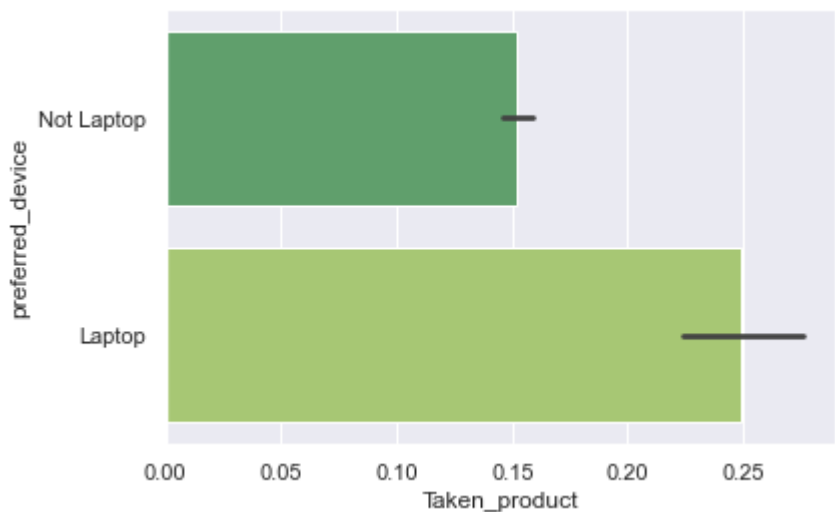


Fig 12. Barplot device-product

- The above barplot shows the relationship between product taken and preferred device.
- It can be seen that people logging in through laptop have more tendency to buy the product.

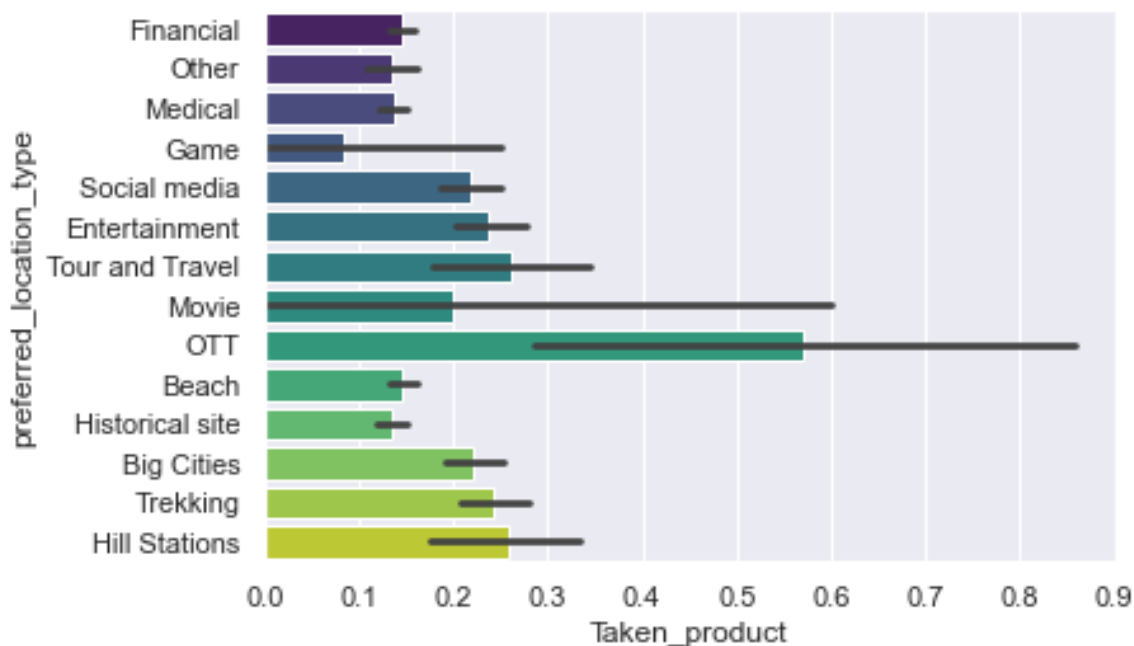


Fig 13. Barplot location-product

- The above barplot shows preferred location type for outstation and product taken.
- Customers watching OTT have more propensity to buy the product while customers going for gaming purposes have less propensity to buy the product offered by the company.

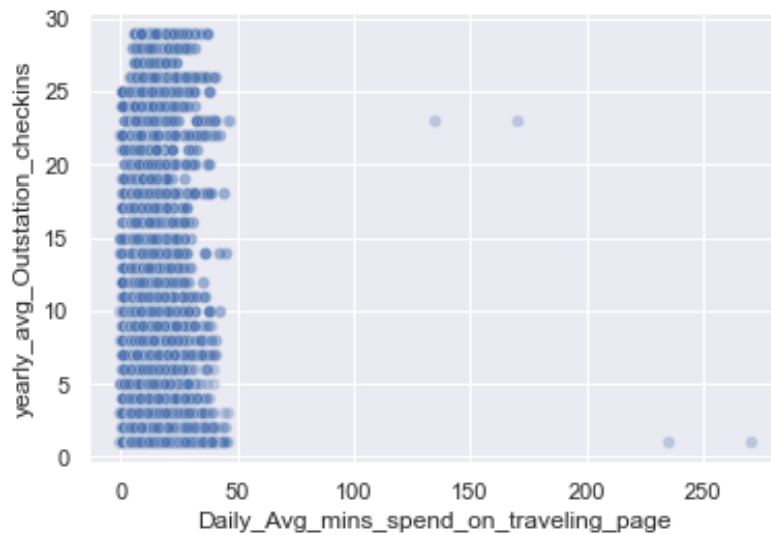


Fig 14. Scatterplot

- From the above scatterplot no accurate conclusion can be drawn as the data is scattered around 0-50 average minutes and between 0-30 average outstation checkins.

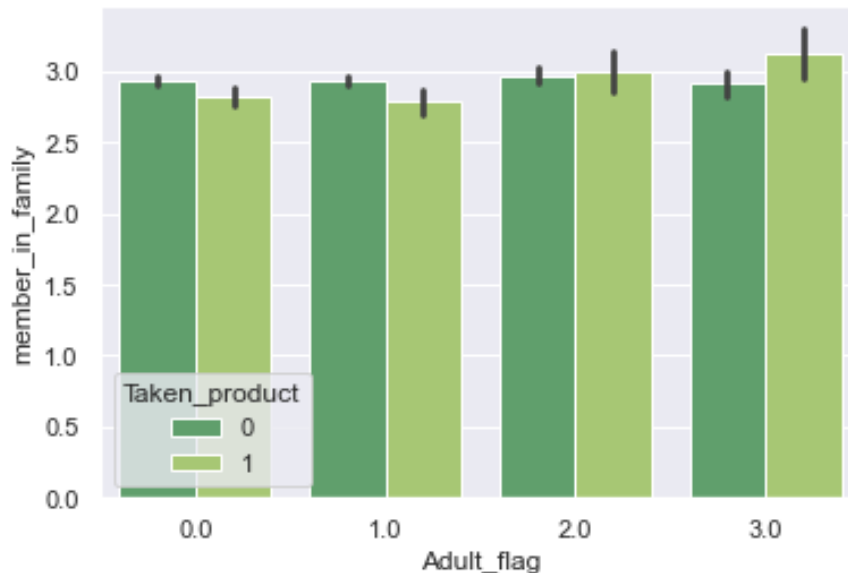


Fig 15. Barplot adult flag-member

- The above barplot depicts the relationship between adult flag and member in the family and product taken is hue over here.
- We can infer that around 3 members are there in the family and then there 3 adults maximum in a family.
- Also, where adult members are three, there is more propensity to buy the product while where adults are not there then less propensity to buy the product.

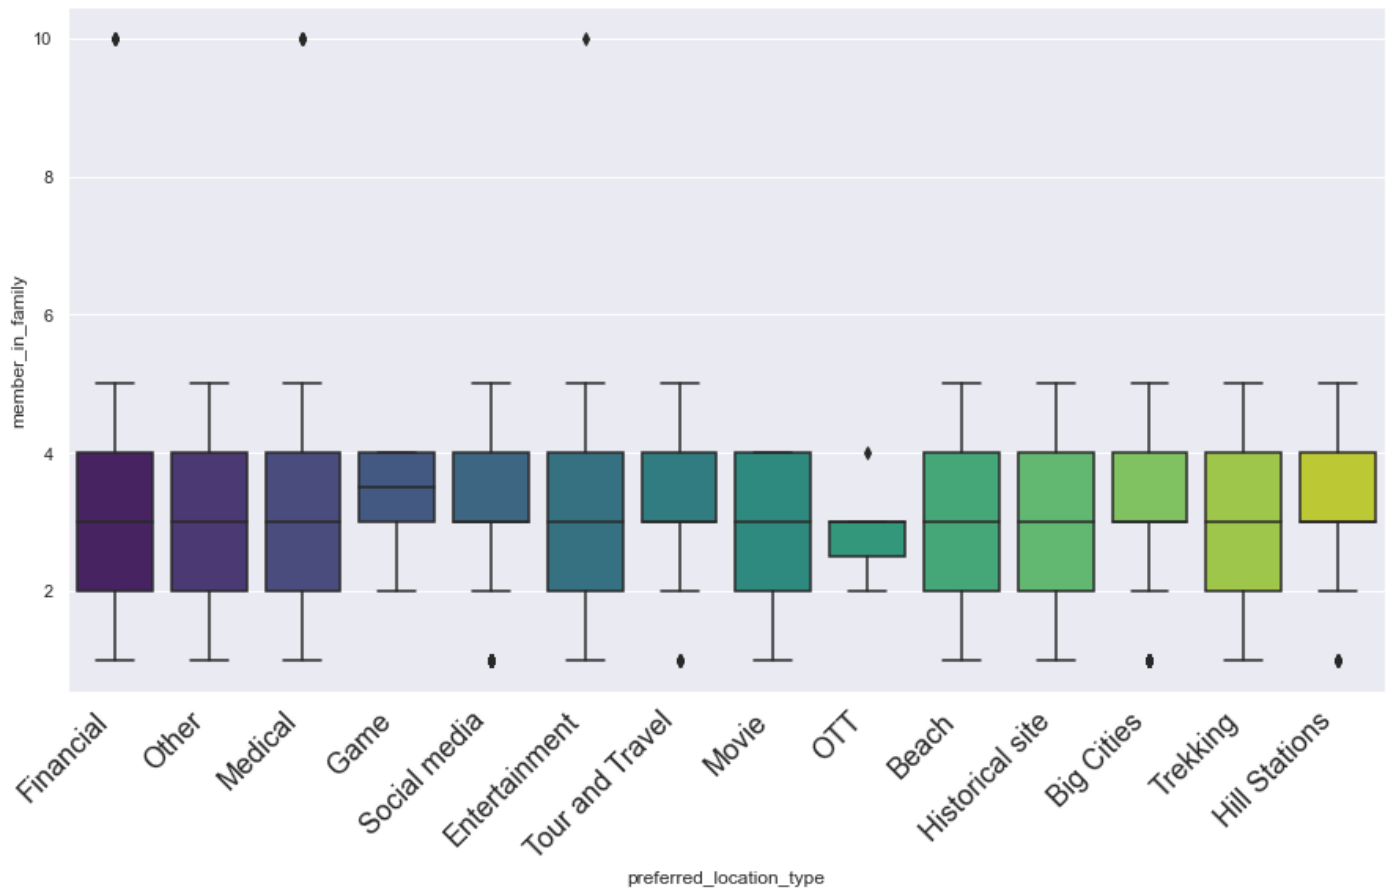


Fig 16. Boxplot location-member

- Maximum people prefer beach, financial, trekking as their location type.
- Very few members prefer tour and travel, OTT, big cities as their preferred location type

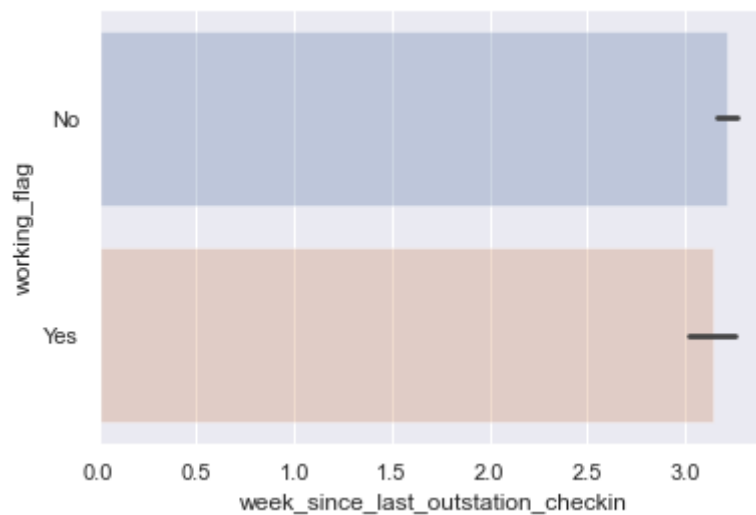


Fig 17. Working-last outstation

- People who are working have more outstation checkins while people who are not working have slightly less outstation checkins as they go outstation very less.

BUSINESS INSIGHTS

- The given data is not balanced as 16% of the customers have taken the product while 84% of the people have not taken the product already published by the company.
- The most preferred location type by the customers is Beach so lucrative offers clubbed with various facilities can be given to customers.
- Most of the people use mobiles to login and buy tickets.
- Working people tend to have more frequent outstation checkins so promotional offers can be made accordingly and frequently.
- Families having more adults tend to go more on vacation.

MODEL BUILDING AND INTERPRETATION

- For model building we need to convert all the object variable data types.
- The categorical data is converted using nominal encoding technique as the attributes were not ordered or ranked.

UserID	float64
yearly_avg_Outstation_checkins	float64
member_in_family	float64
total_likes_on_outofstation_checkin_received	float64
week_since_last_outstation_checkin	float64
montly_avg_comment_on_company_page	float64
travelling_network_rating	float64
Adult_flag	float64
Daily_Avg_mins_spend_on_traveling_page	float64
Taken_product	int32
preferred_device	int8
preferred_location_type	int8
following_company_page	int8
working_flag	int8

Table 8. data type conversion

- After converting categorical data, the data is splitted into train and test datasets with the following parameters :
Random state = 123
Test size = 0.30 i.e. 70% of the information is contained in train dataset while 30% is contained in test dataset.

MODEL I : NAÏVE BAYES

TRAINING SET

- Model score : 0.8342

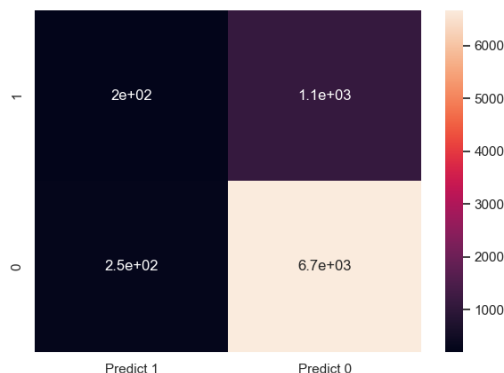


Fig 18. Confusion matrix training– naïve bayes

Classification Report					
	precision	recall	f1-score	support	
1	0.43	0.15	0.22	1306	
0	0.86	0.96	0.91	6926	
accuracy			0.83	8232	
macro avg	0.65	0.56	0.56	8232	
weighted avg	0.79	0.83	0.80	8232	

Table 9. classification report training – naïve bayes

- We can infer that the recall of class “1” is 0.15 while that of class “0” is 0.96 and accuracy of the model is 0.83
- The precision of class “1” is 0.43 while that of other class is 0.86

TESTING SET

- Model score : 0.8209



Fig 19. Confusion matrix test – naïve bayes

	precision	recall	f1-score	support
1	0.40	0.15	0.22	590
0	0.85	0.96	0.90	2938
accuracy			0.82	3528
macro avg	0.63	0.55	0.56	3528
weighted avg	0.77	0.82	0.78	3528

Table 10. classification report testing – naïve bayes

- We can infer that the recall of class “1” is 0.15 while that of class “0” is 0.96 and accuracy of the model is 0.82
- The precision of class “1” is 0.40 while that of class “0” is 0.85

INTERPRETATION : The above model is not showing over-fittedness and accuracy is almost consistent in training and testing set but lets try to build Naïve Bayes with SMOTE to get better accuracy.

MODEL II : BAGGING

- Base model of bagging is built with the following parameters :
- `base_estimator=cart, n_estimators=100, random_state=1`

TRAINING SET

- Model score : 1.0
- Confusion matrix :

```
[[6926    0]
 [    0 1306]]
```

Here, value of true positives is 6926 while that of true negative is 1306.

	precision	recall	f1-score	support
0	1.00	1.00	1.00	6926
1	1.00	1.00	1.00	1306
accuracy			1.00	8232
macro avg	1.00	1.00	1.00	8232
weighted avg	1.00	1.00	1.00	8232

Table 11. classification report training – bagging

- We can infer that the recall of class “1” is 1.0 while that of class “0” is 1.0 and accuracy of the model is 1.0
- The precision of class “1” is 1.0 while that of other class is also 1.0

TESTING SET

- Model score : 0.97
- Confusion matrix :

```
[[2930    8]
 [   89  501]]
```

Here, value of true positives is 2930 while that of true negative is 501 and value of false positive is 8 while that of false negative is 89.

	precision	recall	f1-score	support
0	0.97	1.00	0.98	2938
1	0.98	0.85	0.91	590
accuracy			0.97	3528
macro avg	0.98	0.92	0.95	3528
weighted avg	0.97	0.97	0.97	3528

Table 12. classification report testing – bagging

- We can infer that the recall of class “1” is 0.85 while that of class “0” is 1.0 and accuracy of the model is 0.97
- The precision of class “1” is 0.98 while that of other class is 0.97

INTERPRETATION : The above model is neither over-fitted nor under-fitted if we look at the precision score and accuracy is almost consistent in training and testing set.

Also, we have got more accuracy in bagging model compared to naïve bayes.

MODEL III : GRADIENT BOOST CLASSIFIER

- Base model of gradient boost classifier is built by taking random state as 1.

TRAINING SET

- Model score : 0.89
- Confusion matrix :

```
[[6854    72]
 [ 780   526]]
```

Here, value of true positives is 6854 while that of true negative is 526 and value of false positive is 72 while that of false negative is 780.

	precision	recall	f1-score	support
0	0.90	0.99	0.94	6926
1	0.88	0.40	0.55	1306
accuracy			0.90	8232
macro avg	0.89	0.70	0.75	8232
weighted avg	0.89	0.90	0.88	8232

Table 13. classification report training – gradient boost

- We can infer that the recall of class “1” is 0.40 while that of class “0” is 0.99 and accuracy of the model is 0.90
- The precision of class “1” is 0.88 while that of other class is 0.90

TESTING SET

- Model score : 0.88
- Confusion matrix :

```
[[2898    40]
 [ 368   222]]
```

Here, value of true positives is 2898 while that of true negative is 222 and value of false positive is 40 while that of false negative is 368.

	precision	recall	f1-score	support
0	0.89	0.99	0.93	2938
1	0.85	0.38	0.52	590
accuracy			0.88	3528
macro avg	0.87	0.68	0.73	3528
weighted avg	0.88	0.88	0.87	3528

Table 14. classification report testing – gradient boosting

- We can infer that the recall of class “1” is 0.38 while that of class “0” is 0.99 and accuracy of the model is 0.88
- The precision of class “1” is 0.85 while that of other class is 0.89

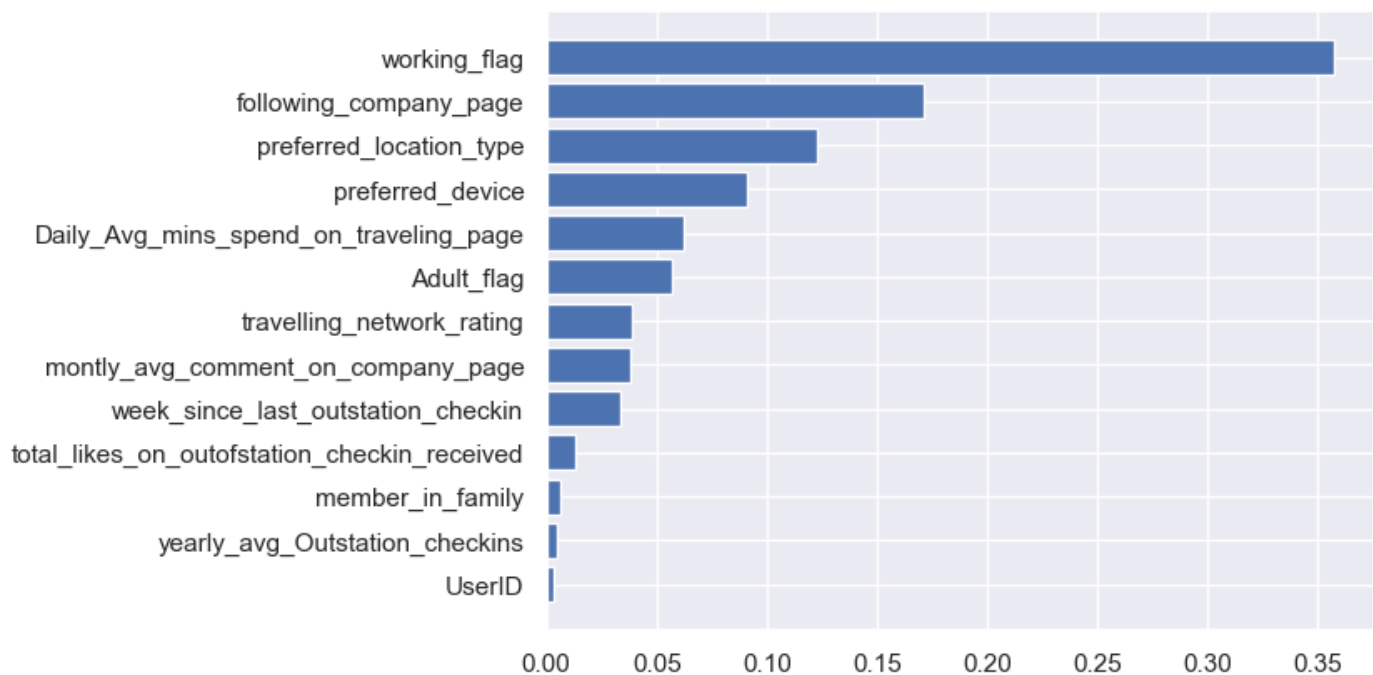


Fig 20. Feature importance – gbcl

INTERPRETATION : The above model is neither over-fitted nor under-fitted if we look at the precision score and accuracy is almost consistent in training and testing set.

According to the above figure the most important feature affecting the type of product taken by the customer is “**working_flag**”.

If the customer is working then he is more likely to go for outstation or domestic trips.

MODEL IV : RANDOM FOREST CLASSIFIER

- Base model of random forest classifier is built using the following parameters :
- n_estimators=100, random_state=1

TRAINING SET

- Model score : 1.0
- **Confusion matrix :**

```
[[ 6926    0]
 [    0 1306]]
```

Here, value of true positives is 6926 while that of true negative is 1306 and value of false positive is 1306.

	precision	recall	f1-score	support
0	1.00	1.00	1.00	6926
1	1.00	1.00	1.00	1306
accuracy			1.00	8232
macro avg	1.00	1.00	1.00	8232
weighted avg	1.00	1.00	1.00	8232

Table 15. classification report training – rfcl

- We can infer that the recall of class “1” is 1.0 while that of class “0” is 1.0 and accuracy of the model is 1.0
- The precision of class “1” is 1.0 while that of other class is 1.0

TESTING SET

- Model score : 0.95
- Confusion matrix :

```
[[2933    5]
 [ 155   435]]
```

Here, value of true positives is 2933 while that of true negative is 435 and value of false positive is 5 while that of false negative is 155.

	precision	recall	f1-score	support
0	0.95	1.00	0.97	2938
1	0.99	0.74	0.84	590
accuracy			0.95	3528
macro avg	0.97	0.87	0.91	3528
weighted avg	0.96	0.95	0.95	3528

Table 16. classification report testing – rfcl

- We can infer that the recall of class “1” is 0.74 while that of class “0” is 1.0 and accuracy of the model is 0.95
- The precision of class “1” is 0.99 while that of other class is 0.95

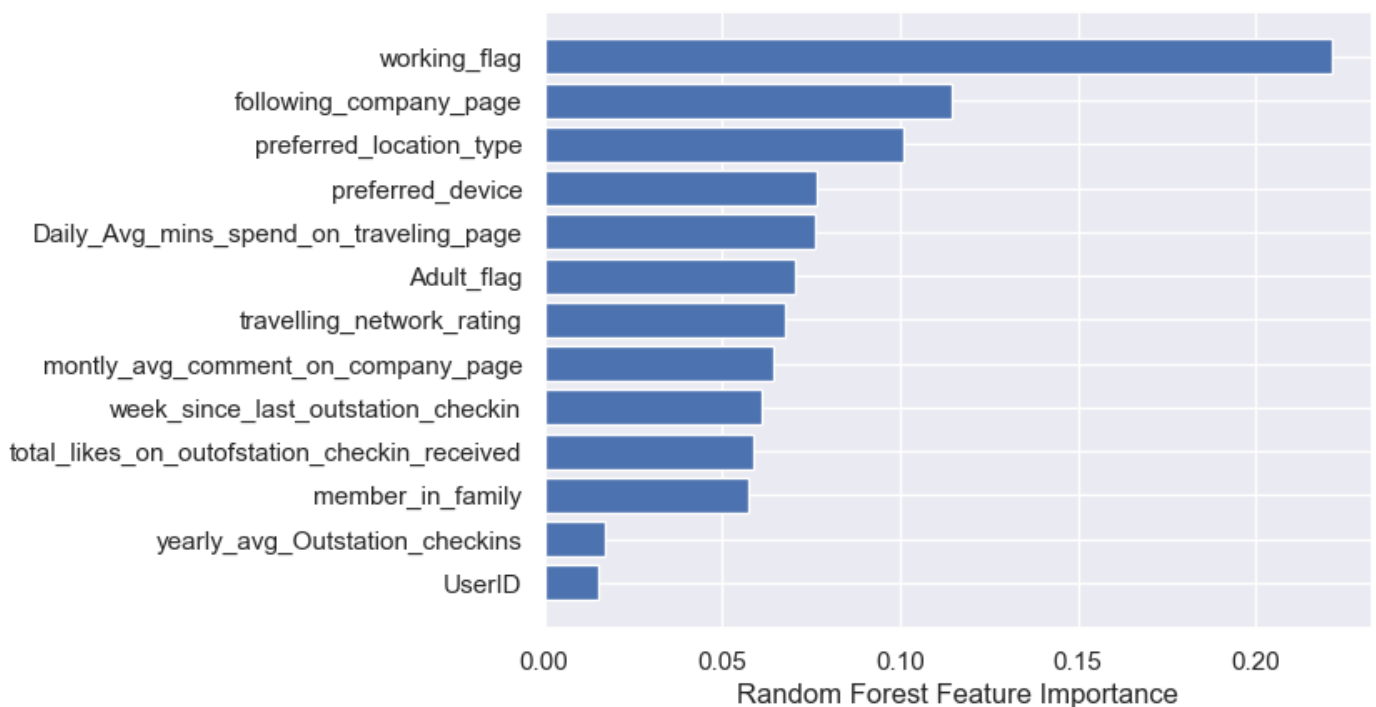


Fig 21. Feature importance – rfcl

INTERPRETATION : The above model is neither over-fitted nor under-fitted if we look at the precision score and accuracy is almost consistent in training and testing set.

Also, we have got more accuracy in random forest classifier model compared to naïve bayes and gradient boosting classifier.

As per the figure given above, the most important feature that affects the decision making of the customers to buy a particular product is “working_flag” and the least important feature is “yearly_avg_outstation_checkin”

MODEL TUNING

- Naïve bayes base model didn’t perform well compared to other model so lets try built naïve bayes with SMOTE.
SMOTE (synthetic minority oversampling technique) is **one of the most commonly used oversampling methods to solve the imbalance problem**. It aims to balance class distribution by randomly increasing minority class examples by replicating them.
- Our problem dataset is an imbalanced dataset as the people who have not taken the product (class “0”) are around 9864 while those who have taken the product (class “1”) are 1896.

MODEL V : NAÏVE BAYES WITH SMOTE

- After applying SMOTE the new shape of the dataset is as follows:
- Rows = 13852 and columns = 13

TRAINING SET

- Model score : 0.64
- Confusion matrix :

```
[[3598 3328]
 [1551 5375]]
```

Here, value of true positives is 3598 while that of true negative is 5375 and value of false positive is 3328 while that of false negative is 1551.

	precision	recall	f1-score	support
0	0.70	0.52	0.60	6926
1	0.62	0.78	0.69	6926
accuracy			0.65	13852
macro avg	0.66	0.65	0.64	13852
weighted avg	0.66	0.65	0.64	13852

Table 17. classification report training – naïve bayes SMOTE

- We can infer that the recall of class “1” is 0.78 while that of class “0” is 0.52 and accuracy of the model is 0.65
- The precision of class “1” is 0.62 while that of other class is 0.70

TESTING SET

- Model score : 0.55
- Confusion matrix :

```
[[1531 1407]
 [ 181  409]]
```

Here, value of true positives is 1531 while that of true negative is 409 and value of false positive is 1407 while that of false negative is 181.

	precision	recall	f1-score	support
0	0.89	0.52	0.66	2938
1	0.23	0.69	0.34	590
accuracy			0.55	3528
macro avg	0.56	0.61	0.50	3528
weighted avg	0.78	0.55	0.61	3528

Table 18. classification report testing – naïve bayes SMOTE

- We can infer that the recall of class “1” is 0.69 while that of class “0” is 0.52 and accuracy of the model is 0.55
- The precision of class “1” is 0.23 while that of class “0” is 0.89

INTERPRETATION : The above model is not good compared to our base model of naïve bayes. The precision has improved in training set but accuracy is decreased.

COMPARISON OF DIFFERENT MODELS :

- Performance of different models on the basis of precision and accuracy is given below in the form of the table :

	PRECISION (CLASS 1)		ACCURACY	
	TRAINING	TESTING	TRAINING	TESTING
Naïve bayes	0.43	0.40	0.83	0.82
Bagging	1.00	0.98	1.00	0.97
Gradient boosting	0.88	0.85	0.90	0.88
Random Forest Classifier	1.00	0.99	1.00	0.95
Naïve bayes with SMOTE	0.62	0.23	0.65	0.55

Table 19. comparison of models

INTERPRETATION :

- Interest class here is “1” i.e people who have taken the product advertised by the company.
- The important metric here is Precision as it is crucial for information retrieval where positive class mattered the most as compared to the negative.
- After comparing the precision of class “1” of different models we can say that naïve bayes and naïve bayes with SMOTE are the worst performing models.
- **Bagging and Random forest classifier** models are performing really nice as the precision and accuracy both is high.
- Company can go for either of the model for further decision making process but as precision of random forest classifier is slightly more so we should go for this model only.
- As per random forest classifier, the **most important feature** affecting the sale of the product (trips advertised on social media page) is **working flag**.
- Also, preferred location type and preferred devices are also important in determining the choice of package.

BUSINESS RECOMMENDATIONS

- As the most preferred location by the customers is “Beach” and “Financial” so the aviation company can club both the products together to offer lucrative packages like, people going for **financial trips can get 2 days stay** near the beach resort.
- People having laptops tends to buy the package more compared to people using mobile phones so the advertisement can be displayed using a **wide range of digital formats, bigger creative giving the superior user experience.**
- **Working people** tends to go for domestic or international trips more often so customized packages can be made for frequent visitors by giving them **extra discounts** or clubbing different offers.
- **People following the Aviation company’s page** affects the tendency of buying the package so better user experience and offers can be displayed on the Company’s page only to attract more customers