

# Outline

- Constraint Satisfaction Problems (CSP)
- Backtracking search for CSPs

# Constraint Satisfaction Problems

Chapter 5  
Section 1 – 3

# Outline

- Constraint Satisfaction Problems (CSP)
- Backtracking search for CSPs
- Local search for CSPs

# Constraint satisfaction problems (CSPs)


- Standard search problem:
  - **state** is a "black box" – any data structure that supports successor function, heuristic function, and goal test□
- CSP:
  - **state** is defined by **variables**  $X_i$  with **values** from **domain**  $D_i$
  - **goal test** is a set of **constraints** specifying allowable combinations of values for subsets of variables□
- Simple example of a **formal representation language**
- Allows useful **general-purpose** algorithms with more power than standard search algorithms

# Example: Map-Coloring



- **Variables**  $WA, NT, Q, NSW, V, SA, T$
- **Domains**  $D_i = \{\text{red, green, blue}\}$
- **Constraints:** adjacent regions must have different colors
- e.g.,  $WA \neq NT$ , or  $(WA, NT)$  in  $\{(\text{red, green}), (\text{red, blue}), (\text{green, red}), (\text{green, blue}), (\text{blue, red}), (\text{blue, green})\}$


# Example: Map-Coloring

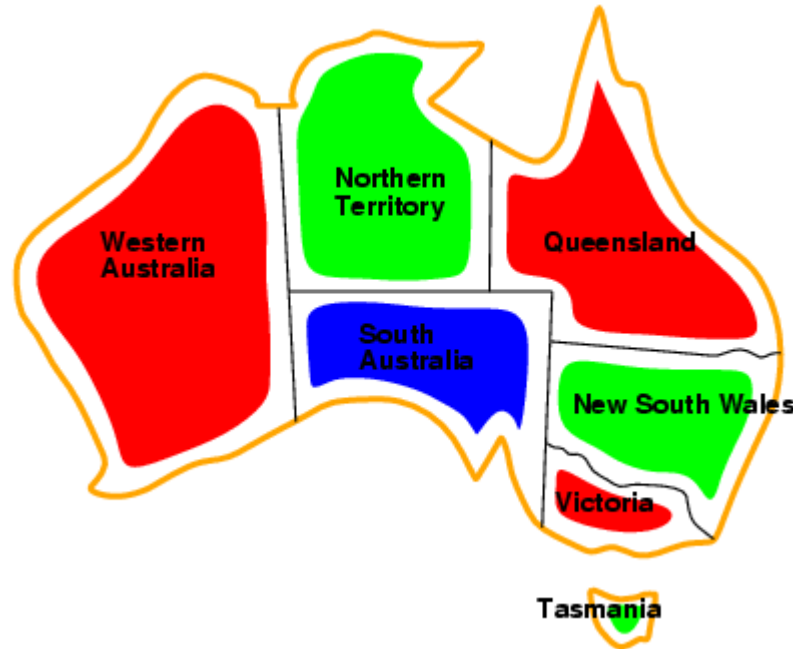

- **Solutions** are **complete** and **consistent** assignments, e.g., WA = red, NT = green, Q = red, NSW = green, V = red, SA = blue, T = green

# Constraint graph

- **Binary CSP:** each constraint relates two variables ☐
- **Constraint graph:** nodes are variables, arcs are constraints ☐

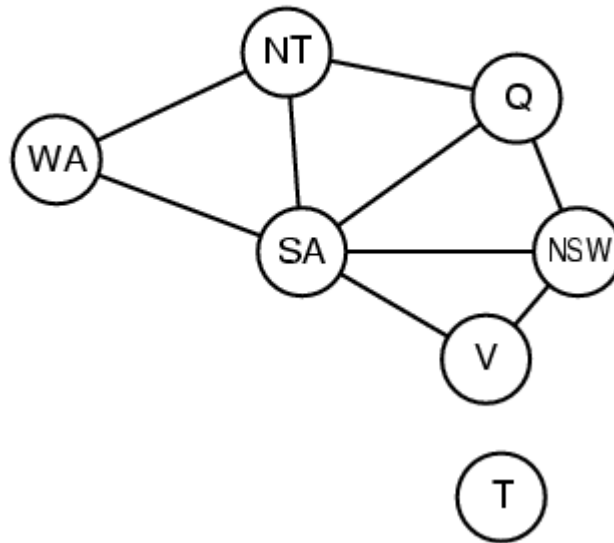

# Varieties of CSPs

- Discrete variables□
  - finite domains:
    - $n$  variables, domain size  $d \rightarrow O(d^n)$  complete assignments
    - e.g., Boolean CSPs, incl. ~Boolean satisfiability (NP-complete)
  - infinite domains:
    - integers, strings, etc.
    - e.g., job scheduling, variables are start/end days for each job
    - need a constraint language, e.g.,  $StartJob_1 + 5 \leq StartJob_3$
- Continuous variables
  - linear constraints solvable in polynomial time by linear programming




# Varieties of constraints

- **Unary** constraints involve a single variable,
  - e.g.,  $SA \neq \text{green}$
- **Binary** constraints involve pairs of variables,
  - e.g.,  $SA \neq WA$
- **Higher-order** constraints involve 3 or more variables,
  - e.g., cryptarithmic column constraints

# Example: Cryptarithmic

$$\begin{array}{r}
 \text{T W O} \\
 + \text{T W O} \\
 \hline
 \text{F O U R}
 \end{array}$$

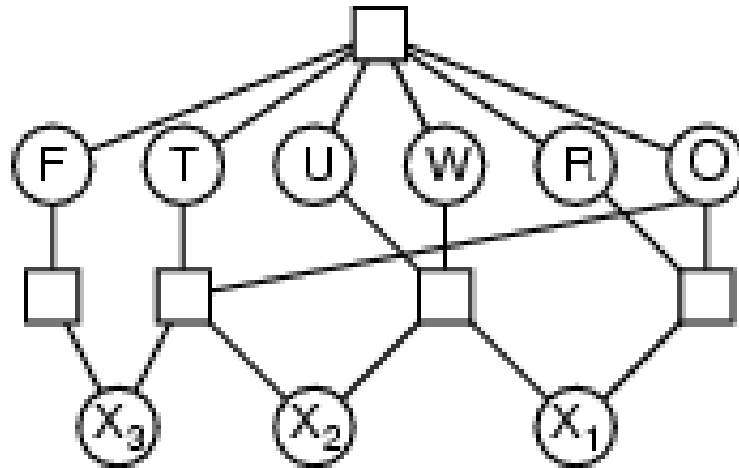

- **Variables:**  $F T U W$   
 $R O X_1 X_2 X_3$
- **Domains:**  $\{0, 1, 2, 3, 4, 5, 6, 7, 8, 9\}$
- **Constraints:**  $\text{Alldiff}(F, T, U, W, R, O)$ 
  - $O + O = R + 10 \cdot X_1$
  - $X_1 + W + W = U + 10 \cdot X_2$
  - $X_2 + T + T = O + 10 \cdot X_3$
  - $X_3 = F, T \neq 0, F \neq 0$

# Real-world CSPs

- Assignment problems
  - e.g., who teaches what class
- Timetabling problems
  - e.g., which class is offered when and where?
- Transportation scheduling
- Factory scheduling
- Notice that many real-world problems involve real-valued variables

# Standard search formulation (incremental)

Let's start with the straightforward approach, then fix it

States are defined by the values assigned so far

- **Initial state**: the empty assignment  $\{ \}$
  - **Successor function**: assign a value to an unassigned variable that does not conflict with current assignment  
→ fail if no legal assignments
  - **Goal test**: the current assignment is complete
1. This is the same for all CSPs
  2. Every solution appears at depth  $n$  with  $n$  variables  
→ use depth-first search
  3. Path is irrelevant, so can also use complete-state formulation
  4.  $b = (n - \ell)d$  at depth  $\ell$ , hence  $n! \cdot d^n$  leaves

# Backtracking search

- Variable assignments are **commutative**, i.e.,  
[ WA = red then NT = green ] same as [ NT = green then WA = red ]
- Only need to consider assignments to a single variable at each node  
→  $b = d$  and there are  $d^n$  leaves
- Depth-first search for CSPs with single-variable assignments is called **backtracking** search
- Backtracking search is the basic uninformed algorithm for CSPs
- Can solve  $n$ -queens for  $n \approx 25$

# Backtracking search

```
function BACKTRACKING-SEARCH(csp) returns a solution, or failure
  return RECURSIVE-BACKTRACKING({}, csp)

function RECURSIVE-BACKTRACKING(assignment, csp) returns a solution, or failure
  if assignment is complete then return assignment
  var ← SELECT-UNASSIGNED-VARIABLE(Variables[csp], assignment, csp)
  for each value in ORDER-DOMAIN-VALUES(var, assignment, csp) do
    if value is consistent with assignment according to Constraints[csp] then
      add { var = value } to assignment
      result ← RECURSIVE-BACKTRACKING(assignment, csp)
      if result ≠ failure then return result
      remove { var = value } from assignment
  return failure
```

# Backtracking example




# Backtracking example






# Backtracking example

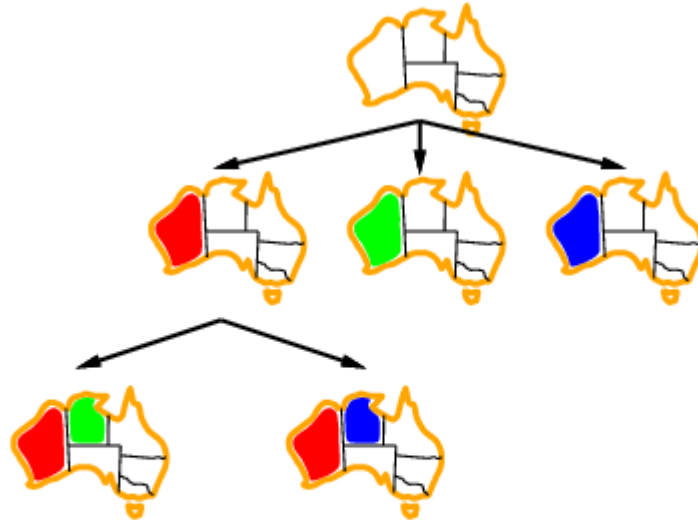

# Backtracking example

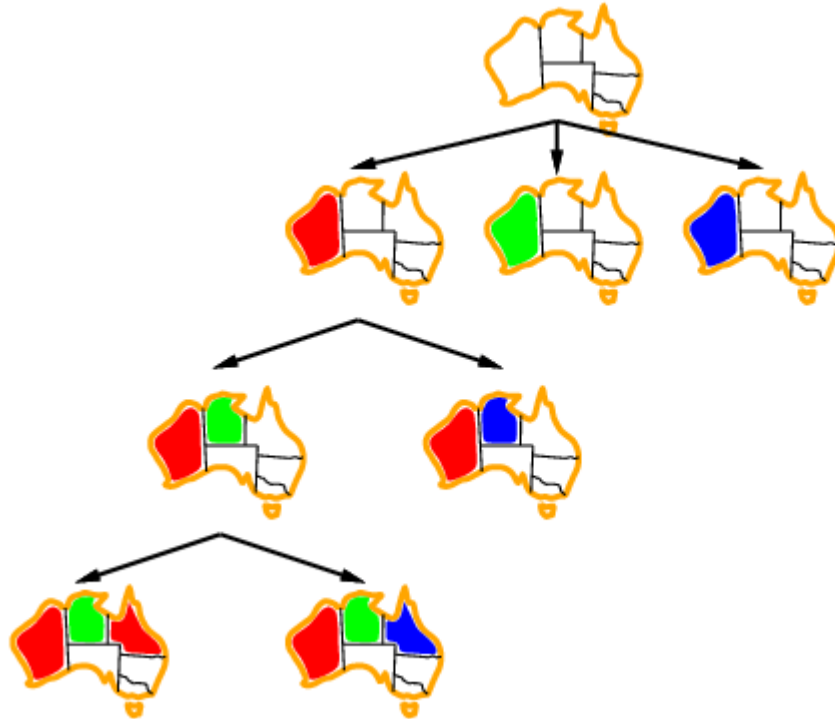


# Improving backtracking efficiency

- **General-purpose** methods can give huge gains in speed:
  - Which variable should be assigned next?
  - In what order should its values be tried?
  - Can we detect inevitable failure early?

# Most constrained variable


- Most constrained variable:  
choose the variable with the fewest legal  
values ☐

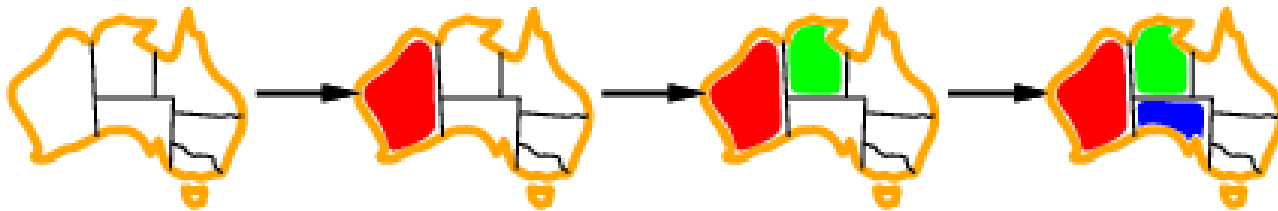

- a.k.a. **minimum remaining values (MRV)**  
heuristic ☐


# Most constraining variable

- Tie-breaker among most constrained variables
- Most constraining variable:
  - choose the variable with the most constraints on remaining variables

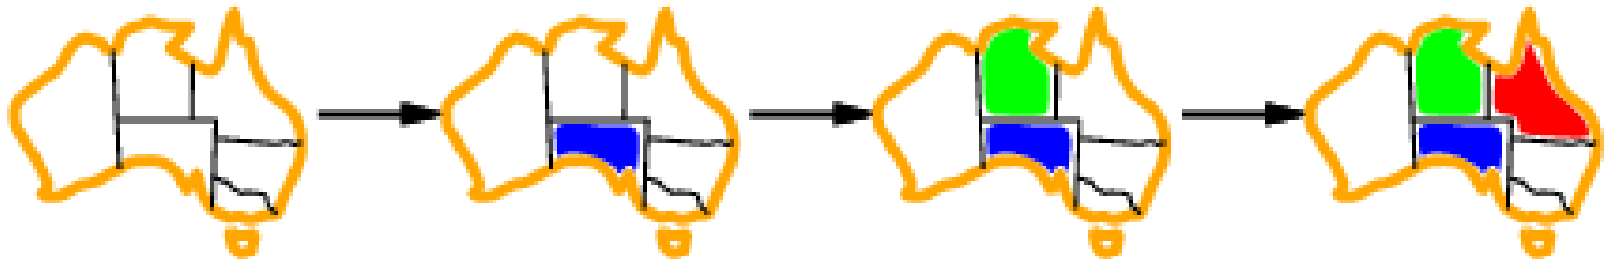

# Least constraining value

- Given a variable, choose the least constraining value:
  - the one that rules out the fewest values in the remaining variables

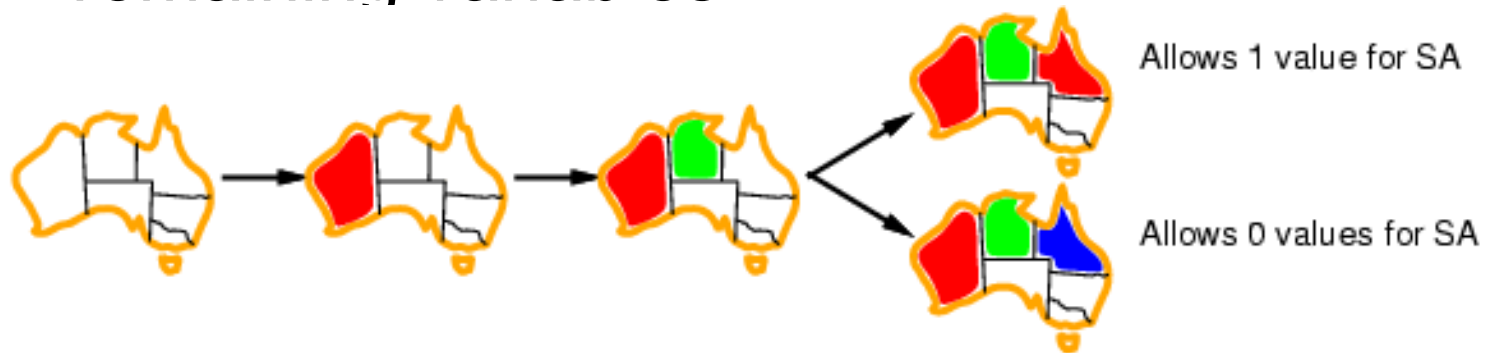

- Combining these heuristics makes 1000 queens feasible ☐


# Forward checking

- Idea:
  - Keep track of remaining legal values for unassigned variables
  - Terminate search when any variable has no legal values ☐



# Forward checking


- Idea:
  - Keep track of remaining legal values for unassigned variables
  - Terminate search when any variable has no legal values □

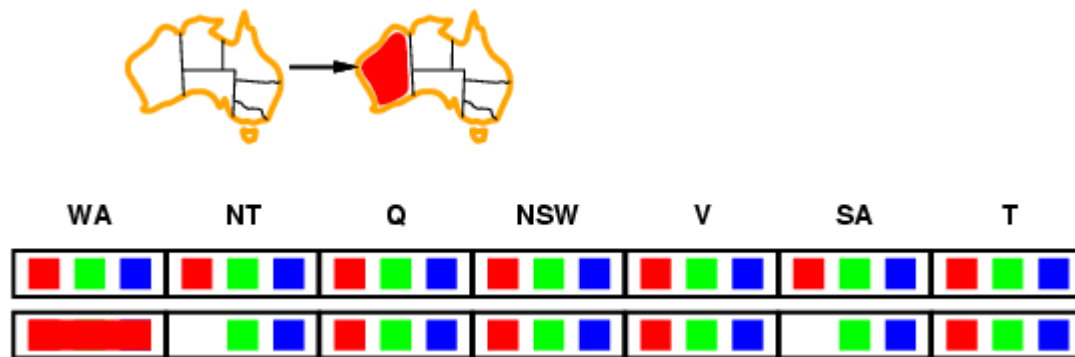




# Forward checking

- Idea:
  - Keep track of remaining legal values for unassigned variables
  - Terminate search when any variable has no legal values □

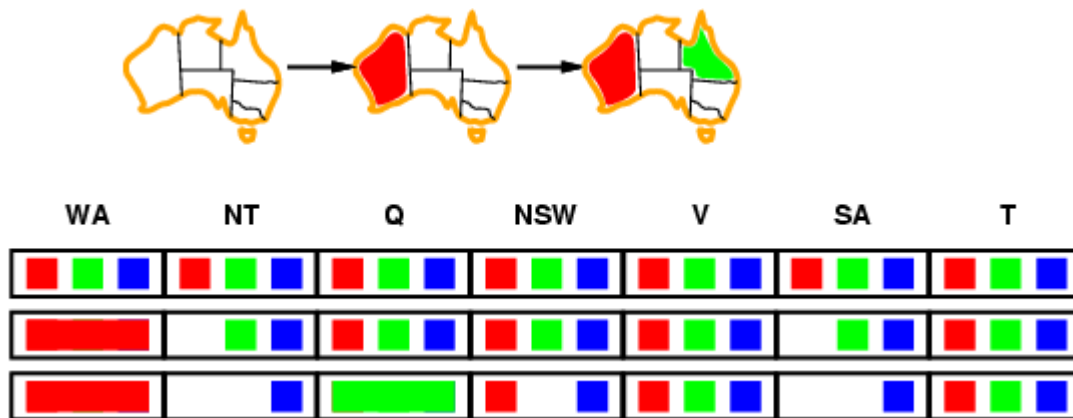


# Forward checking

- Idea:
  - Keep track of remaining legal values for unassigned variables
  - Terminate search when any variable has no legal values □

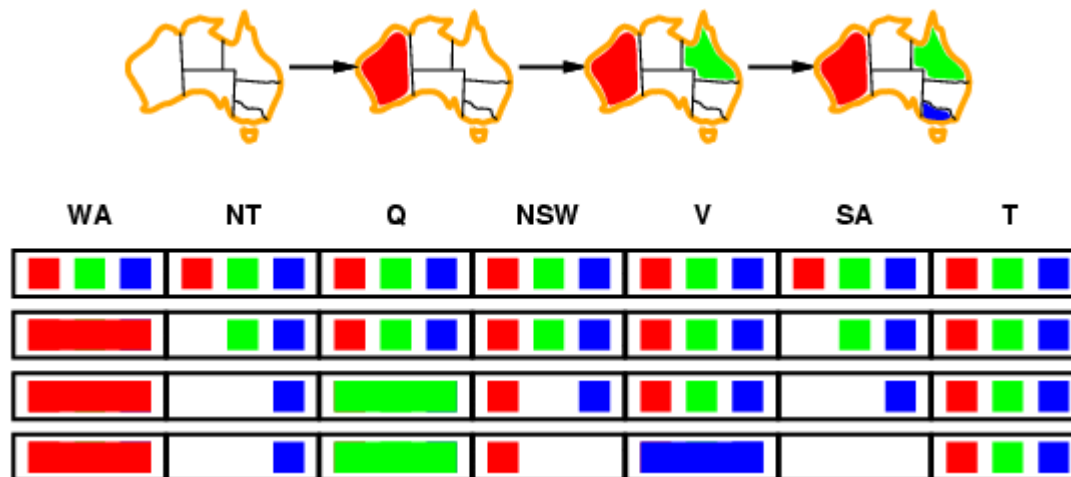

# Constraint propagation


- Forward checking propagates information from assigned to unassigned variables, but doesn't provide early detection for all failures:

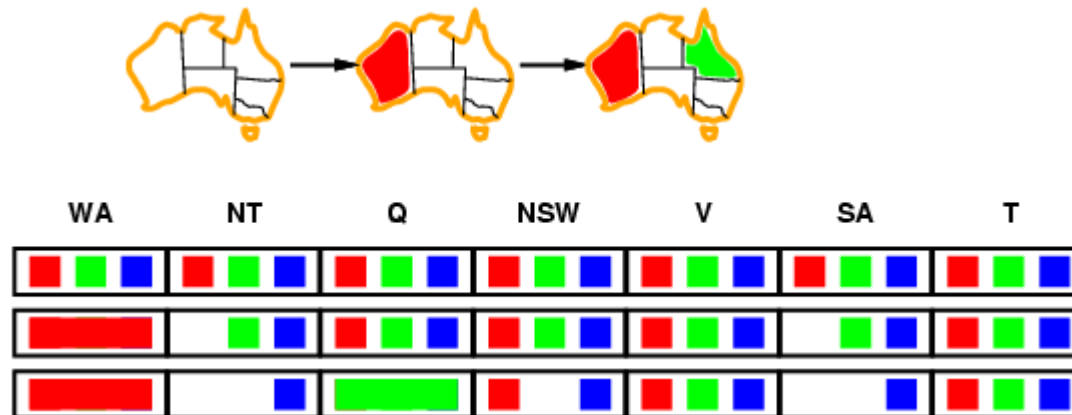

- NT and SA cannot both be blue!
- Constraint propagation repeatedly enforces constraints locally


# Arc consistency

- Simplest form of propagation makes each arc **consistent**
- $X \rightarrow Y$  is consistent iff  
for **every** value  $x$  of  $X$  there is **some** allowed  $y$

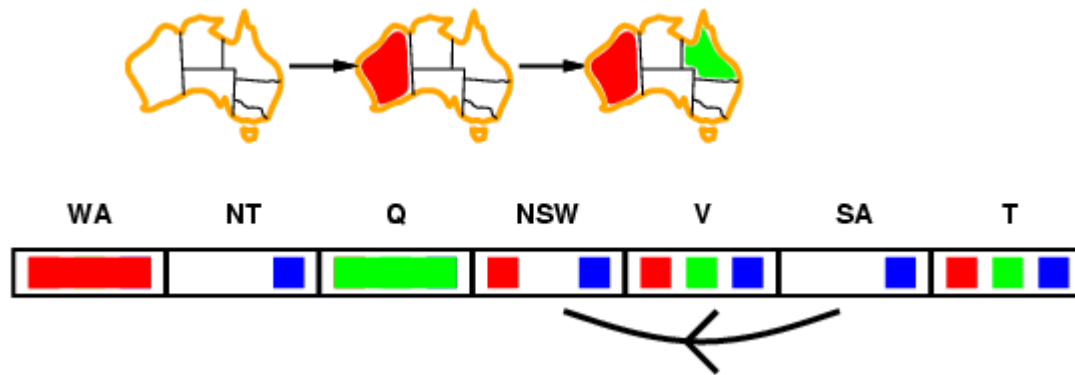


# Arc consistency

- Simplest form of propagation makes each arc **consistent**
- $X \rightarrow Y$  is consistent iff  
for **every** value  $x$  of  $X$  there is **some** allowed  $y$

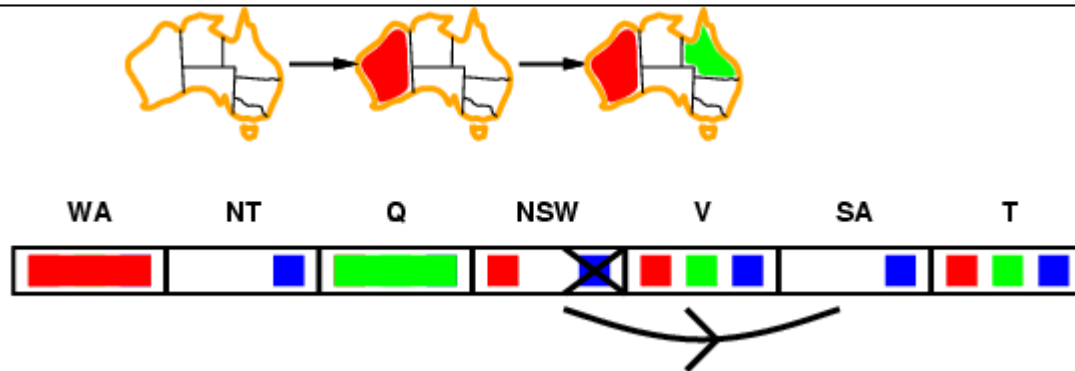

# Arc consistency


- Simplest form of propagation makes each arc **consistent**
- $X \rightarrow Y$  is consistent iff  
for **every** value  $x$  of  $X$  there is **some** allowed  $y$

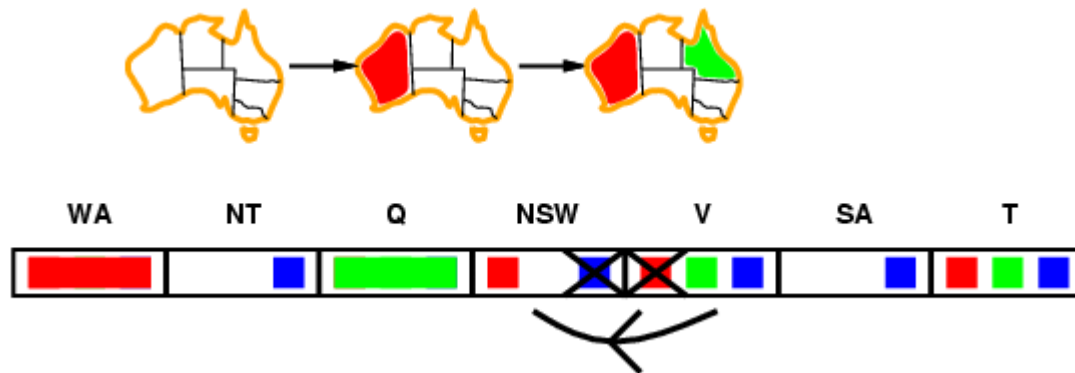

- If  $X$  loses a value, neighbors of  $X$  need to be rechecked

# Arc consistency

- Simplest form of propagation makes each arc **consistent**
- $X \rightarrow Y$  is consistent iff  
for **every** value  $x$  of  $X$  there is **some** allowed  $y$

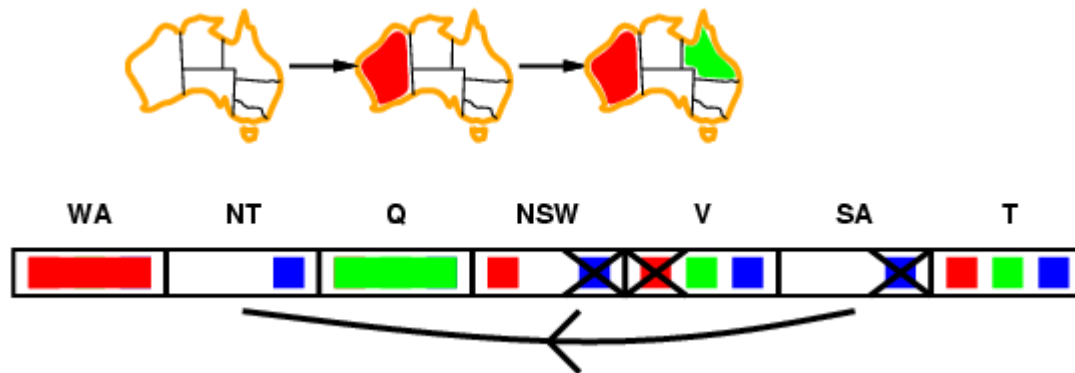

- If  $X$  loses a value, neighbors of  $X$  need to be rechecked
- Arc consistency detects failure earlier than forward checking
- Can be run as a preprocessor or after each assignment

# Arc consistency algorithm AC-3

```
function AC-3(csp) returns the CSP, possibly with reduced domains
  inputs: csp, a binary CSP with variables  $\{X_1, X_2, \dots, X_n\}$ 
  local variables: queue, a queue of arcs, initially all the arcs in csp

  while queue is not empty do
     $(X_i, X_j) \leftarrow \text{REMOVE-FIRST}(\textit{queue})$ 
    if RM-INCONSISTENT-VALUES( $X_i, X_j$ ) then
      for each  $X_k$  in NEIGHBORS[ $X_i$ ] do
        add  $(X_k, X_i)$  to queue



---


function RM-INCONSISTENT-VALUES( $X_i, X_j$ ) returns true iff remove a value
  removed  $\leftarrow$  false
  for each  $x$  in DOMAIN[ $X_i$ ] do
    if no value  $y$  in DOMAIN[ $X_j$ ] allows  $(x, y)$  to satisfy constraint( $X_i, X_j$ )
      then delete  $x$  from DOMAIN[ $X_i$ ]; removed  $\leftarrow$  true
  return removed
```

- Time complexity:  $O(n^2d^3)$



# Summary

- CSPs are a special kind of problem:
  - states defined by values of a fixed set of variables
  - goal test defined by constraints on variable values
- Backtracking = depth-first search with one variable assigned per node
- Variable ordering and value selection heuristics help significantly
- Forward checking prevents assignments that guarantee later failure
- Constraint propagation (e.g., arc consistency) does additional work to constrain values and detect inconsistencies