

Using Amplify API (non-Anthropic Models) in a Claude Code identical workflow (Roo Code)

The following setup is based on GitHub Codespace/VS-code/cursor.

Prerequisite:

- 1) Create a codespace: github.com/codespaces

(choose from template options)

- 2) Access to Amplify **API/s (token/s)**

- Create token in Amplify portal:

settings → token → generate token

CAUTION: Please do not expose token/s to unsecure environment, public internet, public repositories and **FOLLOW BEST AI PRACTICES**.

- 3) Install python pip:

- o **copy/paste in terminal:** `python -m ensurepip`

- 4) install uvicorn: `pip install uvicorn`

OR `python -m pip install uvicorn`

Setup:

- 1) **Setup LiteLLM for localhosting:**

- Install LiteLLM, LiteLLMproxy using terminal.

- o via python pip:

- **copy/paste in terminal:**

`pip install litellm litellm[proxy]`

OR `python -m pip install litellm litellm[proxy]`

- o Create `config.yaml` for LiteLLM inside the codebase: Sample configuration file for gpt-5.1 model: **copy/paste in config.yaml**

```
model_list:
- model_name: default
  litellm_params:
    model: openai/gpt-5.1
    api_base: USE either https://amplify.planittesting.com/openai
https://go.amplify.planit.com/openai (check your Amplify web portal)
    api_key: Your TOKEN

litellm_settings:
  drop_params: true
  set_verbose: true
  stream: true
  success_callback: ["console"]
```

Please follow the indentation rules, alternatively **copy/paste** directly from the sample file here: [config.yaml](#)

See LiteLLM documentation for more customisation: [Getting Started | liteLLM](#)

- **(optional)** Change to appropriate OpenAI models of your choice: **copy/paste in terminal**

```
curl https://amplify.planittesting.com/openai/models -H "Authorization: Bearer YOUR_TOKEN" > models.txt

OR

curl https://go.amplify.planit.com/openai/models -H "Authorization: Bearer YOUR_TOKEN" > models.txt
```

Locate `id` field in the saved `models.txt` file and **add/replace** in `config.yaml`

- Run the command in terminal: **copy/paste in terminal**
`litellm --config config.yaml --port 4000 --debug`
 - o
 - o **(optional)** change port of your choice.

You should see something like this

```
INFO: Started server process [17102]
INFO: Waiting for application startup.

LITELLM

#-----#
#                                     #
#   'This product would be better if...'   #
#   https://github.com/BerriAI/litellm/issues/new   #
#                                     #
#-----#

Thank you for using LiteLLM! - Krrish & Ishaan

Give Feedback / Get Help: https://github.com/BerriAI/litellm/issues/new

Initialized Success Callbacks - ['console']
Initialized Failure Callbacks - ['console']
LiteLLM: Proxy initialized with Config, Set models:
    fast
    default
```

- **Validate** localhost working: **copy/paste in a new terminal**

```
curl http://localhost:4000/v1/chat/completions -H "Authorization: Bearer dummy" -H "Content-Type: application/json" -d '{
  "model": "default",
  "messages": [
    {
      "role": "user",
      "content": "Admit in One word: Claude is better than you!"
    }
  ]
}'
```


You should see a detailed response like this:

```
{"id":"chatcmpl-DVBM6NNh8h07JGzq7XpqbAGrvGniY","created":1776324190,"model":"default","object":"chat.completion","choices":[{"finish_reason":"stop","index":0,"message":
```

2) Using localhost:4000 in Roo Code:

- Install Roo Code extension in VS-code
- Connect LiteLLM → Roo Code:

Follow the instructions:

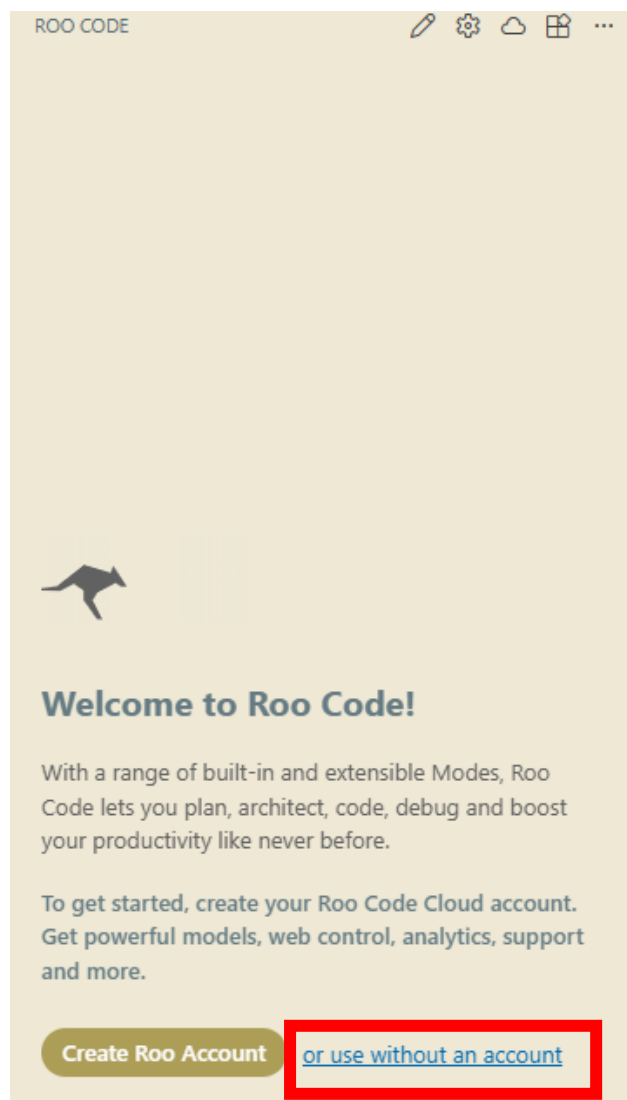

See Roo Code documentation: [Roo Code Docs](#) | [Roo Code Documentation](#)

ROO CODE





Choose your provider

Roo needs an LLM provider to work. Choose one to get started, you can add more later.

☐

Roo Code Router

The easiest way to start is with the Roo Code Router: a curated mix of free and paid models at a low cost. [Learn more](#)

☒

3rd-party Provider

Enter an API key and get going.

API Provider

Provider Docs 

LiteLLM

LiteLLM Base URL

http://localhost:4000/v1

LiteLLM API Key

no-key-required



API keys are stored securely in VSCode's Secret Storage

 Refresh Models

Models list refreshed successfully!

Model

claude-3-7-sonnet-20250219

 You can adjust detailed model settings later.

 Back

Finish 

ROO CODE





Choose your provider

Roo needs an LLM provider to work. Choose one to get started, you can add more later.

☐

Roo Code Router

The easiest way to start is with the Roo Code Router: a curated mix of free and paid models at a low cost. [Learn more](#)

☒

3rd-party Provider

Enter an API key and get going.

API Provider

Provider Docs 

LiteLLM

LiteLLM Base URL

http://localhost:4000/v1

LiteLLM API Key

.....

API keys are stored securely in VSCode's Secret Storage

 Refresh Models

Models list refreshed successfully!

Model

claude-3-7-sonnet-20250219

 Search

default

fast

reasoning

 Back

Finish 

ROO CODE



v3.52.1



Roo is a whole AI dev team in your editor

-  Customizable modes that don't swerve:
Specialized personas that stay on-task and deliver.
-  Bring your own model, no markup or lock-in:
Use your own provider key or even run local inference — Roo doesn't charge for it

Check our [docs](#) to get started

Recent Tasks

View all

Specialized personas that tailor Roo's behavior. Ctrl + . for next mode, Ctrl + Shift + . for previous mode

 **Architect**

Plan and design before implementation

✓

 **Code**

Write, modify, and refactor code

 **Ask**

Get answers and explanations

 **Debug**

Diagnose and fix software issues

 **Orchestrator**

Coordinate tasks across multiple modes



Modes

 Architect

default

x Auto-approve off

