Web Development

HTML

❖ Image and Image Mapping

1. <img> tag

- The <img> tag serves the purpose of embedding images directly within a web page.
- It is a self-contained tag, so there's no need for a closing </img> tag.
- The "src" (source) attribute is utilized to designate the source URL of the image file.
- The "alt" (alternative) attribute is responsible for supplying alternative text, in cases where the image cannot be loaded or for accessibility reasons.
- Attributes such as width and height to manage the image's dimensions. Nevertheless, it is often recommended to use CSS for styling purposes.
- **Online image is called→ External Image / Absolute URL**
- **Local Image is called → Internal Image / Relative Path**

- Syntax →

(For Local photo / my computer photo →)

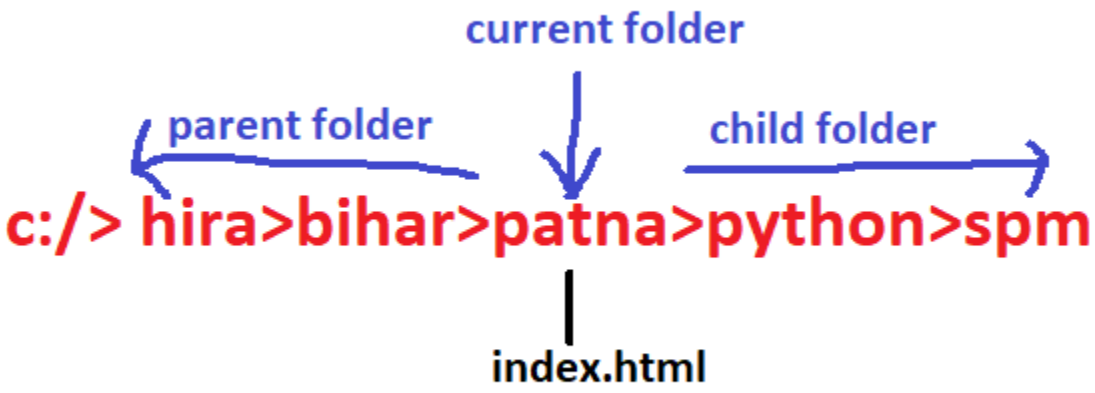

<img src="bihar.jpg" alt="Bihar image" width="300" height ="200">

OR

<img src="bihar.jpg" alt="Bihar image" width="300" height ="200" title =”Bihar map”> (title use करने से यह हुआ की यदि कोई user फोटो पर cursor लेकर जायेगा तो जो आपने title में लिखा हैं वो दिख जायेगा)

OR

(if image save in other folder)

<img src="/1st pro/india.jpg">

(For Online photo)

<img src="https://m.media-amazon.com/images/I/51gTefRkGjL._AC_UF894,1000_QL80_.jpg" alt="maa saraswati"width="250"height= "200">

Clickable image

<a href="https://hira24y7.github.io/bcanotes/"> <img src="bihar.jpg"> </a>

OR (with target)

<a href="https://hira24y7.github.io/bcanotes/" target="_main"> <img src="bihar.jpg"> </a>

(target मतलब लिंक किस जगह open होगा -

_self → Same tab में open होगा (Default)

_blank → New tab में open होगा

_parent → Parent frame में open होगा

_top → Full window में open होगा

_main → जब page में <iframe name="main"> हो।

```
<img src="bihar.jpg" target="_blank" widht="150" height="150">
```

http://127.0.0.1:5500/index.html#13

contact

Lorem ipsum dolor sit amet, consectetur adipisicing elit. Exercitatione

❖ For image download

<a href="bihar.jpg" download>Download image</a><img src="bihar.jpg">

```
<body>
  <a href="bihar.jpg" download>Download image</a><img src="bihar.jpg">
</body>
```

http://127.0.0.1:5500/index.html

Download image

HIRA KUMAR

2. <figcaption>

- <figcaption> tag is used to give a caption (title or description) to an image, diagram, chart, or any content inside <figure> tag.
- Syntax → <figure>
  <img> any image
  <figcaption> name of image </figcaption>
  </figure>

```
<figure>
    <img src="bihar.jpg" height="300">
    <figcaption>Bihar ka photo</figcaption>
</figure>
```

Bihar ka photo

✓ यदि image को center में रखना चाहते हैं तो ऐसे करें - <figure> any image </figure>
(नोट:- HTML5 में इसे avoid करें और आप CSS का use करें)

❖ <figure> tag

- **<figure> tag is used** in HTML to group media content (like images, diagrams, code, etc.) along with its caption.
- Example –

```
<figure>
  <img src="image.jpg" alt="Nature Image">
  <figcaption>Beautiful Nature View</figcaption>
</figure>
```

Here
<figure> → container for content
<figcaption> → description/caption
It is a **semantic tag**

❖ Image Mapping (Image maps)

- Image mapping allows you to define clickable regions on an image, each associated with a specific action or URL.
- This is useful for creating interactive diagrams, navigation menus, or image-based forms.
- The <map> element has a name attribute that should match the usemap attribute of the associated <img>element.
- Each<area> element can have different attributes, depending on the shape of the clickable area:
    - ✓ For rectangular areas: shape, coords, and href.
    - ✓ For circular areas: shape, coords, and href.
    - ✓ For polygonal areas: shape, coords, and href.

✓ Shape → use any shape rectange,circle,…..

✓ Coords→ co-ordinates any specific area in image

✓ Href → do link provide

✓ Rectangle (rect) coords → " x1,y1,x2,y2"
Here x1,y1 → top-left point and x2,y2 → bottom-right point

✓ Circle (circle) coords → "x,y,r"
Here x,y → center point, r→ radius

In rectangle to find top-left & bottom-right any image → use MS-Paint
Measure = pixel
Example → any image
Top (x1) = 100, left (y1)=200 & full size of image part width & height(400*350) then –
X2 = x1+width → 100+400 → 500
Y2=y1+height → 200+350 → 550
Now - coords ="x1,y1,x2,y2"
Coords = "100,200,500,550"

- Syntax →

```
<img src="bihar.jpg" usemap="#workmap" width="400">
<map name="workmap">
 <area shape="rect" coords="34,44,270,350" href="https://www.google.com">
```

Example →

```
<center><img src="computer.JPG" alt="computer" usemap="#workmap"> </center>
<map name="workmap">
<area shape="rect" coords="20,100,320,240" title="computer" href="https://www.google.com">
<area shape="rect" coords="34,308,295,390" title="keyword" href="https://www.google.com">
<area shape="rect" coords="300,312,345,378" title="mouse" href="https://www.google.com">
<area shape="rect" coords="328,44,530,313" title="System unit" href="https://www.google.com">
```

http://127.0.0.1:5500/index.html#13 133%

Lorem ipsum dolor sit amet, consectetur adipisicing elit. Harum sequi eligendi omnis id itaque totam hic eius adipisci lat facere atque, magni eos commodi quaerat deleniti deserunt?

❖ <iframe> tag

- The <iframe> (Inline Frame) tag is used to embed another web page inside the current HTML page.
- It displays a webpage, video, map, or other external content inside a frame.
- Website inside website
- Syntax → <iframe src="link"></iframe>

```
<iframe src="https://ppup.ac.in/" width="500" height="300"></iframe>
```

```
<body>
    <h1> my shop location </h1>
    <center>
    <iframe src="https://www.google.com/maps/embed?pb=!1m18!1m12!1m3!1d3609.8761095182026!2d85.5257494!3d25.207400199999995!2m3!1f0!2f0!3f0!3m2!1i1024
    width="600" height="450" style="border:0;" allowfullscreen="" loading="lazy" referrerpolicy="no-referrer-when-downgrade"></iframe>
   </center>
```

my shop location

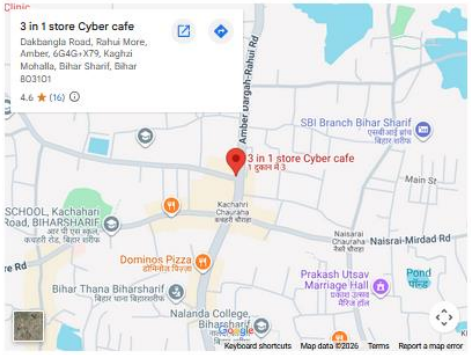

❖ <Video> tag

- The <video> tag in HTML is used to embed video content in a web page.

❖ <source> Tag

- Used inside <video> tag to specify multiple video files.

❖ <track> Tag

- Used to add subtitles, captions, or descriptions.

❖ Important attributes

✓ Src → Specifies the video file

- ✓ Controls → Shows play, pause, volume buttons
- ✓ Autoplay → Video plays automatically
- ✓ Loop → Video repeats again and again
- ✓ Muted → Video starts without sound
- ✓ Width → Sets video width
- ✓ Height → Sets video hight
- ✓ Poster → Shows image before video plays (poster="hira.jpg")
- ✓ Preload → Controls loading behavior (auto, metadata, none)

Example –

```
<body>
        <h2> Bihar & Kashi Video </h2>
       <a><video src="bihar.mp4" width="500" height="300" controls
      loop poster="bihar.jpg"></video></a>  
        <a><video src="kashi.mp4" width="500" height="300" controls
      loop muted autoplay></video></a>
</body>
```

```
<h2> See Kashi Video shoot by me</h2>
<a><video src="bihar.mp4" width="500" height="300" controls loop poster="bihar.jpg"></video></a> &
ensp;
 <a><video src="kashi.mp4" width="500" height="300" controls loop muted autoplay></video></a>
```

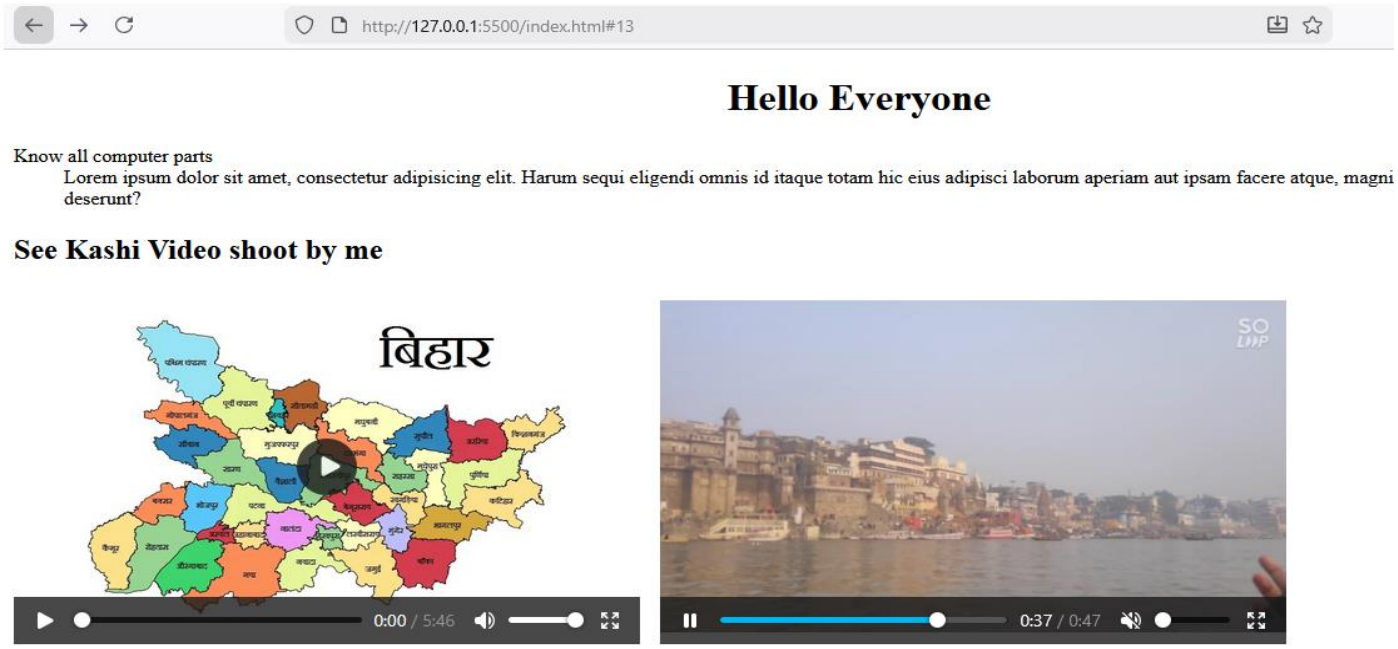

Best view for video & audio tag → open chrome browser

➢ <audio> tag

- The <audio> tag in HTML5 is used to embed sound or music in a web page.

❖ Important attributes in audio

✓ Src → Specifies the video file
✓ Controls → Shows play, pause, volume buttons
✓ Autoplay → Video plays automatically
✓ Loop → Video repeats again and again
✓ Muted → Video starts without sound
✓ Preload → Controls loading behavior (auto, metadata, none)

- Example –

```
<body>
        <h4> Audio </h4>
          <audio src="shiv.mp3" controls loop muted></audio>
</body>
```

```
<h4> Audio </h4>
<audio src="shiv.mp3" controls loop muted></audio>
```

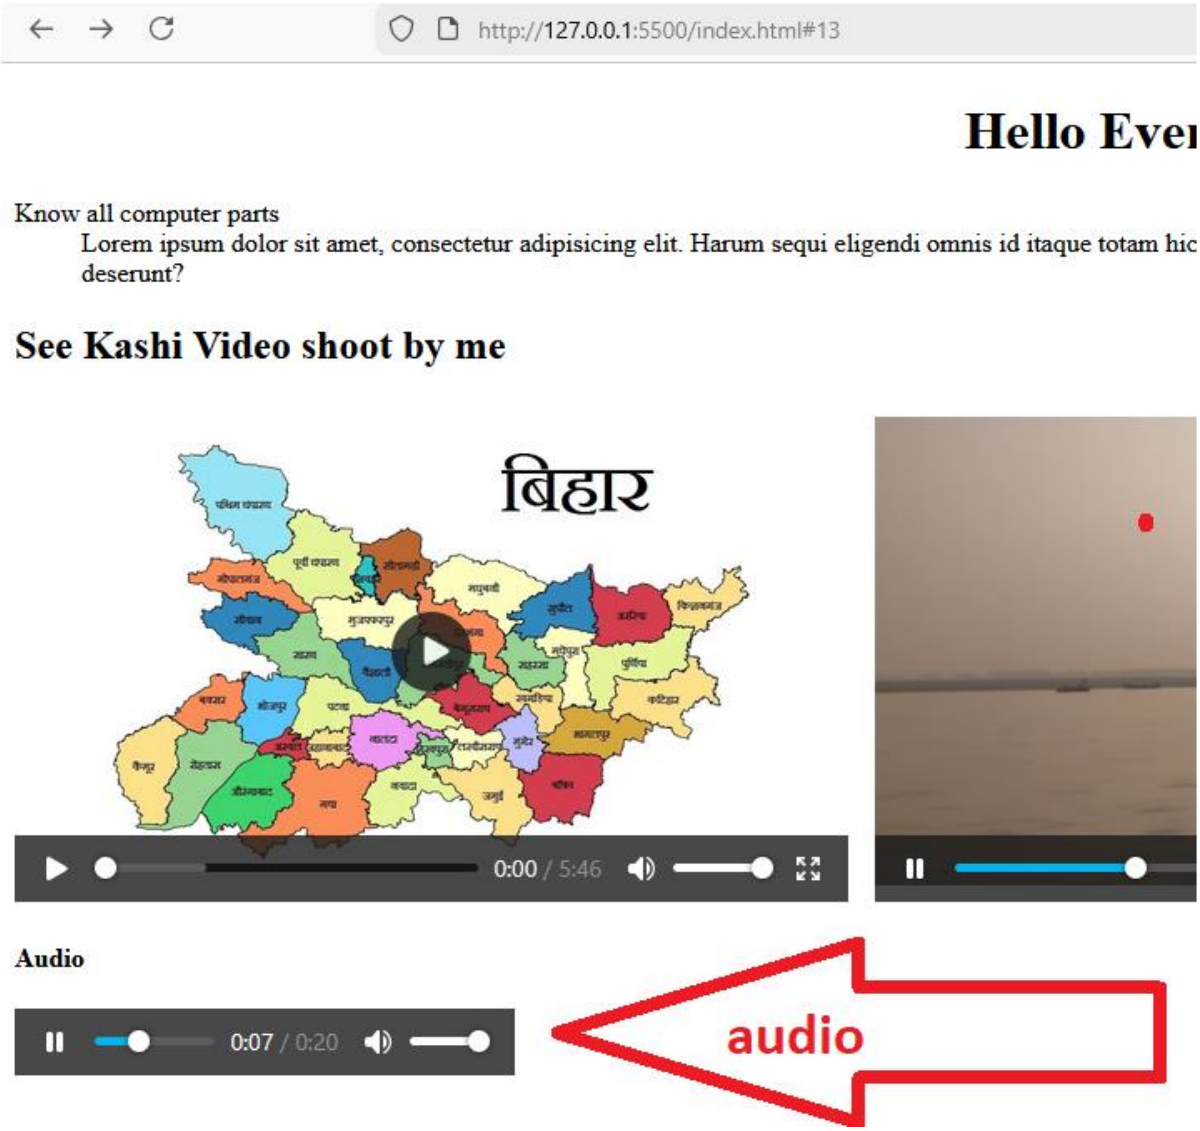

If provide download link then –

<a href="music.mp3" download>Download MP3</a>

```html
<body>
    <h2> Kashi Video </h2>
    <video controls height="300" muted loop="infinite" poster="bihar.jpg">
        <track src="subtitles.vtt" kind="subtitles" srclang="en" label="English">
        <source src="kashi.mp4">
    </video> <br>
    <h2> Shiv Song </h2>
    <audio controls loop muted autoplay>
        <source src="shiv.mp3" type="audio/mp3">
    </audio>
</body>
```

Kashi Video

Shiv Song

0:00 / 0:20

❖ <marquee> tag

- The <marquee> tag in HTML is used to create scrolling text or images on a web page (left, right, up, or down).
- Note :- <marquee> is deprecated (not recommended in HTML5). It is better to use CSS animations instead.
- Syntax → <marquee>Scrolling Text</marquee>

➢ Some Attributes

Attribute	Description	Example
direction	Sets scrolling direction (left(by default), right, up, down)	<marquee direction="right">Text</marquee>

behavior	Sets movement type (scroll(by default), slide, alternate)	<marquee behavior="alternate">Text</marquee>
scrollamount	Sets speed of scrolling	<marquee scrollamount="10">Text</marquee>
scrolldelay	Sets delay between movements (in milliseconds)	<marquee scrolldelay="100">Text</marquee>
loop	Number of times marquee will repeat	<marquee loop="3">Text</marquee>
bgcolor	Background color	<marquee bgcolor="yellow">Text</marquee>
width	Width of marquee	<marquee width="300">Text</marquee>
height	Height of marquee	<marquee height="50">Text</marquee>
hspace	Horizontal space around marquee i.e. align	<marquee hspace="20">Text</marquee>
vspace	Vertical space around marquee i.e. align	<marquee vspace="20">Text</marquee>

Example –

```
<marquee> Hello Hira </marquee>
   <br><br>
  <a href="BCA New Syllabus.pdf"> <marquee><font color = "blue">
Download BCA Syllabus </font>  </marquee></a>
  <br><br>
  <marquee>
   <img src="ant.jpg">
  </marquee>
```

```html
<body>
    <br><br>
    <marquee> Hello Hira </marquee>
    <br><br>
   <a href="BCA New Syllabus.pdf"> <marquee><font color = "blue"> Download BCA Syllabus </font>  </
   marquee></a>
   <br><br>
   <marquee>
    <img src="ant.jpg">
   </marquee>
```

Hello Hira

Download BCA Syllabus