Web Development

HTML

❖ Create client-side form in webpage

Designing a client-side form in a web page entails the utilization of HTML to craft the form's layout and integrating form components like text fields, radio buttons, checkboxes, and a submit button.
HTML introduces the **<form>** element, which serves as the foundation for constructing a structured segment within a web page encompassing interactive form elements. Forms play a pivotal role in web development, facilitating a wide array of applications such as user **registration, search functionality, data submission, and more.** The <form> element acts as a cohesive container, encompassing all the form controls, and also dictates the rules governing the handling of data entered into the form by users. It establishes the framework for collecting and processing user input within the context of web applications and websites.

HIRA KUMAR

BCA Admission Form Session 2025-2026

Full Name name

Father Name

Mother Name

Gender male ◯ Female ◯

Address State Pin code

Contact Information

Mobile Number 56465456456 Email id

-----**Choose any three colleges**-----

Nalanda college ☐

SPM College ☐

Mahila College ☐

Kisan college ☐

A.N college ☐

===== **Enter Payment Method** Debit card

Submit Reset

❖ Starting a Form

1. <form> tag

- All forms start with the <form> tag and end with </form>.All other form objects go between these two tags.
- The form tag has two main properties/attribute: METHOD and ACTION.

Action Attribute → The action attribute specifies the URL or script to which the form data should be sent for processing when the user submits the form. (action यह बताता है कि form submit होने के बाद data किस URL (server page / backend file) पर भेजा जाएगा। data किस server-side program को भेजा जाएगा जो आगे processing और storing करेगा या तो वह backend पर रख सकता हैं या front-end पर भी रख सकता हैं)

✓ Example: <form action="submit_form.php" method="post">

Method Attribute → The method attribute defines the HTTP method used to send the form data to the server. Common methods are "get" and "post."

GET appends form data to the URL and is suitable for simple queries.

POST sends form data in the HTTP request body and is used for more complex or sensitive data (e.g.- password file,..).

- ✓ Example: <form action="submit_form.php" method="post">

One line Action मतलब = data कहाँ भेजना हैं (server file का नाम, जैसे - server.php) Method मतलब = data कैसे भेजना है • get → URL में दिखेगा • post → secure (best)

2. <label> tag

- <label> is an HTML tag used to provide a caption or description for form elements like input, textarea, select, etc.
- It tells the user what to enter in that input box.
  (label input field का नाम/description दिखाने के लिए होता है)

  Attributes

  For → Connects label to input (must match input id)
- Syntax :-

Method1 (Using for and id) {professional → developer use this method}

Syntax → <label for="username">Enter Name:</label>

Example →<input type="text" id="username" name="name">

- ✓ for="username" connects label with input
  id="username" is the identity of input
- ✓ Clicking on "Enter Name" will focus input

Method 2 (Wrapping input inside label)

<label>

Enter Name:
<input type="text" name="name">
</label>

Input is inside label → automatically connected

3. <input> tag

- Used to create different types of input fields.
- Syntax → <input type="text" name="username">

  Input में type का काम - user से input लेने के लिए

  Input में **name** attributes का काम - data को server पर भेजने के लिए

Example –

<input type="text" name="cname">

User ने लिखा = hira

तो server को जायेगा

Cname=hira

(Note - यदि आप सिर्फ <input type="text">> लिखेंगे तो server पर कुछ नहीं जायेगा|)

```
<form>
  <h3>Create i'd and password</h3>
  <label> User name <input type="text" name="username"></label>
  <label> Password <input type="password" name="password"></label><hr>
  <h3> Personal Info </h3>
  <label for="1">Candidate's Name </label>
   <input type="text" id="1" name="cname"> <br>
```

http://127.0.0.1:5500/index.html

BCA Admission Form

Create i'd and password

User name Password

Personal Info

Candidate's Name

❖ List of <input> Types and Their Uses

Input	type
text	<input type="text">
Password	<input type="password">
Email	<input type="email">
Mobile/Tel (Telephone)	<input type="tel">
Number	<input type="number">
Date	<input type="date">
Time	<input type="time">
Datetime-local	<input type="datetime-local">
File (upload)	<input type="file">
Radio (one choice)	<input type="radio">
Checkbox (multiple choice)	<input type="checkbox">
Range	<input type="range">
Color	<input type="color">
Search	<input type="search">
URL	<input type="url">
Submit	<input type="submit">
Reset	<input type="reset">
Button	<input type="button">

Some attributes

1.name server को data भेजने के लिए Example = <input type="text" name="username">
2.id CSS / JavaScript / label connection Example = <input type="text" id="user">
3.value

default value दिखाने के लिए (पहले से लिखा हुआ value)
Example = <input type="text" value="Hira">

4. placeholder

क्या भरना है उसका संकेत
Example = <input type="text" placeholder="Enter your name">

5. required

जरूरी भरना पड़ेगा
Example = <input type="text" required>

6. readonly

केवल पढ़ने के लिए
Example = <input type="text" value="India" readonly>

7. maxlength

max characters limit
Example = <input type="text" maxlength="10">

8. minlength

minimum characters required
Example = <input type="text" minlength="5">

9. pattern

format तय करना
Example = <input type="tel" pattern="[0-9]{10}">

10. min / max

न्यूनतम / अधिकतम value
Example = <input type="number" min="1" max="100">

11. step

बढ़ने की step value
Example = <input type="number" step="5">

12. checked

पहले से चुना हुआ

Example = <input type="radio" checked>
13. multiple एक से ज्यादा चुन सकते हैं Example = <input type="file" multiple>
14. accept file type restriction <input type="file" accept="image/*"> (only image) <input type="file" accept="pdf”> (only pdf)
15. autocomplete browser suggestion on/off Example = <input type="text" autocomplete="off">
16. autofocus अपने आप cursor आ जाएगा Example = <input type="text" autofocus>
17. size input का size Example = <input type="text" size="30">

Explain Radio buttom

Example → <label>Gender Male<input type="radio"name="gender" value="male"> Female<input type="radio"name="gender" value="female"> </label>

Here

type=radio (user से कोई एक choice लेने के लिए)

Name= gender (group बनाने के लिए ताकि कोई एक ही value choice हो)

Value=”male”/ “female” (data को server पर भेजने के लिए)

HTML INPUT TYPES

`<input type="text"/>`	John Doe
`<input type="password"/>`	••••••••••••
`<input type="button"/>`	Click Me
`<input type="checkbox"/>`	User Admin Editor
`<input type="color"/>`	
`<input type="date"/>`	15/05/2024
`<input type="time"/>`	10:30 AM
`<input type="email"/>`	jane.smith@example.com
`<input type="file"/>`	Upload File No file selected
`<input type="url"/>`	https://www.openai.com
`<input type="week"/>`	Week 20, 2024
`<input type="number"/>`	42
`<input type="month"/>`	HTML Javascript
`<input type="range"/>`	75%
`<input type="reset"/>`	Reset
`<input type="search"/>`	Search topics
`<input type="submit"/>`	Submit
`<input type="hidden"`	
`<input type="tel" pattern="[`	123-456-7890
`<input type="datetime-local"`	15/05/2024 10:30 AM

HIRA KUMAR

4. <fieldset> Tag & <legend> Tag

- Groups related form elements.
- Defines a caption for <fieldset>.

```
<fieldset>
  <legend><h3> Contact Info</h3></legend>
   <label>Mobile number <input type ="tel" maxlength="10"></label> <br>
  <label> Email-Id <input type="email"></label><br><hr>
 </fieldset>
```

Contact Info

Mobile number

Email-Id

5. <textarea> tag

- Used for multi-line text input.
- Where is it used?
  - Address
  - Message
  - Feedback
  - Description
- Syntax - <textarea></textarea>

```
Address <textarea name="message" rows="4" cols="30"></textarea>
```

Address

6. <select> Tag & <option> Tag

- <Select> tag use for creates a drop-down list and defines options inside <select> tag.

```
<fieldset>
  <legend> Payment </legend>
  <select name="payment">
  <option value="Dc">Debit Card </option>
  <option value="CC">Credit Card </option>
  <option value="UPI">UPI </option>
  <option value="Netbanking">Netbanking </option>
  <option value="cash">Cash </option>
 </select>
</fieldset>
```

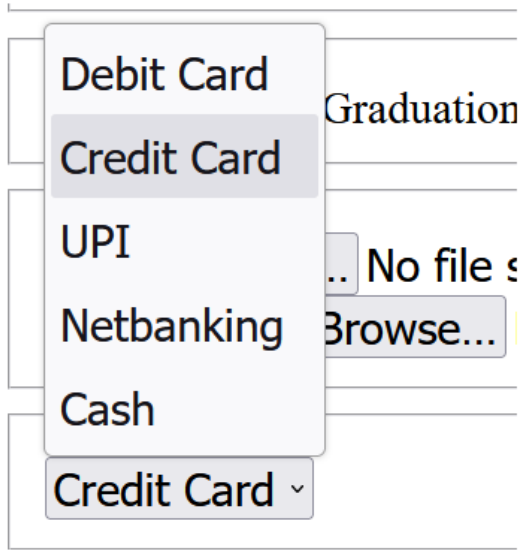

Here

- ✓ Dropdown बन रहा है
- ✓ name="payment" → server पर data जाएगा
- ✓ value → actual data भेजेगा

7. <datalist> Tag

- <datalist> defines a list of options that can be used as suggestions for an <input> element.

```
<label> State <input list="state">
        <datalist id="state">
            <option value ="Bihar"> </option>
            <option value ="Jharkhand"> </option>
            <option value ="delhi"> </option>
        </datalist>
</label><br>
```

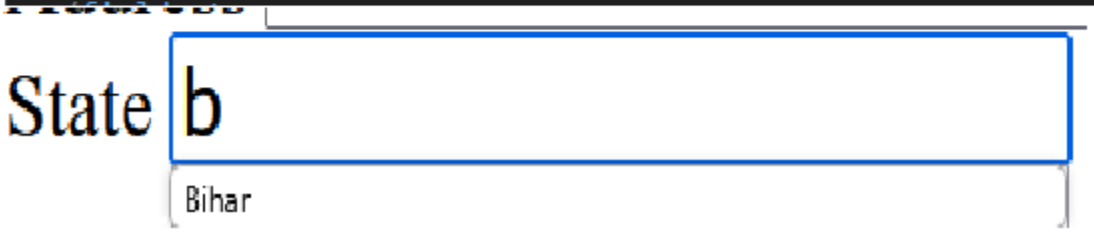


```
<label for="state">State:</label>
<input list="state" id="state" name="state">
   <datalist id="state">
```

```
        <option value="Bihar">
        <option value="Jharkhand">
        <option value="Delhi">
    </datalist>
```

Here -

- list="state" → datalist से connect करता है
- id="state" → datalist की पहचान
- name="state" → server पर भेजने के लिए जरूरी

8. <button> Tag

- Creates a clickable button.

```
<button type="submit">Submit</button>
<button type="reset">Reset</button>
```

Submit Reset

Q Create a form in html for BCA admission.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
  <style>
    *{
      font-size:30px;
    }
    .hira{
      text-align:center;
    }
  </style>
```

```
</head>
<body>
  <h1 class="hira"> BCA Admission Form </h1>
  <form>
    <fieldset>
    <legend><h3>Create i'd and password</h3></legend>
    <label> User name <input type="text" name="username"
placeholder="hira123"></label>
    <label> Password <input type="password"
name="password"></label>
  </fieldset>
  <fieldset>
   <legend><h3> Personal Info </h3></legend>
    <label for="1">Candidate's Name </label>
     <input type="text" id="1" name="cname"> <br>
    <label>Father's Name <input type="text" name="fname"></label>
<br>
  <label>Mother's Name <input type="text"></label> <br>
  <label>Gender   Male<input type="radio"name="gender"
value="male"> Female<input type="radio"name="gender"
value="female"> </label><br>
  <label>Date of Birth <input type="date" ><input type="time"
></label><br>
  </fieldset>
  <fieldset>
     <legend><h3> Contact Info</h3></legend>
      <label>Mobile number <input type ="tel" maxlength="10"></label>
<br>
     <label> Email-Id <input type="email"></label><br>
    </fieldset>
    <fieldset>
     <legend><h3> Address info</h3></legend>
```

```
    <label>Address <textarea name="address" row="4" cols="30"
placeholder="vill+post+ps"></textarea></label> <br>
   <label> State <input list="state">
        <datalist id="state">
           <option value ="Bihar"> </option>
           <option value ="Jharkhand"> </option>
           <option value ="delhi"> </option>
        </datalist>
  </label>
  <label>Distric <input type="text"></label><br>
  <label> Pin code <input type="number"></label>
  </fieldset>
  <fieldset>
   <legend>Reservation info</legend>
   <input type="radio" name="cast" value="gen">General
   <input type="radio"name="cast" value="obc">OBC
   <input type="radio"name="cast" value="sc">SC
   <input type="radio" name="cast" value="st">ST
   <br>
   <input type="radio" name="reg" value="hindu">Hindu
   <input type="radio"name="reg" value="mus">Muslim
   <input type="radio"name="reg" value="chri">Christian
   <input type="radio" name="reg" value="other">other
  </fieldset>
  <fieldset>
   <legend> Education info</legend>
   <input type="checkbox" name="edu[]" value="10">10th
   <input type="checkbox" name="edu[]" value="12">12th
   <input type="checkbox" name="edu[]" value="UG">Graduation
   <input type="checkbox" name="edu[]" value="PG">Post Graduation
   <input type="checkbox" name="edu[]" value="dip">Diploma
   <input type="checkbox" name="edu[]" value="iti">iti
```

```
    <input type="checkbox" name="edu[]" value="oth">other
   </fieldset>
   <fieldset>
    <legend> File Upload </legend>
    <label> Photo <input type="file" accept="image/*">   
Sig <input type="file"></label><br>
    <label> All marksheet <input type="file" multiple
accept=".pdf"></label>
   </fieldset>
   <fieldset>
    <legend> Payment </legend>
    <select name="payment">
      <option value="">--select--</option>
    <option value="Dc">Debit Card </option>
    <option value="CC">Credit Card </option>
    <option value="UPI">UPI </option>
    <option value="Netbanking">Netbanking </option>
    <option value="cash">Cash </option>
    </select>
   </fieldset>
   <div class="hira">
   <button type="submit"> Submit</button>   
   <button type="reset">Reset</button> </div> <br><br>
  </form>
</body>
</html>
```

OUTPUT

http://127.0.0.1:5500/index.html?username=&password=&cname=&fname=&address=&payment= 80%

BCA Admission Form

Create i'd and password

User name hira123 Password

Personal Info

Candidate's Name
Father's Name
Mother's Name
Gender Male ○ Female ○
Date of Birth mm/dd/yyyy --:-- --

Contact Info

Mobile number
Email-Id

Address info

Address vill+post+ps
State Distric
Pin code

Reservation info

○General ○OBC ○SC ○ST
○Hindu ○Muslim ○Christian ○other

Education info

□10th □12th □Graduation □Post Graduation □Diploma □iti □other

File Upload

Photo Browse... No file selected. Sig Browse... No file selected.
All marksheet Browse... No files selected.

Payment

--select--

Submit Reset

❖ **If you show password using help of checkbox then –**
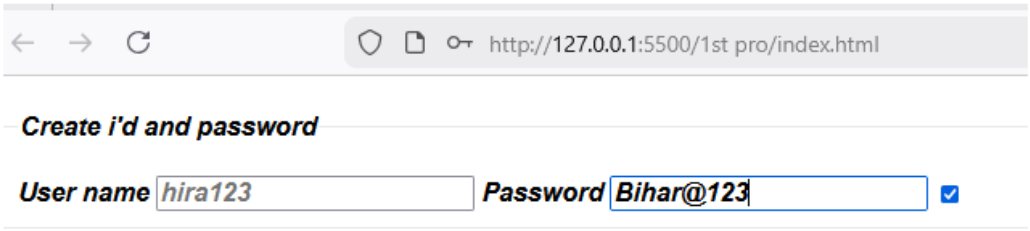
```html
  <fieldset>
  <legend><h3>Create i'd and password</h3></legend>
  <label> User name <input type="text" name="username" placeholder="hira123"></label>
  <label> Password <input type="password" id="pwd" name="password"></label>
  <input type="checkbox" onclick="pwd.type =this.checked ? 'text' :'password'">
</fieldset>
```