Web Development

HTML

❖ HTML Color Coding (use CSS)

- In HTML, you can specify colors using various methods, including color names, hexadecimal color codes, RGB values, and HSL values. Here's an overview of these methods:-

Text Color only

Color Names:

- Syntax→ This text is red.

Hexadecimal color codes:

- Syntax → This text is red.

RGB color values:

- Syntax → This text is red.

Background color only

- Syntax → BG Color name = Blue

Background color and text color mix

- Syntax →   Color name = white

```html
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8">
        <title>Heading check</title>
    </head>
    <body>
        <h1 style="color: red;"> Color name = Red </h1>
        <p style="color: #0000ff">Color name = Blue</p>
        <div style="color:  rgb(0,255,0);"> Color name = Green</div>
         <p style="background-color: #0000ff">BG Color name = Blue</p>
         <div style="background-color: #0000ff"> <p style="color: White;"> Color name = white</p></div>
         <p style="background-color: #ccdd35">BG Color name = yellow</p>
         <p style="background-color: red">BG Color name = red</p>


     </body>
</html>
```

Color name = Red

Color name = Blue

Color name = Green

BG Color name = Blue

Color name = white

BG Color name = yellow

BG Color name = red

❖ Concept of lists

Three types of lists

1. Unordered lists (<ul>)

- Unordered lists are used to represent lists of items that don't have a specific numerical or sequential order.
- The <ul> element is used to define an unordered list, and each list item is enclose within <li> (list item) tags.
- Unordered lists,which have no inherent (fixed or natural) order and each item is bydefault bulleted/Disk(•) and you can also use rectangle, circle or none form.

- Syntax →

```
<ul>
    <li> Roll no 1 </li>
    <li> Roll no 2 </li>
    <li> Roll no 3 </li>
</ul>
```

```
<ul type="square">

    <li> Roll no 1 </li>
    <li> Roll no 2 </li>
    <li> Roll no 3 </li>
</ul>
```

```
<ul>
    <li>HTML</li>
    <li>CSS</li>
    <li>JS</li>
</ul>
<ul type="square">
    <li>HTML</li>
    <li>CSS</li>
    <li>JS</li>
</ul>
```

- HTML
- CSS
- JS

- HTML
- CSS
- JS

2. Ordered lists (<ol>)

- Ordered lists are used for enumerating items in a specific numerical or sequential manner.
- Each item in an ordered list is usually prefaced by numbers or letters that signify their position.
- Ordered lists, which have an inherent order and each item is numbered.
- In type attribute use this → <ol type="1"> list </ol>
  1 → Numbers (Default)
  A → Capital Letters (A, B, C)
  a → Small Letters (a, b, c)
  I → Capital Roman (I, II, III)
  i → Small Roman (i, ii, iii)
- Syntax →

```
<ol >
    <li> HTML </li>
    <li> CSS </li>
    <li> JS </li>
</ol>
```

```
<ol type="i">
    <li> HTML </li>
    <li> CSS </li>
    <li> JS </li>
</ol>
```

```
<ol type="A">
    <li> HTML </li>
    <li> CSS </li>
    <li> JS </li>
</ol>
```

1. HTML
2. CSS
3. JS

i. HTML
ii. CSS
iii. JS

A. HTML
B. CSS
C. JS

➢ Nexted list

```
<ol type="i">
    <li> HTML </li>
        <ul>
            <li> HTML day1 </li>
            <li> HTML day2</li>
            <li>HTML day3</li>
        </ul>
    <li> CSS </li>
    <li> JS </li>
</ol>
```

i. HTML
- HTML day1
- HTML day2
- HTML day3

ii. CSS
iii. JS

3. Definition lists (<dl> <dt> <dd>)

- Definition lists are used to represent a list of terms (definitions) and their corresponding descriptions or definitions.
- <dl> use for definition lists, <dt> use for definition term & <dd> use for definition description
- Syntax →

```
<dl>
    <dt> HTML</dt>
        <dd> Hypertext Markup Language (HTML) is the standard markup language for documents designed to be displayed in a web browser. It defines the content and structure of web
```

content. It is often assisted by technologies such as Cascading Style Sheets (CSS) and scripting languages such as JavaScript.
</dd>
<dt> CSS </dt>
<dd> Cascading style sheets </dd>
<dt>JavaScript</dt>
<dd> A programming language for the web</dd>
</dl>

```html
<html lang="en">
    <body>
        <h1> Unordered list </h1>
        <ul>
            <li>Roll No 1</li>
            <li>Roll No 2</li>
            <li>Roll No 3</li>
        </ul>
        <h1> Ordered list </h1>
        <ol>
            <li>Roll No 1</li>
            <li>Roll No 2</li>
            <li>Roll No 3</li>
        </ol>
        <h1> Difinition list </h1>
        <dl>
            <dt> HTML</dt>
            <dd>Hypertext Markup Language</dd>
            <dt> CSS </dt>
            <dd> Cascading style sheets </dd>
            <dt>JavaScript</dt>
            <dd> A programming language for the web</dd>
        </dl>
    </body>
</html>
```

Unordered list

- Roll No 1
- Roll No 2
- Roll No 3

Ordered list

1. Roll No 1
2. Roll No 2
3. Roll No 3

Difinition list

HTML
Hypertext Markup Language
CSS
Cascading style sheets
JavaScript
A programming language for the web

❖ HTML Hyperlink

- In HTML, you can create hyperlinks (or links) to navigate between web pages, resources, or locations on the internet.
- Hyperlinks are created using the (anchor) element.
- <a> → “a” means anchor. The <a> element is used to define the hyperlink.
- href → “href” means hyper reference. The href attribute specifies the URL or destination of the link. It can be an **absolute URL** (e.g., "https://www.example.com") or a **relative URL**/local files link (e.g., "page.html").

- Syntax → <a href =”URL”> link text</a>

Link text

- Indeed, the link text is the visible text displayed on a web page, and it acts as the clickable link.

Example of hyperlink in HTML

- **Linking to an external website (Absolute URL)**

  Open same tab in browser

✓ <a href ="https://hira24y7.github.io/bcanotes/"> Visit BCA Notes (online mode)</a>

  open other tab in browser

✓ <a href =”https://hira24y7.github.io/bcanotes/” target=”_blank”> Visit BCA Notes (online mode)</a>

- **Linking to an internal page (Relative URL)**

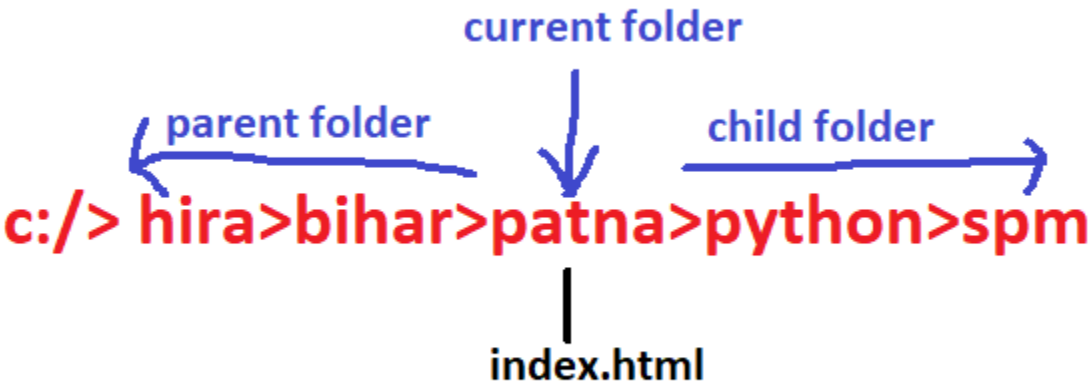

Same folder / Current Folder

Syntax/Example → <a href ="bca.html"> Bca notes (offline Mode)</a>

Other folder

Two types of folder – (i) parent folder (ii) child folder

(i) Parent folder

Use double dot(..) by which jump one folder back.

Example → <a href=”../bca.pdf”> BCA notes</a>

(ii) Child folder

Use folder name by which jump one folder next.

Example → <a href=”/python/spm/bca.pdf”> BCA notes</a>

```
<a href="/1st pro/computer.pdf">bca</a>
```

- **Linking to an Email Address**

<a href="mailto:3in1store24y7@gmail.com"> Contact us </a>

- **Linking to an phone number**

<a href="tel:+918210150576">Call us</a>

```
index.html > html > body > br
<!DOCTYPE html>
<html>
<body>
<h2>Hyperlink Example</h2>
<a href ="https://hira24y7.github.io/bcanotes/"> Visit BCA Notes (online mode)</a>
<a href ="bca.html"> Bca notes (offline Mode)</a><br>
<a href="3in1store24y7@gmail.com"> Contact us</a><br>
<a href="tel:+918210150576">Call us</a><br>
<a href="bcasyllabus.pdf"> Download PDF</a><br>
</body>
</html>
```

Hyperlink Example

Visit BCA Notes (online mode)
Bca notes (offline Mode)
Contact us
Call us
Download PDF

❖ Single page link in HTML page

- A Single Page Link is a link that jumps to another section of the same HTML page using #id.
- Syntax –

<a href =”#id”>
<h2 id=”123”> any text </h2>

Example → <a href=”#hira”>
<h2 id=”hira”> Computer </h2>

```
<body>
<center><h1>Pure HTML website</h1></center>
<a href="#"> HOME</a>  
<a href="#10"> Computer </a>  
<a href="#11"> Input device</a>  
<a href="#12"> output device</a>  
<a href="#13"> cotact</a>  
<h3 id="10"> Computer </h3>
<p>Lorem ipsum dolor sit amet consectetur adipisicing elit. Distinctio at doloribus
<h3 id="11"> Input device</h3>
<p>Lorem ipsum, dolor sit amet consectetur adipisicing elit. Facere blanditiis maxi
<h3 id="12">output</h3>
<p>Lorem ipsum dolor sit amet consectetur adipisicing elit. Inventore doloribus at
<h3 id="13"> contact</h3>
<p>Lorem ipsum dolor sit amet, consectetur adipisicing elit. Exercitationem, dolori
```

❖ Multiple page link in HTML page

- A multi Page Link is a link that jumps to another section of the HTML page.
- Example -

```
<a href="shop.html" target="_blank"> 3 in 1 store </a>
```

Lorem ipsum dolor sit amet, consectetur adi

3 in 1 store

1.

2.

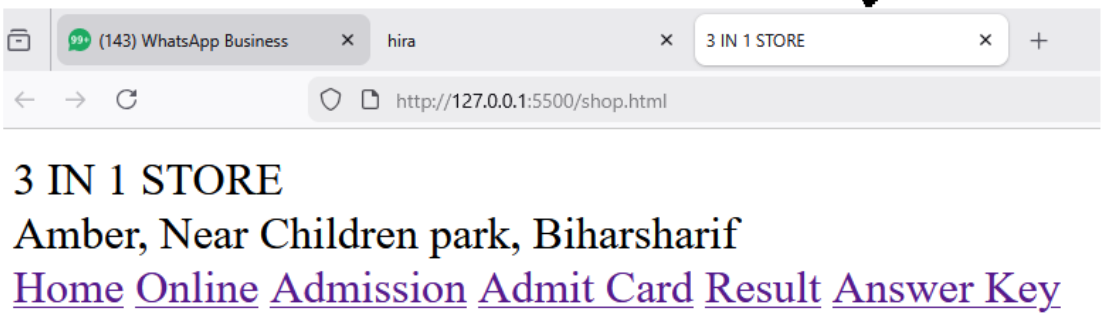

3 IN 1 STORE
Amber, Near Children park, Biharsharif
Home Online Admission Admit Card Result Answer Key

❖ Company Logo link in browser tab

- Syntax- <link rel="icon" href="path">
  Here, rel = relation
- Example –

Pure HTML website

HOME Computer Input device output device cotact

Computer

Lorem ipsum dolor sit amet consectetur adipisicing elit. Distinctio at doloribus doloremque rerum esse dolorum quibusdam harum vitae vel id omnis est voluptatum error ea nostrum ur tenetur excepturi. Omnis dolores vitae delectus error! Modi unde maiores saepe qui eligendi ab? Ex, eveniet velit commodi suscipit molestiae, nemo voluptatem officia accusantium rem pariatur eos voluptate. Pariatur corporis rem quis nesciunt eos quisquam ea consequatur, nat obcaecati. Dolore modi labore tempora nemo illum alias repudiandae beatae harum reiciend