



# S.P.M College, Udantpuri

Bachelor Of Computer Application (BCA)

Part -1 (Paper-1)

– Hira Kumar

## DOS (Disk Operating System) Internal Command

All Internal commands are stored in **COMMAND.COM**

| Genral purpose                                                                                       | File related commands                                                                      | Directory related commands                      |
|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------|
| 1. <u>CLS</u><br>2. <u>DIR</u><br>3. <u>VER</u><br>4. <u>VOL</u><br>5. <u>DATE</u><br>6. <u>TIME</u> | 7. <u>COPY CON</u><br>8. <u>TYPE</u><br>9. <u>COPY</u><br>10. <u>REN</u><br>11. <u>DEL</u> | 12. <u>MD</u><br>13. <u>CD</u><br>14. <u>RD</u> |

NOTE:- If we need any help for above DOS commands the we put a '/'? symbol after writting the command at DOS prompt .

Example:- C:\> DIR/?

C:\> COPY/?

C:\> color/?




### 10. MD(Make Directory)

- Work -This command allows to create a new directory.
- Note :- In GUI base interface directory is also called folder.
- Note:- In windows/dos you can't create "aux" OR "Con" name folder.

HIRA KUMAR


- Syntax – c:\> MD <Dirname>

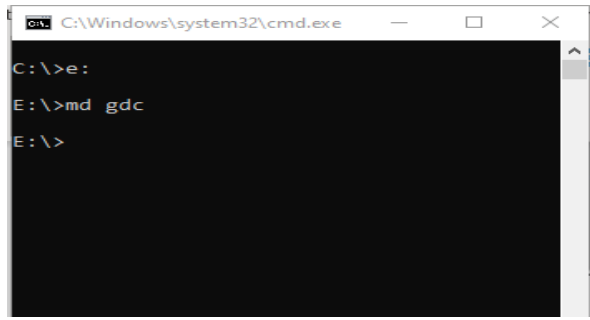

```
C:\Windows\system32\cmd.exe
C:\>e:
E:\>md gdc
E:\>
```

## 11. CD(*Change Directory*)

- Work -We can enter or exit from any directory using this command.
- Syntax for enter in directory - c:\> CD <Directory name>
- Syntax for exit to directory– c:\> CD..

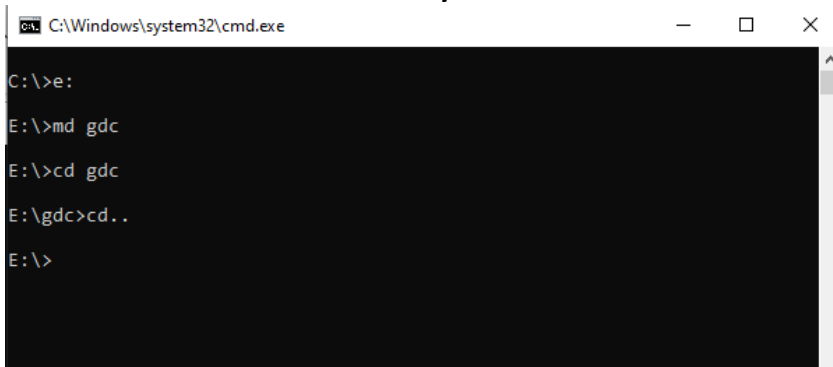

```
C:\Windows\system32\cmd.exe
C:\>e:
E:\>md gdc
E:\>cd gdc
E:\gdc>cd..
E:\>
```

## 12. COPY CON

- **Work** - This command gives the facility to create a new text file.
- Syntax - **C:\>COPY CON** <filename> Enter
- After press enter,type message and again press ctrl+Z or press F6 button and press again enter.
- Default file extension of ms dos commands is .txt

```
C:\Windows\system32\cmd.exe

E:\gdc>copy con bca.txt
hello world!
^Z
        1 file(s) copied.

E:\gdc>copy con bba.pdf
hello students
^Z
        1 file(s) copied.

E:\gdc>copy con bsc.doc
hello india^Z
        1 file(s) copied.

E:\gdc>copy con ba.html
ba means bachelor of arts.^Z
        1 file(s) copied.

E:\gdc>
```

are View

This PC > Local Disk (E:) > gdc

Search gdc

| Name                                                                                    | Date modified     | Type                | Size |
|-----------------------------------------------------------------------------------------|-------------------|---------------------|------|
|  ba   | 1/13/2025 5:15 AM | Firefox HTML Doc... | 1 KB |
|  bba | 1/13/2025 5:09 AM | Microsoft Edge P... | 1 KB |
|  bca | 1/13/2025 5:09 AM | Text Document       | 1 KB |
|  bsc | 1/13/2025 5:12 AM | Microsoft Word 9... | 1 KB |

# Types of most popular file extensions

We will discuss the popular types of file extensions listed below in this article.

**Text and word processing files:** .doc, .docx, .odt, .txt, .pages

**Web-related files:** .htm, .html

**Page layout files:** .pdf

**Spreadsheet files:** .xls, .xlsx, .ods

**Presentation files:** .ppt, .pptx, .key

**Image files:** .bmp, .jpeg, .jpg, .png

**Programming files:** .py, .java, .js

**Compression and archive files:** .zip

**Executable program files:** .exe, .app, .bin


**Audio and video files:** .mp3, .wav, .mp4

**Draw program files:** .drw, .dwg

**System files:** .sys, .tmp, .ini

## 13. TYPE

- This command is used to display/View for exist/available file in directory/folder.
- Syntax:- C:\> TYPE <Filename>

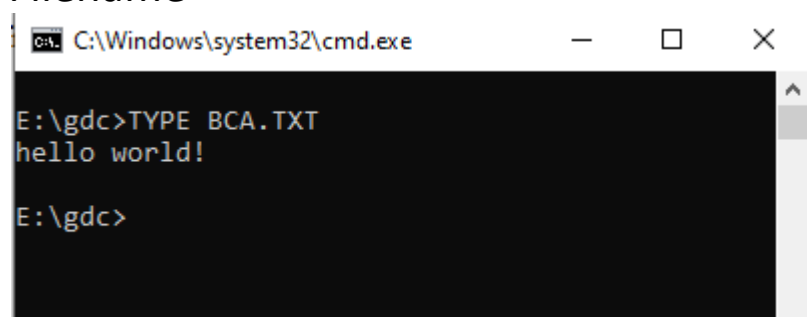


```
C:\Windows\system32\cmd.exe
E:\gdc>TYPE BCA.TXT
hello world!
E:\gdc>
```

## 14. Copy


- Copy command is used for copy any file one location to another location or to copy the files one directory to another directory.

- This command may also be used for copying any file to another disk with different file name.
- Syntax -C:\> COPY <Source filename> <Target file name>

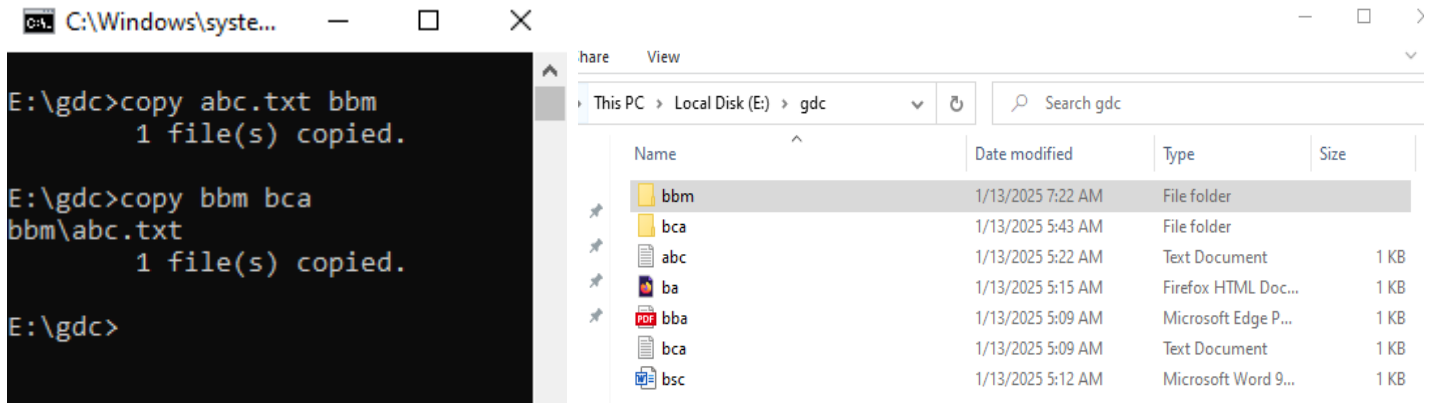


## 15. REN(*Rename*)

- This command is used to change the name of any file or directory.
- Syntax - REN <Source filename> <Target filename>

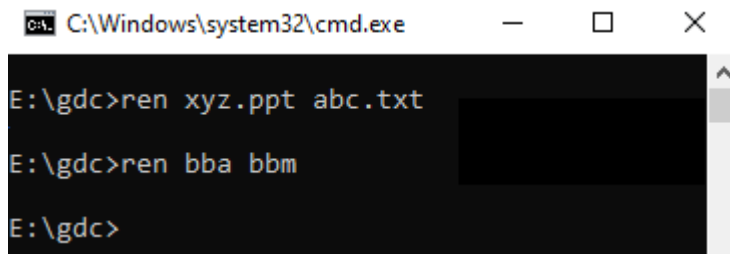

## 16. DEL/ERASE

- This command is used for erasing any file from the disk.
- Syntax - C:\> DEL <Filename> OR C:\> ERASE <filename>

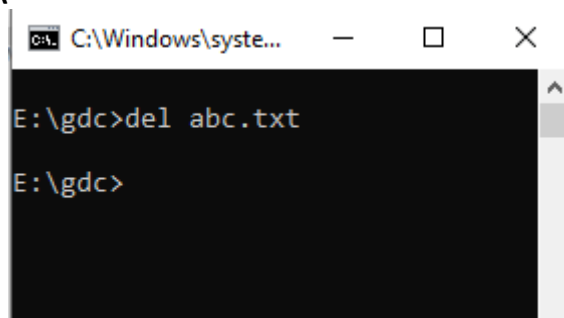

## 17. RD (Remove Directory)

- Work - Remove (or Delete) a Directory.
- Syntax – c:\> RD <Dir name>
- If many file available in directory then remove command not run. But use this syntax – c:\> rd/s <Dir name>, all file delete as well as directory.
- Here rd/s (/s – as work switch)

```
E:\gdc>rd bca
The directory is not empty.

E:\gdc>rd/s bca
bca, Are you sure (Y/N)? y


E:\gdc>
```

## Difference b/w DEL command and RD command

- DEL Command => Delete only files
- RD Command => Delete/remove only directory.(Note – remove only empty directory)

## 18 Move

- Work – This command is used to move file/directory one location to another location.
- When use move command file/directory move i.e delete current location and send another location.
- Syntax – c:\> move <source file name> <target file name>  
C:\> move <source directory> <target directory>

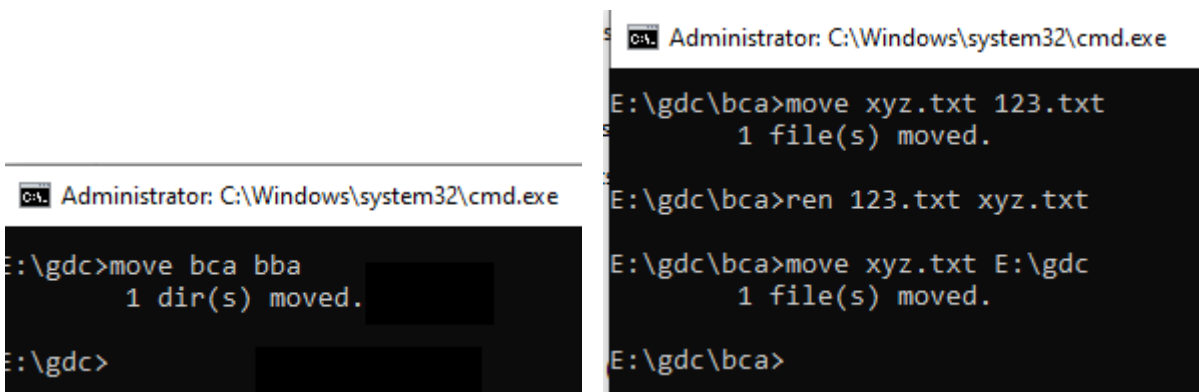

The image contains two screenshots of a Windows Command Prompt window. The left screenshot shows the command 'move bca bba' being executed, resulting in '1 dir(s) moved.' The right screenshot shows a series of commands: 'move xyz.txt 123.txt' (resulting in '1 file(s) moved.'), 'ren 123.txt xyz.txt', and another 'move xyz.txt E:\gdc' (resulting in '1 file(s) moved.').

```
Administrator: C:\Windows\system32\cmd.exe

E:\gdc>move bca bba
1 dir(s) moved.

E:\gdc>

Administrator: C:\Windows\system32\cmd.exe

E:\gdc\bca>move xyz.txt 123.txt
1 file(s) moved.

E:\gdc\bca>ren 123.txt xyz.txt

E:\gdc\bca>move xyz.txt E:\gdc
1 file(s) moved.

E:\gdc\bca>
```

## Difference b/w COPY command and MOVE command

- Copy Command → copy files one location to another
- Move Command → Copy any files/directory both → and → copy new location (Here file/folder delete original location)

## 19. PATH

- This command is used for display or sets directories for executable files.
- Syntax- C:\> PATH

- Example

Path=C:\Windows\system32;C:\Windows;C:\Windows\System32\Wbem;C:\Windows\System32\WindowsPowerShell\v1.0\;C:\Windows\System32\OpenSSH\;C:\Users\hira\AppData\Local\Microsoft\WindowsApps;

## 20. Exit

- Exit is used to close the command prompt or terminate a batch file.
- Example :- C:\> Exit

=====HIRA KUMAR=====