

## PHASE-2 ASSISTED PROJECT


EMP ID: 2587325

### CRUD OPERATIONS

### IN GIT

NAME: HIRANMAI

Creating files

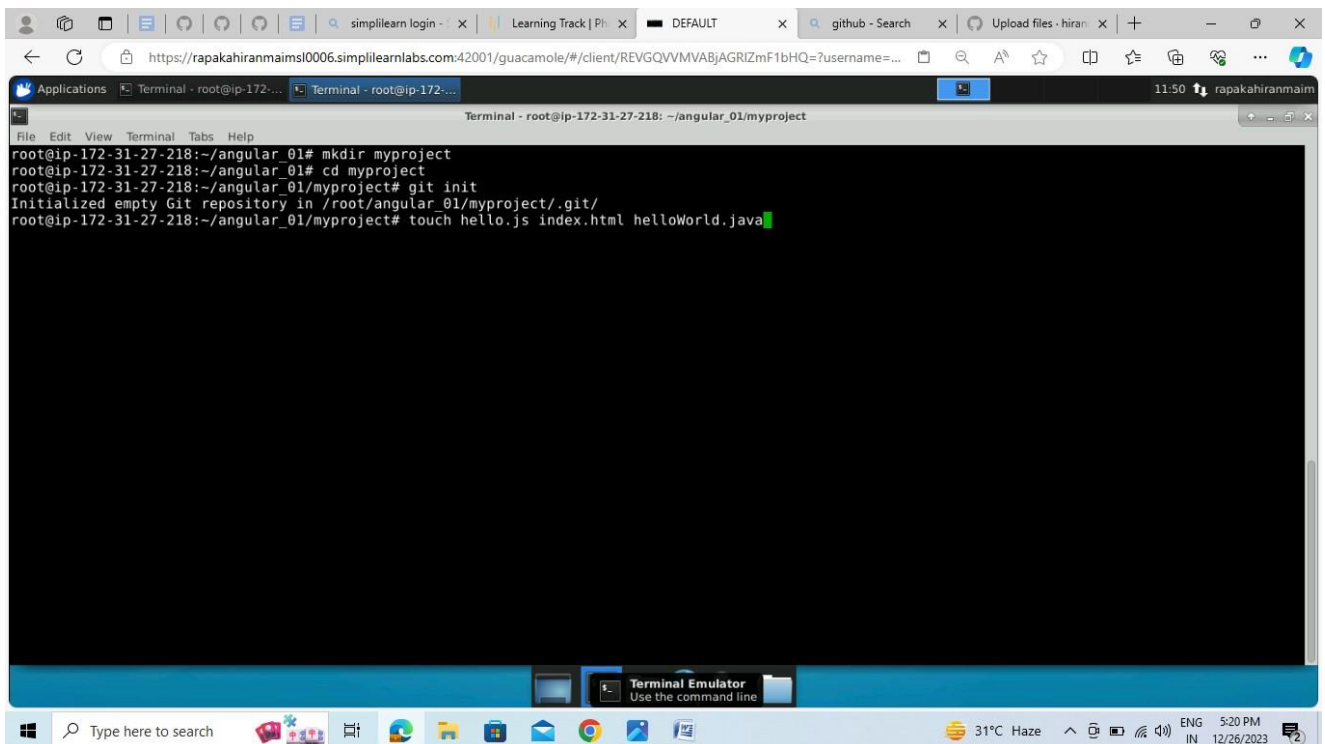


The screenshot shows a terminal window within a web browser. The terminal output is as follows:

```
root@ip-172-31-27-218:~/angular_01# mkdir myproject
root@ip-172-31-27-218:~/angular_01# cd myproject
root@ip-172-31-27-218:~/angular_01/myproject# git init
Initialized empty Git repository in /root/angular_01/myproject/.git/
root@ip-172-31-27-218:~/angular_01/myproject# touch hello.js index.html helloWorld.java
```

The terminal window is titled "Terminal - root@ip-172-31-27-218: ~/angular\_01/myproject". The browser's address bar shows a URL from "rapakahiranmains0006.simplilearnlabs.com". The Windows taskbar at the bottom indicates the time is 5:20 PM on 12/26/2023, with a temperature of 31°C and "Haze" weather.


## Add and commit

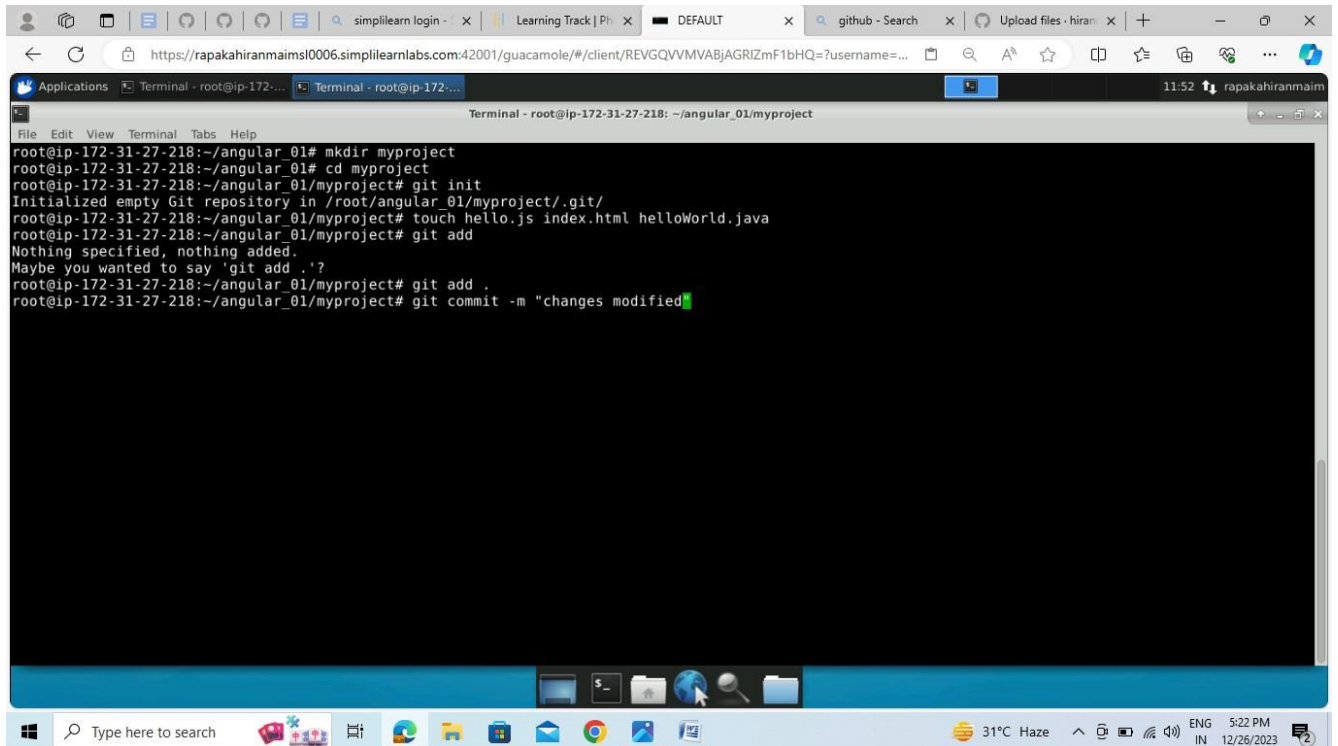

The screenshot shows a terminal window with the following commands and output:

```
root@ip-172-31-27-218:~/angular_01# mkdir myproject
root@ip-172-31-27-218:~/angular_01# cd myproject
root@ip-172-31-27-218:~/angular_01/myproject# git init
Initialized empty Git repository in /root/angular_01/myproject/.git/
root@ip-172-31-27-218:~/angular_01/myproject# touch hello.js index.html helloWorld.java
root@ip-172-31-27-218:~/angular_01/myproject# git add
Nothing specified, nothing added.
Maybe you wanted to say 'git add .'
root@ip-172-31-27-218:~/angular_01/myproject# git add .
root@ip-172-31-27-218:~/angular_01/myproject# git commit -m "changes modified"
```

## Deleting of file/ignoring the file

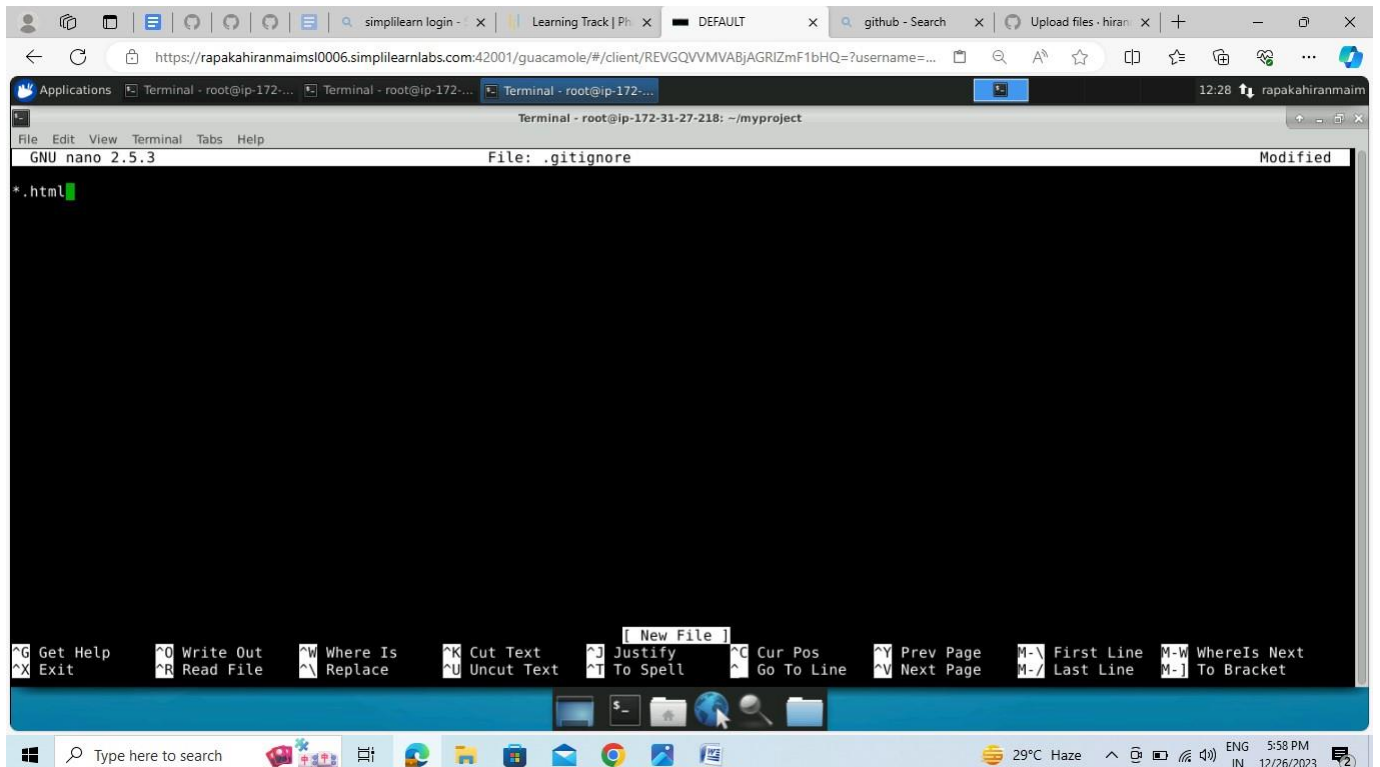


The screenshot shows a terminal window with the following commands and output:

```
root@ip-172-31-27-218:~/myproject# rm *.html
root@ip-172-31-27-218:~/myproject# echo *.html > .gitignore
```

The terminal window also shows the GNU nano 2.5.3 editor interface with the file .gitignore open. The editor shows the content \*.html and the status Modified. The bottom status bar of the nano editor displays various keyboard shortcuts.

## Pull and fetch

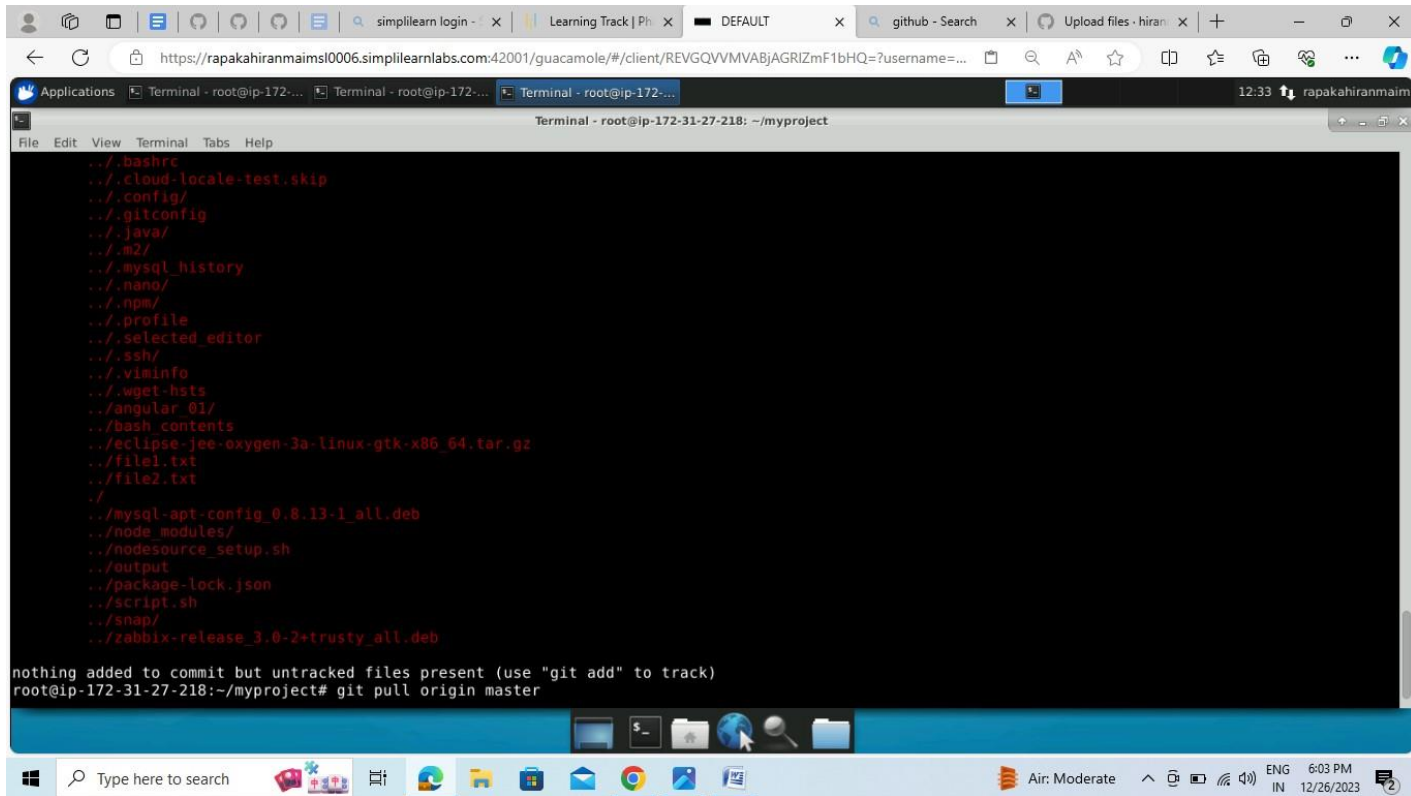

The screenshot shows a web browser window with a terminal application running. The terminal window is titled "Terminal - root@ip-172-31-27-218: ~/myproject". It displays a list of files and directories, including .bashrc, .cloud-locales-test.skip, .config/, .gitconfig, .java/, .m2/, .mysql\_history, .nano/, .npm/, .profile, .selected\_editor, .ssh/, .viminfo, .wget-hsts, .angular\_01/, .bash\_contents, .eclipse-jee-oxygen-3a-linux-gtk-x86\_64.tar.gz, .file1.txt, .file2.txt, ./, .mysql-apt-config\_0.8.13.1\_all.deb, .node\_modules/, .nodedsource\_setup.sh, .output, .package-lock.json, .script.sh, .snap/, and .zabbix-release\_3.0-2+trusty\_all.deb. Below the list, it says "nothing added to commit but untracked files present (use "git add" to track)". The terminal prompt is "root@ip-172-31-27-218:~/myproject#". The user has entered the command "git pull origin master". The browser window shows the URL "https://rapakahiranmains10006.simplilearnlabs.com:42001/guacamole/#/client/REVGQVVMVABjAGRIZmF1bHQ=?username=...". The browser tabs include "simplilearn login", "Learning Track | Ph...", "DEFAULT", "github - Search", and "Upload files - hiran...". The browser's address bar shows the URL. The browser's status bar shows "Air: Moderate", "ENG IN", and "6:03 PM 12/26/2023".

```
.../.bashrc
.../.cloud-locales-test.skip
.../.config/
.../.gitconfig
.../.java/
.../.m2/
.../.mysql_history
.../.nano/
.../.npm/
.../.profile
.../.selected_editor
.../.ssh/
.../.viminfo
.../.wget-hsts
.../.angular_01/
.../.bash_contents
.../.eclipse-jee-oxygen-3a-linux-gtk-x86_64.tar.gz
.../.file1.txt
.../.file2.txt
.../.
.../.mysql-apt-config_0.8.13.1_all.deb
.../.node_modules/
.../.nodedsource_setup.sh
.../.output
.../.package-lock.json
.../.script.sh
.../.snap/
.../.zabbix-release_3.0-2+trusty_all.deb

nothing added to commit but untracked files present (use "git add" to track)
root@ip-172-31-27-218:~/myproject# git pull origin master
```