


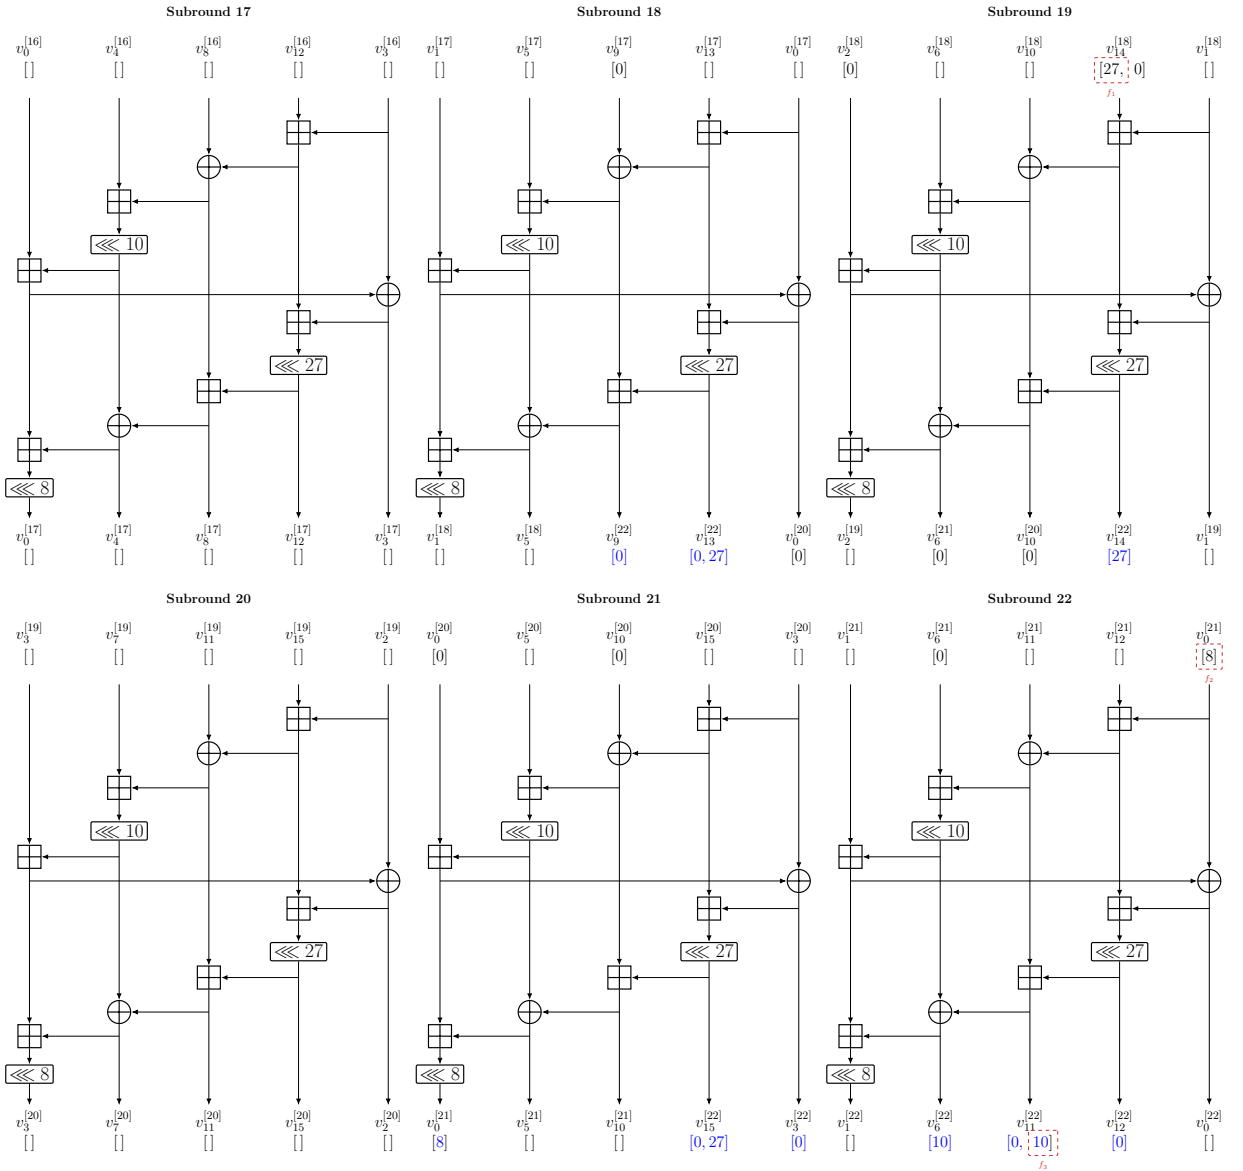

Extension of the output mask through subrounds 17 to 22 in the 5.5-round attack. Top row: subrounds 17 to 19. Bottom row: subrounds 20 to 22. The distinguisher gives a mask on the state after subround 16, shown at the top of the first panel. Each mask bit is carried forward through the operations that pass it with correlation 1: an XOR, a rotation, or bit 0 of a modular addition. **Blue** bits are the terms of the final parity, which the attacker computes from the keystream and the guessed key bits; black bits are intermediate bits that a later subround still uses. A **dashed red box** marks a bit that would next have to cross a modular addition at a position other than 0. The extension stops there, and that bit becomes the target of the punctured function f_i named at the box. A masked word that the following subrounds do not use keeps its value, so it is labeled with the index of the subround in which it is next used, or 22 if it is not used again.