


図面／規格
【（一）皿小ねじ】

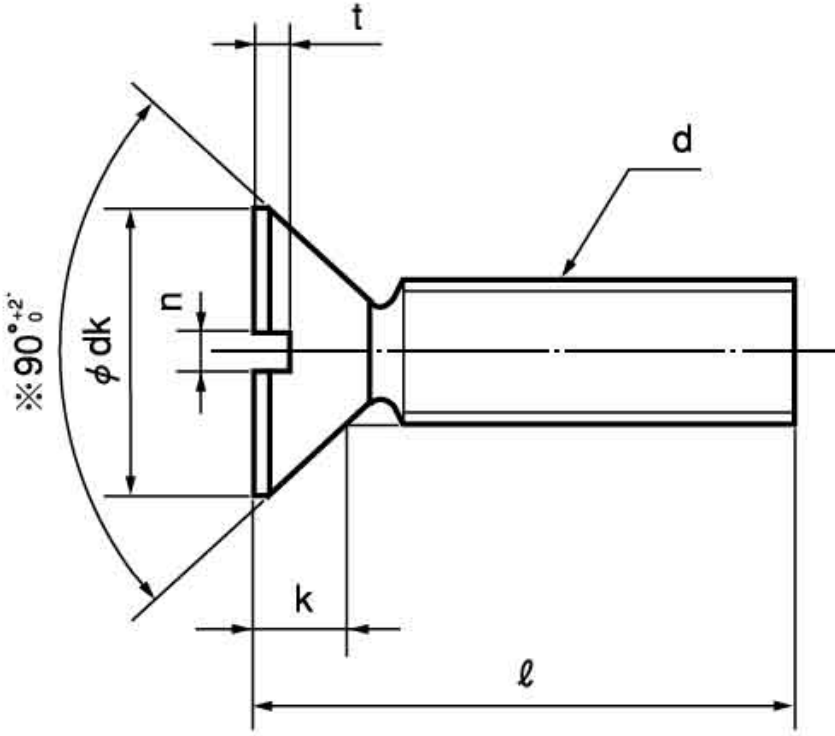

呼び径 (d)	ピッチ	dk		k		n		t	
		基準 寸法	許容差	基準 寸法	基準 寸法	許容差	基準 寸法	許容差	
M1	0.25	2.0	0 -0.3	0.6	0.32	+0.1 -0	0.25	± 0.05	
M1.2	0.25	2.4		0.8	0.32		0.3		
M1.4	0.3	2.8		0.85	0.32		0.3		
M1.6	0.35	3.2		0.95	0.4		0.35		
M2	0.4	4.0	0 -0.4	1.2	0.6	+0.15 -0	0.5	± 0.1	
M3	0.5	6.0	0	1.75	0.8		0.7		
M4	0.7	8.0	-0.5	2.3	1.0		0.9	± 0.15	
M5	0.8	10	0 -0.6	2.8	1.2		+0.2 0	1.1	± 0.2
M6	1.0	12	0 -0.7	3.4	1.2	1.4		± 0.25	
M8	1.25	16	0 -0.8	4.4	1.6	1.8		± 0.3	
M10	1.5	20	0 -1.3	5.7	2.0	+0.25 0		2.5	± 0.4
M12	1.75	24		6.7	2.0		2.5		
M14	2.0	27		7.2	3.0		3.5		
M16	2.0	30		7.7	3.0		3.5		
M18	2.5	33	0 -1.6	8.2	3.0	+0.3 0	3.5	± 0.5	
M20	2.5	36		8.8	4.0		4.5		
※ M22	2.5	36		13.6	4.0		5.0		
※ M24	3.0	39		14.4	4.0		5.0		
※ M30	3.5	48		17	5.0	6.0			

※ M22、M24、M30 は皿角度 60° になります。