

SOFTWARE DESIGN AND CONSTRUCTION

Assignment 0. Software Requirement Specification

Lecturer: NGUYEN Thi Thu Trang, trangntt@soict.hust.edu.vn

1. SUBMISSION GUIDELINES

When you want to submit your individual work of in-class tasks for the Case Study, you have to push your work to your individual GitHub repository, complied with the naming convention “TeamName-StudentID.StudentName” (e.g. TKXDPM.KHMT.20231.20192012.HoangNghiaPhu or TKXDPM.VP.20231-20192122.LuongHongHai).

2. IN-CLASS TASKS

In this lab, we continue with the requirement modeling and try it ourselves with Use case diagram, Flow of events, activity diagrams, and use case (UC) specification for the Case Study AIMS.

You are asked to work individually for this section, and then put all your file(s) and directories to a parent directory, namely “Requirement Analysis”. After that, push your commit to your individual repository before the announced deadline.

2.1. USE CASE DIAGRAM WITH ASTAH

Please see the following link to know how to make a use case diagram with Astah.

<https://astah.net/support/astah-pro/user-guide/usecase-diagram/>

2.2. USE CASE DIAGRAM FOR THE CASE STUDY

In this part, you are asked to draw the Use case diagram for AIMS Project by using Astah. When you finish drawing the diagram, export your diagram to a PNG file. Please create a directory named “*Use case diagram*” inside the directory “Requirement Analysis” to store your diagram (include both .astah file and exported PNG file).

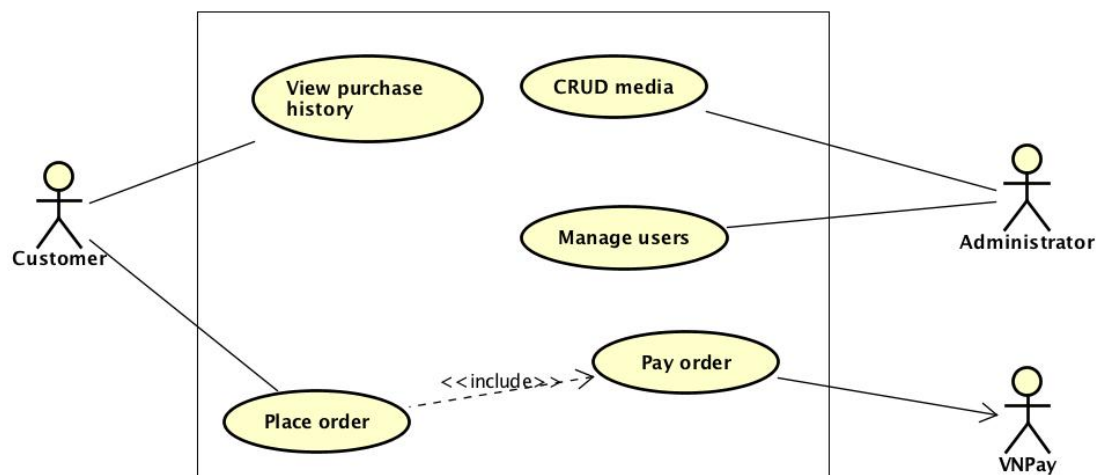


Figure 1-An Example of Use Case Diagram for AIMS Project (not complete).

Figure 1 is an example of use case diagram (incomplete). Please read the problem statement of AIMS, and complete the use case diagram.

2.3. USE CASE SPECIFICATION

In use case models, a use case describes a **flow of events** which is *performed by the software* and *yields an observable result of value to a particular actor*.

In this subsection, we would use the two use cases, UC “Place Order” and UC “Pay Order”, to demonstrate how we can make a flow of events or use case specification. Please note that there does not exist a best answer, but a reasonable answer.

2.3.1. Use Case Specification for UC “Pay Order”

In this part, you are asked to fill in the provided template for the use case specification of UC “Pay Order” by using the following solution. When you finish the task of this part, please export your work to a PDF file, namely “Use case specification – Pay Order.”

This use case describes the interactions between the AIMS software with the customer and Interbank when the customer desires to pay order. The precondition of this use case is that the AIMS software has calculated the total amount of money which the customer has to pay. On the other hand, there is no need of specification of output data nor the postcondition. An incomplete example for the basic flow of events is listed as follows.

- Step 1. The AIMS software displays the payment screen
- Step 2. The customer enters credit card info and confirms to pay order

- Step 3. The AIMS software asks the Interbank to process the payment transaction
- Step 4. The Interbank processes the payment transaction
- Step 5. The AIMS software saves the payment transaction
- Step 6. The AIMS software displays transaction information

The alternative flows of events of this use case are illustrated in the following table.

No	Location	Condition	Action	Resume location
1.	At Step 3	If the card info is in invalid	<ul style="list-style-type: none"> The AIMS software notifies that the card info is invalid 	At Step 1
2.	At Step 5	If the card info is wrong	<ul style="list-style-type: none"> The AIMS software notifies that the card info is wrong 	At Step 1
3.	At Step 5	If the balance is not enough	<ul style="list-style-type: none"> The AIMS software notifies that the balance is not enough 	At Step 1

The input data of payment form is shown as follows.

No	Data fields	Description	Mandatory	Valid condition	Example
1.	Card holder name		Yes	Maximum of 50 characters	DO MINH HIEU
2.	Card number		Yes	16 digits	1234 5678 9123 4567
3.	Expiration date		Yes	Consist of month and last 2 digits of year only	01/23
4.	Security code		Yes	3 digits	123

The output data of payment form is shown as follows.

No	Data fields	Description	Display format	Example
1.	Transaction ID			
2.	Card holder name			DO MINH HIEU
3.	Amount		Right alignment	1.200.000 VNĐ

No	Data fields	Description	Display format	Example
			Vietnamese currency (VNĐ) Vietnamese locale	
4.	Transaction Content			
5.	Transaction Date		dd/mm/yyyy	05/10/2023

Sau khi thanh toán thành công, hệ thống sẽ hiển thị mã giao dịch (transaction ID), tên chủ thẻ, số tiền bị trừ, nội dung giao dịch, số dư (balance), ngày giờ giao dịch.

Template of Use Case Specification is shown as below.

Use Case “Name of use case”

1. Use case code

UC00X

2. Brief Description

This use case describes the interaction between <actor(s)> and <name_of_the_system> when <actor(s)> wish(es) to ...

3. Actors

3.1 Name of Actor 1

4. Preconditions

5. Basic Flow of Events

1. The actor(s) ...
 - i. The software displays ... (see Table T).

6. Alternative flows

Table N-Alternative flows of events for UC Place order

No	Location	Condition	Action	Resume location
1.	At Step S	If ...	▪ Action 1	Resumes at Step Q
2.	At Step O	If ...	▪ Action 2	Use case ends

7. Input data

Table A-Input data of ...

No	Data fields	Description	Mandatory	Valid condition	Example
1.					

8. Output data

Table B-Output data of ...

No	Data fields	Description	Display format	Example
6.				

9. Postconditions

2.3.2. Use Case Specification for UC “Place Order”

In the AIMS Project, UC “Place Order” describes the interaction between customers and AIMS software when the customer wishes to place order. Naturally, from the use case diagram, we describe how the use case starts and ends to gain the purpose of a use case, and we may think of a basic flow of the events for UC “Place Order” as follows.

- Step 1. The customer requests to place order in the cart
- Step 2. The AIMS software checks the availability of products in the cart
- Step 3. The AIMS software displays the form of delivery information
- Step 4. The customer enters and submits delivery information
- Step 5. The AIMS software calculates shipping fees
- Step 6. The AIMS software displays the invoice
- Step 7. The customer confirms to place order
- Step 8. The AIMS software calls UC “Pay order”**
- Step 9. The AIMS software creates a new order

- Step 10. The AIMS software makes the cart empty
- Step 11. The AIMS software sends email about the order notification and information
- Step 12. The AIMS software displays the successful order notification and the order information.

We specify what happens when, for each action. Remember this text will be used to identify test cases. However, things hardly ever go as planned. Taking the above flow as our initial basic flow, we would try to analyse and improve our flow of events for UC “Place Order”.

Question: Should we trust any input to an action/event?

It depends on the question or the request and the way it has been asked or responded. If the response must comply with a rule or a regulation, we must question the validity of the input. In case of humans, they tend to follow the given instructions in an incorrect manner even after several trials. In cases of non-human actors, there are a lot of factors that heavily affect the input from other systems, e.g., noise in transmission. Hence, we need to give them the chance to try repeatedly until their input is valid or within an acceptable limitation to be at least. However, there are cases in which we must take the input for granted since it is unnecessary or beyond the control of the system. To illustrate, in the form of delivery information, we should not check if the user has filled the real name of the receiver in the field for receiver name, yet we must not let the user leave it blank.

Question: What data is exchanged between actor and use case and between use case and use case?

In this use case, there are two inputs we need from the customer up to now: information of media in the cart (for displaying cart, order confirmation, shipping fees, and payment) and delivery information (for shipping and shipping fees). Some or all attributes of these information may play critical roles in input validation, so we need to specify the attributes of the input. To illustrate, the input data of delivery information may include these data fields:

Table 1- Input data of delivery information

No	Data fields	Description	Mandatory	Valid condition	Example
1.	Receiver Name		Yes		Do Minh Hieu

No	Data fields	Description	Mandatory	Valid condition	Example
2.	Phone Number		Yes	10 digits	0987654321
3.	Province	Choose from a list	Yes		Hanoi
4.	Address		Yes		12, 34 Alley of Tran Thai Tong street, Cau Giay district
5.	Shipping instructions		No		

We also need to specify which the output to the actor(s) since it is the main factor that impacts on the input from actor(s). For instance, the output data when displaying the invoice is shown in the following tables (the rows with green shading are repeated for all media products in the cart/invoice).

Table 2-Output data of displaying invoice

No	Data fields	Description	Display format	Example
1.	Title	Title of a media product		DVD Phim Vượt ngục
2.	Price	Price of the corresponding media product	<ul style="list-style-type: none"> ▪ Comma for thousands separator ▪ Positive integer ▪ Right alignment 	123,000
3.	Quantity	Quantity of the corresponding media	<ul style="list-style-type: none"> ▪ Positive integer ▪ Right alignment 	2
4.	Amount	Total money of the corresponding media	<ul style="list-style-type: none"> ▪ Comma for thousands separator ▪ Positive integer ▪ Right alignment 	246,000
5.	Subtotal Before VAT	Total price of products in the cart before VAT	<ul style="list-style-type: none"> ▪ Comma for thousands separator ▪ Positive integer ▪ Right alignment 	2,106,000
6.	Subtotal	Total price of products in the cart with VAT		2,316,600

No	Data fields	Description	Display format	Example
7.	Shipping fees			30,000
8.	Total	Sum of subtotal and shipping fees		2,346,600
9.	Currency			VND
10.	Name			Do Minh Hieu
11.	Phone number			0987654321
12.	Province	Choose from a list		Hanoi
13.	Address			12, 34 Alley of Tran Thai Tong street, Cau Giay district
14.	Shipping instructions			

Note that we do not describe the details of the user interface unless it is necessary to understand the behavior of the system. Specifying user interface details too early will limit design options.

Now, we can finally validate the data. For list of media in the cart, we need to check if a media is out-of-stock. For delivery information, we need to check if a mandatory field is left blank and valid condition for the phone number. Thus, we need inset at least two more events into the flow so as to validate the two corresponding inputs.

Additionally, depending how you design, you might want to check the input from UC “Pay order” at Step 9.

After validation, in case there is an exception, the flow cannot continue normally. Consequently, we need alternative flows or sub-flows for the next events in these cases. For instances, the sub-flows for UC “Place Order” is shown as follows.

The alternative flows of events of the use case “Place order” are illustrated (not complete) in Table 1.

Table 3-Alternative flow of events for UC “Place Order”

No	Location	Condition	Action	Resume location
1.	At Step 3	If the products are not available	<ul style="list-style-type: none"> The AIMS software notifies that the the products in the cart are not available and come back to the use case “View cart” 	Use case ends
2.	At Step 5	If the delivery info is invalid	<ul style="list-style-type: none"> The AIMS software notifies that the delivery info is invalid (blank or wrong format) 	At Step 3
3.	At Step 5	If the user chooses to place a rush order	<ul style="list-style-type: none"> The AIMS software inserts use case “Place rush order” 	At Step 5
4.	At Step 9	If the order payment is not successful	<ul style="list-style-type: none"> The AIMS software notifies that the payment is not successful 	At Step 8

The last questions are *what we should save and when we save it*.

By saving the data, we can save a lot of time and efforts for us, the system, and the users. To illustrate, the customer cannot finish placing order for some reasons. Thus, we can save some information for later such as the list of media in cart, so that the customer does not have to add them to the cart again.

Finally, we may provide the pre-condition and the post-condition. For example, the pre-condition for UC “Place Order” can be “there is an active network connection to the Internet.” A post-condition can be “the logs have been updated accordingly” in the case of failure condition.

For this part, given the above suggestion, you are asked to make a use case specification for UC “Place Order” by using the template. Remember to validate data and save information if need be. When you finish the task of this part, please export your work to a PDF file, namely “Use case specification – Place Order.” Then put both files in the directory “Use case specification”.

2.3.3. Use Case Specification for “Place Rush Order”

In practice, it is a possibility that you are asked to add more features or change some policies in your products, especially when your clients are allowed to provide the inputs in some stages of the development process and change their minds. Things can be worse when they keep asking again and again.

In this course, you will frequently face with requirement changes, too.

In this lab, there is one additional feature: placing rush order. Placing rush order allows the customer to receive the goods at a scheduled time.

You are asked to update the use case specification for UC “Place order” and/or to make another use case specification by using the provided template (e.g., you can model the relationship between UC “Place Rush Order” and UC “Place Order” as an extension) for the additional UC “Place Rush Order”.

When you finish the task of this part, please export your work to a PDF file, namely “Use case specification – Place Order with Place Rush Order.” Then put your work and the exported file in the directory “Use case specification.”

2.4. ACTIVITY DIAGRAM

2.4.1. Activity diagram with Astah

Please see the following link to know how to make an activity diagram with Astah.

<https://astah.net/support/astah-pro/user-guide/activity-diagram/>

2.4.2. Activity diagram of UC “Pay Order”

In this part, you are asked to redraw the following activity diagram for UC “Pay Order” by using Astah.

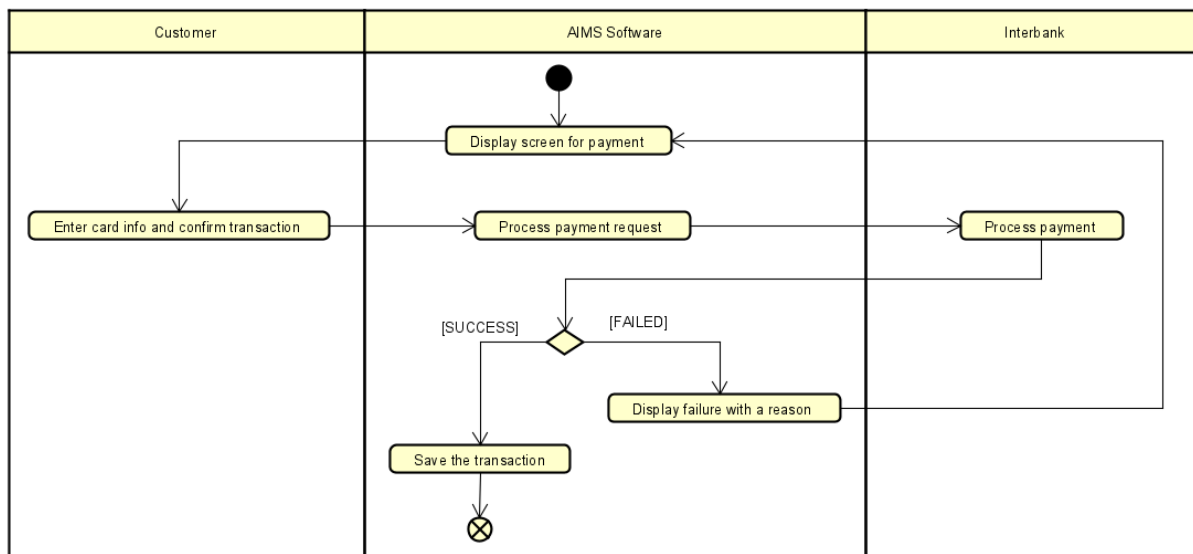


Figure 2-Activity diagram of UC “Pay Order”

When you finish the task of this part, please export your work to a PNG file, namely “Activity Diagram – Pay order,” and save your work in a directory, namely “Activity diagrams.”

2.4.3. Activity diagram(s) of UC “Place Order” with “Place Rush Order”

As can be seen, the incomplete flow of events in the part 2.3.2 is clearly represented in the activity diagram in 2.4.2. We can convert an activity diagram into flows of events with very little effort.

In this part, you are asked to draw activity diagram(s) of UC “Place Order” with “Place Rush Order” by using Astah. If you consider “Place Rush Order” as an extension use case, you need to two activity diagrams: one for UC “Place Order”, another for UC “Place Rush Order”. Otherwise, one activity diagram is enough.

When you finish the task of this part, please export your work to a PNG file, namely “Activity Diagram – Place order with Place rush order,” and save your work in a directory, namely “Activity diagrams.”

3. HOMEWORK ASSIGNMENTS

3.1. COMPLETE AT-CLASS EXERCISES

Complete all in-class exercises (in section 2,3) following the guidelines.

3.2. COMPLETE THE SRS FOR AIMS

Complete the Software Requirement Specification for the AIMS Project following the template including:

- Use case diagram(s) for AIMS: A general use case diagram and lower-level use case diagrams (if any).
- Business processes of AIMS, e.g. the process to place an order, from searching media items until making the order successfully or the process to manage the order.
- Use case specification for all use cases related to place order starting when the user ask to place an order until the order is made successfully.