


电竞大厅

- CP管理：编辑时是否有效的状态不生效；新增后要割一段时间才能刷新出来【已修复】
- 公告管理：编辑后数据更新不同步；新增提示保存成功，但查询接口没有新增的数据：【已修复】
- 推荐管理：query查询接口里有某id的数据,但是view接口里没有数据：【已修复】

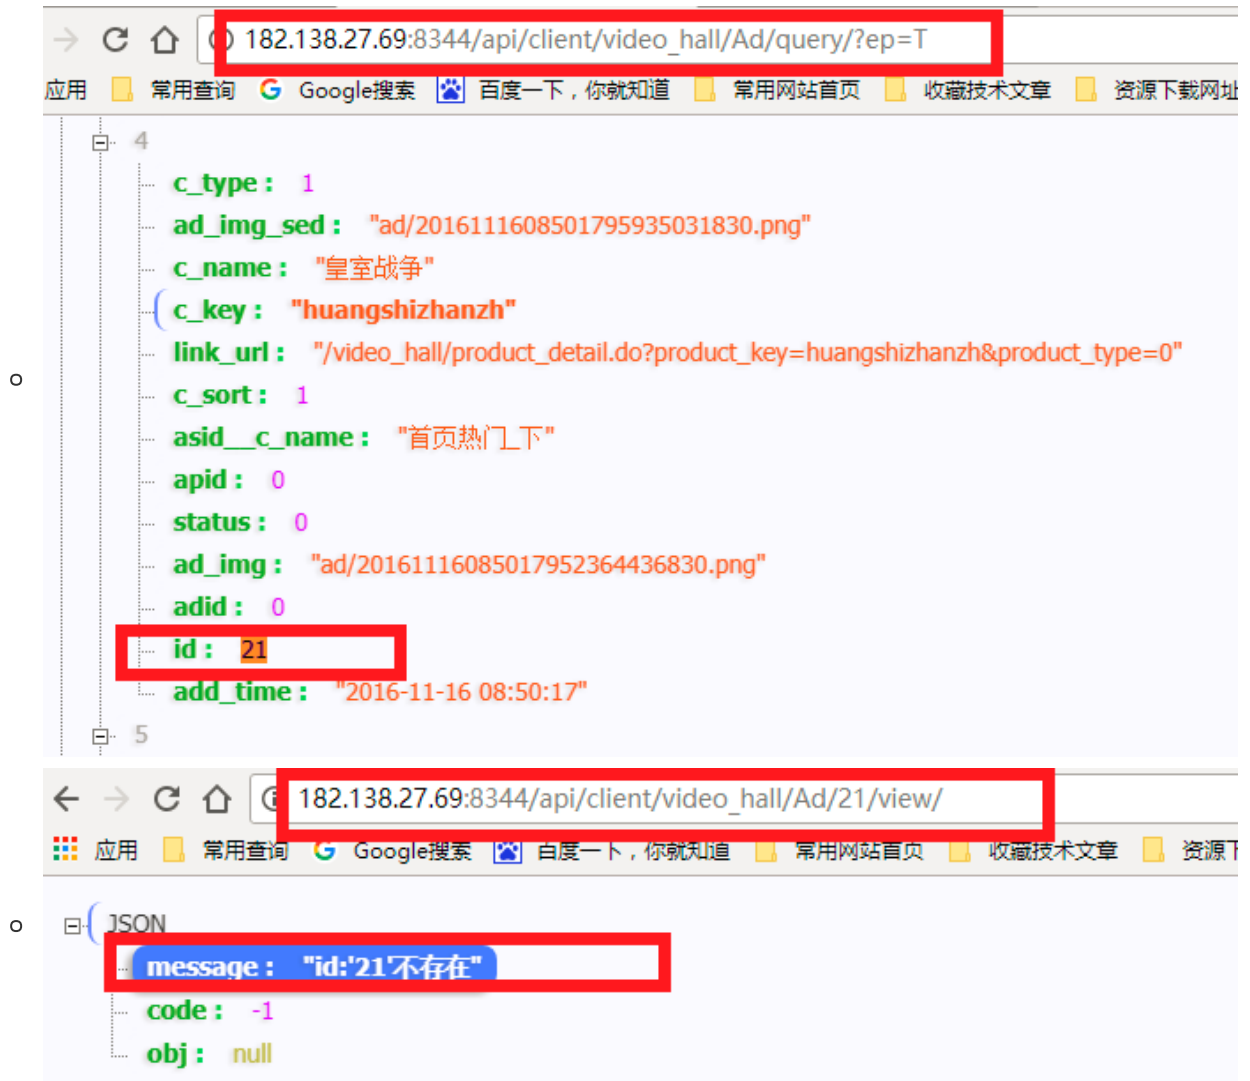

- 新增接口参数有问题，与现网不一致，导致不匹配【重庆现网看，不需要apid，但是新增时提示apid不能为空】：

```
{\ "message\":"Traceback (most recent call last):\n File  
\\\\"\\home\\wangjushidaigame\\rh\\video_dx_sichuan\\base_api\\views.py\\",  
line 330, in save\n    ret = instance.save()\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\models\\base.py\\", line 589, in save\n    force_update=force_update, update_fields=update_fields)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\models\\base.py\\", line 617, in save_base\n    updated  
= self._save_table(raw, cls, force_insert, force_update, using, update_fields)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\models\\base.py\\", line 698, in _save_table\n    result = self._do_insert(cls._base_manager, using, fields, update_pk, raw)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\models\\base.py\\", line 731, in _do_insert\n    using=using, raw=raw)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\models\\manager.py\\", line 92, in manager_method\n    return getattr(self.get_queryset(), name)(*args, **kwargs)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\models\\query.py\\", line 921, in _insert\n    return  
query.get_compiler(using=using).execute_sql(return_id)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\models\\sql\\compiler.py\\", line 921, in  
execute_sql\n    cursor.execute(sql, params)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\backends\\utils.py\\", line 65, in execute\n    return  
self.cursor.execute(sql, params)\n File  
\\\\"\\usr\\local\\python\\lib\\python2.7\\site-packages\\Django-1.7.9-  
py2.7.egg\\django\\db\\backends\\mysql\\base.py\\", line 134, in execute\n    six.reraise(utils.IntegrityError, utils.IntegrityError(*tuple(e.args)), sys.exc_info()  
[2])\n File \\\\"\\usr\\local\\python\\lib\\python2.7\\site-  
packages\\Django-1.7.9-py2.7.egg\\django\\db\\backends\\mysql\\base.py\\",  
line 129, in execute\n    return self.cursor.execute(query, args)\n File  
\\\\"build\\bdist.linux-x86_64\\egg\\MySQLdb\\cursors.py\\", line 174, in  
execute\n    self.errorhandler(self, exc, value)\n File \\\\"build\\bdist.linux-  
x86_64\\egg\\MySQLdb\\connections.py\\", line 36, in defaulterrorhandler\n    raise errorclass, errorvalue\nIntegrityError: (1048, \\\"Column 'apid' cannot be  
null\\\")\n\\", \"code\":-1, \"id\":null}
```