Tidal potential measured with distant optical clocks

Lei Hou[1,2], Xiang Zhang[1,2,3], Qiang Zhu[4], Xiang-Pei Liu[1,3], Fa-Xi Chen[1,5], Wen-Xuan Song[1,2,3], Zhuan-Xian Xiong[1,4], Jian-Yu Guan[1,2], Yu-Chen Zhang[1,2,3], De-Quan Kong[1,2,3], Jia-Hao Zhang[1,2,3], Long-Fei Liao[1,2,3], Shao-Mao Wang[1,2], Bing Wang[4], De-Zhi Xiong[1,4], Xing-Yang Cui[1,2], Ping Xu[1,2,3], Peng Liu[1,2], Jie Li[2,3], Xiao Jiang[1,2,3], Hua-Qing Zhang[1,5], Ling-Xiang He[1,4], Li-Bo Li[5], Qi Shen[1,2,3], Youchao Xie[6], Lei Wang[6], Sheng-Kai Liao[1,2,3], Juan Yin[1,2,3], Cheng-Zhi Peng[1,2,3], Wen-Bin Shen[6], Baolong Lyu[1,4], Han-Ning Dai[1,2,3], Qiang Zhang[1,2,3,5], Yu-Ao Chen[1,2,3], Hai-Feng Jiang[1,2,3], Jian-Wei Pan[1,2,3]

[1] Hefei National Laboratory, University of Science and Technology of China, Hefei, China

[2] Shanghai Research Center for Quantum Sciences and CAS Center for Excellence in Quantum Information and Quantum Physics, University of Science and Technology of China, Shanghai, China

[3] Hefei National Research Center for Physical Sciences at the Microscale and School of Physical Sciences, University of Science and Technology of China, Hefei, China

[4] Innovation Academy for Precision Measurement Science and Technology, Chinese Academy of Sciences, Wuhan, China

[5] Jinan Institute of Quantum Technology and CAS Center for Excellence in Quantum Information and Quantum Physics, University of Science and Technology of China, Jinan, China

[6] Time and Frequency Geodesy Center (TFGC), School of Geodesy and Geomatics, Wuhan University, Wuhan, China

Optical clocks measure gravitational potential through the gravitational redshift. Remote comparisons can therefore probe changes in Earth's gravity field, provided astronomical signals can be distinguished from laboratory variations that repeat with the solar day. Here we measure tidal potential variations between optical clocks in coastal Shanghai and inland Wuhan, connected by a stabilized fibre link. Observations across five campaigns span changing lunar phases relative to local solar time. A joint fit with astronomical phases and within-group amplitude ratios separates lunar and solar-frequency semidiurnal contributions, with response factors of 0.97 ± 0.14 and 0.90 ± 0.29 relative to the combined solid-Earth and ocean-loading predictions. The uncertainties are statistical, at one standard deviation. A free-phase lunar fit agrees with the astronomical phase. Local spectra, conditional fits and reciprocal component subtraction support the frequency separation and identify sampling sidelobes. These measurements show how astronomical phase evolution and spectral separation enable distant optical clocks to track time-dependent gravitational potential.

Introduction

Optical clocks measure differences in gravitational potential through the gravitational redshift.[1–4] Advances in clock accuracy[5–10] and optical frequency transfer[11–13] have enabled comparisons between distant laboratories and across international networks.[14–16] Clock-based measurements have determined static potential differences and resolved gravitational redshifts over laboratory and geodetic height scales.[17–22] Measuring changes in potential would extend these comparisons to the dynamics of Earth's gravity

field. Tides provide a predictable signal, with contributions from astronomical forcing, solid-Earth deformation and ocean loading.[23–25]

Laboratory conditions also vary with the solar day. Their 24-h cycles and 12-h harmonics can overlap or lie close to tidal frequencies, making a short record difficult to interpret. The principal lunar semidiurnal tide M_2 has a period of approximately 12.42 h, so its phase moves relative to local solar time. Observations over different lunar–solar phases can distinguish this response from disturbances locked to the solar day. Gaps in the record introduce a further complication: a single component can produce several spectral peaks. Phase coverage and the sampling response must therefore be considered together when identifying the tide.

Here we measure tidal potential variations between a Sr clock in Shanghai and a Yb clock in Wuhan. Ocean loading contributes to the potential difference on this coastal–inland baseline. We estimate the lunar and solar-frequency semidiurnal responses, examine their amplitudes and phases through spectral separation and component subtraction, and quantify the response to solar-day disturbances. Environmental and transmission records provide additional controls on the measurement.

Results

A coastal–inland potential measurement

The Sr and Yb clocks are separated by 692 km and connected by a 1,350-km phase-stabilized fibre link (Fig. 1a). The comparison senses the combined potential difference from the solid-Earth tide and ocean loading. We calculate the solid-Earth contribution using the IERS conventions[26] and the loading contribution from FES2022[27,28] with a Green's function that includes water attraction, induced potential and clock displacement.[29] At M_2, the predicted differential solid and loading amplitudes are 3.41×10^{-18} and 1.42×10^{-18} in fractional frequency. Their 20° phase difference gives a combined amplitude of 4.77×10^{-18} (Fig. 1b). Loading thus contributes approximately one-third of the predicted signal.

Five campaigns between September 2025 and August 2026 provide approximately 544 h of retained observations in 54 segments. Data and predictions undergo the same 1,200-s triangular filter at 600-s steps. Each segment has a fitted offset. We estimate separate responses for the lunar group (M_2, N_2), the neighbouring semidiurnal group (S_2, K_2) and the diurnal group, retaining the predicted phase and relative amplitudes within each group (Methods).

Amplitude and phase of the lunar response

The lunar response is $A_{\mathrm{L}} = 0.97 \pm 0.14$, where the statistical uncertainty is calibrated by residual resampling (Fig. 2; Extended Data Fig. 11). Allowing the lunar phase to vary gives an amplitude of 0.98 ± 0.11 and a phase offset of $-6^\circ \pm 8^\circ$, with segment-bootstrap uncertainties. The observations agree with both the predicted amplitude and astronomical phase. The neighbouring semidiurnal and diurnal responses are $0.90 \pm$

0.29 and 0.35 ± 0.51, respectively. Their precision differs from that of the lunar response. The complete template gives 0.90 ± 0.12.

The 274-h summer campaign spans two months and covers the full S_2–M_2 relative-phase cycle (Fig. 1d). It provides 61% of the conditional information on the joint lunar estimate and gives 0.87 ± 0.18 when fitted alone. The four earlier campaigns together give 1.05 ± 0.31. Campaign estimates are consistent ($\chi^2 = 4.1$ for four degrees of freedom, $p = 0.40$). The extended phase coverage supplies the separation that each short campaign lacks. Figure 2 shows the summer response, and Extended Data Fig. 4 retains the calendar dates and gaps of the April record.

Frequency separation and sampling sidelobes

Local spectra distinguish structure near M_2 and S_2 and retain responses when the competing principal frequency is controlled (Fig. 3). These diagnostics use a separate reduction into 3,299 non-overlapping 600-s means, representing 545.924 member-hours, with the original UTC times and 54 segment constants. The different selection and averaging define an auxiliary analysis, whose sample support is compared with the primary reduction in Methods.

With freely phased N_2 and K_2 terms controlled, a joint sinusoidal fit gives M_2 and S_2 amplitude estimates of 4.50×10^{-18} and 1.92×10^{-18}. The UTC-day jackknife covariance gives nominal 95% two-coefficient regions whose amplitude ranges are $[2.94, 6.09] \times 10^{-18}$ for M_2 and $[0, 4.42] \times 10^{-18}$ for S_2 (Extended Data Fig. 12). The S_2 region includes zero, so its free-phase estimate is less precise and does not constrain its phase at that level. These regions use a bivariate-normal approximation to the estimated covariance. These are individual sinusoidal amplitudes; the primary response factors instead scale physical groups with fixed internal phase and amplitude relations.

Subtracting the jointly estimated M_2 waveform changes the S_2 single-frequency amplitude from 2.918 to 1.921×10^{-18}. Subtracting S_2 changes M_2 from 4.857 to 4.505×10^{-18} (Extended Data Fig. 8). The projected sine–cosine subspaces have a maximum canonical correlation of 0.290. Their joint-coefficient correlations are also modest, with maximum cross-component absolute correlations of 0.248 under scaled least squares and 0.261 under UTC-day deletion (Extended Data Fig. 9). Together, the conditional spectra and reciprocal subtraction identify separate contributions while quantifying their coupling.

Single-component injections through the observed sampling generate sidelobes at 22.1016 and 22.6283 μHz. Subtracting the fitted M_2 waveform reduces the corresponding observed powers by 99.56% and 99.39%, with minima near unit compensation (Extended Data Fig. 10). Their locations and responses support M_2 leakage at these frequencies. Other neighbouring features respond differently. The sampling analysis thus explains specific sidelobes rather than assigning every peak to the same cause. A response at the S_2 frequency remains compatible with either an astronomical tide or a laboratory variation at exactly 12 h.

Solar-day sensitivity and measurement controls

A sinusoidal perturbation of amplitude 10^{-18} at 24 h or 12 h changes the lunar response by at most 0.020 when its phase is common to the record (Fig. 4). Independent campaign phases increase the maxima to 0.032 and 0.12, respectively. This distinction matters: a campaign-dependent 12-h disturbance can approach the statistical uncertainty. The observed summer daily amplitudes give worst-phase lunar shifts of 0.045 at 24 h and 0.024 at 12 h.

Fits that include daily terms support the lunar estimate. A common 24-h and 12-h pair gives 1.00 ± 0.13, while free-phase 12-h terms in each campaign give 0.82 ± 0.17, or 0.86 ± 0.18 when 24-h terms are also included. The temperature regressions and available chamber records provide additional checks (Methods). On the reported 474-h overlap with the fibre round-trip monitor, adding the monitor changes the lunar and whole-template coefficients by less than 0.005 on identical clock samples.

The lunar response is stable under alternative baseline definitions, campaign deletion and transient treatment (Fig. 4). Retaining the excluded excursions gives 0.96 ± 0.14; resampling the 29 operating groups gives a 95% interval of [0.76, 1.18]. Held-out lunar predictions improve six of eight periods. A separate processing of the 2026 records, using non-overlapping means and ten-day baselines, gives a lunar response of 0.89 ± 0.28 with daily terms. The statistical and physical-model checks are described in Methods and Extended Data.

Discussion

The joint clock comparison yields distinct lunar and solar-frequency semidiurnal responses within the astronomical-template model. The lunar amplitude and phase agree with the combined solid-Earth and ocean-loading prediction. The broad lunar–solar phase coverage, conditional frequency response and component-subtraction results support the identification from complementary views of the record. For the lunar response, the evolving astronomical phase distinguishes the tide from variations fixed to the solar day. The sampling calculations explain how each fitted component contributes to neighbouring spectral structure.

The measurement tests the combined potential on a coastal–inland baseline. A separate loading coefficient of 0.89 ± 0.55 is consistent with the model but does not yet provide a precise loading measurement. Coastal-mask changes shift a fitted response by approximately 0.06–0.07, an appreciable scale compared with the lunar statistical uncertainty of 0.14. This is model sensitivity, rather than a probability distribution to be added mechanically to the statistical variance. Better coastal modelling and more precise clock comparisons would allow the loading contribution to be tested more closely.

Observation duration, clock stability and lunar–solar phase coverage jointly determine the information available from an interrupted comparison. Extending observations across seasons can improve that coverage and help distinguish evolving laboratory disturbances. The present experiment demonstrates a regional measurement of

time-dependent potential with distant optical clocks.

A contemporaneous independent observation of tidal potential variations in a European optical-clock network has also been reported.[30]

Methods

Clocks, frequency transfer and sampling

The Sr optical lattice clock is located in Shanghai (31.130° N, 121.570° E, height approximately 5 m) and the Yb optical lattice clock in Wuhan (30.529° N, 114.357° E, approximately 30 m). The tidal model is insensitive to the absolute heights: changing the Shanghai height by 5 m changes the differential model by 4×10^{-23}. The geopotential difference between the clocks, 280.042 ± 0.085 m^2 s^{-2}, was determined by first-order levelling. It enters the static frequency ratio and is absorbed by the fitted offsets. The evaluated systematic uncertainties of the Sr and Yb clocks are 9.2×10^{-19} and 1.3×10^{-18}, respectively [5,6]; optical frequency dissemination over field fibres of comparable length has also been demonstrated [12,13].

A 1,550-nm carrier referenced to the Sr clock through a frequency comb in Shanghai is transmitted to Wuhan, where its beat against the Yb-referenced comb is recorded at 1-s intervals. In the 2026 campaigns, the beat frequency is 33.6 MHz and a deviation of 1 Hz corresponds to 5.17×10^{-15} in Yb/Sr. In 2025, the counter recorded the beat after division by two; these deviations are therefore multiplied by two. Fitting the September–October 2025 campaign alone gives $A = 1.28 \pm 0.31$, consistent with this scale and sign. The white-frequency-noise level of the tide-corrected ratio, $\sigma_y\sqrt{\tau}$, obtained from the overlapping Allan deviation [31] at averaging times of 256–4,096 s, is 7.9×10^{-16} in September–October 2025 and 4.2–5.3×10^{-16} in the 2026 campaigns.

The record contains five campaigns: September–October 2025, January 2026, April 2026, May 2026 and June–August 2026. The 54 segments were defined by the experiment team. There are 38 segments and 270 h before June and 16 segments and 274 h in June–August, giving 544 h, or approximately 23 days, of retained data. The analysis distinguishes these five campaigns from eight observation periods and 29 operating groups. Campaigns define the seasonal subsets and campaign-specific daily terms; observation periods are the units of held-out prediction and period-level sign resampling; operating groups are the units of group bootstrap resampling; segments carry the offsets in the primary fit. These levels are not treated as interchangeable independent samples.

Data selection

The same selection procedure is applied to every segment. The time axis of each data file is reconstructed from its first time stamp and the sample index, assuming one acquired sample per second within the supplied segment. The retained run is contiguous in sample index; this convention does not by itself establish the absence of unmarked acquisition losses. Samples more than 10 Hz from the segment median are removed, the longest uninterrupted run is retained, and leading and trailing samples deviating

from the median by more than 1% of the peak-to-peak range are trimmed. The 10-Hz threshold corresponds to approximately 5×10^{-14} in Yb/Sr. To identify smaller transient excursions, the retained 1-s data are averaged over 300 s and compared with a running median over ±30 min. Averages deviating by more than six robust standard deviations of these differences within the segment are removed together with their neighbours. This step removes 0.4% of the samples, or 2.2 h, including an excursion of approximately -2×10^{-16} lasting about 20 min on 7 July 2026.

The transient criterion uses no tidal model. Adding the model with factors of -1, 1 or 3 leaves the removed samples unchanged. Six robust standard deviations is the lowest tested threshold for which this invariance holds up to three times the model. For block lengths of 60 or 300 s and thresholds from four to eight standard deviations, the lunar amplitude ranges from 0.93 to 1.02. Retaining the excursions gives 0.96 ± 0.14; the full-template and semidiurnal amplitudes change by less than 0.04. After removal, the campaign diurnal amplitudes are mutually consistent ($p = 0.21$). Because the tested tidal additions do not change selection and the subsequent filter is linear, the injection simulations use the selected data.

Durations refer to retained 1-s samples; exposure measured from the filtered data at 600-s steps, used for temperature overlap, is slightly shorter. The last April segment ends at 18:00 on 19 April, following the experiment team's segment table. Omitting end-point trimming while retaining the other steps changes the lunar amplitude by -0.009 and the full-template amplitude by 0.008. Each segment has its own fitted offset. Time stamps are in local time (UTC+8); shifting the model by ±10 min changes A by less than 0.02. Long-period tides are outside the analysis: the similar site latitudes make the predicted differential semiannual tide only about 2×10^{-20}.

Solid Earth tide and ocean loading

The solid Earth contribution at each clock is computed directly as

$$\delta W = \sum_m (1 + k_{2m}) V_{2m} + (1 + k_3) V_3 - g u_r .$$

Here V_{2m} are the degree-2 tide-generating potentials of the Moon and Sun separated by order m, V_3 is the lunar degree-3 potential, and u_r is radial displacement. We use $k_{20} = 0.29525$, $k_{22} = 0.29801$ and $k_3 = 0.093$. The IERS 2010 resonance formula is applied constituent by constituent for k_{21}, giving 0.2588 for K_1, 0.2873 for P_1 and 0.2975 for O_1. The radial displacement is computed with the IERS algorithm, including the frequency and latitude dependence of the Love number h [26].

The ocean-loading potential is computed by grid convolution:

$$\delta W_{\text{ocean}}(t) = \sum_{\text{ocean}} \rho_w \zeta(\mathbf{r}', t) G_W(\psi)\, \mathrm{d}A, \qquad G_W(\psi) = \frac{ga}{M_E} \sum_n (1 + k'_n - h'_n) P_n(\cos\psi).$$

The ocean elevation ζ is taken from FES2022 on a $1/30^\circ$ grid [27,28], $\rho_w = 1,025\ \mathrm{kg\,m^{-3}}$, a and M_E are Earth's radius and mass, and ψ is angular distance. The Green's function follows ref. [29]. PREM load Love numbers are used through degree $n = 696$ [32], from the gravity-toolkit distribution [33]. Above this degree, h'_n is joined smoothly to its Boussinesq limit of -6.22, and the series is summed with a Kummer transformation through $n = 40,000$. The convolution uses full grid resolution within 3° of each station and sums blocks of 8×8 cells farther away. This aggregation changes differential M_2 and K_1 loading by at most 0.05%. The ocean mean is removed to enforce mass conservation. Eight constituents—Q_1, O_1, P_1, K_1, N_2, M_2, S_2 and K_2—are synthesized with astronomical arguments and nodal corrections.

The full loading potential exceeds the vertical-displacement contribution $-g\delta h$ by factors of approximately 1.4 for the semidiurnal constituents and 1.8 for the diurnal constituents. The radial displacement from the same convolution agrees with the FES2022 load-tide grid to within 2% in amplitude and 1.2° in phase for seven of the eight constituents. This comparison checks the convolution and displacement contribution; the direct attraction and induced-potential terms use the same PREM load Love numbers. For S_2, the amplitude differs by 18% and the phase at Wuhan by 54°; the load-tide grid uses a different ocean-model release. The S_2 loading contributions expressed as fractional frequency are 0.62×10^{-18} in Shanghai and 0.18×10^{-18} in Wuhan, giving a differential amplitude of 0.63×10^{-18}, compared with 1.42×10^{-18} for M_2. Substituting the S_2 loading inferred from the load-tide grid changes the full-template amplitude by 0.001 and the semidiurnal amplitude by 0.000 at the reported precision, with no reported change in the lunar amplitude. The lunar and near-12-h groups have separate fitted amplitudes.

The Shanghai clock is 22 km from the nearest ocean cell. To examine coastal-mask sensitivity, land cells within 0.3° or 0.6° of the coastline in a $4^\circ \times 5^\circ$ box centred on Shanghai are filled with the nearest ocean values. These strips, approximately 33–66 km wide, increase the Shanghai M_2 loading potential expressed as $\delta W/g$ from 15.3 mm to 17.0 or 18.5 mm and decrease the fitted response by 0.06 or 0.07. These are physical-model sensitivity tests, with shifts approximately half the quoted lunar statistical uncertainty; they are not treated as independent Gaussian errors or as an exhaustive loading-model uncertainty.

Tidal fits and uncertainty

The 1-s observations and model are filtered identically using a 1,200-s triangular window stepped by 600 s. The whole-template model is fitted by least squares as $y(t) = c_i + As(t)$, with an offset c_i for segment i. For the band analysis, the eight-constituent model is divided either into semidiurnal (M_2, S_2, N_2, K_2) and diurnal (K_1, O_1, P_1, Q_1) bands, or into lunar (M_2, N_2), near-12-h (S_2, K_2) and diurnal groups with separate amplitudes. The primary grouped fit contains no empirical daily terms. If the full physical model is correct, fitting the solid Earth tide alone on the actual sampling is expected to give $A = 1.32$, because loading adds to the solid tide with an M_2 phase difference of approximately 20°.

Where indicated, uncertainty is the larger of the scaled least-squares standard error[34] and the day-by-day jackknife error. For the full template, semidiurnal band and lunar group, uncertainty is calibrated by residual resampling. The fitted residuals are shifted circularly within each continuous run of the filtered record and added to the model with $A = 1$; the standard deviation of the refitted amplitude over 200 realizations supplies the calibrated error. These shifts retain the within-run residual structure under circular wrapping. For the lunar group, two independent sets of 200 realizations give standard deviations of 0.13 and 0.14, compared with 0.13 for the larger of the scaled least-squares and jackknife errors. We quote 0.14; the resampling bias is +0.01. With the daily disturbances described below, 5,000 realizations per scenario give standard deviations rounding to 0.14, coverage of 0.67–0.68 for the interval ±0.14, and 0.945–0.952 for ±1.96 × 0.14.

Calibrated errors are used for the whole-template and semidiurnal responses of individual campaigns and of the full record. For the diurnal and near-12-h groups, fits containing empirical daily terms, and fitted daily amplitudes, the larger of the scaled least-squares and jackknife errors is used. In the resampled data, these errors differ from the calibrated uncertainty by factors of 0.8–1.3. Unless otherwise specified, quoted ± uncertainties denote one standard deviation or one standard error as defined by the applicable procedure.

Group-bootstrap intervals are obtained by drawing the 29 operating groups with replacement and refitting 1,000 times; the segment bootstrap instead draws the 54 segments. These procedures permit correlations within each resampling unit but assume independence between units. For the semidiurnal response, the group-bootstrap standard deviation of 0.08 is smaller than the calibrated value of 0.12, and the larger value is quoted. In the phase test, each tidal band has an in-phase and a quadrature template, the latter formed by shifting every constituent by 90°. Segment-bootstrap standard deviations give a lunar amplitude of 0.98 ± 0.11 and phase of $-6^\circ \pm 8^\circ$.

The phase-folded summer display is formed after subtracting the fitted segment offsets and non-lunar groups and then averaging in 30° M_2-phase bins; the M_2+N_2 model is folded with the same sampling. Its day-by-day jackknife error bars hold the fitted non-lunar terms fixed. They are conditional display uncertainties and do not propagate uncertainty in those fitted terms; they are distinct from the uncertainty of the joint lunar-amplitude estimate. The summer time-series display uses 3-h averages and removes gaps longer than 6 h from its horizontal axis, marking their locations.

The eight constituents explain 99.84% of the model variance. The remaining component, with an r.m.s. of 0.18×10^{-18}, is retained at its predicted value. Setting it to zero or doubling it gives semidiurnal amplitudes of 0.95–0.96 and lunar amplitudes of 0.95–0.99. An additional central-value check uses a Kalman filter with state (segment offset, A), resetting the offset at each segment and allowing a random walk reaching 5×10^{-18} after 6 h. It gives $A = 0.95$ for the full record; changing that scale to 2×10^{-18} or 10^{-17} gives 0.92 or 0.99, respectively.

Daily disturbances and validation

Daily sensitivity fits add terms $a_1 \cos \omega t + b_1 \sin \omega t + a_2 \cos 2\omega t + b_2 \sin 2\omega t$, where $\omega = 2\pi/(1\ \text{day})$ and t is local time. Common coefficients and campaign-specific coefficients are examined. A physically constrained alternative uses a free-amplitude 24-h term in each campaign with the phase of the 24-h harmonic of hourly ERA5 2-m air temperature at the two sites [35], averaged over that campaign. Another alternative includes the air-temperature anomalies at both sites relative to a 24-h running mean as two regressors. Within a short campaign, a 24-h term is partly degenerate with diurnal tides and segment offsets.

The sensitivity of the lunar estimate to $B\cos(\omega t - \varphi)$ is evaluated using the lunar row h of the least-squares operator. For a common phase, the maximum amplitude change is

$$B\sqrt{(h \cdot \cos \omega t)^2 + (h \cdot \sin \omega t)^2}.$$

For phases independent between campaigns, the maximum is the sum of the corresponding campaign norms. These bounds describe the specified sinusoidal disturbances and phase assumptions; they do not exclude arbitrary time-varying daily effects.

Injection tests use circularly shifted residuals of the full-template fit, adding either the full tidal model ($A = 1$) or the model without its lunar group ($A = 0$). Four daily-disturbance scenarios are considered: no added daily disturbance; campaign-specific 24-h terms with air-temperature phases and amplitudes fitted to the observations; common 24-h and 12-h terms with fitted amplitudes and phases; and the fitted summer 24-h and 12-h terms. The added disturbances have r.m.s. values up to 1.9×10^{-18}. In 300 realizations per scenario and injected amplitude, lunar-amplitude biases lie between -0.03 and -0.00 at the reported precision. The larger of the scaled least-squares and jackknife errors covers the injected value in 0.59–0.71 of realizations at one standard error and 0.90–0.95 at 1.96 standard errors. The main estimate uses the calibrated uncertainty above. For $A = 1$, the fitted lunar amplitude exceeds three times its estimated error in every realization; for $A = 0$, this fraction is at most 0.003. These simulation results are conditional on the selected residual and disturbance models.

A complementary restricted wild bootstrap flips the residual sign of whole observation periods under the null. With eight periods, the smallest attainable two-sided probability is $2/256$. The resulting two-sided probabilities are 0.008 for the lunar estimate and 0.008 for the whole-template estimate. Campaign information shares are calculated by projecting the lunar template onto the complement of the other fit columns—near-12-h and diurnal templates and segment offsets—and summing its squared projected values within each campaign.

Held-out prediction estimates the amplitude from the other observation periods and applies it to the excluded period, fitting that period's segment offsets. The whole-template prediction reduces residual sums of squares in seven of eight periods, by 4.9% when pooled; the lunar prediction improves six of eight periods, by 1.7% when pooled. These checks use the same underlying record as the primary fits.

Spectral diagnostics and alternative processing

The full-record spectrum shows sinusoidal power after projection of the segment offsets, before and after subtraction of the fitted whole template. Its 99% threshold is the quantile of the maximum over 5–40 μHz in 200 resampled residual series. For the April record, sinusoidal power is expressed as amplitude squared divided by two. Pointwise 99% thresholds and the 99% threshold of the maximum over 15–50 μHz are obtained from 1,000 resampled residual series. No frequency exceeds the latter threshold after tidal correction; the largest residual feature, near 39 μHz, is away from the tidal frequencies. The four-day April record combines neighbouring constituents into broad diurnal and semidiurnal bands. Spectral displays use a linear vertical scale. The full-record maximum reference is estimated from 200 realizations, so its 99% tail is sparsely sampled. It is shown as an exploratory reference, not used to claim a blind detection above the full-band 99% threshold. The targeted lunar inference uses the pre-specified astronomical templates and its own resampling analysis.

Independent processing of the same 2026 records uses non-overlapping 600-s means, corrected clock systematic shifts and fixed ten-day calendar baselines. It gives a whole-template response of 0.88 ± 0.10 and a lunar response of 0.89 ± 0.28 when daily terms are included in each ten-day block. Its whole-template prediction improves all six held-out 2026 periods. Simulations with white, Ornstein–Uhlenbeck (correlation times of 1 h to 3 d), Student-t and moving-average noise give biases below 0.04 and nominal 95% interval coverage of 94.5–99.8%, using the largest of least-squares, delete-day and delete-period standard errors. Simpler solid-tide approximations change its whole-template scale by less than 0.01. These estimates are processing checks on shared observations and are not combined as independent measurements.

Fibre-link monitor

The round-trip beat of the fibre link is recorded at the Shanghai end near 10 MHz with 1-s resolution. Its deviations are normalized by the optical carrier frequency without division by two and filtered in the same way as the clock ratio. Samples more than 10 Hz from the median are excluded. Monitor excursions reaching 10^{-12} leave the recorded ratio unchanged. Additionally excluding 300-s monitor blocks deviating by more than 5×10^{-16} changes the regression result by less than 0.005. The monitor covers 474 h of the analysed data. On that overlap, the lunar and whole-template amplitudes are 0.93 and 0.80; including the monitor as an additional regressor changes each by less than 0.005.

Environmental analysis

The Sr vacuum-chamber temperature is the mean of 20 PT100 sensors sampled every 20 s, available from 28 June to 7 July 2026 and overlapping 98 h of the filtered summer record. The blackbody sensitivity is 6.26×10^{-17} K^{-1} at 294.3 K; a temperature increase raises Yb/Sr. The daily temperature profile is obtained after subtracting a 24-h running mean and excluding the chamber-temperature transient on 30 June. Both clocks apply

blackbody corrections in real time, so the recorded ratio already includes them. The regression therefore tests correction errors proportional to chamber temperature; its expected coefficient is zero.

Over the 98-h overlap, the blackbody shift calculated from chamber temperature and filtered like the ratio has an r.m.s. of 2.8×10^{-18}, including the 30 June transient. Adding it with a free coefficient gives 0.92 ± 0.74, or 0.72 ± 0.74 after excluding the transient, with day-by-day jackknife errors. Both are consistent with zero at this precision. Through the summer lunar-estimator response of 0.016 per 10^{-18}, a residual with the size of the observed 24-h ratio term would change the lunar amplitude by about 0.045. Without real-time correction, the blackbody shift would contain a daily component of 2.0×10^{-18} peaking at 12:13 local time. In the same overlap, the fitted 24-h ratio term is $(0.9 \pm 1.1) \times 10^{-18}$ with maximum at 10:54 ± 5.0 h. The mean daily profile of the uncorrected blackbody contribution has a peak-to-peak range of 4×10^{-18}, indicating the size of the removed effect.

Auxiliary frequency-domain analysis

The separate non-overlapping reduction contains 3,299 means and 545.924 member-hours in 54 segments. We use its recorded fractional-frequency means, expressed numerically in units of 10^{-18}, at their stored UTC bin centres. The trial sinusoids are evaluated at these centres, following the bin-centre spectral convention; within-bin member integration and the main analysis's triangular filter are not reconstructed here. Equal spectral weights differ from the noise-based weights used for the physical amplitude estimates in that reduction.

For a nuisance matrix N, we form its orthonormal basis Q and apply $R = I - QQ^T$ to both the observation vector and each trial cosine–sine pair. The spectral score ΔRSS is the reduction in residual sum of squares when the projected pair is fitted. We use the nominal-600-s normalization, $D(f) = 600 \times 10^{-42}$ ΔRSS per μHz. This convention provides a common scale for comparisons on these gapped observations; integrating it is not asserted to recover the time-domain variance. Extended Data Fig. 7a uses segment constants only. Extended Data Fig. 7b–d add freely phased N_2 and K_2 terms. All sinusoidal phases refer to 6 September 2025, 16:05 UTC, the first stored bin centre.

The M_2 and S_2 subtraction waveforms come from a simultaneous four-coefficient fit after the same nuisance projection. Conditional scans add the other principal pair to N and scan within ±0.16 μHz of the target. No physical amplitude ratio or phase constraint links the two principal components. As a nuisance sensitivity check, their joint amplitudes without N_2/K_2 control are 4.63 and 1.82×10^{-18}. Scaled least-squares and UTC-day-deletion covariances quantify the joint coefficient uncertainties (Extended Data Table 4 and Extended Data Fig. 9). Synthetic injection curves contain only the fitted principal sinusoidal waveform evaluated at the measured times, with no added random noise. Direct nested regression verifies the conditional ΔRSS calculation.

Compensation sensitivity and template correlation

For donor D and target T, the joint fit supplied the fixed donor coefficient vector $\hat{\beta}_D$. For 61 values of λ from 0 to 1.5, we formed $y_\lambda = y - \lambda X_D \hat{\beta}_D$ and fitted only the target pair together with N. With $P_T = R_N X_T$ and $P_D = R_N X_D$, its coefficient vector obeys

$$\hat{\beta}_T(\lambda) = \hat{\beta}_{T,\text{single}} - \lambda P_T^{+} P_D \hat{\beta}_D.$$

We also repeated the sweep using the donor's single-frequency estimate to show the dependence on waveform definition. A separate jointly controlled fit retains both M_2 and S_2 pairs after subtraction. Its target coefficient is necessarily invariant, because the subtracted waveform lies within the fitted donor subspace; this curve is an algebraic control, not evidence against leakage. Amplitude is the norm of the two coefficients and phase is $\text{atan2}(\beta_{\sin}, \beta_{\cos})$, corresponding to $A\cos(2\pi f(t - t_0) - \phi)$. Target-only incremental improvement is $\Delta\text{RSS} = \hat{\beta}_T^{\mathsf{T}} P_T^{\mathsf{T}} P_T \hat{\beta}_T$. The jointly controlled improvement instead residualizes the target against both N and the donor, so these two improvements have different baselines even where their coefficient estimates coincide. Density displays use the nominal 600-s least-squares convention $600\Delta\text{RSS} \times 10^{-42}$ per µHz for observations expressed in units of 10^{-18}; an integral of this gapped-record display is not asserted to satisfy a Parseval variance identity.

Canonical correlations are the singular values of $Q_M^{\mathsf{T}} Q_S$, where each Q spans a residualized constituent pair. Template lag correlations evaluate the fitted donor waveform at $t - \ell$ and the target at t, residualize both on the unchanged observation support, and normalize their inner product. Lags span ±24 h in 5-min steps. Their zero-lag correlation is 0.1955; maximum absolute lag correlations are 0.2413 for shifted M_2 against S_2 and 0.2113 in the reverse direction. These are design and fitted-template similarities, not an observed stochastic cross-correlation function or a measured propagation delay.

For alias diagnostics, we scanned 20–25 µHz with spacing $1/(12T)$, where T is the elapsed observation span. For each donor, we selected the three strongest local maxima of its pure-injection spectrum at least $2/T$ away from its own frequency. Selection used the injection response, not a significance threshold on the observed data. At each selected frequency, we compared the actual refit to the predicted vector response $\hat{b}_f(\lambda) = \hat{b}_f(0) - \lambda \hat{b}_{f,D}$. Its squared norm in the frequency-specific Gram metric gives the predicted quadratic power response. Numerical agreement verifies the processing operator; because this is a linear identity, agreement alone cannot establish an exclusively aliased origin of the observed peak. The compensation curves describe deterministic sensitivity conditional on the fitted waveforms.

We express each four-coefficient covariance as a correlation matrix, $R_{ij} = C_{ij}/\sqrt{C_{ii}C_{jj}}$, separately for scaled least squares and UTC-day deletion (Extended Data Fig. 9c,d). These matrices describe the coupled uncertainty of the joint coefficient estimates, distinct from correlations of the design columns and fitted templates.

Joint coefficient regions

For each constituent, we took its cosine–sine coefficient vector $\hat{\beta}$ and the associated 2×2 block C of the previously calculated joint-fit covariance. We formed the nominal 95% region $(\beta - \hat{\beta})^{\mathsf{T}} C^{-1} (\beta - \hat{\beta}) \leq 5.991$, using the two-degree-of-freedom chi-square quantile (radius $\sqrt{5.991}$). We calculated the extrema of $\|\beta\|$ over this region; the lower bound is zero if the origin is inside, otherwise it is the minimum norm on the ellipse boundary. Phase is $\operatorname{atan2}(\beta_{\sin}, \beta_{\cos})$, with time origin 6 September 2025 at 16:05 UTC; phase extrema are reported only when the region excludes the origin. The ranges are projections of a joint coefficient region, not symmetric amplitude standard errors. Their coverage is nominal under a normal approximation and has not been recalibrated by a new bootstrap. The construction applies separately to each constituent and does not provide simultaneous 95% coverage for both. The 43 UTC days are deletion blocks in the existing jackknife, not 43 independent measurements. Scaled least-squares regions provide a comparison using a second existing covariance estimate.

Observation support of the two reductions

Sample processing and observation support. Counts in the auxiliary route refer to recorded nominal one-second members, not independent samples. The main and auxiliary routes use overlapping observations but have not been reconciled member by member.

Processing stage or definition	Main triangular-filter route	Auxiliary non-overlapping route
Observing units	54 segments in five campaigns; 29 operating groups and eight observation periods serve the specified checks	54 segments and eight observation periods; saved segment/bin membership is available
Time assignment	First file timestamp plus nominal one-second sample index; local time converted as specified	Recorded labels define wall-clock bins; stored times are UTC bin centres
Selection before averaging	Segment screening and endpoint trimming, followed by the stated transient criterion	Existing segment cuts and jump screening; no main-route transient exclusion
Additional transient exclusion	Reported 2.2 h, approximately 0.4%; exact retained-member list unavailable	Not applied
Members available before the minimum-bin-count rule	Not reconstructed	1,966,908

Processing stage or definition	Main triangular-filter route	Auxiliary non-overlapping route
Members excluded in underfilled bins	Not applicable to the same operator	1,581 members in 29 bins
Members retained in the fitted record	Approximately 544 h of nominal one-second observations; exact count unavailable	1,965,327 members, or 545.924 member-hours
Spectral/fit weighting	Least-squares primary fit, with residual-calibrated uncertainty	Equal row weights for auxiliary spectra and free-phase fits
Reference levels	One offset per segment	The same 54 segment indicators
Averaging	1,200-s triangular window at 600-s steps	Non-overlapping 600-s wall-clock bins; retain bins with at least 180 members
Output rows	Exact current member-to-window table unavailable	3,299 rows; 3,291 distinct bin-centre times, with shared centres belonging to different segments

The approximate difference between the two reported durations is not assigned entirely to transient rejection: their endpoint, timing and averaging rules differ, and the exact common-member set has not been established. The stated time assignments are processing conventions; they do not constitute an independent verification of counter continuity or synchronization.

Author contributions

Jian-Wei Pan planned and directed the study and contributed to manuscript writing. Hai-Feng Jiang designed and coordinated the optical-clock comparison and organized its implementation. Qiang Zhang designed and coordinated the comparison experiment. Lei Hou coordinated the remote frequency comparison and was responsible for the optical frequency combs at both stations. Xiang-Pei Liu designed and coordinated the Sr-clock comparison and evaluated its gravitational redshift. Qi Shen designed the optical-frequency-comb and clock-comparison experimental schemes. Sheng-Kai Liao, Juan Yin and Cheng-Zhi Peng contributed to discussions of the experimental design and planning.

Han-Ning Dai was responsible for the overall Sr-clock design. Xiang Zhang operated and maintained Sr1 and analysed the Sr-clock data. Jia-Hao Zhang and Long-Fei Liao operated and maintained the Sr clock. Xiao Jiang and Yu-Ao Chen were responsible for the Sr-clock system. Yu-Chen Zhang was responsible for the link between the Sr1 ultrastable laser and the frequency comb and for height measurements in Shanghai. De-Quan Kong maintained the U1 ultrastable laser. Xing-Yang Cui constructed and maintained

the Sr-clock laser servo systems; Ping Xu constructed and maintained its ultrastable clock-laser system; Peng Liu constructed and maintained the atomic-physics system; and Jie Li constructed and maintained its electronics. Hua-Qing Zhang optimized and modified the Sr-clock laser output.

Zhuan-Xian Xiong and Baolong Lyu were responsible for the overall Yb-clock system. Qiang Zhu constructed the Yb-clock optical system, designed its electronics and analysed data. Bing Wang constructed the optical system and operated and maintained the Yb clock; Ling-Xiang He operated and maintained the Yb clock. De-Zhi Xiong performed simulations and analysis of the Yb-clock blackbody-radiation shift and ultrastable-cavity vibrations. Baolong Lyu also performed theoretical analysis and data processing for the AC Stark-shift uncertainty.

Fa-Xi Chen was responsible for the fibre link, and Li-Bo Li maintained it. Wen-Xuan Song operated the Shanghai optical frequency comb and acquired and processed data. Jian-Yu Guan was responsible for the optical frequency combs and comparison-data acquisition and processing. Shao-Mao Wang was responsible for the 1,550-nm ultrastable laser used for frequency transfer in the local frequency-comb system. Youchao Xie, Lei Wang and Wen-Bin Shen evaluated the gravitational potentials in Wuhan and Shanghai. Yu-Ao Chen also processed data.

Lei Hou, Wen-Xuan Song, Jian-Yu Guan, Han-Ning Dai, Qiang Zhang, Yu-Ao Chen, Hai-Feng Jiang and Jian-Wei Pan contributed to manuscript writing.

References

1. Ludlow, A. D., Boyd, M. M., Ye, J., Peik, E. & Schmidt, P. O. Optical atomic clocks. *Rev. Mod. Phys.* **87**, 637–701 (2015). https://doi.org/10.1103/RevModPhys.87.637
2. Vermeer, M. *Chronometric levelling*. Rep. Finn. Geod. Inst. **83:2** (1983). https://hdl.handle.net/10138/353062
3. Bjerhammar, A. On a relativistic geodesy. *Bull. Géod.* **59**, 207–220 (1985). https://doi.org/10.1007/BF02520327
4. Mehlstäubler, T. E., Grosche, G., Lisdat, C., Schmidt, P. O. & Denker, H. Atomic clocks for geodesy. *Rep. Prog. Phys.* **81**, 064401 (2018). https://doi.org/10.1088/1361-6633/aab409
5. Jia, Z.-P. et al. Improved systematic evaluation of a strontium optical clock with uncertainty below 1×10^{-18}. *Metrologia* **63**, 025002 (2026). https://doi.org/10.1088/1681-7575/ae449e
6. Zhu, Q. et al. Ytterbium lattice clock with systematic uncertainty of 1.3×10^{-18} and instability at the 10^{-19} level. *Metrologia* **63**, 065002 (2026). https://doi.org/10.1088/1681-7575/aeb809
7. McGrew, W. F. et al. Atomic clock performance enabling geodesy below the centimetre level. *Nature* **564**, 87–90 (2018). https://doi.org/10.1038/s41586-018-0738-2
8. Aeppli, A., Kim, K., Warfield, W., Safronova, M. S. & Ye, J. Clock with 8×10^{-19} systematic uncertainty. *Phys. Rev. Lett.* **133**, 023401 (2024). https://doi.org/10.1

103/PhysRevLett.133.023401
9. Marshall, M. C. et al. High-stability single-ion clock with 5.5×10^{-19} systematic uncertainty. *Phys. Rev. Lett.* **135**, 033201 (2025). https://doi.org/10.1103/hb3c-dk28
10. Arnold, K. J. et al. Lu^{+} optical frequency references with accuracy verified at the 19th digit. *Nature* **658**, 60–64 (2026). https://doi.org/10.1038/s41586-026-11072-8
11. Riehle, F. Optical clock networks. *Nat. Photon.* **11**, 25–31 (2017). https://doi.org/10.1038/nphoton.2016.235
12. Schioppo, M. et al. Comparing ultrastable lasers at 7×10^{-17} fractional frequency instability through a 2220 km optical fibre network. *Nat. Commun.* **13**, 212 (2022). https://doi.org/10.1038/s41467-021-27884-3
13. Chen, F.-X. et al. 10^{-21}-Level optical frequency dissemination over 2067 km of noise-loaded field-deployed fiber network. *Light Sci. Appl.* **15**, 276 (2026). https://doi.org/10.1038/s41377-026-02299-1
14. Boulder Atomic Clock Optical Network (BACON) Collaboration. Frequency ratio measurements at 18-digit accuracy using an optical clock network. *Nature* **591**, 564–569 (2021). https://doi.org/10.1038/s41586-021-03253-4
15. Lindvall, T. et al. Coordinated international comparisons between optical clocks connected via fiber and satellite links. *Optica* **12**, 843–852 (2025). https://doi.org/10.1364/optica.561754
16. Pizzocaro, M. et al. International optical clock comparison using the European optical fiber network. *Phys. Rev. Research* **8**, 033250 (2026). https://doi.org/10.1103/l4bh-ryxs
17. Chou, C. W., Hume, D. B., Rosenband, T. & Wineland, D. J. Optical clocks and relativity. *Science* **329**, 1630–1633 (2010). https://doi.org/10.1126/science.1192720
18. Lisdat, C. et al. A clock network for geodesy and fundamental science. *Nat. Commun.* **7**, 12443 (2016). https://doi.org/10.1038/ncomms12443
19. Takano, T. et al. Geopotential measurements with synchronously linked optical lattice clocks. *Nat. Photon.* **10**, 662–666 (2016). https://doi.org/10.1038/nphoton.2016.159
20. Grotti, J. et al. Geodesy and metrology with a transportable optical clock. *Nat. Phys.* **14**, 437–441 (2018). https://doi.org/10.1038/s41567-017-0042-3
21. Takamoto, M. et al. Test of general relativity by a pair of transportable optical lattice clocks. *Nat. Photon.* **14**, 411–415 (2020). https://doi.org/10.1038/s41566-020-0619-8
22. Bothwell, T. et al. Resolving the gravitational redshift across a millimetre-scale atomic sample. *Nature* **602**, 420–424 (2022). https://doi.org/10.1038/s41586-021-04349-7
23. Voigt, C., Denker, H. & Timmen, L. Time-variable gravity potential components for optical clock comparisons and the definition of international time scales. *Metrologia* **53**, 1365–1383 (2016). https://doi.org/10.1088/0026-1394/53/6/1365
24. Denker, H. et al. Geodetic methods to determine the relativistic redshift at the level of 10^{-18} in the context of international timescales: a review and practical results.

J. Geod. **92**, 487–516 (2018). https://doi.org/10.1007/s00190-017-1075-1

25. Schröder, S., Stellmer, S. & Kusche, J. Potential and scientific requirements of optical clock networks for validating satellite-derived time-variable gravity data. *Geophys. J. Int.* **226**, 764–779 (2021). https://doi.org/10.1093/gji/ggab132
26. Petit, G. & Luzum, B. (eds) *IERS Conventions (2010)*. IERS Technical Note **36** (2010). https://iers-conventions.obspm.fr/content/tn36.pdf
27. Lyard, F. H., Allain, D. J., Cancet, M., Carrère, L. & Picot, N. FES2014 global ocean tide atlas: design and performance. *Ocean Sci.* **17**, 615–649 (2021). https://doi.org/10.5194/os-17-615-2021
28. CNES. *FES2022 (Finite Element Solution) Tidal model (Version 2024)* [Data set] (2024). https://doi.org/10.24400/527896/A01-2024.004
29. Farrell, W. E. Deformation of the Earth by surface loads. *Rev. Geophys.* **10**, 761–797 (1972). https://doi.org/10.1029/RG010i003p00761
30. Stahl, K. et al. Optical clock network tracks tidal variations of the gravity potential. Preprint at https://arxiv.org/abs/2610.39635v1 (2026).
31. Riley, W. J. *Handbook of Frequency Stability Analysis*. NIST Special Publication **1065** (2008). https://doi.org/10.6028/NIST.SP.1065
32. Han, D. & Wahr, J. The viscoelastic relaxation of a realistically stratified earth, and a further analysis of postglacial rebound. *Geophys. J. Int.* **120**, 287–311 (1995). https://doi.org/10.1111/j.1365-246x.1995.tb01819.x
33. Sutterley, T. C. *gravity-toolkit: Python tools for working with time-variable gravity fields*. https://github.com/polargeodesy/gravity-toolkit.
34. Birge, R. T. The calculation of errors by the method of least squares. *Phys. Rev.* **40**, 207–227 (1932). https://doi.org/10.1103/PhysRev.40.207
35. Hersbach, H. et al. The ERA5 global reanalysis. *Q. J. R. Meteorol. Soc.* **146**, 1999–2049 (2020). https://doi.org/10.1002/qj.3803

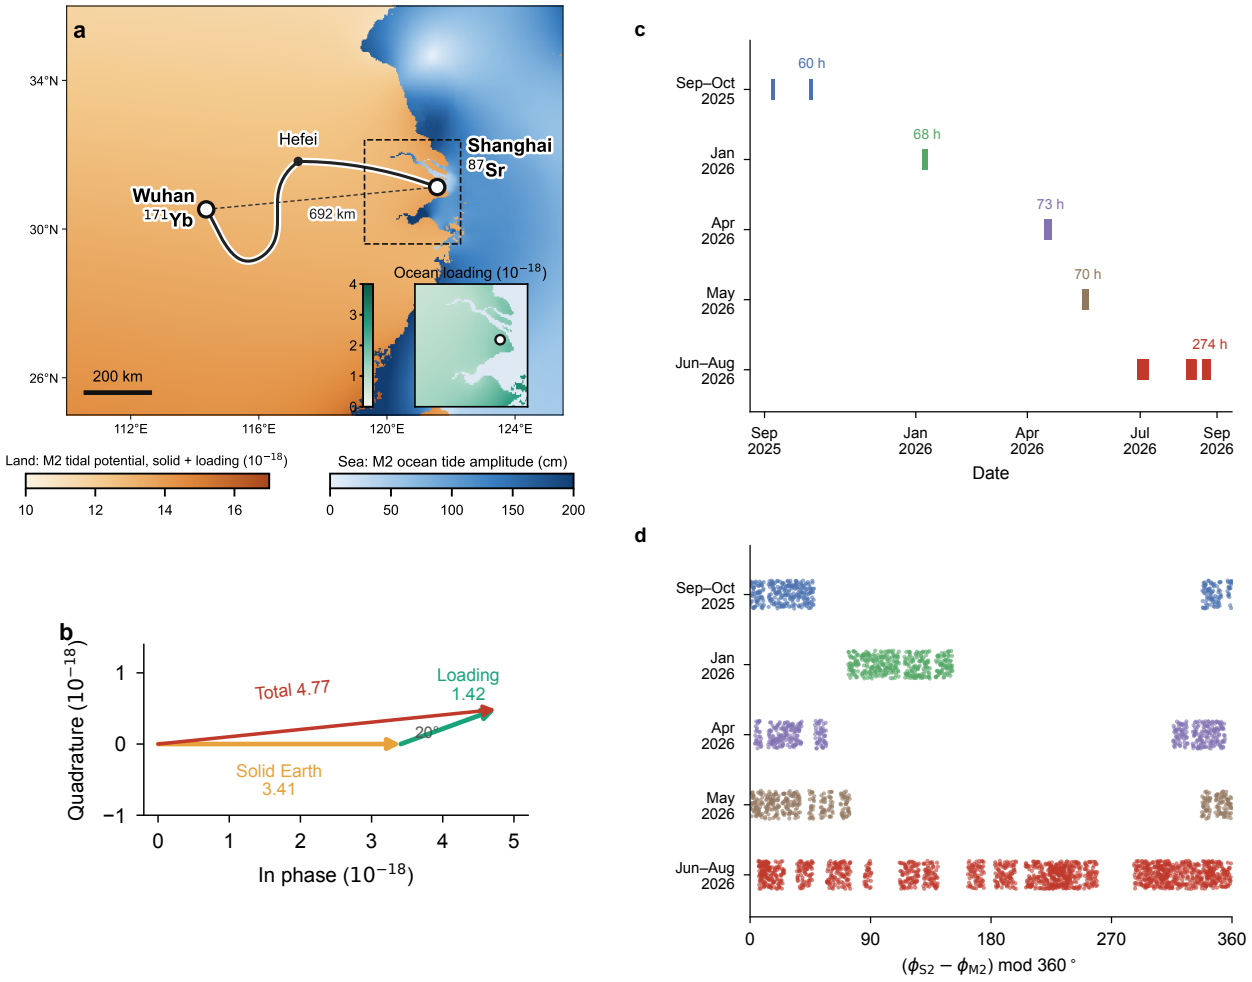


Fig. 1 | The predicted tide on a coastal-inland baseline. **a,** The Sr clock in Shanghai, the Yb clock in Wuhan and the fibre link through Hefei. The dashed line marks the 692-km distance between the clocks. Land colours show the predicted M_2 tidal potential sensed by a clock, including the solid Earth tide and ocean loading, expressed as fractional frequency. The inset shows the ocean-loading contribution around Shanghai; sea colours show the FES2022 M_2 ocean-tide amplitude. **b,** Predicted differential M_2 phasors of the solid Earth tide, the ocean-loading potential and their sum, referenced to the solid Earth tide. **c,** Filtered samples and observation hours in the five campaigns from September 2025 to August 2026. **d,** Relative astronomical phase of S_2 and M_2, including the nodal correction, at the same samples. The short campaigns cover limited relative phases, whereas the summer campaign covers the full cycle as the lunar tide moves through the solar day.

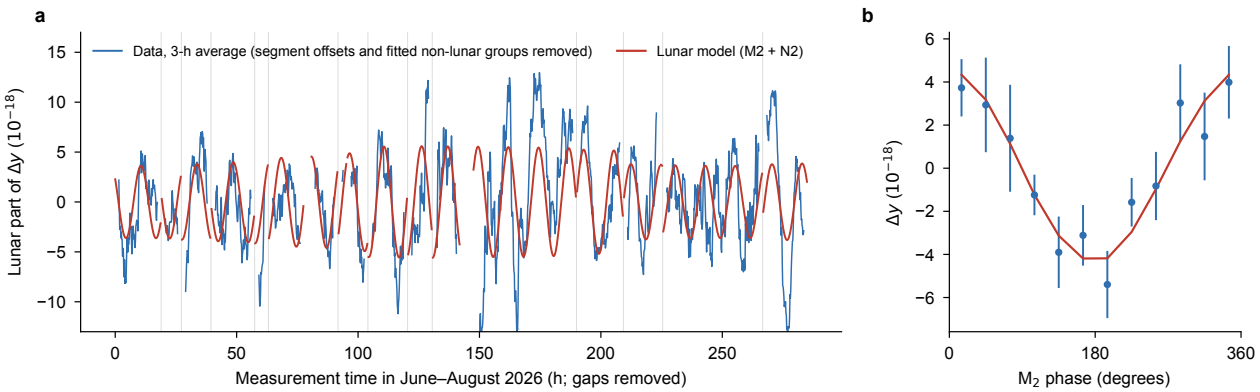


Fig. 2 | The lunar tide in the summer record. a, Three-hour averages of the June–August 2026 frequency ratio after subtracting fitted segment offsets and the fitted near-12-h and diurnal tidal groups (blue), with the lunar model (red). The measurement-time axis compresses gaps longer than 6 h; grey lines mark their removal. White frequency noise alone corresponds to a scatter of approximately 5×10^{-18} for a 3-h average. **b,** The same data folded at the model M_2 phase in 30° bins, with the lunar model (M_2 and N_2) folded using identical sampling. Error bars are day-by-day jackknife uncertainties conditional on the fitted non-lunar terms, which are held fixed during resampling. No empirical daily terms are fitted. Extended Data Fig. 4 provides a complementary view with the actual calendar-time axis.

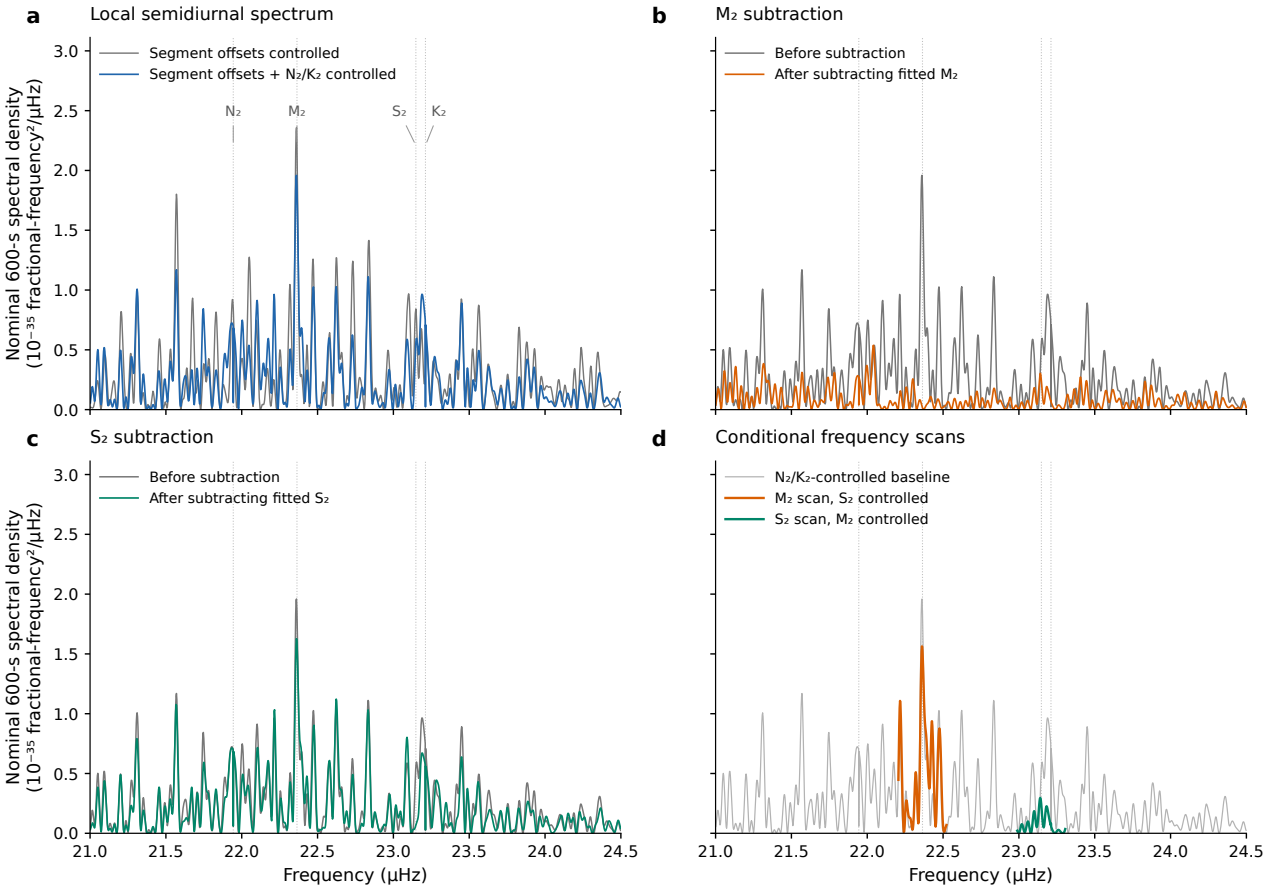


Fig. 3 | Local semidiurnal spectra and component separation. Spectra are calculated from the auxiliary reduction into 3,299 non-overlapping 600-s means at their recorded UTC bin centres, retaining gaps and using equal weights and 54 segment constants. This reduction differs from the triangular filtering used for the main lunar-group amplitude. **a,** Local spectra with segment constants alone (grey) and with freely phased N_2 and K_2 sine–cosine pairs additionally controlled (blue). **b,c,** The N_2/K_2-controlled spectrum before subtraction (grey), after subtracting the fitted M_2 waveform (**b**, orange), and after subtracting the fitted S_2 waveform (**c**, green). Both waveforms are obtained from one simultaneous freely phased M_2–S_2 fit with the same nuisance terms. **d,** Scans within ±0.16 μHz of M_2 with S_2 controlled (orange), and of S_2 with M_2 controlled (green); N_2 and K_2 remain controlled. Both the observations and the trial sine–cosine pair undergo the same nuisance projection. The grey curve is the N_2/K_2-controlled baseline. Dotted lines mark N_2, M_2, S_2 and K_2. All panels use the same linear ordinate and nominal-600-s density normalization, defined in Methods, rather than the amplitude²/2 power used for the triangular-filter spectra. Extended Data Fig. 7 includes fitted-waveform injections through the same sampling operator to examine sidelobes.



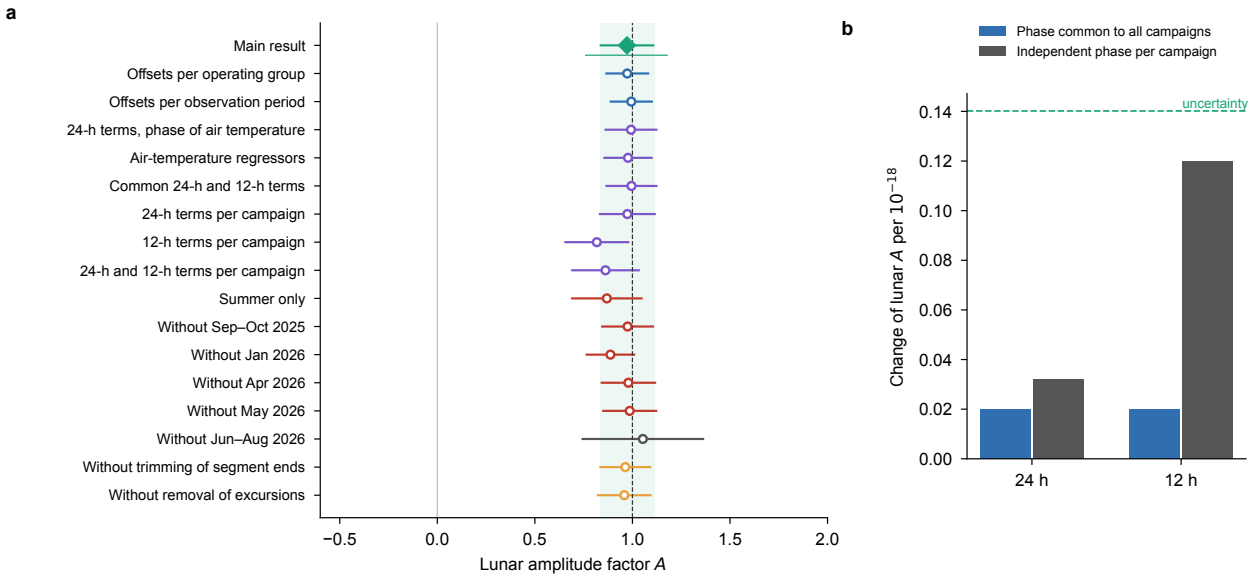



Fig. 4 | Robustness of the lunar amplitude. **a,** Lunar amplitude for the main fit (filled diamond and shaded uncertainty band), alternative offset definitions, daily terms represented by air-temperature measurements or fitted 24-h and 12-h sinusoids, the summer campaign alone, omission of each campaign, and retention of segment ends or transient excursions. The thin bar below the main result is the 95% interval from resampling operating groups. These estimates share observations. The grey interval obtained without the summer campaign shows the loss of information that separates the tidal groups. **b,** Change in the lunar amplitude caused by a 24-h or 12-h sinusoid of fractional-frequency amplitude 10^{-18}, either with one phase common to all campaigns or with the combination of independent campaign phases that produces the largest change. The dashed line marks the uncertainty of the main estimate. The vertical axis is linear.

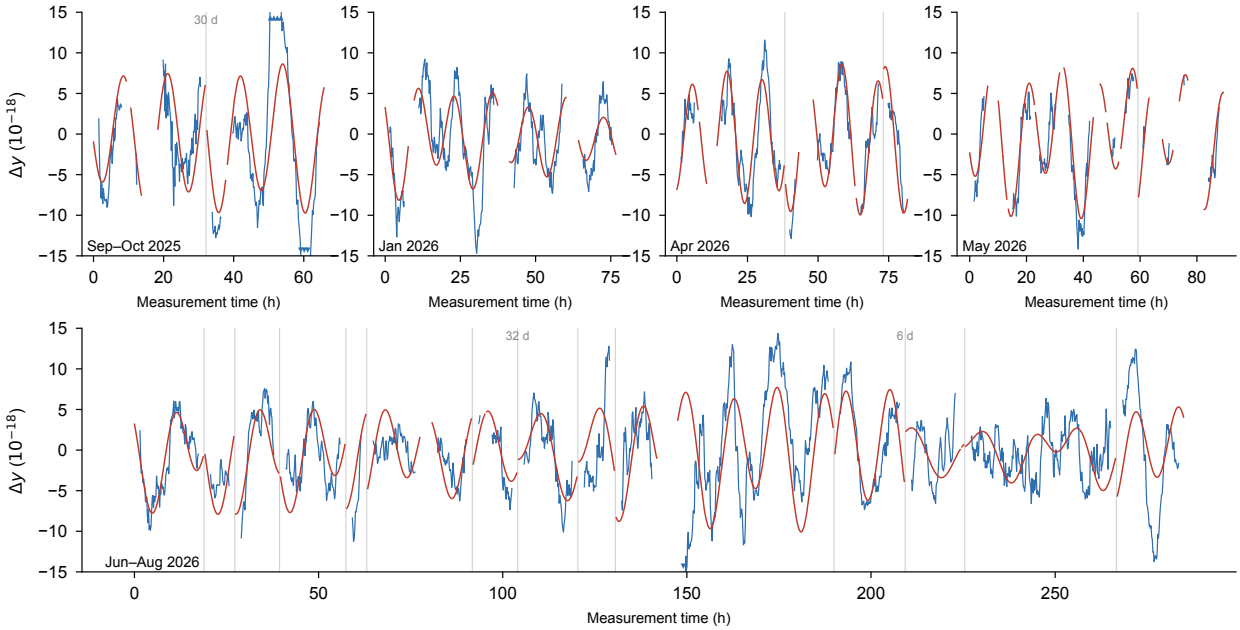


Extended Data Fig. 1 | Tidal records in all campaigns. Three-hour averages of the filtered frequency ratio after subtraction of fitted segment offsets (blue), with the tidal model (red). Measurement-time axes compress gaps longer than 6 h, marked by vertical lines; gaps longer than 5 days are labelled. The vertical range is ±15 × 10^{-18}, and triangles mark values outside this range. The actual calendar-time axis is retained for the April campaign in Extended Data Fig. 4a.

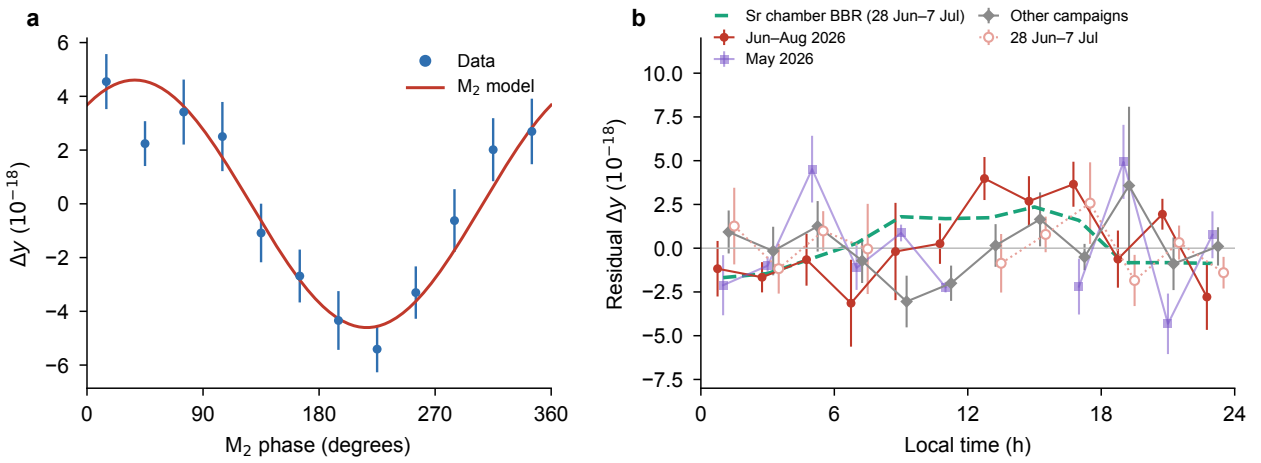


Extended Data Fig. 2 | Folds by tidal phase and local time. a, All observations folded at the M_2 phase after subtracting fitted segment offsets and all tidal constituents except M_2 from the full-model fit. Points are means in 30° bins with day-by-day jackknife uncertainties; the curve is the M_2 model. These phase-bin uncertainties are conditional on the fitted terms removed before folding, which are held fixed. **b,** Tidally corrected residuals folded by local time in 2-h bins for summer, May (light symbols), the other three campaigns, and summer observations overlapping the temperature record from 28 June to 7 July (open circles). Error bars are day-by-day jackknife uncertainties; bins covering fewer than three days are omitted. The dashed curve is the mean daily blackbody-radiation shift computed from the Sr chamber temperature from 28 June to 7 July 2026 after removing a 24-h running mean and excluding the temperature transient on 30 June. The real-time correction removes this chamber-temperature shift from the recorded frequency ratio.

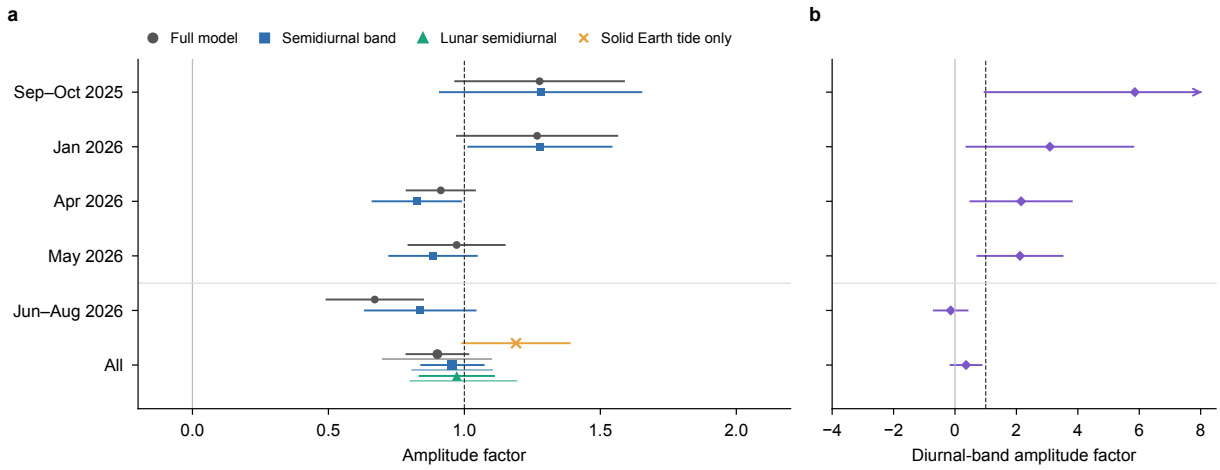


Extended Data Fig. 3 | Campaign-resolved tidal amplitudes. a, Full-model and semidiurnal amplitude factors for each campaign and the combined observations, fitted with segment offsets. Combined-data estimates also include the lunar group and the solid Earth tide alone. Short campaigns constrain the semidiurnal band as a whole; the joint fit separates the lunar group. **b,** Diurnal amplitude fitted jointly with the semidiurnal band in a two-band fit; the combined estimate is 0.36 ± 0.50. The arrow marks an uncertainty extending beyond the plotted range. Error bars represent one standard deviation, calibrated by residual resampling for the full model, semidiurnal band and lunar group; for the diurnal band and solid Earth tide alone they are the larger of the scaled least-squares and day-by-day jackknife uncertainties. Thin lines in the combined-data rows show 95% intervals from resampling operating groups, or segments for the lunar group.

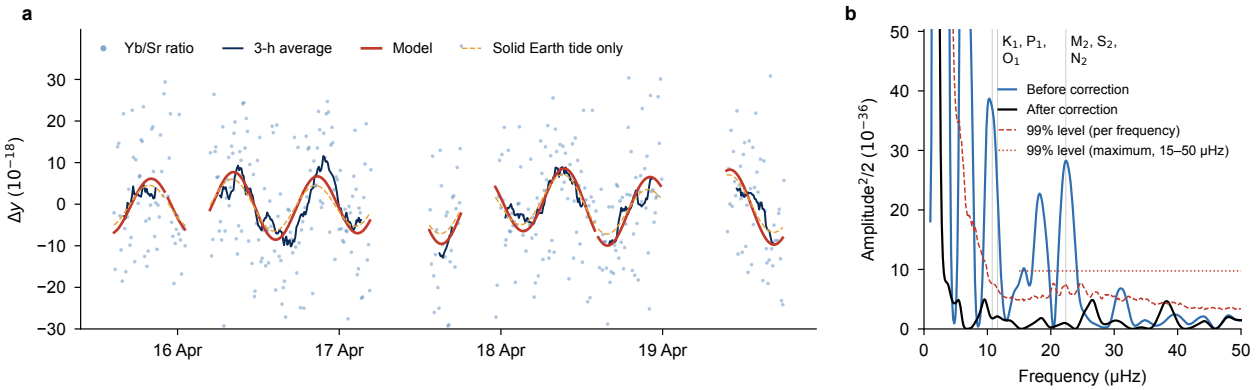


Extended Data Fig. 4 | April campaign in calendar time and frequency. a, Frequency-ratio observations after the 1,200-s triangular filter and removal of fitted segment offsets, their 3-h averages, and predictions with and without ocean loading. The horizontal axis retains actual calendar dates and gaps (local time, UTC+8). **b,** Sinusoidal power before and after subtracting the model, expressed as amplitude squared divided by two on a linear vertical axis, in units of 10^{-36}. The dashed curve is the 99% level at each frequency; the dotted line is the 99% level for the maximum over 15–50 μHz, both obtained from 1,000 resampled residual series. The four-day record combines K_1, P_1 and O_1 into a diurnal band and M_2, S_2 and N_2 into a semidiurnal band. Power below 8 μHz exceeds the displayed range.

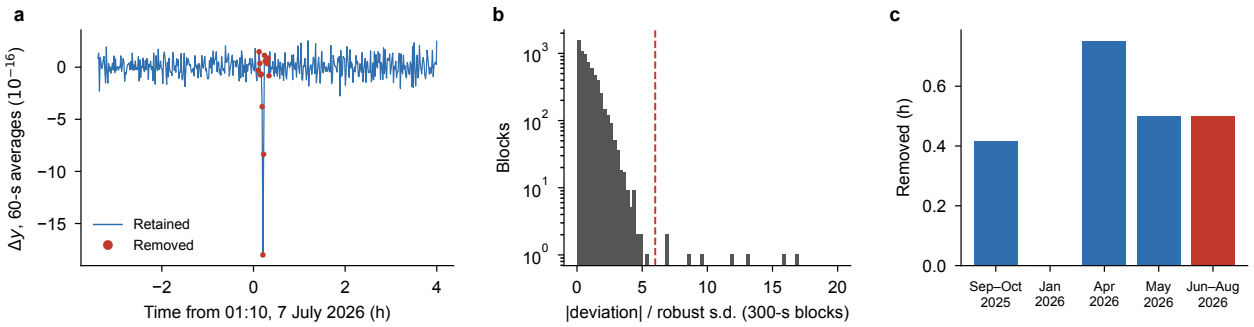


Extended Data Fig. 5 | Transient excursions and sample exclusion. **a,** Sixty-second averages around the excursion on 7 July 2026; red points indicate the 1-s samples excluded by the criterion in Methods. **b,** Distribution of deviations of 300-s means from a running median over ±30 min, divided by the robust standard deviation within each segment. The dashed line marks the threshold of six. The count axis is logarithmic. **c,** Observation time excluded in each campaign.

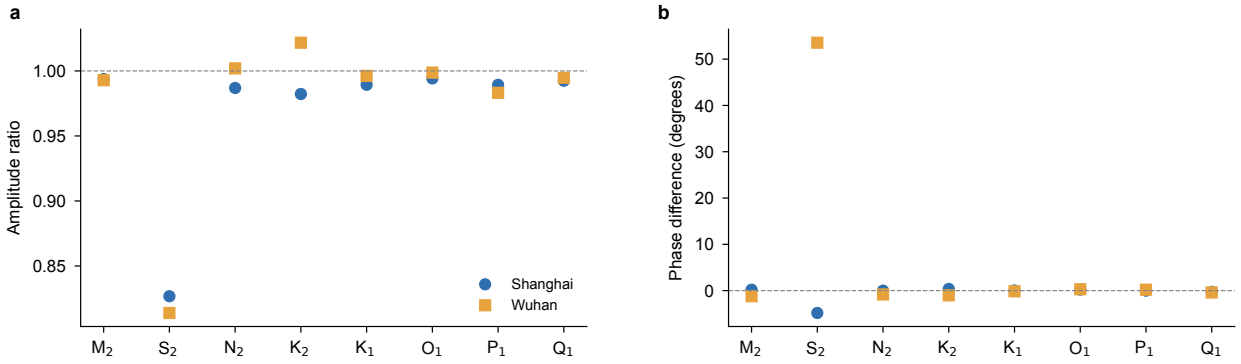


Extended Data Fig. 6 | Radial-displacement validation of the loading convolution. a,b, Amplitude ratios (**a**) and phase differences (**b**) between radial displacements calculated with the loading Green's function and the FES2022 load-tide grid in the centre-of-mass frame, at Shanghai and Wuhan, for eight constituents. Methods discusses the S_2 discrepancy.

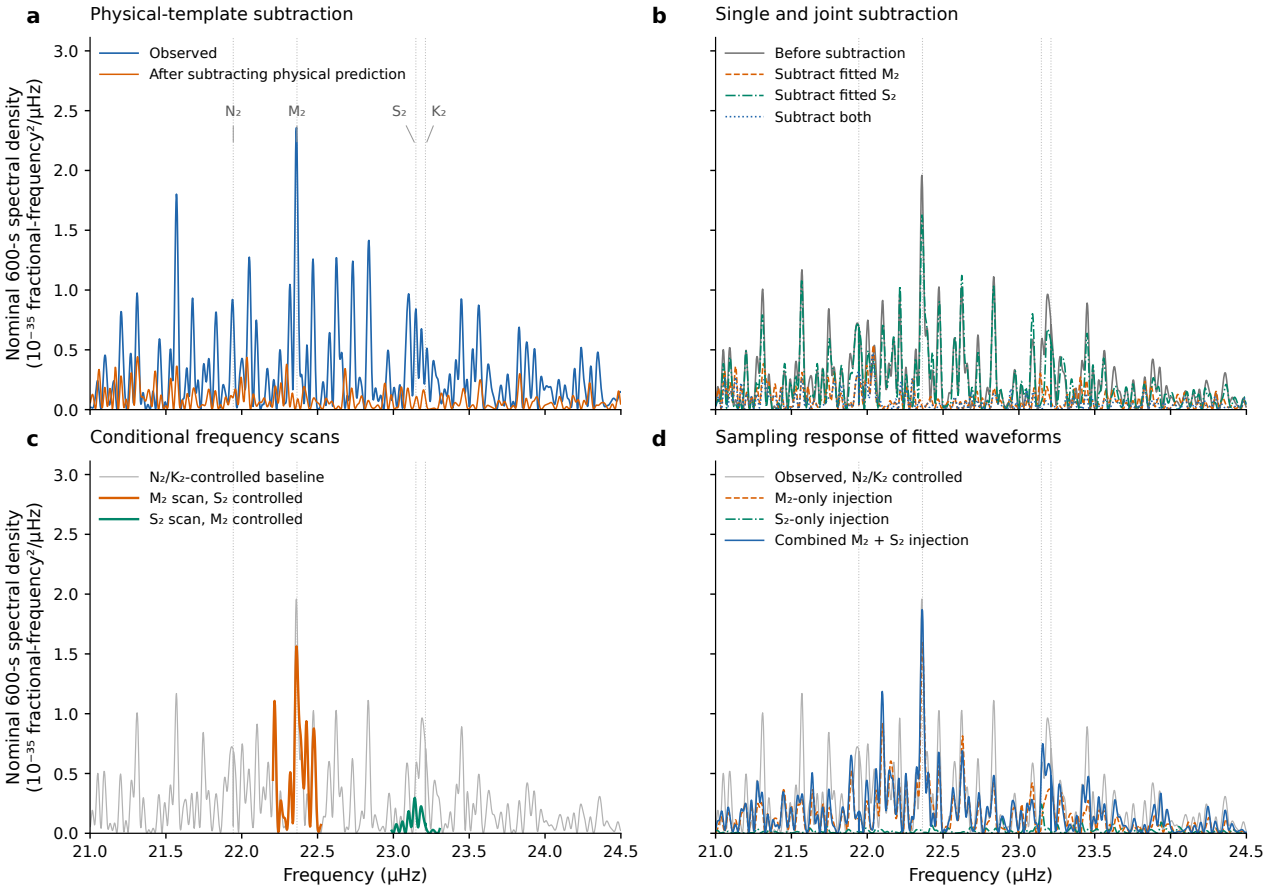


Extended Data Fig. 7 | Semidiurnal spectra and sampling response. All panels use the auxiliary non-overlapping 600-s means, their 3,299 recorded UTC bin-centre times, equal weights and 54 segment constants. **a,** Observed spectrum and spectrum after subtraction of the fixed unit-amplitude physical prediction, with segment constants controlled. **b,** Spectra before subtraction, after subtracting the fitted M_2 waveform, after subtracting the fitted S_2 waveform and after subtracting both. The waveforms come from a simultaneous freely phased M_2–S_2 fit controlling freely phased N_2 and K_2 terms. **c,** Scans near M_2 conditional on S_2, and near S_2 conditional on M_2, with N_2 and K_2 controlled in both cases. The grey curve is the N_2/K_2-controlled baseline. **d,** Spectra of deterministic M_2-only, S_2-only and combined fitted-waveform injections evaluated at the actual observation times and passed through the same nuisance projection, with the observed spectrum in grey. Interference means that the separate injected powers need not sum to the combined power. Dotted lines mark N_2, M_2, S_2 and K_2. The shared linear ordinate uses the nominal-600-s least-squares density defined in Methods. No values are interpolated across gaps. The injection curves characterize the sampling response of the specified waveforms; they do not assign the fraction of an observed peak caused by leakage.

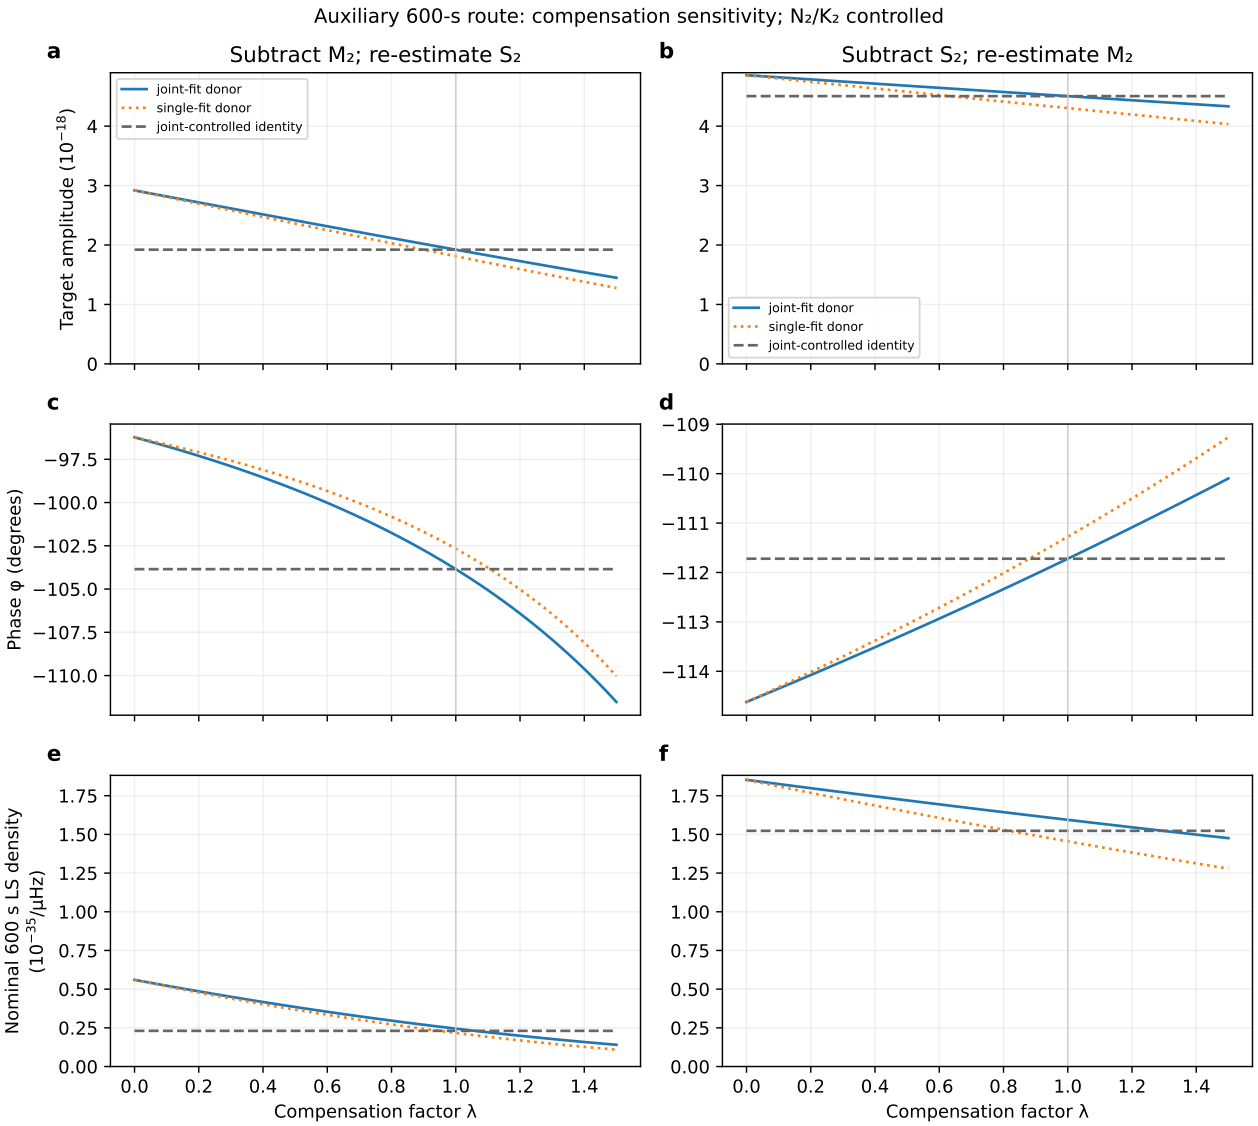


Extended Data Fig. 8 | Compensation sensitivity on the auxiliary 600-s record. a,c,e, Subtracting a scaled M_2 waveform and re-estimating S_2; b,d,f, the reverse. a,b, Target amplitude; c,d, absolute phase; e,f, nominal 600-s least-squares density. Solid curves use donor waveforms from the joint fit; dotted curves use single-frequency donor fits. All target-only fits retain segment offsets and free N_2/K_2 pairs. Dashed grey curves also control the donor pair and are invariant by construction. The power improvement for these curves is conditional on the donor and therefore has a different baseline from the target-only curves. $\lambda = 1$ denotes subtraction of the selected estimated waveform. Curves describe deterministic sensitivity conditional on the fitted waveforms. Amplitude and density panels share their respective vertical scales across directions, and density axes are linear with zero baselines.

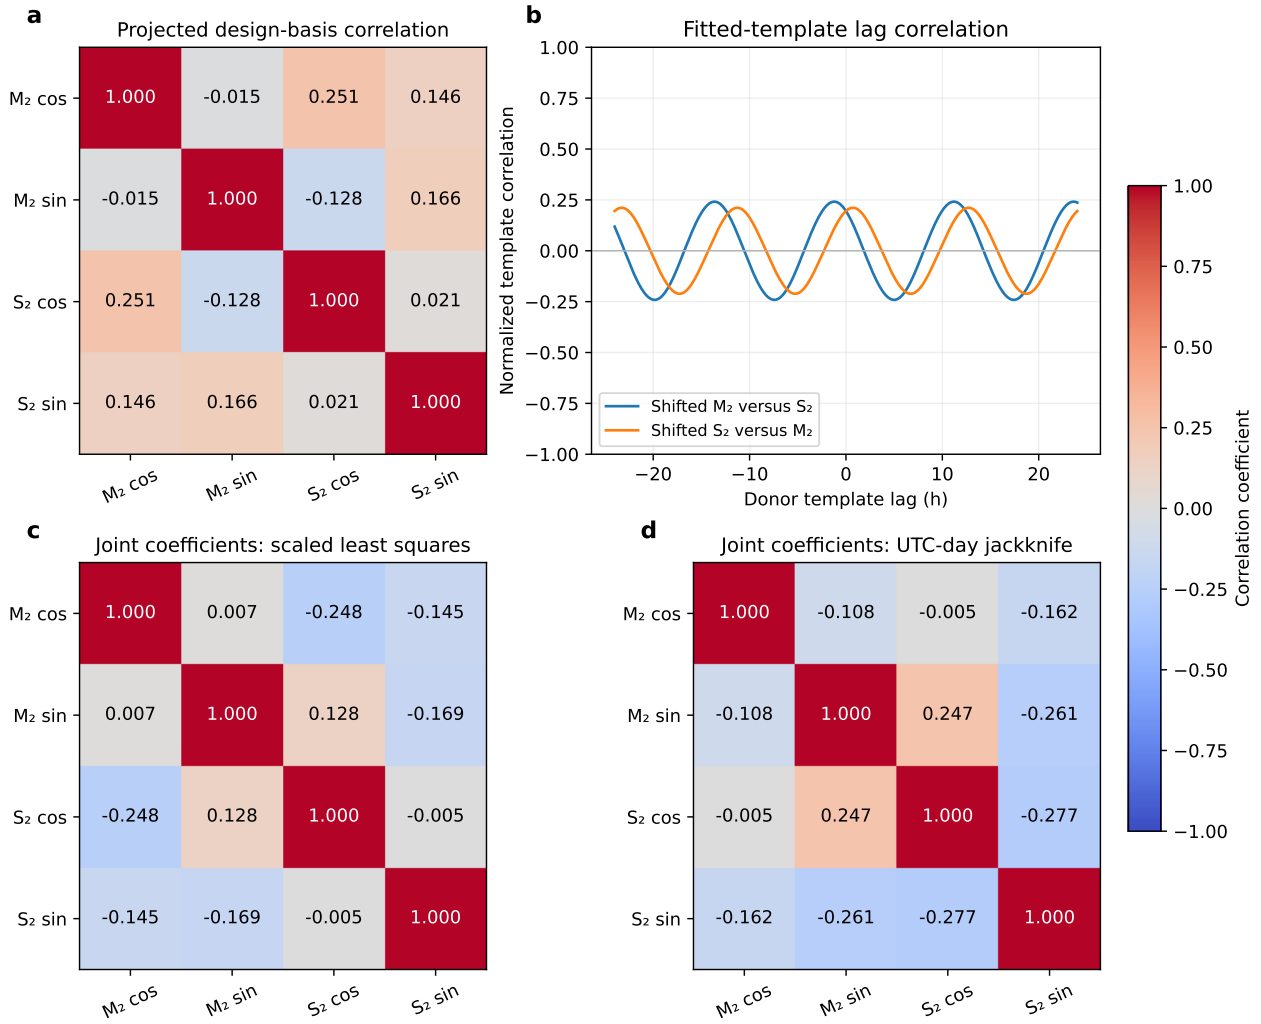


Extended Data Fig. 9 | Harmonic geometry and joint-coefficient correlations on the auxiliary 600-s record. a, Correlations of the M_2 and S_2 cosine and sine design columns after projecting out 54 segment constants and free N_2/K_2 pairs. b, Normalized lag correlations of the fitted templates, evaluated on the original timestamps without interpolating missing observations; these describe template similarity, not propagation delay. c,d, Correlations between the four coefficients estimated jointly, obtained by normalizing the existing scaled least-squares covariance (c) and UTC-day delete-one jackknife covariance (d). Coefficient order is M_2 cosine, M_2 sine, S_2 cosine and S_2 sine. The three matrices use the same −1 to +1 colour scale. Joint-coefficient covariance describes uncertainty coupling and is distinct from the design-column correlations in a. The 43 UTC days define deletion blocks for the jackknife, not 43 independent measurements. The joint correlations describe coupling between the estimated frequency components.

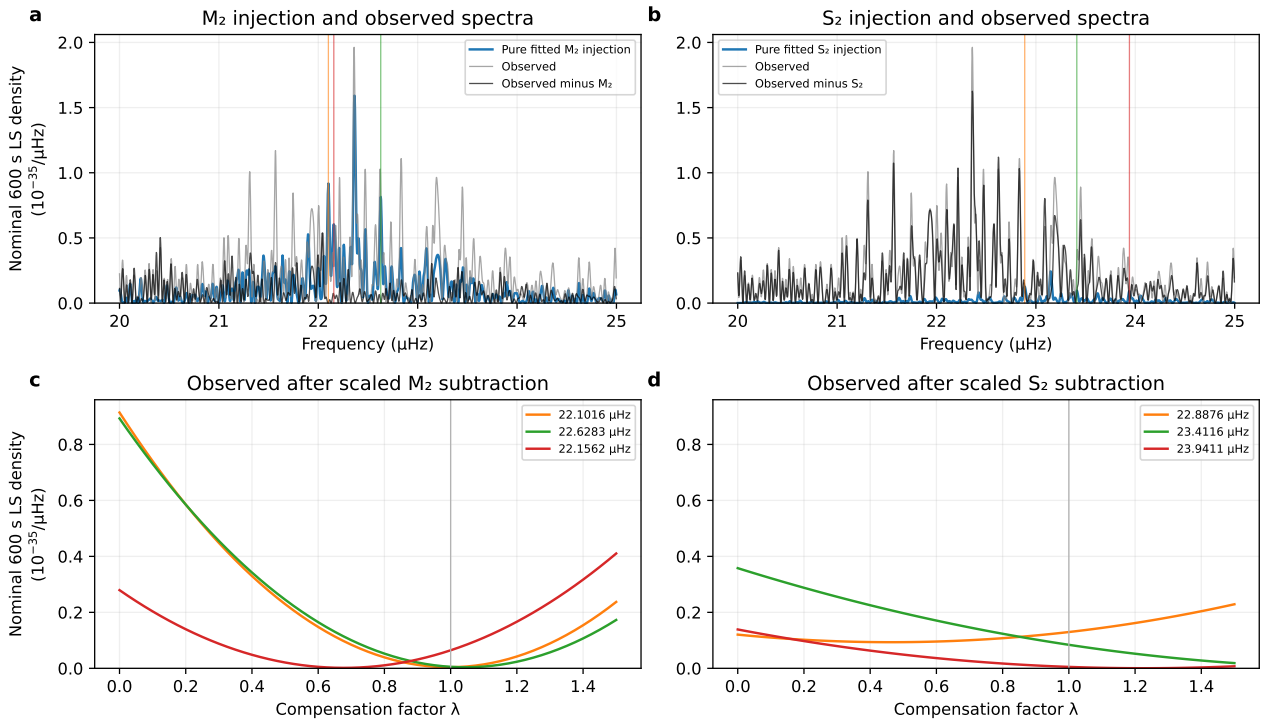

Extended Data Fig. 10 | Sampling aliases and compensation response. a,b, Observed spectra, spectra after subtraction of a joint-fit donor, and spectra of that donor alone on the identical timestamps and nuisance projection. Vertical markers identify three off-centre local maxima selected from the injection. c,d, Observed power at those fixed candidate frequencies as the compensation factor varies. The curves equal the quadratic responses predicted from the complex coefficient subtraction; this agreement is an operator check rather than an independent alias attribution. All density axes are linear and share scales within rows.

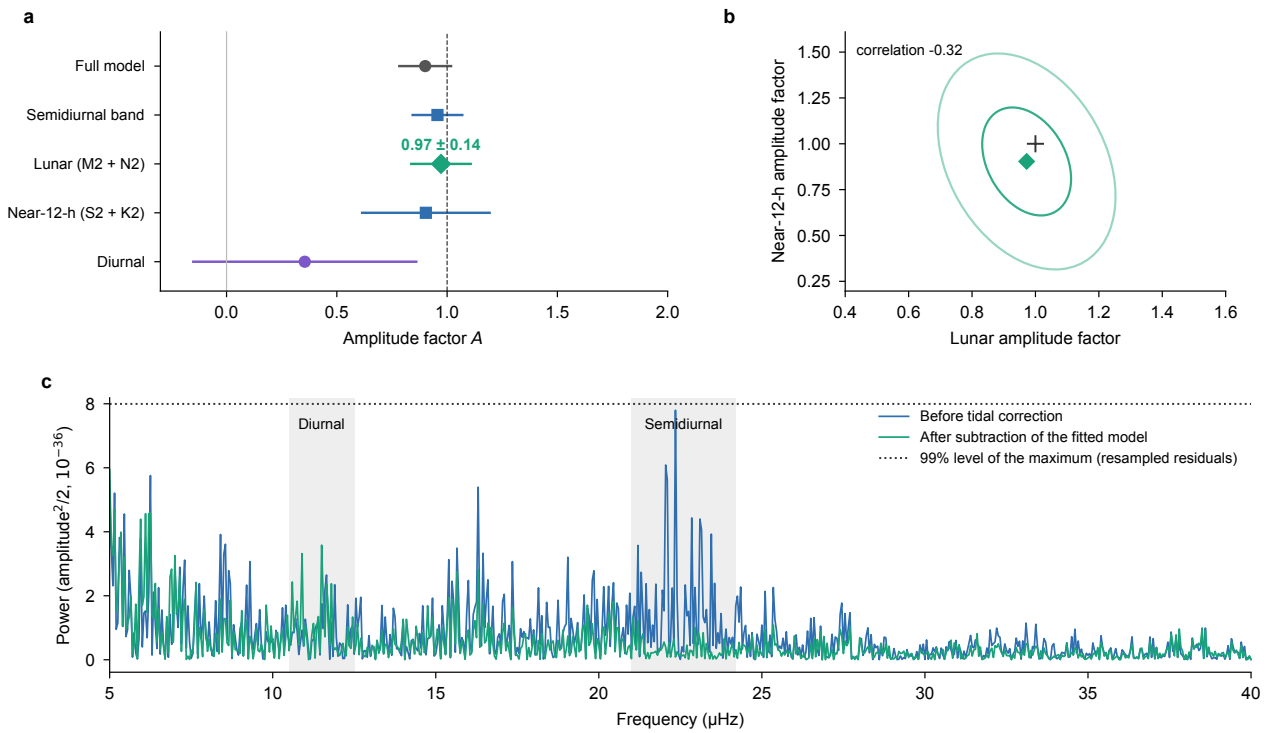

Extended Data Fig. 11 | Group responses and broad-band spectrum. a, Full, semidiurnal and jointly estimated group responses. Error bars are one standard deviation, calibrated by residual resampling for the full, semidiurnal and lunar estimates; neighbouring and diurnal errors use the larger of scaled least squares and the day jackknife. **b,** Covariance contours at radii one and two with the least-squares correlation scaled to the quoted marginal uncertainties. **c,** Broad-band amplitude-squared/2 power before and after fitting the whole template. The dotted line estimates the 99% quantile of the maximum over 5–40 μHz from 200 resampled records. It is an exploratory reference with limited tail precision; the observed peaks do not cross it and this panel is not presented as a full-band 99% blind detection.

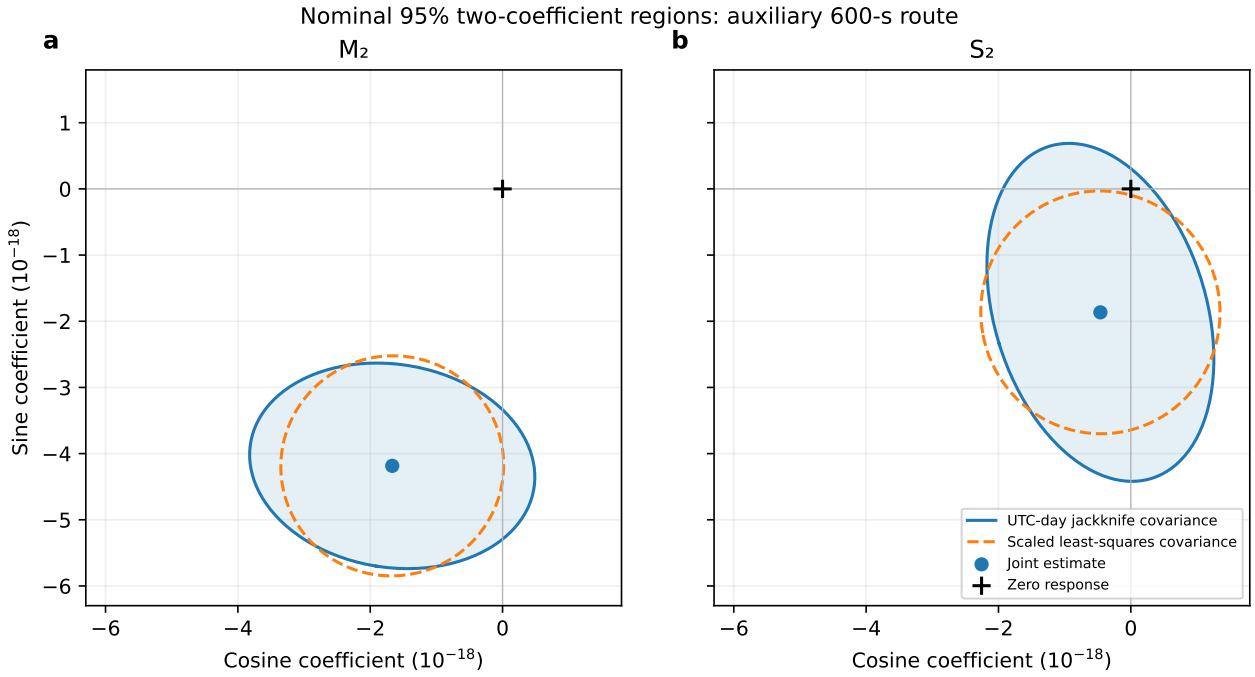

Extended Data Fig. 12 | Joint coefficient uncertainty in the auxiliary 600-s analysis. a, M_2; b, S_2. Points are the free-phase coefficients from the joint M_2–S_2 fit with 54 segment offsets and free N_2/K_2 pairs. Solid blue ellipses and shading are nominal 95% two-coefficient regions obtained from the UTC-day jackknife covariance; dashed orange ellipses use scaled least-squares covariance. Both use radius $\sqrt{5.991}$ under a bivariate normal approximation. Black crosses mark zero response. The two panels have identical axes and equal aspect ratio. The jackknife M_2 region excludes zero, whereas its S_2 region includes zero. These regions summarize existing covariance estimates; they are not newly bootstrap-calibrated confidence regions or an independent replication of the spectral analysis.

Extended Data Table 1 | Noise-model simulations of the alternative processing. Bias and coverage of nominal 95% intervals based on the largest of the least-squares, delete-day and delete-period standard errors. T denotes the full template without daily terms, and L the lunar group with daily terms, using the ten-day calendar-baseline design described in Methods and the actual observation times. Gaussian scenarios contain 1,024 simulations; Student-t and moving-average scenarios contain 4,096. OU denotes Ornstein–Uhlenbeck noise and MA(1) a first-order moving-average process.

Noise model	Bias (T)	Coverage (T), %	Bias (L)	Coverage (L), %
White	−0.000	96.7	−0.001	98.3
White + OU, 1 h	−0.007	94.5	−0.002	96.9
White + OU, 12 h	−0.002	96.1	+0.031	98.8
White + OU, 3 d	+0.003	95.9	+0.004	99.8
White + period constants	+0.001	96.0	+0.004	98.3
Student-t_7 MA(1)	+0.002	98.3	+0.004	98.2
Student-t_5 MA(1)	+0.001	98.9	+0.003	98.3
Student-t_7 MA(1) + OU	+0.001	97.2	+0.005	98.5

Extended Data Table 2 | Injection tests of the main estimator. Lunar amplitudes fitted with segment offsets and no empirical daily terms to resampled residuals plus either the full tidal model (Atrue = 1) or the model without the lunar group (Atrue = 0). The four daily-disturbance scenarios are defined in Methods, with 300 realizations per row. Bias and standard deviation describe the fitted amplitude. The median standard error is that computed within each realization, before the final residual-based calibration. Coverage is the fraction of intervals containing the injected amplitude; the accompanying 95% binomial interval refers to one-standard-error coverage. The last column gives the fraction with $A > 3\sigma$.

Disturbance	Atrue	Bias	s.d.	Median error	1σ coverage	95% binomial interval	1.96σ coverage	$A > 3\sigma$
None	0	−0.026	0.134	0.135	0.70	0.645–0.751	0.94	0.003
None	1	−0.003	0.135	0.137	0.71	0.659–0.764	0.94	1.000
24 h, air-temperature phase	0	−0.013	0.141	0.136	0.61	0.549–0.662	0.93	0.000
24 h, air-temperature phase	1	−0.007	0.145	0.138	0.64	0.579–0.691	0.94	1.000
Common 24 h + 12 h	0	−0.013	0.148	0.140	0.63	0.573–0.685	0.90	0.000
Common 24 h + 12 h	1	−0.024	0.148	0.139	0.60	0.546–0.659	0.92	1.000
Summer 24 h + 12 h	0	−0.021	0.138	0.140	0.67	0.610–0.720	0.95	0.000
Summer 24 h + 12 h	1	−0.016	0.150	0.137	0.59	0.529–0.643	0.92	1.000

Extended Data Table 3 | Daily terms and campaign-specific tidal amplitudes. Amplitude and local time of maximum of the 24-h term, and amplitude of the 12-h term, fitted jointly with the full tidal model within each campaign. Daily amplitudes are expressed in 10^{-18}. Their uncertainties are the larger of the scaled least-squares and day-by-day jackknife values; uncertainties in the time of maximum are jackknife estimates. Weak sinusoidal amplitudes are biased positive. The full-template amplitude A, fitted without daily terms, and its residual-calibrated uncertainty are those in Extended Data Fig. 3a. The last column gives the lunar amplitude fitted independently to each campaign with the main estimator.

Campaign	Days	24-h amplitude	24-h maximum, h	12-h amplitude	A	Alunar
Sep–Oct 2025	4	5.1 ± 2.7	20.7 ± 5.6	5.0 ± 9.7	1.28 ± 0.31	0.04 ± 0.74
Jan 2026	4	2.1 ± 3.0	17.2 ± 3.9	4.1 ± 1.8	1.27 ± 0.30	1.36 ± 0.37
Apr 2026	5	2.9 ± 2.2	1.9 ± 1.4	1.0 ± 3.9	0.91 ± 0.13	0.66 ± 0.42
May 2026	4	5.2 ± 3.3	3.8 ± 2.4	3.1 ± 2.6	0.97 ± 0.18	0.28 ± 0.68
Jun–Aug 2026	22	2.8 ± 1.3	15.8 ± 1.5	0.6 ± 0.7	0.67 ± 0.18	0.87 ± 0.18

Extended Data Table 4 | Free sinusoidal coefficients in the auxiliary reduction. Joint M_2 and S_2 cosine–sine coefficients, after controlling 54 segment constants and freely phased N_2 and K_2 terms. Coefficients and standard errors are in units of 10^{-18}. Phases refer to 6 September 2025, 16:05 UTC. Scaled least-squares errors use the residual variance; UTC-day jackknife errors delete each of the 43 observed dates and refit all coefficients. The full covariance matrices are retained with the analysis. These errors describe this auxiliary harmonic model and are not substituted for the primary lunar-group uncertainty.

Coefficient	Estimate	Scaled LS standard error	UTC-day jackknife standard error
M_2 cosine	-1.667	0.688	0.880
M_2 sine	-4.185	0.679	0.635
S_2 cosine	-0.460	0.738	0.701
S_2 sine	-1.866	0.750	1.043