

## Creating Turtles

David Rossiter and Gibson Lam

## Outcomes

- After completing this presentation, you are expected to be able to:
  1. Create new turtle objects
  2. Read information about each turtle object

COMP1021

Creating Turtles

Page 2

## The Turtle

```
import turtle
turtle.forward(100)
turtle.left(120)
turtle.forward(100)
turtle.left(120)
turtle.forward(100)
turtle.left(120)
turtle.done()
```

- So far, we have seen lots of code like this
- One turtle was used
- The turtle is actually a *turtle object*
- (We will discuss objects later in the course)
- Actually, we can make lots of turtle objects
- There's always one turtle object, which we sometimes call the *default turtle* – that's what we have been using since the start of the course

## Creating a New Turtle Object

- This is how you create a new turtle object:

```
newTurtle = turtle.Turtle()
```
- After the above code `newTurtle` is a new turtle
- After you create the new turtle you can use all the techniques you know about e.g.

```
newTurtle.forward(100)
newTurtle.left(90)
newTurtle.color("red")
```

and so on

COMP1021

Creating Turtles

Page 4

## Simple Example

```
import turtle
turtle.forward(100) } Use the default turtle
```

```
t=turtle.Turtle() } Create a new
t.shapesize(4, 4) } turtle, make it
t.left(180) } bigger, rotate it
t.forward(100) } 180 degrees,
move it forward
```



```
turtle.done() } Need this at the end
```

You can see 2 turtles in the turtle window

- Don't forget that turtles always start in the middle of the screen

## Hiding the Default Turtle

Sometimes you only want the newly created turtle(s) – you can hide the default turtle

```
import turtle
turtle.hideturtle() }
```

```
t=turtle.Turtle() } Create a new
t.shapesize(4, 4) } turtle, make it
t.left(180) } bigger, rotate it
t.forward(100) } 180 degrees,
move it forward
```




```
turtle.done() } Need this at the end
```

You can see 1 turtle in the turtle window


- Don't forget that turtles always start in the middle of the screen

## A Demonstration Using 5 Turtles

- Now we will build a demonstration which creates and uses 5 turtles
  - Most of the properties of the 5 turtles are the same, except for the colour
- After making the turtles, an infinite loop is used:
  - One of the turtles is randomly selected
  - That turtle has its angle changed randomly
  - That turtle is moved forward a random distance



## Running The Program

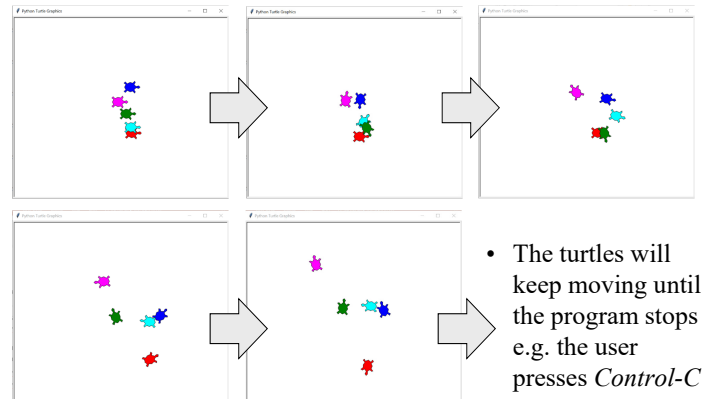

## Using a List

- To better manage the turtles we store them in a list
- We start with an empty list:
 

```
allTurtles = []
```
- Then, after we create each new turtle, we add it to the list of turtles using append:
 

```
newTurtle = turtle.Turtle()
allTurtles.append(newTurtle)
```




COMP1021

Creating Turtles

Page 9

## Accessing Turtles in a List

- As you know, we can retrieve something from a list by using the index e.g. `listname[2]`
- This is true whatever is in the list, even a turtle
- For example, to access the first item in the list we can use `allTurtles[0]`



COMP1021

Creating Turtles

## A Function To Create 1 Turtle

```

# Create a new turtle, set its parameters, add it to the list
def createOneTurtle(thisColor):
    thisTurtle = turtle.Turtle() # Make a new turtle object
    thisTurtle.fillcolor(thisColor) # Set the color of the turtle
    thisTurtle.shape("turtle") # Change to "turtle" shape
    thisTurtle.shapesize(2, 2) # Make the turtle twice as big
    thisTurtle.up() # Do this so no line drawn
    thisTurtle.goto(random.randint(-80, 80),
                    random.randint(-80, 80)) # Starting position
    allTurtles.append(thisTurtle) # Append the turtle to the list
    
```

- This function creates one turtle object
- The turtle is added to a list, so it can be easily accessed and managed later
- See the next slide for examples of how the function is used

## Creating all the Turtles

```

def createOneTurtle(thisColor):
    ... see previous slide ...
    
```

```

# The main part of the program
allTurtles = [] # An empty list
createOneTurtle("red")
createOneTurtle("green")
createOneTurtle("blue")
createOneTurtle("cyan")
createOneTurtle("magenta")
...
    
```

Create 5 turtles, each with a different colour


- For our demonstration program we create 5 turtle objects, using the function shown on the previous slide

## Changing a Turtle

- To make a fun effect we repeatedly select a random turtle, change it to a random angle, and move it a random distance

```
def changeOneTurtle():
    index = random.randint(0, 4)
    allTurtles[index].left(
        random.randint(-90, 90) ) # Change angle
    allTurtles[index].forward(
        random.randint(10, 15) ) # Move forward

# The main part of the program
...
while True:
    changeOneTurtle() # Repeatedly change a turtle
```



## Getting Information From a Turtle

- If you have a turtle object called e.g. `thisTurtle` then you can get information from it like this:

|  |                          |
|--|--------------------------|
| <code>result = thisTurtle.xcor()</code>      | Get the x position value |
| <code>result = thisTurtle.ycor()</code>      | Get the y position value |
| <code>result = thisTurtle.position()</code>  | Get both x and y         |
| <code>result = thisTurtle.heading()</code>   | Get the turtle angle     |
| <code>result = thisTurtle.fillcolor()</code> | Get the fill color       |
| <code>result = thisTurtle.speed()</code>     | Get the speed            |
| <code>result = thisTurtle.shape()</code>     | Get the shape            |

... other information can also be extracted from a turtle object ...

COMP1021

Creating Turtles


Page 14

## Showing Turtle Information

- Let's extend the previous example so that the position of the turtle is shown after it is changed:

```
def changeOneTurtle():
    index = random.randint(0, 4)
    allTurtles[index].left(
        random.randint(-90, 90) ) # Change angle
    allTurtles[index].forward(
        random.randint(10, 15) ) # Move forward
    allTurtles[index].clear() # Clear previous text
    allTurtles[index].write( \
        str( allTurtles[index].position() ), \
        font=("Arial", 16, "bold") ) # Show position
```

*These 2 lines of code are added*



## Example Program Display

